


24" Compact Laundry Brochure

Volume 4



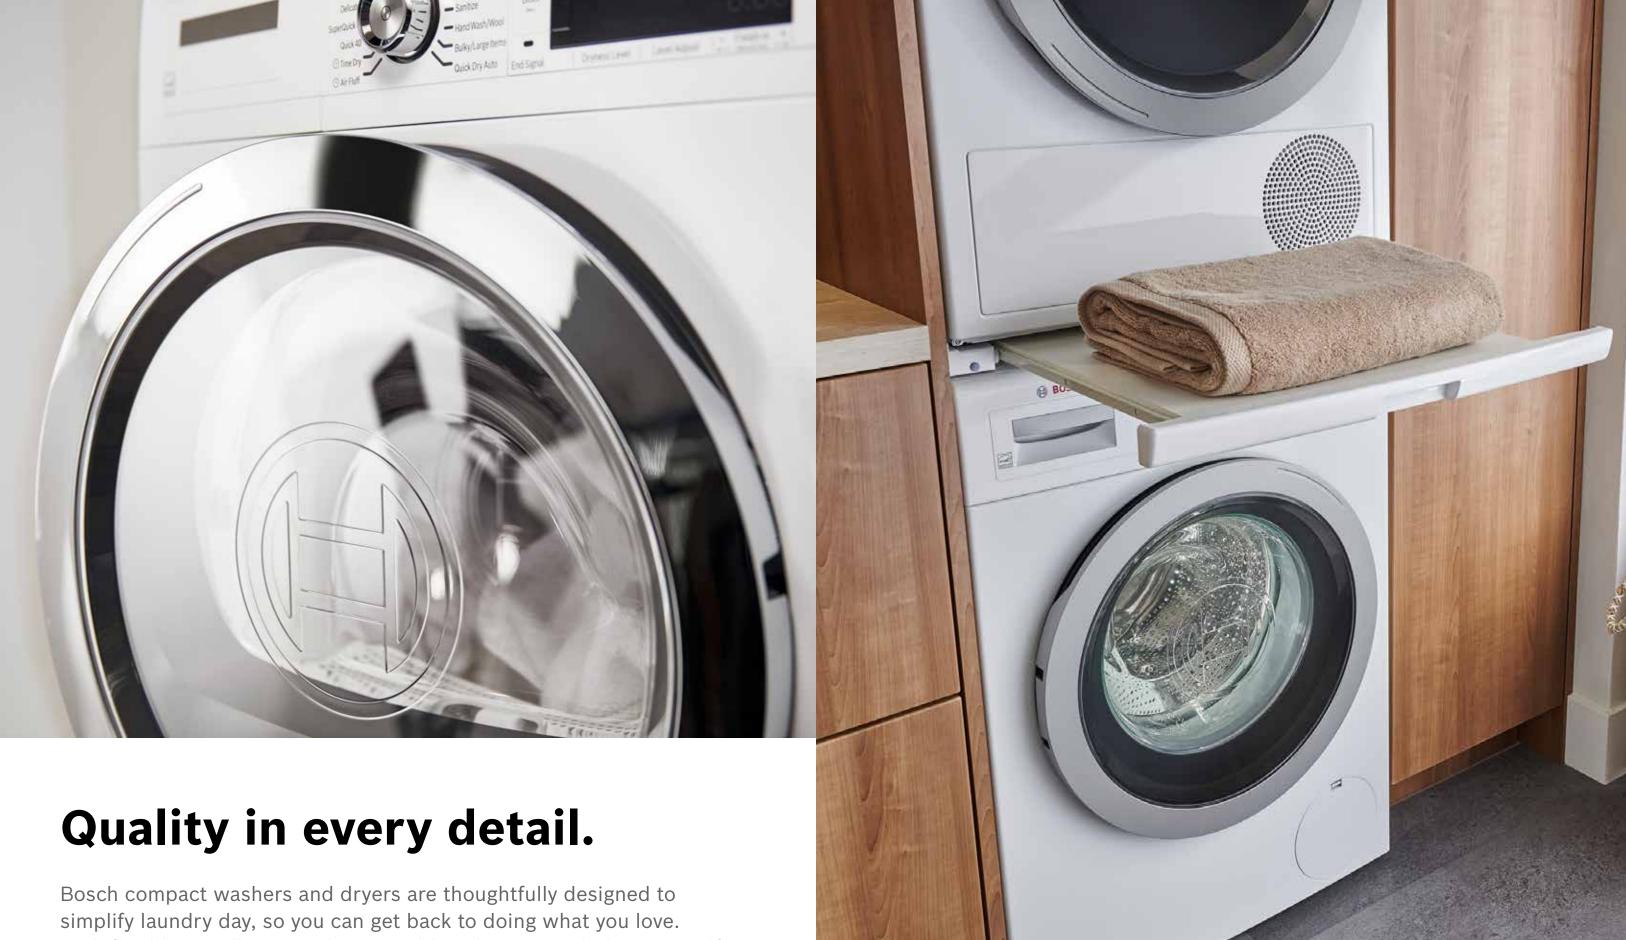

Bosch compact washers and dryers are thoughtfully designed to simplify laundry day, so you can get back to doing what you love. With flexible installation and sustainable solutions, including our Self-cleaning Condenser™ and ENERGY STAR® certified laundry line up, enjoy a more efficient way to wash and dry clothes.



Flexible configuration. Easy installation.

Combining simple installation with compact laundry solutions, Bosch gives you the flexibility to place the washer and dryer in an area that's most convenient for the home. The 500 and 800 Series dryers also offer the option for a reversible door. Bosch compact laundry units can be installed stacked, side-by-side, on pedestals, in a closet or under a counter. The Bosch laundry pair is ideal for small spaces such as urban lofts, guest suites, or secondary laundry and vacation homes.







Flexible accessories



WTZ20410UC – Stationary Stacking Kit



WTZ11400UC -Stacking Kit with Pull Out Tray



WTZSB30UC – Bracket-style Stacking Kit



WMZPW20W – Washer Pedestal WTZPW20D – Dryer Pedestal



WMZ20600 - Drying Rack



WTZPA30US – 3 Prong Power Adapter



WTZPA20UC – 4 Prong Power Adapter (included with all Bosch Dryers)



Less is more.


All Bosch washers and dryers are ENERGY STAR® certified for less energy usage and more water savings. The 500 Series heat pump dryer is 60% more efficient* and is recognized as ENERGY STAR® Most Efficient of 2023 along with its matching washer.



Sustainable laundry solutions.

Featuring a Self-cleaning Condenser[™], the Bosch 500 Series dryer removes the need to manually clean and maintain the condenser, providing you with consistent dry times and energy efficiency load after load.



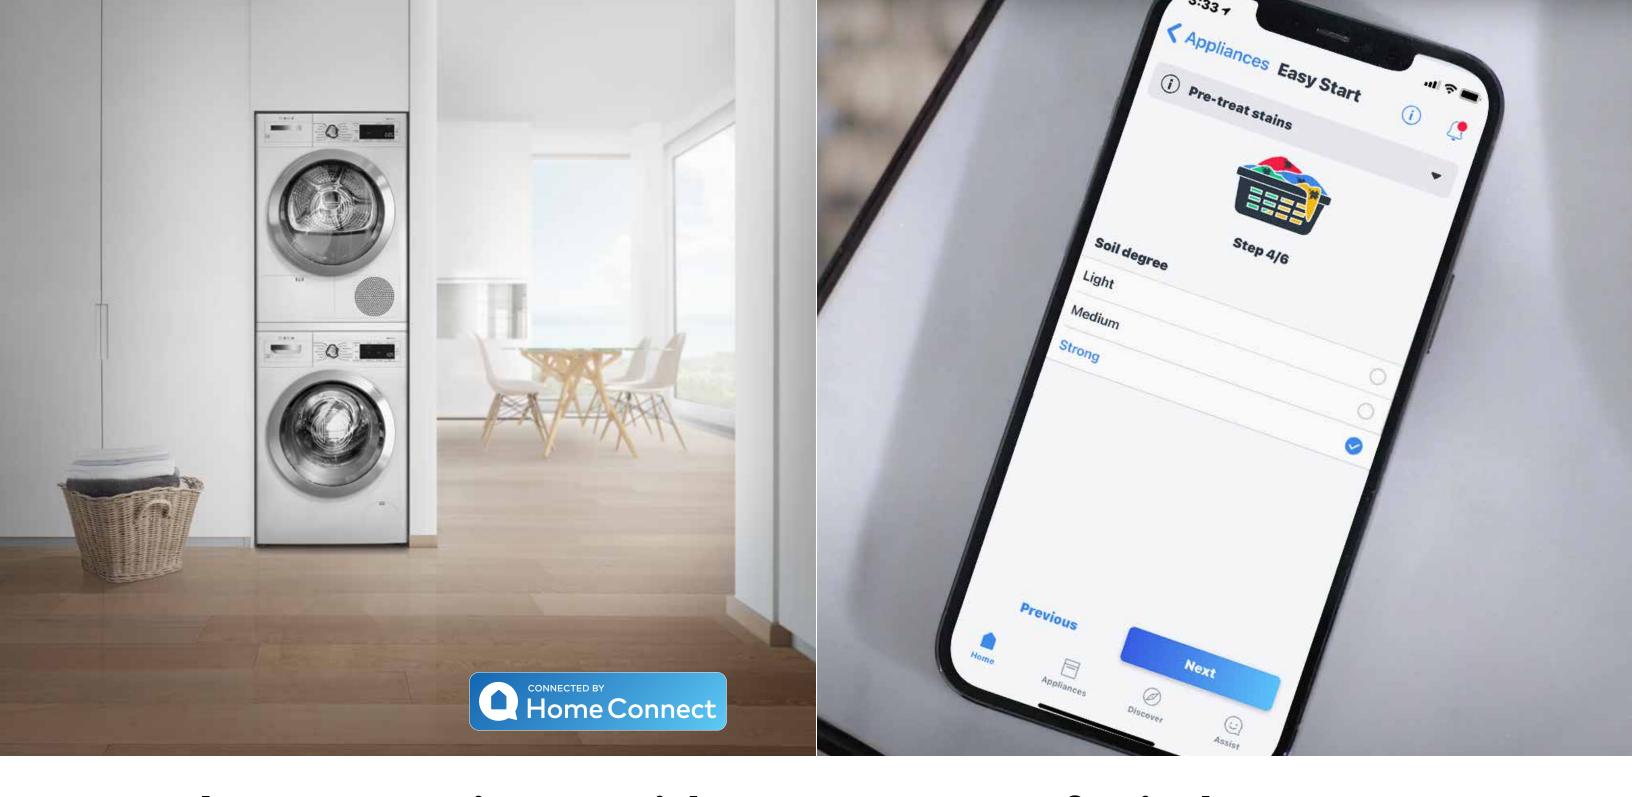

Complete convenience with connectivity.

The Bosch 500 Series and 800 Series compact laundry pairs provide a new level of ease through Home Connect®. Control and monitor your appliance remotely and receive helpful notifications on your smart device, including when a cycle is complete.

Peace of mind.

Not sure which program to select for your mixed laundry load? The EasyStart* feature can recommend the perfect program based on the types of clothing you select in the Home connect app. Take the guesswork out of laundry day.

Engineered for efficiency.



Condensation Dryers

Bosch condensation dryers are engineered to efficiently reduce drying times. Warm, moist air from the drum is cooled in the heat exchanger, releasing moisture. This water is collected and pumped out to the drain. The air is then reheated with an electric element and put back into the drum. This eliminates the need for external ducting or venting. With no ducting required, installation is made easier, faster and more cost-effective.

Heat Pump Dryer

The 500 Series Bosch Heat Pump Dryer is ventless and has no heating element. Instead, the heat pump technology uses both a cooling phase and a heating phase to remove moisture from the drum air and heat it up again before it goes back into the drum.

Condensation dryers.

How does a Condensation Dryer work?

The Bosch Condensation Dryer uses a flexible installation solution to gently dry clothes at an optimal temperature without the need for external ducting. Bosch condensation dryers are engineered to efficiently reduce drying times.



- 1 Ambient (cool) air enters dryer.
- 2 Ambient air enters condenser.
- 3 Ambient air (warm and dry) exits condenser and exhausted.
- 4 Process air (dry) exits condenser. A fan blows it into heater.
- 5 Process air air enters heater (heating element) and heated.
- 6 Process (heated) air enters drum to absorb moisture and dry laundry.
- 7 Process air (warm, wet) enters condenser and is cooled, releasing the moisture.

Orain Condensed water is collected and pumped out to drain

11

out to drain

Leak Protection

AquaShield®

The AquaShield® System, on the 500 and 800 Series, consists of a special double-walled inlet hose, which provides protection against water damage.

AquaStop® Plus

The AquaStop® Plus System, on the 800 Series, consists of the AquaShield® double-walled inlet hose with a safety valve and a leak-detector switch in the bottom of the washer to provide extensive protection against water damage. A smitty pan may no longer be required to protect floors and walls from water damage. ▶



Installation Cost Savings

Bosch washers and dryers offer both space and cost savings.

- No Additional Power Cord or Water Hoses Needed
 All power cords and the hot and cold water lines are included with
 Bosch washers and dryers.
- No Additional Power Outlets or Wall Receptacles Needed
 With the washer plugging into the dryer adapter and only requiring one wall receptacle, the installation of a second wall receptacle is no longer needed.
- No Ducting Needed

 Condensation drying requires no ducting. This saves you the cost of running ducting as well as the space behind the dryer needed for flexible duct connections.
- No Leak Risk

 No smitty pan needed* with the AquaStop® Plus and AquaShield® water leak protection systems. Avoid costly floor and wall damage with these Bosch leak protection systems.**
- ENERGY STAR® Certified

 Save on energy and water costs over the life of your project with

 Bosch ENERGY STAR® certified products. The 500 Series Pair has been recognized as ENERGY STAR® Most Efficient of 2023.



heck local building codes for complete requirements. **Available only on 500 Series and 800 Series respectively

Fit and functional design.



Design Options

The Bosch compact laundry pairs feature matching washer and dryer designs across the three different series. Design accents unique to each series include white, silver or chrome control knobs and door ring.



Premium look and feel

Purposeful design

The sleek design of the LED control panel and illuminated dial* offers easy cycle and option selection.

The circular design of the side walls and wave-pattern of the drum minimizes vibration and noise for a peaceful clean.



*Available only on 500 Series and 800 Series models.

EcoSilence™ Motor

The EcoSilence™ Motor is a brushless motor which makes the SpeedPerfect® mode even quieter. Energy-efficient and quiet in operation, the EcoSilence™ Motor provides a more efficient performance cycle with an especially long life.



Featuring an anti-vibration system, Bosch washers monitor the load weight and movement of the drum to reduce noise. The circular design of the sidewall further reinforces its structure and increases the stability of the overall appliance.



14

Quality and performance.



Dirty to dry in 30 minutes

The 800 Series laundry pair features a 15-minute wash and a 15-minute dry cycle. The cycle can be used on any small, lightly soiled load, such as five dress shirts.



SpeedPerfect® option

SpeedPerfect® provides up to 40% faster washing time.*





Large capacity

Even with a small footprint, our washer features a large capacity and holds a variety of loads. An expansive viewing window and lightweight door make loading and unloading a snap.

Powerful yet gentle wash

Depending on the cycle, the washer adjusts the direction of the drum rotation, using the steeper edges for heavy duty or shallow edges for delicate fabrics that require gentler care.

*As compared to Perm Press Heavy Soil cycle without SpeedPerfect®.

Bosch laundry lineup + Represents Step-up

Washers

300 Series WGA12400UC



- ENERGY STAR
- ▶ dBA 52 spinning/72 washing
- ▶ AntiVibration system
- ▶ Quick 30 minute program
- ► SpeedPerfect®
- ▶ Up to 1400 RPM spin speed
- ► EcoSilence[™] drive BLDC motor

500 Series WAW285H1UC



- + dBA 50 spinning/71 washing
- + Home Connect® controls washer remotely
- + AquaShield® hose
- + Sanitize cycle heats water to over 140°F
- + Stain Type Selection

800 Series WAW285H2UC



- + dBA 50 spinning/71 washing
- + AquaStop® Plus for leak protection in the base and in the hose
- + Premium LED controls
- Illuminated selection jog dial
- + LED interior light
- + SuperQuick 15™ minute program

Dryers

300 Series (Condensing) WTG86403UC



- ▶ 67 dBA
- ▶ Intelligent sensors prevent over drying
- ► AntiVibration system
- ► Washer plugs into the dryer adapter for easy installation
- ▶ Wrinkle Block

500 Series (Heat Pump) WTW87NH1UC



Most Efficient 2023

↑ Home Connect

2023

- + 65 dBA
- + Home Connect® controls dryer remotely
- + Self-cleaning condenser™
- + Reversible door

800 Series (Condensing) WTG865H4UC



- + 63 dBA
- + Premium LED controls
- + Illuminated selection jog dial
- + LED interior drum light
- + SuperQuick 15™ minute program

17

24" Compact Washer



- 1 Home Connect
- + AquaStop® Plus for Leak Protection in the Base and in the Hose
- + Premium LED Controls with Enhanced Text and Icons
- Illuminated Selection Jog Dial
- +LED Interior Light
- + SuperQuick 15™ Minute Program
- +Lower Noise 50 / 71 dBA (Washing / Spinning)

Indicates a step-up feature	800 Series
	White – WAW285H2UC
General Properties	
Tub material	Stainless steel
Maximum spin speed	1,400 rpm
Interior light	Yes (LED)
Leak protection systems	AquaStop® Plus (AquaStop® base + AquaShield® hose)
Internal water heater	Yes
Stackable	Yes with Stacking Kit Accessory
Silence level – washing	50 dBA
Silence level – spinning	71 dBA
Programs (No.), [Special]	(14), [SuperQuick 15, Whitest Whites]
Options (No.), [Special]	(10), [Remote Start, EcoPerfect™, Stains]
Home Connect® (Wi-Fi enabled)	Yes
Energy consumption	84 kWh/yr
Water consumption	2,379 gal/yr
ENERGY STAR® certified	Yes
Capacity	
Capacity	2.2 cu. ft.
Design Elements	
Door ring	Chrome
Control type	Premium LED touch
Dial	Illuminated jog dial
Bosch logo on door glass	Yes
Technical Details	
Watts	2,520 W
Circuit breaker	15 A*
Volts	208/220-240 V
Current	10.5 A
Frequency	60 Hz
Power cord (included) [Type]	(Yes) [240V; NEMA 6-15 3 prong]
Power cord length	63" (full length)
Drain / inlet hose length	57" / 48" (full length)
Door hinge	Left side (not reversible)
Dimensions & Weight	
Overall dimensions (HxWxD)	33 1/4 " x 23 1/2 " x 25"
Net weight	164 lbs
Minimum stack height	67 3/4 "
ADA compliance	Meets ADA height and access requirements when installed on pedestal. Meets ADA operable parts requirements for controls and detergent dispenser.

 $^{{}^{\}star}\text{Stated}$ circuit breaker size is if the appliance is plugged into an individual 240/208V,

15A minimum branch circuit.

24" Compact Washers



Most Efficience 2023

500 Series WAW285H1UC



- + Home Connect® Controls Washer Remotely
- + Recognized as ENERGY STAR® Most Efficient of 2023
- +AquaShield® Hose Provides Protection Against Water Damage
- +Sanitize Cycle Heats Water to Over 140 Degrees
- +Lower Noise 50 / 71 dBA (Washing / Spinning)



300 Series WGA12400UC

- SpeedPerfect® Provides Up to 40% Faster Washing Time*
- EcoSilence[™] Motor Delivers Quiet, Efficient Performance
- Anti-vibration Circular Side Walls Reduce Vibration
- ENERGY STAR® Certified



+Indicates a step-up feature	500 Series	300 Series
· ·	White - WAW285H1UC	White - WGA12400UC
General Properties		
Tub material	Stainless steel	Stainless steel
Maximum spin speed	1,400 rpm	1,400 rpm
Interior light	No	No
Leak protection systems	AquaShield® hose	Reinforced hose
Internal water heater	Yes	Yes
Stackable	Yes with Stacking Kit Accessory	Yes with Stacking Kit Accessory
Silence level – washing	50 dBA	52 dBA
Silence level – spinning	71 dBA	72 dBA
Programs (No.), [Special]	(14), [Sanitize, Outdoor / Sport]	(15), [Allergen, Jeans, Heavy Duty]
Options (No.), [Special]	(10), [Remote Start, EcoPerfect™, Stains]	(6), [SpeedPerfect®, PreWash]
Home Connect® (Wi-Fi enabled)	Yes	No
Energy consumption	84 kWh/yr	84 kWh/yr
Water consumption	2,379 gal/yr	2,379 gal/yr
ENERGY STAR® certified	Most Efficient of 2023	Yes
Capacity		
Capacity	2.2 cu. ft.	2.2 cu. ft.
Design Elements		
Door ring	Silver	White
Control type	Premium LED touch	Touch
Dial	Illuminated jog dial	White
Bosch logo on door glass	Yes	No
Technical Details		
Watts	2,520 W	2,520 W
Circuit breaker	15 A**	15 A**
Volts	208/220-240 V	208/220-240 V
Current	10.5 A	10.5 A
Frequency	60 Hz	60 Hz
Power cord (included) [Type]	(Yes) [240V; NEMA 6-15, 3-prong]	(Yes) [240V; NEMA 6-15, 3-prong]
Power cord length	63" (full length)	63" (full length)
Drain / inlet hose length	57" / 48" (full length)	57" / 48" (full length)
Door hinge	Left side (not reversible)	Left side (not reversible)
Dimensions & Weight		
Overall dimensions (HxWxD)	33 1/4 " x 23 1/2 " x 25"	33 1/4 " × 23 1/2 " × 24 1/4 "
Net weight	164 lbs	158 lbs
Minimum stack height	67 3/4 "	67 3/4 "
ADA compliance	Meets ADA height and access requirements wher Meets ADA operable parts requirements for cont	

^{*}As compared to Perm Press Heavy Soil cycle without SpeedPerfect®

^{**}Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit.

24" Compact Dryer



- + Premium LED Controls with Enhanced Text and Icons
- + Illuminated Selection Jog Dial
- +Interior LED Drum Light
- +SuperQuick 15™ Minute Program
- ENERGY STAR® Certified
- +Lower Noise 63 dBA



lndicates a step-up feature	800 Series White - WTG865H4UC		
General Properties			
Dryer type	Condensing		
Drum material	Stainless steel		
Interior light	Yes (LED)		
Ventless drying (no ducting)	Yes		
Stackable	Yes with Stacking Kit Accessory		
Silence level	63 dBA		
Programs (No.), [Special]	(14), [SuperQuick 15, Anti Shrink]		
Options (No.), [Special]	(8), [Remote Start, Dryness Level]		
Home Connect® (Wi-Fi enabled)	Yes		
Energy consumption	315 kWh/yr		
ENERGY STAR® certified	Yes		
Capacity			
Capacity	4.0 cu. ft.		
Design Elements			
Door ring	Chrome		
Control type	Premium LED touch		
Dial	Chrome illuminated jog dial		
Bosch logo on door glass	Yes		
Technical Details			
Energy source	Electric		
Watts	2,520 W		
Circuit breaker	15 A*		
Volts	208/220-240 V		
Current	10.5 A		
Frequency	60 Hz		
Power cord (included) [Type]	(Yes) [240V; NEMA 6-15, 3-prong]		
Power cord length	63" (full length)		
Drain hose length	78" (full length)		
Door hinge	Right side (reversible)		
Dimensions & Weight			
Overall dimensions (HxWxD)	33 1/4 " x 23 1/2 " x 25"		
Net weight	95 lbs		
Minimum stack height	67 3/4 "		
ADA compliance	Meets ADA height and access requirements when installed on pedestal. Meets ADA operable parts requirements for controls and lint filter.		

^{*}Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit.

24" Compact Dryers



2023

WTW87NH1UC

- + Home Connect® Controls **Dryer Remotely**
- + Recognized as ENERGY STAR® Most Efficient of 2023
- + Self-cleaning Condenser™
- + Reversible Door
- + Stainless Steel Drum
- +Lower Noise 65 dBA



300 Series (Condensing) WTG86403UC

- Washer Plugs into Dryer Adapter for Easy Installation (accessory purchase required)
- Intelligent Sensors Prevent Over Drying
- Anti-vibration Circular Side Walls
- Quick 40 Minute Program
- ENERGY STAR® Certified
- Low Noise 63 dBA


+Indicates a step-up feature	500 Series	300 Series	
	White - WTW87NH1UC	White - WTG86403UC	
General Properties			
Dryer type	Heat pump	Condensing	
Drum material	Stainless steel	Stainless Steel	
Interior light	No	No	
Ventless drying (no ducting)	Yes	Yes	
Stackable	Yes with Stacking Kit Accessory	Yes with Stacking Kit Accessory	
Silence level	65 dBA	67 dBA	
Programs (No.), [Special]	(14), [Sanitize, Outdoor/Sport]	(15), [Jeans, Heavy Duty]	
Options (No.), [Special]	(8), [Remote Start, Dryness Level]	(6), [Dry Level, Finished In]	
Home Connect® (Wi-Fi enabled)	Yes	No	
Energy consumption	123 kWh/yr	315 kWh/yr	
ENERGY STAR® certified	Most Efficient of 2023	Yes	
Capacity			
Capacity	4.0 cu. ft.	4.0 cu. ft.	
Design Elements			
Door ring	Silver	White	
Control type	Premium LED touch	Touch	
Dial	Silver	White	
Bosch logo on door glass	Yes	No	
Technical Details			
Energy source	Electric	Electric	
Watts	900 W	2,520 W	
Circuit breaker	15 A*	15 A*	
Volts	208/220-240 V	208/220-240 V	
Current	3.5 A	10.5 A	
Frequency	60 Hz	60 Hz	
Power cord (included) [Type]	(Yes) [240V; NEMA 6-15, 3-prong]	(Yes) [240V; NEMA 6-15, 3-prong]	
Power cord length	63" (full length)	63" (full length)	
Drain hose length	78" (full length)	78" (full length)	
Door hinge	Right side (reversible)	Right side (not reversible)	
Dimensions & Weight			
Overall dimensions (HxWxD)	33 1/4 " x 23 1/2 " x 25"	33 1/4 " x 23 1/2 " x 25"	
Net weight	125 lbs	94 lbs	
Minimum stack height	67 3/4 "	67 3/4 "	
ADA compliance	Meets ADA height and access requirements we Meets ADA operable parts requirements for o		

^{*}Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit.


20 21


24" Compact Washers

800 Series and 500 Series Dimensions and Installation

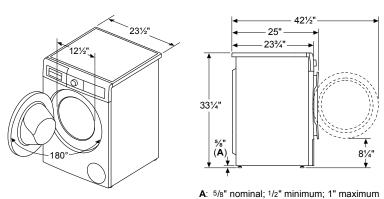


300 Series Dimensions and Installation





A: 5/8" nominal: 1/2" minimum: 1" maximum


800 Series, 500 Series and 300 Series

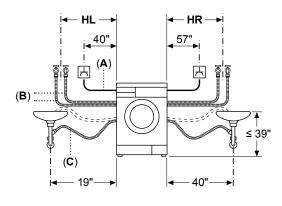

Supply Hose length	
HL	HR
37"	21"
43"	28"
	HL 37"

- A: Power Cord
- B: Supply Hoses
- C: Drain Hose


800 Series, 500 Series and 300 Series



- A: Drain exit
- B: Power cord exit C: Supply hoses (Hot and Cold)

800 Series, 500 Series and 300 Series

Guidance for location of Dryer receptacle and Water taps to minimize depth allowance (Not to Scale)




- A: Dryer
- C: Axis lines, in shaded areas, indicate Center Line of home's Dryer receptacle for minimal depth allowance if located entirely behind
- D: Minimum Stack Height (with Stacking Kit) E: Hatched area - indicates location for home's Hot and Cold water taps/outlets for minimal depth if located entirely behind


Installer / Customer is responsible for fit, function, maintenance and safety of utility

measurements in inches

24" Compact Dryers

800 Series, 500 Series and 300 Series Dimensions and installation






A: 5/8" nominal; 1/2" minimum; 1" maximum

800 Series, 500 Series and 300 Series

Guidance for location of Dryer receptacle and Water taps to minimize depth allowance (Not to Scale)




- A: Dryer B: Washer
- C: Axis lines, in shaded areas, indicate Center Line of home's Dryer receptacle for minimal appliances.
- D: Minimum Stack Height (with Stacking Kit)
 E: Hatched area indicates location for home's Hot and Cold water taps/outlets for minimal depth if located entirely behind

Installer / Customer is responsible for fit, function, maintenance and safety of utility


measurements in inches

800 Series and 300 Series




A: Power cord exit

500 Series



800 Series, 500 Series and 300 Series Reach of Power cords + Adapter (Not to Scale)



- A: Dryer B: Washer C: Power Adapter
- All references to NEMA 14-30R Dryer receptacles in this document have the orientation with the ground pin up.

Use of two individual NEMA 6-15R or 6-20R receptacles may be used as alternative means to power Washer and Dryer.

Dimensions reflect use of stacking kits.

Accessories - Washers

P/N 645787 (800 & 500 Series) Short Stainless Steel Hose (If Needed for Plumbing Box Clearance with



4-Prong Power Adapter

(Included With Dryer)*







3-Prong

Power Adapter





WTZ11400UC

Stacking Kit



WTZ20410UC

Stacking Kit

Without Shelf



WTZSB30UC

Washer

Pedestal

WMZPW20W

Accessories - Dryers







Power Adapter







Dryer Pedestal



WTZ11400UC

Stacking Kit

With Shelf





WTZ20410UC

Stacking Kit

Without Shelf





WTZSB30UC



WMZ20600

Stacking Kit Drying Rack with Brackets

Stacking Kit 4-Prong Power Adapter (Included With Drver) with Brackets

^{*}Matching Bosch Dryers are supplied with a Power Adapter to fit into a standard 4-Prong, 30A, Dryer receptacle (NEMA 14-30R) and power both Bosch Washers and Dryers. Note: - 3-Prong Adapter may be ordered directly from Bosch (not supplied with Washer or Dryer). - Use of two individual NEMA 6-15R or 6-20R receptacles/circuits may be used as alternative means to power Washer and Dryer.


^{*}Bosch Dryers are supplied with WTZPA20UC adapter to fit a standard 4-Prong, 30A, Dryer receptacle (NEMA 14-30R) to power both Bosch Washers and Dryers. Note: – 3-Prong Adapter may be ordered directly from Bosch (not supplied with Washer or Dryer).

⁻ Use of two individual NEMA 6-15R or 6-20R receptacles/circuits may be used as alternative means to power Washer and Dryer.


24" Washers and Dryers Installed in Enclosure

Enclosure Dimensions

Closet: Stacked Washer and Condensation Dryer



Closet: Stand Alone (shown) or Side by Side



Minimum clearance requirements (Stacked, Stand Alone or Side by Side):

A: Both sides (left and right) - 5/8'

B: Top – 61/4" **C**: Rear – 21/2" **D**: Front – 21/2"

Minimum louvered area and spacing:


E: Top louver area – 63 sq. in. F: Bottom louver area – 63 sq. in.

G: Lower Height (stacked) – 37" H: Upper Height (stacked) – 26"

K: Upper Height (stand alone) - 29" For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow

minimal drying results (expect long drying

Closet: Stacked Washer with Heat Pump Dryer



Minimum clearance requirements

(Stacked, Stand Alone or Side by Side):

A: Both sides (left and right) – 1/2"

B: Top – 61/4" **C**: Rear – 3"

D: Front – 1/2"

Minimum door undercut (louvered area):

E: Undercut height (Top and Bottom) - 11/4

Louvered areas of equal total sizes and split between upper and lower portions of door are permitted. F: Undercut width (Top and Bottom):

- 24" minimum for Stacked and Stand Alone


- 48" minimum for Side by Side

For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow minimal drying results (expect long

Optional Pedestal 231/4

All 800-500-300 Series **Washers & Dryers**

Under Counter (Preferred)



Minimum opening dimensions:


A: Depth - 28"

B: Width – 231/8" C: Height - 341/2"

Front of appliance fully open. No doors or coverings.

All 800-500-300 Series **Washers & Condensate Dryers**

Under Counter Enclosed (Less Preferred)



If the front of the appliance is covered, louvered openings must be installed as shown and front/rear clearances adhered to according to

Minimum louvered area and spacing:


E: Top louver area – 63 sq. in. F: Bottom louver area – 63 sq. in.

G: Lower Height – 3"

For shortest drying times keep cabinet door open while dryer is operating. When cabinet door is closed, open areas only allow minimal drying results (expect long drying times).

500 Series **Heat Pump Dryer**

Under Counter Enclosed (Less Preferred)



Minimum door undercuts: E: Undercut height (Top and Bottom) – 11/4" Louvered areas of equal total sizes and split between upper and lower portions of door are permitted.

For shortest drying times keep cabinet door open while dryer is operating. When cabinet door is closed, open areas only allow minimal drying results (expect long drying times).

measurements in inches

Washer Programs Dryer Programs

	300 Series	500 Series	800 Series
Cotton (Regular)	✓	✓	✓
Cotton Light Soil	~		
Perm Press Light Soil	~		
Perm Press Heavy Soil	✓		~
Perm Press (Regular)	✓	✓	✓
Towels	✓		✓
Allergen	✓		
Jeans	✓	✓	
Heavy Duty	✓		
Drum Clean	✓	✓	✓
Drain	✓	✓	✓
Hand Wash/Wool	✓	✓	~
Rinse/Spin	✓	✓	✓
Quick 30	✓	~	~
Delicates	✓	✓	✓
Mix		✓	
Whitest Whites		~	~
Sanitize		~	~
Bulky/Large Items		~	✓
Outdoor/Sport		~	
SuperQuick 15™			✓

Washer Options

- Temperature Selection
- Spin Speed Selection
- Finish In
- Extra Rinse**
- Prewash
- SpeedPerfect®
- EcoPerfect™*
- Remote Start*
- Stains*
- Rinse Plus*

	300 Series	500 Series	800 Series
Cotton Extra Dry	~		
Cotton Dry (Regular)	~	✓	~
Permanent Press Extra	✓		
Permanent Press Dry	✓	✓	✓
Permanent Press Damp	~		
Jeans	✓	✓	✓
Quick Dry Auto	~	✓	✓
Air Fluff/No Heat	~	✓	✓
Time Dry Variable	~	✓	✓
Quick 40	~	✓	✓
Delicates	~	✓	✓
Heavy Duty	~		
Sanitize	~	✓	✓
Hand Wash/Wool	✓	~	~
Towels	~		~
Mix		✓	
Anti-Shrink		~	~
Bulky/Large Items		~	~
Outdoor/Sport		~	
Super Quick 15™			~

Dryer Options

- Time Dry
- Dry Level
- Finish In
- Low Heat
- Wrinkle Block
- Start/Pause
- Level Adjust*
- · Remote Start*
- · End Signal

Service you can trust.

The Bosch Customer Support Team is ready to help. Please don't hesitate to contact us if you have questions on our product line, need advice about use and care, or would like to purchase parts and accessories. We are ready to assist you.

Website:

- ► How-to Videos
- ► Frequently Asked Questions
- ► Filters, Accessories and Parts
- ▶ Owner Manuals
- ▶ Product Registration
- ▶ Find a Dealer
- ► Find a Bosch Authorized Servicer

Bosch Home Appliances US: www.bosch-home.com/us

Bosch Home Appliances Canada: **www.bosch-home.ca**

Phone:

- ➤ 24-Hour Call Center Access
- ► English, French, Spanish

1-800-944-2904

Warranty:

- ► Limited warranty for entire appliance, parts and labor (1 year)
- ► Limited warranty for nonelectronic components; parts only (1st to 2nd year)
- ► Limited warranty for control board (microprocessor); parts only (1st to 2nd year)
- Limited warranty for motor or any component of the motor (1st year to 2nd year)

Please visit Bosch website to review the Use & Care Manual for full warranty terms.

Important note: Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904



Bosch Home Appliances

1901 Main St., Suite 600 Irvine, CA 92614

www.bosch-home.com/us www.bosch-home.ca

24-hour call center support in English **1-800-944-2904**

©2024 BSH Home Appliances Corporation
All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.
23-BOS-1701 2/2024