

# The easy way to perfect results.

Bosch built-in cooking catalogue





## Designed to make your everyday life easier.

Compact appliances For lovers of cooking, you can add combination steam, pure steam or combination microwave ovens to your kitchen.



#### **Ovens** High-quality stainless steel combined with

sleek black glass offers timeless design, while sophisticated features deliver the best results meaning less work and more cooking pleasure.



#### **Coffee machine**

For lovers of coffee, your favourite cafè can be right in your kitchen. The coffee machine design matches the Series 8 ovens for a seamless and coordinated look.

#### Warming drawers

Keep your coffee cups on hand for the morning cappuccino or warm up plates before serving dinner. You can also defrost, prove dough and so much more.

#### Cooktops

Choose a cooktop to match your cooking habits: from traditional ceramic or gas cooktops, to innovative induction.

#### **Built-in refrigeration**

Stylish, matching your kitchen cabinetry and packed full of sensor technology keeping your food fresher for longer.

#### Dishwashers

A dishwasher is a must in any modern kitchen to save you the hassle of cleaning up. Choose from semi and fully intergrated models to perfectly match the kitchen cabinetry.



## Find the right appliance for your dream kitchen.

### Ovens page 12-23



60cm Built-in single ovens Our ovens combine high-quality stainless steel and black glass for a sleek finish on all models. Multiple cooking and cleaning options offer convenience.



Double ovens Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



90 cm Built-in single oven With a large interior cavity, boasting 77 usable litres (net) telescopic rails and catalytic liners, the 90cm oven offers total convenience.

### Compact appliances page 24-31



**Combination steam and** pure steam ovens Cooking with steam helps retain vitamins and minerals in fresh foods, as well as maintain original colour, shape and consistency.




**Combination microwave ovens** Add speed to your traditional cooking process without compromising on taste.



Coffee machine Whether your preference is a skinny latte, a double shot cappuccino or a delicious hot chocolate, our coffee machine brings café-style drinks to your home.

Warming drawers Ensure food stays at just the right serving temperature. You can also defrost, prove dough or slow cook.

### Cooktops page 32–49



Induction cooktops Quite simply, Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.



Ceramic cooktops With their electronic touch-controls and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design



Gas cooktops The cooktop of choice in most professional kitchens, modern gas cooktops are as stylish as they are practical.

### Rangehoods page 50-63



#### Canopy wall-mounted rangehoods

Canopy wall-mounted rangehoods provide a focal point in any kitchen. Choose a design that compliments your style, plus they are also packed full of convenient features.



#### Integrated rangehoods

Sleek in design, Bosch fully integrated rangehoods are neatly concealed beneath the cupboard for a seamless look in the kitchen. Performance that is not seen or heard

### Dishwashers page 64–69





Semi-integrated dishwashers Can be fitted with a door panel to match the design of your kitchen, while providing a focal point in the visible, easy to use control panel. A continuous kick panel provides seamless integration.

#### Fully-integrated dishwashers Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry with a control panel that is neatly integrated into the top of the dishwasher door.

### Refrigeration page 70-75



#### **Built-in refrigeration**

Concealed behind panels that match the rest of your kitchen, these fully integrated fridgefreezers allow you to continue the clean design lines of your kitchen.



#### Slideout rangehoods

Extends when in use and slides neatly away when not in operation.

## Bosch – a brand you can trust.



#### Design

Every detail of every appliance has been carefully designed, where everything just matches perfectly and makes your time spent in the kitchen as enjoyable as possible.



#### Quality

Bosch appliances offer premium quality, outstanding German made and engineered technology and have been produced and tested by our engineers to fully satisfy the highest of standards.



#### Performance

With BoschAssist and advanced sensor technology found in PerfectBake<sup>™</sup> and PerfectRoast, your Bosch Series 8 ovens and compact appliances will modify the cooking process from start to finish for perfect baking and roasting results.



#### Convenience

A little peace of mind for your daily life at home with Bosch sensor technology for perfect cooking results. Plus, Active Cooling technology will keep your food fresher for longer and our self-cleaning functions will save you the trouble of cleaning up.



#### Sustainability

The Green Technology inside signet stands for the resource-efficiency of our products – quite simply, a Bosch kitchen reflects environmental consciouness.



Bosch | Good, Better, Best

## Design your kitchen

### Your every day kitchen

These appliances are perfect for first time home owners wanting reliable appliances in a contemporary design that deliver efficient value for money.



Series 4 | DFR067A50A 60cm Slideout Rangehood





\_\_\_\_\_

Series 4 | PKF645D17A 60cm Ceramic Cooktop



Series 6 | PCH615B9TA 60cm Stainless Steel Gas Cooktop

#### Want a bit more?

60cm EcoClean Oven


These appliances are perfect for families that need easy to operate home appliances with additional cooking features, a timeless design and German quality.



Series 4 | DWW097A50A 90cm Wall-mounted Stainless Steel Canopy Rangehood



Series 8 | HBG6753S1A 60cm Pyrolytic Oven



Series 4 | PIJ611BB1E 60cm Induction Cooktop



Series 6 | PCI815B91A 75cm Stainless Steel Gas Cooktop

#### Best in class

These appliances are perfect if you want the latest technology with a premium finish and outstanding German quality. With a self-cleaning oven, steam oven, microwave oven, coffee machine and warming draw all your cooking needs are covered. The flex induction cooktop makes cooking to perfection a breeze.





CSG656RS1A 60cm Compact Built-in Combination Steam Oven

HRG6767S2A 60cm Built-in Pyrolytic Oven with added steam



60cm Warming Drawer






Series 8 | PXX675DC1E 60cm FlexInduction® Cooktop

Series 6 | PPQ716B21A 70cm Black Tempered Glass Gas Cooktop



Series 8 | DHL895CAU 86cm Integrated Rangehood







CMG656RS1A 60cm Compact Built-in Combination Microwave Oven



## Contents

Ovens	
Series 8 ovens	
Series 6 ovens	
Compact appliances	
Series 8 compact applian	10
Cooktops	
FlexInduction <sup>®</sup> cooktops	
CombiInduction cooktop	S
Induction cooktops	
Ceramic cooktops	
Gas cooktops	
Rangehoods	
Wall-mounted rangehood	5
Integrated rangehoods	
Retractable slideout rang	ge
Dishwashers	
Refrigeration	
Reference guides	
Accessories	
<b>T</b>	
Technical diagrams	

	12-23
	18-19
	20-23
	24-31
ices	30-31
	32-49
	36
S	37
	38-41
	42-45
	46-49
	50-63
ls	58-59
	60-61
ehoods	62-63
	64-69
	70-75
	76-91
	92-93
	94-102
	103

# Ovens

AND STREET, ST 

THI CHIERONIAN

SSECTOR STATISTICS OF STATES

STREET,

TTEILEUTIC

Water ore

TUTE

THE STATE OF THE S



Ovens | Design

## Put a new spin on your cooking.

With the new Bosch Series 8 control panel, cooking just became a lot easier. Everything you need at hand: Our new, intuitive control ring makes cooking easier than ever.

#### **TFT Touch Graphic Display**



The iconic control ring and clear TFT screen display, combined with the direct select TouchControl buttons, make operating the Series 8 ovens simpler than ever before. Clear, vivid food images and helpful prompts guide you through each step as you navigate through the various menu options, giving you total flexibility and control of cooking functions.

#### **TFT Touch Symbol Display**



The intuitive control ring and clear TFT display with DirectSelect icons make it easy to operate your oven. Shortcuts to the two most commonly used heating functions, helpful icons and clear descriptions inside the control ring, provide all the information you need to keep track of your cooking.

#### **Rotary Controls**

The rotary controls make the oven easy to operate. The retractable controls, on selected models, maintain a clean line when the oven is not in use, making the oven control panel easy to clean.



### **Ovens** | Automatic functions

## With Bosch sensor technology it's the oven that cooks by itself. Automatically.

#### **Bosch Assist**

You could easily search through cookbooks and family recipes without ever finding the exact temperature or cooking time for that favourite dish. Thanks to Bosch Assist, you don't have to. The advanced sensor technology found in PerfectRoast and PerfectBake<sup>™</sup> – combined with the functionality of automatic programs as we know them today - offers an extensive menu of food categories that help create your perfect meal. Simply select the desired dish, press start and your oven automatically sets the ideal heating mode, temperature and length of time, monitoring and modifying the cooking as required for the best results. Of course, you can also select these settings yourself every bit as easily.



#### PerfectBake™

Baking has never been easier, thanks to the unique PerfectBake<sup>™</sup> sensor. This function constantly measures the precise moisture level of your dishes and automatically adjusts the entire baking process, which means you'll never have to set the heating mode, length of time or temperature ever again. Simply choose the type of dish, such as 'Cake in Tin', press start and let your Bosch oven bake your cake to perfection\*.



Achieve the perfect roast lamb, Christmas turkey, stuffed meats and fish. The PerfectRoast meat probe features three sensitive measuring points and uses the lowest temperature reading to determine the core temperature before calculating the residual cooking time. The results are simply perfect. Used manually or with Bosch Assist, you can modify the suggested core temperature (within a recommended range) and combine with microwave and steam cooking functions.



The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, enter its weight and select the desired program from the menu.













### **Ovens** | Cleaning functions

## At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows it can be exhausting and time-consuming. Thanks to the new EcoClean Direct and pyrolytic self-cleaning function, manual cleaning is a thing of the past. At the touch of a button, the self-cleaning pyrolytic program reduces residual food to ash, leaving your oven sparkling clean.



#### **EcoClean Direct**

The self-cleaning surfaces in the oven are directly coated with a patented, microfine ceramic material. This coating absorbs and breaks down grease and residue during baking and roasting. Before activating the cleaning function, all you need to do is wipe down the base of the oven and the inside of the glass door. For added convenience, the oven also prompts when it needs to run a cleaning cycle. Of course, you can also activate the cleaning program at any time.\*

#### EcoClean

EcoClean uses a coating of microfine ceramic material applied to liners fitted within the oven cavity. This coating absorbs and breaks down grease and residue during roasting and baking. Depending on the model of the oven, the EcoClean system has rear wall, side walls and/or ceiling liners. As with other Bosch cleaning functions, all you need to do is wipe down the base of the oven and the inside of the glass door before activating.\*



#### **Pyrolytic cleaning**

During the pyrolytic cleaning function, the oven heats up to 480°C to burn off grease and food residue. What's left is a small residual amount of ash in the base of the oven that can be easily wiped clean. There are three different cleaning programs to choose from, depending on the degree of residue that has accumulated. The pyrolytic proof enamelled trays, shelf racking\* and telescopic rails, mean you can now leave them in the oven during the cleaning program too.

\*Please remove all accessories when activating the specific EcoClean Direct or EcoClean program. #Metal racks may show slight discolouration after prolonged use of the pyrolytic function. To prevent this you may choose to remove the wire racks during the pyrolytic cycle. Features may vary depending on models. Please check individual product specifications









### Because there's hot. and then there's hot.

Perfect baking and roasting not only requires the right temperature, but also the appropriate heating function too. From 4D HotAir to Slow cooking, Bosch ovens offer heating functions that deliver everything from haute cuisine to everyday feasts

#### 4D HotAir\*

Thanks to 4D HotAir, you can place your food on any shelf from level one to four, and the results will be consistently perfect. The rotating fan alternates its direction during cooking to distribute heat evenly on every level. And for reliable results 'top to bottom', you can also bake and roast on up to four different levels simultaneously.^

single tray. This energy efficient function distributes less heat into the oven and uses residual heat to maintain the set temperature.

#### Top and bottom heat\*

Uses both the upper and lower heating the selected temperature. Suitable for traditional baking and roasting, and offers best results for cakes with moist toppings.

#### Top and bottom heat Eco

In addition to the Top and bottom heat function, selected Series 8 ovens feature a new eco-friendly mode, which supports cooking on a single shelf for energy efficient cooking. Prepare perfect sponges, pound cakes, delicate pastries and bread rolls while saving valuable energy.

final baking stage. The heat is emitted from the lower heating element.

Combines the top element with a more powerful bottom heating element that is perfect for crispy bases and baking in tins.

#### Hot air grilling\*

crisp cooking results.

Grill, large area

for cooking a gratin.

Grill, small area

**Pizza setting** 

elements.

warm.

Keeping warm\*

Slow cooking

without a lid

Drying

on or off.

Preheat ovenware

#### HotAir Eco

HotAir Eco uses less energy by using a

elements. Heat travels to the centre of the oven, which is the best position to obtain

#### **Bottom heating**

For cooking in a bain-marie and for the

#### Intensive heat

Sabbath mode Set a maximum timer of up to 74 hours using the Sabbath function. You can keep the food in the cooking compartment warm without having to switch the oven

Features may vary depending on models. Please check individual product specifications. \*Possible to use added steam for this type of heating (operation only possible when the water tank is full). ^To cook on all four levels simultaneously, four wire racks are required for best results. For up to three levels, all accessories are suitable, ie. universal tray or baking tray.

Achieve rotisserie-style cooking for meat and poultry. The grill and fan alternate, which produces even and

For grilling flat items, such as steaks and sausages, for making toast, and

For grilling small amounts of steaks or sausages, for making toast or where grilling a smaller surface area is required.

Create crispy pizzas or give any dish that extra heat that's needed from underneath by using a combination of heating

A new feature that keeps cooked food

For gentle and slow cooking of seared, tender pieces of meat in ovenware

A new feature that is useful for preheating ovenware and even dinnerware

A new function for drying fruits, vegetables and herbs with maximum flavour. This function can also be used for drying out the oven cavity after the added steam function has been used.

#### Rapid heating

With rapid heating, you can shorten the heat-up time for selected heating functions, including 4D HotAir and Top and bottom heating.

**3D HotAir Plus** 

Cook on up to 3 levels simultaneously with even heat distribution.

#### Fan forced hot air

A fan disperses heat evenly for cakes and pastries baked on two levels.

#### Fan assisted top and bottom heating

Uses both upper and lower heating elements while a fan disperses heat evenly.

#### Defrost

Perfect for gentle defrosting of meat, poultry, bread and much more.

#### Reheating\*

For plated meals and baked items. Cooked food is gently reheated. The steam ensures the food does not dry out.


#### Dough proving\*

For yeast dough and sourdough. Dough will rise considerably quicker than at room temperature. The surface of the dough does not dry out.

### Ovens | Overview

## Bosch ovens bring style and elegance to your kitchen.

### Serie 8

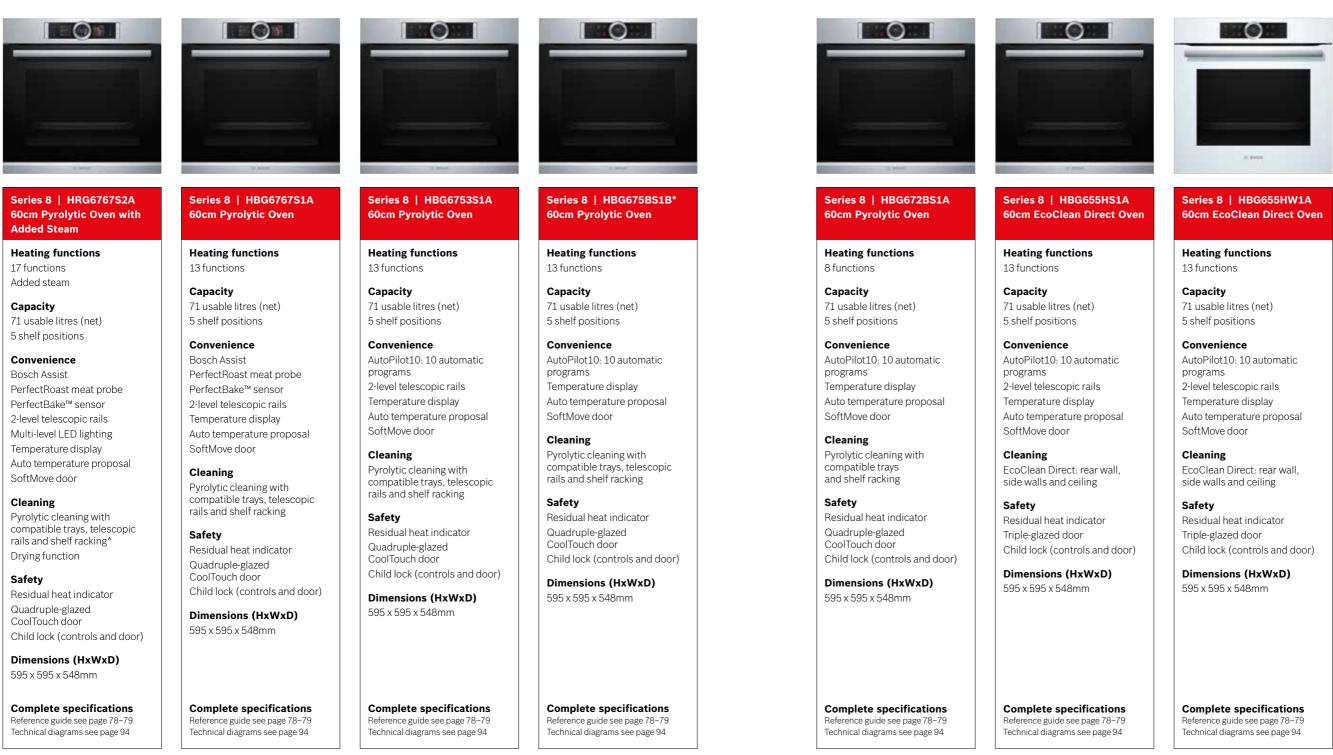

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. ^Please remove the water tank prior to running the pyrolytic cleaning cycle. \*Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance



#### Series 8 | HBG633BS1A 60cm EcoClean Direct Oven

Heating functions 10 functions

Capacity 71 usable litres (net) 5 shelf positions

#### Convenience

Temperature display Auto temperature proposal SoftMove door

Cleaning EcoClean Direct: rear wall

Safety Residual heat indicator Triple-glazed door Child lock (controls and door)

Dimensions (HxWxD) 595 x 595 x 548mm

Complete specifications

Reference guide see page 78-79 Technical diagrams see page 94 Ovens | Overview

### Serie 6



#### Series 6 | HBA73R350B\* 60cm Pyrolytic Oven

**Heating functions** 9 functions

Capacity 65 usable litres (net) 5 shelf positions

Convenience Electronic touch-control clock/ timer with end-time programming 1-level telescopic rails

Cleaning Pyrolytic cleaning including enamel trays with pyrolytic proof pan supports

Safety Quadruple-glazed CoolTouch door Child lock

**Dimensions (HxWxD)** 595 x 595 x 548mm

Complete specifications Reference guide see page 80-81 Technical diagrams see page 94



#### Series 6 | HBA63B150B\* 60cm Pyrolytic Oven

Heating functions 6 functions

Capacity 65 usable litres (net) 5 shelf positions

Convenience Electronic touch-control clock/ timer with end-time programming

Cleaning Pyrolytic cleaning including enamel trays with pyrolytic proof pan supports

Safety Quadruple-glazed CoolTouch door Child lock

Dimensions (HxWxD) 595 x 595 x 548mm

Complete specifications Reference guide see page 80–81 Technical diagrams see page 80-81



Series 6 | HBA33B150A\* 60cm EcoClean Oven

Heating functions 7 functions

Capacity 62 usable litres (net) 5 shelf positions

Convenience Electronic touch-control clock/ timer with end-time programming

Cleaning EcoClean System: Rear wall

Safety Triple-glazed door Child lock

Dimensions (HxWxD) 595 x 595 x 515mm

**Complete specifications** Reference guide see page 80-81 Technical diagrams see page 94



Series 6 | HBA23B151A\* 60cm EcoClean Oven

> Heating functions 5 functions

> > Capacity 67 usable litres (net) 5 shelf positions

> > > Convenience Electronic touch-control clock/ timer with end-time programming

Cleaning EcoClean System: Rear wall

Safety Triple-glazed door Child lock

Dimensions (HxWxD) 595 x 595 x 548mm

**Complete specifications** Reference guide see page 80-81 Technical diagrams see page 94



Series 6 | HBA13B254A 60cm EcoClean Oven

Heating functions 4 functions

Capacity 67 usable litres (net) 5 shelf positions

Convenience Electronic touch-control clock/ timer with end-time programming

Cleaning EcoClean System: Rear wall and ceiling liners

Safety Triple-glazed door Child lock

Dimensions (HxWxD) 595 x 595 x 548mm

**Complete specifications** Reference guide see page 80-81 Technical diagrams see page 94

Series 6 | HBA13B253A 60cm EcoClean Oven

Heating functions 4 functions

Capacity 62 usable litres (net) 5 shelf positions

Convenience Electronic touch-control clock/ timer with end-time programming

Cleaning EcoClean System: Rear wall liner

Safety Triple-glazed door Child lock

Dimensions (HxWxD) 595 x 595 x 515mm

Complete specifications Reference guide see page 80-81 Technical diagrams see page 94

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. \*Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance



#### Series 6 | HVA541NS0 90cm Built-in Oven

#### Heating functions 9 functions

Capacity 77 usable litres (net) 4 shelf positions

#### Convenience

Electronic clock/timer 1-level telescopic rails

#### Cleaning

Catalytic liners: Side and rear walls

#### Safety

Triple-glazed door

#### Dimensions (HxWxD)

478 x 896 x 568mm

#### **Complete specifications**

Reference guide see page 80-81 Technical diagrams see page 94

#### Ovens | Overview

### Serie 6



#### Series 6 | HBM43S550A 60cm EcoClean Double Oven

**Heating functions** 3 functions - top oven 5 functions - bottom oven

#### Capacity

35 usable litres (net) top oven 67 usable litres (net) bottom oven 2 shelf positions – top oven 5 shelf positions - bottom oven

#### Convenience

Electronic touch-control clock/timer with end-time programming 2-level telescopic rails bottom oven

#### Cleaning

EcoClean System: Rear wall, side walls and ceiling liners both top and bottom ovens

Safety Triple-glazed door Child lock

Dimensions (HxWxD) 888 x 595 x 550mm

**Complete specifications** Reference guide see page 80-81 Technical diagrams see page 95



Series 6 | HBM43B250A 60cm EcoClean Double Oven

Heating functions 2 functions - top oven 5 functions - bottom oven

#### Capacity

35 usable litres (net) top oven 67 usable litres (net) bottom oven 2 shelf positions - top oven 5 shelf positions - bottom oven

Convenience Electronic touch-control clock/timer with end-time programming

Cleaning EcoClean System: Rear wall, side walls and ceiling liners both top and bottom ovens

Safety Triple-glazed door Child lock

**Dimensions (HxWxD)** 888 x 595 x 550mm

**Complete specifications** Reference guide see page 80-81 Technical diagrams see page 95

### Ovens | Features and functions

## Features and functions for everyday use.



#### Efficiency

#### **Telescopic rail system**

The Bosch telescopic rails are fully or partially extendable (depending on model) and are ideal for loading and removing trays with ease. Whether you choose a single or double rail option, all shelves are pyrolytic proof and compatible with microwave and steam cooking. Trays are also interchangeable between Series 8 full-sized ovens and compact appliances, excluding the pure steam compact oven.

#### Extra large cavity

Bosch Series 8 ovens offer up to 71 usable litres of cooking space and larger baking trays. The increased cavity creates more uniform baking results due to the improved heat circulation between the racks. Series 6 60cm ovens have an interior capacity of 67 usable litres (net), with the 90cm model boasting 77 usable litres (net).

#### SoftMove and SoftClose

SoftMove in Series 8 and SoftClose on Series 6 models is a special damping mechanism, the oven door opens and closes softer and quieter than before. This convenient feature not only offers a premium finish, it also protects the oven and door during the life of the oven.

#### Lighting

Depending on the model, Series 8 ovens and compact appliances offer our classic, halogen lighting, LED ceiling light or the new multi-level LED lighting.

Energy efficient LED lighting offers vibrant illumination and longevity. The multi-level LED lighting offers illumination on each level, which is exceptionally convenient when baking on multiple levels.

Integrated halogen lighting ensures the interior cavity is brightly lit. More efficient than standard lights, they are durable and are designed to last longer.



#### Simplicity

#### Oven clock and timer with programming

The electronic clock displays time of day and also acts as a countdown timer with an audible beep to indicate the end of the timer function. Programming adds extra convenience. Simply select the end-time (when you arrive home, eg. 6.30pm), the length of cooking, along with the cooking function and temperature, and the oven will do the rest.

#### CoolTouch doors

For added safety, selected Bosch single ovens are fitted with quadruple-glazed CoolTouch doors. The reflective inner glass is designed to keep the heat in, while providing a safe-to-touch door on the outside.

#### **Residual heat indicator**

When the appliance is switched off, the display ring shows the residual heat in the cooking compartment. As the residual heat cools down, the display ring becomes darker then disappears.

#### Cabinetry cooling fan

The fan circulates cool air around the oven to keep the appliance and the surrounding cabinetry free from the hot air vented by the oven.

#### Automatic switch-off

after a period of time

#### **Child lock**

Bosch Series 8 ovens are equipped with a child lock that prevents unwanted changes to settings. The control panel is locked so the appliance can only be switched off using the On/Off button. Optional door lock function on selected models.





#### Performance

Added steam function

If left unattended the oven will switch-off

dough, baking or roasting, you can set the

oven to automatically add bursts of steam, or you can add steam manually to regulate the intensity. Create succulent roasts and perfectly browned bread crusts with ease. Added steam works with: 4D HotAir. Hot air grilling, Top and bottom heating and Keep warm.

Enhance your cooking results by adding

a little bit of moisture from time to time,

Whether you're reheating dishes, proving

thanks to the added steam function.

#### Precise temperature control

Electronic thermostats monitor the ovens cavity temperature to maintain temperature consistency during the cooking process.

# Compact appliances





## Serie 8

Compact appliances | Design

## The perfect compliment to your Series 8 kitchen.

For lovers of cooking, Bosch compact appliances offer exceptional cutting-edge features and extra cooking functionality. Perfectly matched design panels within Series 8 allow you to mix and match these appliances with full-sized ovens for a seamless and coordinated look. With the intuitive display and Bosch control ring, operating functions are harmonised for easy use.



### Built-in coffee machine

Espresso, cappuccino or latte macchiato? With the Series 8 built-in coffee machine, you can treat yourself and your guests to your favourite beverage at the touch of a button. Bosch Barista technology guarantees a full-bodied aroma and perfect crema for coffees as delicious as those brewed in your favourite café.

#### SensoFlow system for a perfect aroma

The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow system heats the water to just the right temperature, for a full-bodied espresso aroma from the first to the last cup.

#### A choice of coffee at the touch of a button

With the OneTouch function, it'll be ready in an instant. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.

#### Automatic cleaning of the milk system

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato instead of cleaning.





### Combination microwave

Sometimes, you just can't get food to the table fast enough. Our new Series 8 combination microwave ovens help speed up the cooking process and give you perfect control over your menu and your schedule. Whether you're heating baby food, pre-cooked meals or frozen foods, you'll produce outstanding results quickly and without compromising on taste.

#### Automatic functions to speed up your cooking

Heat, defrost, roast or grill anything, thanks to 1000 watts and five power levels. The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, enter its weight and select the desired program from the menu.

#### Sensor technology for perfect results

With Bosch Assist on our premium model, press start and the oven takes care of the rest, monitoring and modifying the cooking method as required for best results. Bosch Assist works in combination with the unique PerfectBake™ sensor and PerfectRoast meat probe for perfect cooking and baking results.



### Warming drawers

Our Series 8 warming drawers can do much more than just keep food and plates warm; they're also perfect for slowcooking meat, defrosting frozen foods and proving dough.

#### Designed to match

The warming drawers from Bosch can be installed either separately or in combination with Series 8 ovens, compact ovens and built-in automatic coffee machine. The practical 'push and pull' technology ensures they are always easy to open, even when you have both hands full. They come in two sizes: 140mm high with 20 usable litres (net) and 290mm high with 52 usable litres (net).



## Steams so gently, even vitamins stay for dinner.

There is no healthier or tastier way to prepare food than in a Series 8 steamer or combination steam oven. When gently cooked in steam, food retains its vitamins and aroma while bringing out the full and natural flavour. Vegetables stay fresh and crisp, while poultry and fish remain juicy and tender. With steam, you can even cook without adding oil or extra seasoning. Thanks to the integrated water tank, Bosch steamers don't require an external water connection, offering greater flexibility in choosing their position in your kitchen.



### Steam oven

#### Menu cooking

With the Series 8 steamer, you can prepare an entire set menu using up to three levels at once. Salmon with asparagus and rosemary potatoes? Cook them all together and everything will turn out perfectly. Need to prepare dessert, too? No problem. Thanks to the moisture in the oven, there's no intermingling of flavours - each dish retains its own authentic flavour.



### Serie | 8

Compact appliances | Steamers



### Combination steam oven

#### The best of both worlds

With the Bosch Series 8 combination steam oven, you can bake, steam or both. Combine the benefits of pure steam cooking with functions of a conventional oven and discover the results of giving your roasts and home-made bread a crispy finish. The premium combination steam oven also comes with Bosch Assist, the PefectBake<sup>™</sup> sensor and PerfectRoast meat probe for perfect cooking and baking results.

#### Reheating

At 90–95°C, food is gradually reheated to taste as if it was freshly cooked.

#### Dough proving

For yeast dough and sourdough. Dough will rise considerably quicker than at room temperature. The surface of the dough does not dry out.



Compact appliances | Overview

## Designed to create perfect symmetry in your kitchen.

### Serie 8



#### Series 8 | CSG656RS1A 60cm Combination Steam Oven

Heating functions 18 heating functions Multi level pure steaming Conventional cooking combined with steam cooking for tender and crispy results

Capacity 47 usable litres (net) 3 shelf positions 1 litre removable water tank with empty water tank indicator

Convenience Bosch Assist PerfectBake<sup>™</sup> sensor PerfectRoast meat probe 1-level telescopic rails Temperature display Automatic temperature proposal SoftMove door Stainless steel cavity

Cleaning EcoClean Direct: rear wall, side walls and ceiling Drying function Descaling program

Safety Residual heat indicator Triple-glazed door Child lock

Dimensions (HxWxD) 455 x 595 x 548mm

**Complete specifications** Reference guide see page 82 Technical diagrams see page 95



#### Series 8 | CDG634BS1 60cm Pure Steam Oven

**Heating functions** 4 heating functions Multi level pure steaming

Capacity 38 usable litres (net) 4 shelf positions 1.3 litre removable water tank with empty water tank indicator

Convenience AutoPilot20: 20 automatic programs Temperature display Automatic temperature proposal SoftMove door

Cleaning Descaling program

Safety Residual heat indicator Triple-glazed door Child lock

Dimensions (HxWxD) 455 x 595 x 548mm

**Complete specifications** Reference guide see page 82 Technical diagrams see page 95



Series 8 | CMG656RS1A 60cm Combination Microwave Oven

**Heating functions** 13 heating functions Conventional cooking combined with microwave 5 inverter microwave power levels up to 1000W

Capacity 45 usable litres (net) 3 shelf positions

Convenience Bosch Assist PerfectBake<sup>™</sup> sensor PerfectRoast meat probe 1-level telescopic rails Temperature display Automatic temperature proposal SoftMove door

Cleaning EcoClean Direct: rear wall, side walls and ceiling

Safetv Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD) 455 x 595 x 548mm

Complete specifications Reference guide see page 82 Technical diagrams see page 95





Series 8 | CMG633BS1B 60cm Combination Microwave Oven

#### Heating functions

7 heating functions Conventional cooking combined with microwave 5 inverter microwave power levels up to 1000W

Capacity 45 usable litres (net) 3 shelf positions

#### Convenience AutoPilot14: 14 automatic programs

Temperature display Automatic temperature proposal SoftMove door

Safety Residual heat indicator Triple-glazed door Child lock (controls and door)

Dimensions (HxWxD) 455 x 595 x 548mm

**Complete specifications** Reference guide see page 82 Technical diagrams see page 95

(i) workers

Series 8 | CTL636ES1 60cm Built-in Coffee Machine

#### Flavour

SensoFlow System: Heating system for maximum and constant brewing temperature AromaPro Concept: Optimal aroma extraction

#### Convenience

TFT Touch Graphic Display with interactive menu MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso

#### Performance

SilentCeram Drive: Quiet. premium grinder made from non-wearing ceramic CoffeeSensor Pro: Automatically

#### Hygiene

hygienic cleaning under running water AutoMilk Clean: Automatically steam cleans the milk system after every beverage

Dimensions (HxWxD)

455 x 594 x 375mm

**Complete specifications** Reference guide see page 83

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance



adjusts grinding unit to bean variety

Removable brewing unit: Easy and

Technical diagrams see page 96



#### Series 8 | BID630NS1A/BIC630NS1A 60cm Warming Drawers

**Heating functions** 

40°C-80°C temperature control

#### Capacity

BID630NS1A: 52 usable litres (net) BIC630NS1A: 20 usable litres (net)

#### Convenience


Fully extendable telescopic drawer Ceramic-glass base element Suitable for: plate warming, keep warm, slow cooking, defrost and proving dough

#### Dimensions (HxWxD)

BID630NS1A: 290 x 595 x 548mm BIC630NS1A: 140 x 595 x 548mm

Complete specifications Reference guide see page 83 Technical diagrams see page 95-96



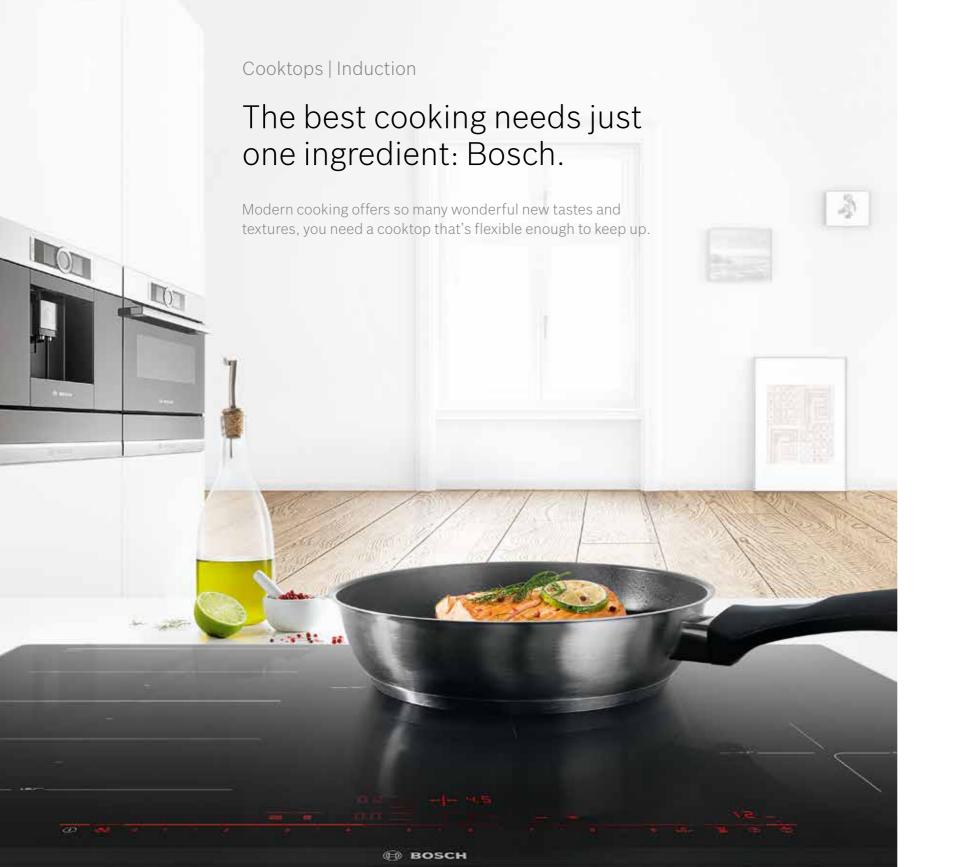


----



and more.

Induction speeds up your cooking

Time required to heat 2 litres of water at 15°C-90°C



Source: BSH Hausgeräte GmbH, Germany (overseas test results)

#### Old pots, new technology

Most of your old pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.

#### **Bosch FlexInduction®**


The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. The FlexZone can be used as two separate zones or combined into a single 'super-zone' where the entire zone becomes your cooking canvas.

#### **Bosch Combilnduction**

Experience the magic of CombiZone – two cooking zones can be linked, making the switch from small to large pans effortless. Plus, the MoveMode function automatically switches from boil to simmer with a simple slide of the saucepan.

#### **Bosch Induction**

Bosch's benchmark Induction cooktops put you in control with 17 power levels plus PowerBoost for each zone, dual function timer with automatic switch-off, residual heat indicators, child lock



Induction cooktops offer the most efficient way of cooking at lower temperatures, ie. melting chocolate, etc.


Cooktops | FlexInduction®

### FlexInduction<sup>®</sup> cooktops

Introducing Bosch FlexInduction<sup>®</sup>, the result of decades of research and development. Introducing true freedom in the kitchen.



Ideal for small pots, large pots, multiple pots, frying pans or caserole dishes - you name it, thanks to the unique coil shapes you get the ultimate flexibility and heat distribution. At the flick of a switch, two induction zones become one large FlexInduction® surface.



#### MoveMode

Pre-set 3 different power levels and move from boil to simmer in just seconds.

1. Perfect for rapid boiling (Power level 9 – Front FlexZone)

2. Medium heat cooking (Power level 5 – Middle FlexZone)

3. Ideal for simmering (Power level 1 – Back FlexZone)



Perfect FrySensor - for a steak that is just right With up to 5 automatic settings, the pan is heated to just the right temperature. Sensors inside the cooktop continuously measure the temperature and maintain it for perfect results. \*Works with Bosch PerfectFry Sensor Pans, see page 93 for details.

Cooktops | Combilnduction

### Combilnduction cooktops

Bosch CombiInduction lets you switch from small to large and oversized pans, like Teppan Yaki, simply and easily. So now there's no limit to the tastes you can create.



#### CombiZone

With Bosch Combilnduction you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard cooking zones into one large cooking zone.

# MoveMode always in control.





When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next, without a hiccup, and

Cooktops | Induction overview

## Induction cooktops

### Serie | 8



Series 8 | PXV975DC1E\* 90cm FlexInduction® Cooktop

#### Heating functions

5 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans 320mm triple circuit zone 17 power levels PowerBoost for each zone ShortBoost for each zone

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone MoveMode: 3 automatic power levels PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display

#### Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 916 x 527mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 96–97



Series 8 | PXE875DC1E\* 80cm FlexInduction® Cooktop

#### Heating functions

4 induction cooking zones: 1 large FlexInduction® zone for large pans or multiple smaller pans 17 power levels PowerBoost for each zone ShortBoost for each zone

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone MoveMode: 3 automatic power levels PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display

#### Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

#### Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 816 x 527mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 96–97



Series 8 | PXX675DC1E 60cm FlexInduction® Cooktop

#### Heating functions

4 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans 17 power levels PowerBoost for each zone ShortBoost for each zone

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone MoveMode: 3 automatic power levels PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display


#### **Cleaning** WipeProtection pauses all

settings for easy cleaning while cooking Safety

#### 2-stage residual heat indicators Child lock

Dimensions (WxD) 606 x 527mm

Complete specifications Reference guide see page 84–85 Technical diagrams see page 96–97



Series 8 | PIV995DC1E\* 90cm Induction Cooktop

#### Heating functions

5 induction cooking zones: 1 large 32cm triple circuit zone 17 power levels PowerBoost for each zone ShortBoost for each zone

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display

#### **Cleaning** WipeProtection pauses all settings for easy cleaning while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 916 x 527mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 96–97

## Serie **6**



Series 8 | PIV975DC1E\* 90cm Induction Cooktop

#### Heating functions

5 induction cooking zones: 1 large 32cm triple circuit zone 17 power levels PowerBoost for each zone ShortBoost for each zone

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display

**Cleaning** WipeProtection pauses all settings for easy cleaning while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 916 x 527mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 96–97

Series 6 | PVS875FB1E 80cm Combilnduction Cooktop

#### Heating functions

4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans 17 power levels PowerBoost for each zone

#### Convenience

Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off for each zone MoveMode: 2 automatic power levels QuickStart ReStart Energy Consumption display

**Cleaning** WipeProtection pauses all settings for easy cleaning while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 802 x 522mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 96–97



#### Series 6 | PVS675FB1E 60cm Combilnduction Cooktop

#### Heating functions

4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans 17 power levels PowerBoost for each zone

#### Convenience

Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off for each zone MoveMode: 2 automatic power levels QuickStart ReStart Energy Consumption display

#### Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

#### Safety

2-stage residual heat indicators Child lock

#### Dimensions (WxD)

592 x 522mm

#### **Complete specifications**

Reference guide see page 84–85 Technical diagrams see page 96–97



#### Series 6 | PIE631FB1E 60cm Induction Cooktop

#### Heating functions

4 induction cooking zones 17 power levels PowerBoost for each zone

#### Convenience

Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off for each zone MoveMode: 2 automatic power levels Keep warm: low setting for keeping food warm QuickStart ReStart Energy Consumption display

#### Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

#### Safety 2-stage residual heat indicators Child lock

#### Dimensions (WxD) 592 x 522mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 96–97 Serie 4

Series 4 | PIJ611BB1E 60cm Induction Cooktop

Heating functions 3 induction cooking zones including XL 28cm cooking zone

PowerBoost for each zone

TouchSelect electronic controls

Dual timer with auto switch-off

2-stage residual heat indicators

Dimensions (WxD)

**Complete specifications** 

Reference guide see page 84-85

Technical diagrams see page 96-97

17 power levels

Convenience

for each zone

QuickStart

ReStart

Safety

Child lock

592 x 522mm

Cooktops | Induction features

## Features and functions for everyday use.



#### Efficiency

#### WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

#### QuickStart

Start cooking quicker. New Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

#### ReStart

Things happen quickly in the kitchen - if you spill something on the control panel or accidentally switch-off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

#### Energy Consumption Display\*

Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

#### Automatic pot detection

Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.



#### Performance

#### 17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

#### PowerBoost - now with even more power!

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.

#### ShortBoost

Reduce the time to heat up pans - this boost function heats up the pan for 30 seconds at high power before automatically reducing the heat to the correct power setting.

#### Keep warm

Ideal setting for keeping food warm before serving at the touch of a button

Enjoy total convenience with DirectSelect. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/- repeatedly.

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.



### Simplicity

#### Dual function timer including automatic switch-off for each zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (ie. level 5.5) for up to 99 minutes - ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

#### 2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.

#### Child lock

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

#### **DirectSelect Premium**

Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

#### DirectSelect 1.0

#### TouchSelect

#### Automatic safety switch-off

Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.

Cooktops | Ceramic

## The world of Bosch ceramic cooktops.

There is a wide range of ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.







#### Efficiency

#### WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

#### ReStart

Things happen quickly in the kitchen if you spill something on the control panel or accidentally switch-off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

#### **Energy Consumption Display**

Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

### Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy. TouchSelect

Simplicity

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

#### **Rotary Controls**

The rotary controls make the cooktop easy to operate for those who like a more hands on approach.

#### 2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.



#### **DirectSelect Premium**

Taking easy to use, intuitive controls to the next level, new DirectSelect



#### Performance

#### 17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

#### Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.

#### Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casserole and other (large) cooking dishes.

#### Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.

#### QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

#### PowerBoost

PowerBoost now on selected Bosch ceramic lets you heat up large volumes of water even faster than on the highest.

#### Keep warm

Ideal setting for keeping food warm before serving at the touch of a button.

Cooktops | Ceramic overview

## Ceramic cooktops

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as being practical and easy-to-clean.

### Serie 8



#### Series 8 | PKM875DP1A 80cm Ceramic Cooktop

Heating functions 4 QuickTherm cooking zones: 2 dual circuit zones, 1 dual circuit/extended roasting zone 17 power levels PowerBoost for each zone

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone Keep warm - low setting for keeping food warm ReStart – quickly reinstates previous settings Energy consumption display

#### Cleaning

WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 816 x 527mm

**Complete specifications** Reference guide see page 84-85 Technical diagrams see page 97



#### Series 8 | PKG775DB1A 70cm Ceramic Cooktop

Heating functions 4 QuickTherm cooking zones: 2 dual circuit zone 17 power levels

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone Automatic electronic boil start Keep warm - low setting for keeping food warm ReStart – quickly reinstates previous settings Energy consumption display


### Cleaning

WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 710 x 527mm

**Complete specifications** Reference guide see page 84-85 Technical diagrams see page 97



Series 8 | PKN675DB1A

60cm Ceramic Cooktop

Heating functions 4 QuickTherm cooking zones: 1 dual circuit zones, 1 dual circuit/extended roasting zone 17 power levels

#### Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone Automatic electronic boil start Keep warm – low setting for keeping food warm ReStart – quickly reinstates previous settings Energy consumption display

#### Cleaning

WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety 2-stage residual heat indicators Child lock

Dimensions (WxD) 606 x 527mm

**Complete specifications** Reference guide see page 84–85 Technical diagrams see page 97

Serie 4

#### Series 4 | PKF645D17A 60cm Ceramic Cooktop

Heating functions 4 QuickTherm cooking zones: 1 dual circuit zone 17 power levels


Convenience Electronic TouchSelect +/touch-controls Dual timer with auto switch-off for each zone ReStart

Safetv 2-stage residual heat indicators Child lock

Dimensions (WxD) 583 x 513mm

Complete specifications Reference guide see page 84-85 Technical diagrams see page 97

### Serie 2



Series 2 | PKE645C17A 60cm Ceramic Cooktop

Heating functions 4 QuickTherm cooking zones 9 power levels

Convenience Rotary control knobs

Safety Residual heat indicator

Dimensions (WxD) 583 x 513mm

**Complete specifications** 

Reference guide see page 84-85 Technical diagrams see page 97

Cooktops | Gas cooktops

## Fire that does exactly what you want.

Gas provides fast and instant versatility. Our German-designed gas cooktops all feature Bosch flame failure technology fitted to each burner and conveniently come with controls that are either front or side mounted.





#### Efficiency

#### **One-hand ignition**

Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one-hand, there is also no separate ignition button to clean.

#### Easy clean tempered glass

Premium models with cutting-edge features offer instant versatility in cooking with fire. Their tempered glass base is easy to clean for total convenience and completed by a frameless finish for a designer look. Stylish and functional all in one.



#### Simplicity

#### Flame failure device

feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

#### **Cast-iron supports**

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.

#### Slim profile

Finished in black tempered glass, our Bosch premium gas cooktops provide a stylish and sleek look.

For added safety, all Bosch gas cooktops



### Performance

#### High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner, which provides up to 18Mj/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.

#### **Flexible burners**

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of the pan.

Gas cooktops | Overview

## Gas cooktops

### Serie 6



#### Series 6 | PPQ716B21A **70cm Black Tempered Glass** Gas Cooktop

Heating functions 5 burners: 1 x 16Mj/h triple flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

#### Convenience One-hand ignition via control knobs Enamelled cast-iron

pan supports Safety Flame failure for each burner

stops gas flow if flames go out Dimensions (WxD)

Other Suitable for NG or LPG

710 x 520mm

**Complete specifications** Reference guide see page 86-87 Technical diagrams see page 98



#### Series 6 | PPH616B21A 60cm Black Tempered Glass Gas Cooktop

**Heating functions** 4 burners: 1 x 12Mj/h dual flame wok burner, 2 standard burners, 1 economy burner

Convenience One-hand ignition via control knobs Enamelled cast-iron pan supports

Safety Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD) 590 x 520mm

Other Suitable for NG or LPG

**Complete specifications** Reference guide see page 86-87 Technical diagrams see page 98



#### Series 6 | PCT915B9TA 90cm Stainless Steel Gas Cooktop

Heating functions 6 burners: 2 x 18Mj/h dual flame wok burner, 2 standard burners, 2 economy burners

Convenience One-hand ignition via control knobs Enamelled cast-iron pan supports

Safety Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD) 915 x 520mm

Other Suitable for NG or LPG

**Complete specifications** Reference guide see page 86–87 Technical diagrams see page 98



#### Series 6 | PCR915B91A 90cm Stainless Steel Gas Cooktop

Heating functions 5 burners: 1 x 18Mj/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience One-hand ignition via control knobs Enamelled cast-iron pan supports

Safety Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD) 915 x 520mm

Other Suitable for NG or LPG

**Complete specifications** Reference guide see page 86-87 Technical diagrams see page 98





Series 6 | PCQ715B90A 70cm Stainless Steel Gas Cooktop

Heating functions 5 burners: 1 x 16Mj/h triple flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience One-hand ignition via control knobs Enamelled cast-iron pan supports

Safety Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD) 702 x 520mm

Other Suitable for NG or LPG

**Complete specifications** Reference guide see page 86-87 Technical diagrams see page 98

### Series 6 | PCI815B91A 75cm Stainless Steel

Gas Cooktop Heating functions

4 burners: 1 x 16Mj/h triple flame wok burner, 1 high-speed burner, 1 standard burner, 1 economy burner

Convenience One-hand ignition via control knobs Enamelled cast-iron pan supports

Safety Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD) 762 x 520mm

Other Suitable for NG or LPG

**Complete specifications** Reference guide see page 86–87 Technical diagrams see page 98

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance



#### Series 6 | PCH615B9TA 60cm Stainless Steel Gas Cooktop

#### Heating functions

4 burners: 1 x 18Mj/h dual flame wok burner, 1 high-speed burner, 1 standard burner, 1 economy burner

#### Convenience

One-hand ignition via control knobs Enamelled cast-iron pan supports

#### Safety

Flame failure for each burner stops gas flow if flames go out

#### Dimensions (WxD) 582 x 520mm

Other Suitable for NG or LPG

#### **Complete specifications**

Reference guide see page 86-87 Technical diagrams see page 98

### Serie 2



#### Series 2 | PBH615B9TA 60cm Stainless Steel Gas Cooktop

#### Heating functions

4 burners: 1 x 18Mj/h dual flame wok burner, 2 standard burners, 1 economy burner

#### Convenience

One-hand ignition via control knobs Enamelled cast-iron pan supports

#### Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD) 580 x 510mm

#### Other Suitable for NG or LPG

#### **Complete specifications**

Reference guide see page 86-87 Technical diagrams see page 98


# Rangehoods





Rangehoods | Design

Designs for your dream kitchen. From focal point canopy to hidden integrated rangehoods.




#### **Ducted extraction**

Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.

#### What extraction rate do I need?


It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: minimum of 6 times per hour; and a maximum of 12 times per hour.

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.

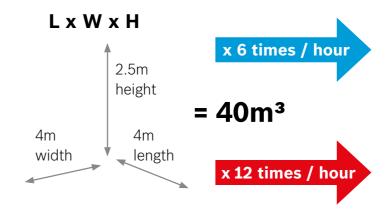

Bosch extraction rates are tested inline with EU standards. See page 90 for more information







CleanAir module Accessory to be purchased separately\*

\*Available for selected Bosch rangehoods

#### **Recirculation kit**

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.

### 240m<sup>3</sup>

necessary air extraction rate at normal use (simmering on 2–3 hotplates)

### 480m<sup>3</sup>

necessary air extraction rate at intensive use (eg. strong frying activities)



### Rangehoods | Silence

## Relax in a quieter kitchen with family and friends.

A few decibels can make the difference between harmful, loud and pleasant. Operating at 40dB(A)\*, our quietest rangehood means you can have it on while listening to music, enjoying a conversation or while your baby rests.

#### Silence

30 dB(A)

Noise is measured in numeric decibels or dB(A). It is important to note that a few decibels can make a huge difference.

#### EcoSilence Drive® motor

The EcoSilence Drive® motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. To reduce motor noise even further (1 dB(A) noise reduction compared to other motors), we have optimised the airflow inside the hood. The result: low noise levels with high power.



Bosch Rangehood DFR097E50A

40 dB(A)



140 dB(A)

115 dB(A)

Baby crying 110 dB(A)



Dog barking 90 dB(A)

speech 60 dB(A)

### Rangehoods | Functions and features

## Features and functions for everyday use.

#### Efficiency

#### Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.




#### LED lighting

The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.

#### Simplicity

#### Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.



#### **Electronic control**

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function, control at your fingertips.



#### Halogen lighting Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than

standard lights and are designed to last longer.



#### Electronic button control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit




Rocker switch control It doesn't get any easier: one switch with 3 power levels and one for turning the lights on and off.

#### Performance


#### Dishwasher-safe metal filters

For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.



#### Metal grease filter

Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.



#### Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.



**Rim ventilation filter** 

With its smooth uninterrupted surface and grease separation of 80–92%,\* the rim ventilation filter from Bosch has a multi-patented filter sealing system and flow-optimised filter system with 12-layer filter mats.

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height, Bosch rangehoods offer powerful maximum extraction rates for when you are cooking up a storm in the kitchen. While the variable power settings allow you to navigate just the extraction power you need for each meal.

#### Variable power settings

All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.

#### **CleanAir Recirculation**

The CleanAir module is an optional accessory for rangehoods. The special active carbon filter, when compared to ducted systems, is equal in performance for odour reduction and grease absorption. It also uses up to 3 dB(A) less noise than conventional recirculation systems. Easy to install, the surface of the carbon filter is the equivalent of around 50 soccer fields offering more performance and greater energy efficiency.

#### Extraction rates

Rangehoods | Overview

## Wall-mounted rangehoods

Powerful performance, classic design.

### Serie 6



Serie 2



#### Series 6 | DWA097E51A 90cm Wall-mounted Stainless Steel Canopy Rangehood with Glass Screen

Power functions 690m<sup>3</sup>/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor

#### Convenience

Whisper-quiet: 54dB at level 2 or 350m<sup>3</sup>/h (150mm ducted) Electronic controls with LED display 2 x 3W LED SoftLights with dimmer function

#### Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

**Dimensions (HxWxD)** 638–954 x 900 x 540mm (ducted) or 694 x 900 x 540mm (CleanAir recirculated)

**Complete specifications** Reference guide see page 88–90 Technical diagrams see page 98

#### Series 6 | DWB091E51A 90cm Wall-mounted Stainless Steel Canopy Rangehood

### Power functions

810m<sup>3</sup>/h maximum extraction capacity with rim ventilation 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor

Convenience Whisper-quiet: 59dB at level 2 or 430m<sup>3</sup>/h (150mm ducted) Sound insulation mats Electronic controls with LED display 3 x 3W LED SoftLights with dimmer function

#### **Cleaning** Dishwasher-safe metal grease filters Electronic filter s aturation indicator

Dimensions (HxWxD) 628–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)

**Complete specifications** Reference guide see page 88–90 Technical diagrams see page 99

#### Series 6 | DWB097E50A 90cm Wall-mounted Stainless Steel Canopy Rangehood

#### Power functions

730m<sup>3</sup>/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor

#### Convenience

Whisper-quiet: 49dB at level 2 or 360m<sup>3</sup>/h (150mm ducted) Sound insulation mats Electronic controls with LED display 3 x 3W LED SoftLights with dimmer function

#### **Cleaning** Dishwasher-safe metal

grease filters Electronic filter saturation indicator Dimensions (HxWxD)

642–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)

Complete specifications Reference guide see page 88–90 Technical diagrams see page 99

#### Series 4 | DWW097A50A 90cm Wall-mounted Stainless Steel Canopy

Rangehood Power functions 730m<sup>3</sup>/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting EcoSilence Drive® brushless motor

#### Convenience

Whisper-quiet: 49dB at level 2 or 360m<sup>3</sup>/h (150mm ducted) Sound insulation mats Electronic button control 3 x 3W LED lights

**Cleaning** Dishwasher-safe metal grease filters

#### Dimensions (HxWxD)

622–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)

**Complete specifications** Reference guide see page 88–90 Technical diagrams see page 99



#### Series 2 | DWW09W851A 90cm Wall-mounted Stainless Steel Canopy Rangehood

**Power functions** 780m<sup>3</sup>/h maximum extraction capacity 3 power settings

#### Convenience

Very quiet: 59dB at level 2 or 450m<sup>3</sup>/h (150mm ducted) Rocker switch controls for power and lights 2 x 20W halogen lights

**Cleaning** Dishwasher-safe metal grease filters

**Dimensions (HxWxD)** 799–976 x 900 x 500mm (ducted or recirculated) Series 2 | DWB09W850A\* 90cm Wall-mounted Stainless Steel Canopy Rangehood

**Power functions** 750m<sup>3</sup>/h maximum extraction capacity 3 power settings

#### Convenience

Very quiet: 61dB at level 2 or 460m<sup>3</sup>/h (150mm ducted) Rocker switch controls for power and lights 2 x 20W halogen lights

**Cleaning** Dishwasher-safe metal grease filters

#### Dimensions (HxWxD)

642–954 x 900 x 500mm (ducted) or 642–1064 x 900 x 500mm (recirculated)

**Complete specifications** Reference guide see page 88–90 Technical diagrams see page 99 **Complete specifications** Reference guide see page 88–90 Technical diagrams see page 100

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

#### Series 2 | DWW09W651A\* 90cm Wall-mounted Stainless Steel Canopy Rangehood

#### Power functions

650m<sup>3</sup>/h maximum extraction capacity 3 power settings


#### Convenience

Very quiet: 61dB at level 2 or 430m<sup>3</sup>/h (150mm ducted) Rocker switch controls for power and lights 2 x 20W halogen lights

**Cleaning** Dishwasher-safe metal grease filters

#### Dimensions (HxWxD)

799–976 x 900 x 500mm (ducted or recirculated)



Reference guide see page 88–90 Technical diagrams see page 99



#### Series 2 | DWW06W851A 60cm Wall-mounted Stainless Steel Canopy Rangehood

#### **Power functions**

730m<sup>3</sup>/h maximum extraction capacity 3 power settings

#### Convenience

Very quiet: 59dB at level 2 or 420m<sup>3</sup>/h (150mm ducted) Rocker switch controls for power and lights 2 x 20W halogen lights

#### Cleaning

Dishwasher-safe metal grease filters

#### Dimensions (HxWxD)

799–976 x 600 x 500mm (ducted or recirculated)

#### **Complete specifications**

Reference guide see page 88–90 Technical diagrams see page 100

### Rangehoods | Overview

## Integrated rangehoods

Great performance in a tiny space. These neatly concealed rangehoods are housed underneath the kitchen unit and can be seen if you look underneath the kitchen cabinetry.

### Serie | **8**

### Serie **6**



#### Series 8 | DHL895CAU 86cm Integrated Rangehood

#### **Power functions**

- $820 m^{\scriptscriptstyle 3}/h$  maximum extraction capacity with rim ventilation
- 3 power settings + 1 intensive setting with automatic revert
- to previous setting Automatic run-on time 30 mins
- EcoSilence Drive® brushless motor

#### Convenience

Whisper quiet: 55dB at level 2 or 400m<sup>3</sup>/h (150mm ducted) Low-lift push button controls for power and light 2 x 1W LED lights with dimmer function

### Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

**Dimensions (HxWxD)** 418 x 836 x 282mm (ducted or recirculated)

**Complete specifications** Reference guide see page 88–90 Technical diagrams see page 100

#### Series 6 | DHL785BAU 70cm Integrated Rangehood

Power functions 730m<sup>3</sup>/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting

#### Convenience

Very quiet: 63dB at level 2 or 540m<sup>3</sup>/h (150mm ducted) Low-lift push button controls for power and light 2 x 20W halogen lights

#### **Cleaning** Dishwasher-safe metal grease filters

**Dimensions (HxWxD)** 418 x 676 x 264mm (ducted or recirculated)

#### **Complete specifications** Reference guide see page 88–90 Technical diagrams see page 100

Complete specifications Reference guide see page 88–90 Technical diagrams see page 100

Serie 4

Series 4 | DHL555BAU

Very quiet: 52dB at level 2

2 x 20W halogen lights

Dimensions (HxWxD)

(ducted or recirculated)

255 x 530 x 380mm

or 320m<sup>3</sup>/h (150mm ducted)

Slide controls for power and light

Dishwasher-safe metal grease filters

Power functions

Convenience

Cleaning

53cm Integrated Rangehood

650m<sup>3</sup>/h maximum extraction capacity

3 power settings + 1 intensive setting

 $\overline{r}$ 



### All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.





Rangehoods | Overview

## Retractable slideout rangehoods

To operate, the slideout section is pulled out, enlarging the extraction surface. The pelmet front can even be matched to your kitchen units.\* So this rangehood will be almost invisible in your kitchen.

### Serie 6



#### Series 6 | DFR097E50A 90cm Slideout Rangehood

Power functions 730m<sup>3</sup>/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1–10 mins

EcoSilence Drive® brushless motor

#### Convenience

Whisper quiet: 48dB at level 2 or 320m<sup>3</sup>/h (150mm ducted) Electronic controls with LED display Sound insulation mats 2 x 3W LED SoftLights with dimmer function Easy installation system

#### Cleaning Dishwasher-safe metal grease filters

Electronic filter saturation indicator

Dimensions (HxWxD) 426 x 898 x 290mm (ducted or CleanAir Recirculated) Fits 60cm or 90cm cupboard

**Complete specifications** Reference guide see page 88–90 Technical diagrams see page 101

#### Series 6 | DFR067E50A **60cm Slideout Rangehood**

Power functions 730m<sup>3</sup>/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor

#### Convenience

Whisper quiet: 49dB at level 2 or 330m<sup>3</sup>/h (150mm ducted) Electronic controls with LED display Sound insulation mats 2 x 3W LED SoftLights with dimmer function Easy installation system

Cleaning Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD) 426 x 598 x 290mm (ducted or CleanAir Recirculated)

**Complete specifications** Reference guide see page 88-90 Technical diagrams see page 101

### Serie 4



#### Series 4 | DFR097A50A 90cm Slideout Rangehood

Power functions

740m<sup>3</sup>/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor

Convenience

Whisper quiet: 50dB at level 2 or 340m<sup>3</sup>/h (150mm ducted) Low-lift push button controls for power and light 2 x 3W LED lights Easy installation system

Cleaning Dishwasher-safe metal grease filters

Dimensions (HxWxD) 426 x 898 x 290mm (ducted or CleanAir Recirculated) Fits 60cm or 90cm cupboard

Complete specifications Reference guide see page 88–90 Technical diagrams see page 101

### Series 4 | DFR067A50A

60cm Slideout Rangehood

#### Power functions 740m<sup>3</sup>/h maximum extraction capacity

3 power settings + 1 intensive setting with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor

#### Convenience

Whisper quiet: 50dB at level 2 or 330m<sup>3</sup>/h (150mm ducted) Low-lift push button controls for power and light 2 x 3W LED lights Easy installation system

Cleaning Dishwasher-safe metal grease filters

Dimensions (HxWxD) 426 x 598 x 290mm (ducted or CleanAir Recirculated)

**Complete specifications** Reference guide see page 88-90 Technical diagrams see page 101

### Serie 2



#### Series 2 | DFL064W50A 60cm Slideout Rangehood

Power functions 400m<sup>3</sup>/h maximum extraction capacity 3 power settings

Convenience

Quiet: 64dB at level 2 or 340<sup>3</sup>/h (150mm ducted) Rocker switches for power and light 2 x 20W halogen lights

Cleaning Dishwasher-safe metal grease filters

Dimensions (HxWxD)

203 x 598 x 290mm (ducted or recirculated)

**Complete specifications** Reference guide see page 88-90 Technical diagrams see page 102

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. \*For cabinetry match pelmet required from cabinet maker. Stainless Steel pelmet included, black and white available as optional accessory.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance



# Dishwashers

HEAP HAD BEEN A ANALY MANY CONTRACT OF



### Dishwashers | Design

### Integrate your dishwasher for a seamless look.

Bosch semi and fully integrated dishwashers are designed to fit your new kitchen to perfection. They can be fitted with a door panel to match the design of your kitchen cabinetry



GlassSecure Tray model number: SMZ5300

#### Wine glasses should be washed by hand. Or by Bosch. The GlassSecure Tray protects your glasses.

Designed for Bosch dishwashers equipped with VarioFlex<sup>™</sup> or VarioFlex<sup>™</sup> Pro basket systems, this unique tray securely holds four long stemmed glasses in place. The locking mechanism lifts and secures all four glasses at once. Glasses are angled and positioned to provide optimum cleaning with the highest glass protection.

#### Glass Wash 40°

Dedicated glass program to add an extra sparkle to your glassware at the touch of the button.

#### Full colur display

The multi-coloured TFT display not only looks good, it also provides you with useful information throughout the wash cycle. Progress of the wash cycle, time remaining, as well as wash programs and other optional settings are clearly displayed in full colour resolution.



#### EcoSilence Drive® brushless motor

The revolutionary EcoSilence Drive® brushless motor is quieter and more energy-efficient than all others before it.

Plus, with up to three levels of sound insulation and targeted spray jets, the result is a dishwasher that's even quieter.

#### **Silent benefits**

We know that the kitchen is a central part of the home where people gather. With this in mind, we have designed a range of 42dB whisper-quiet dishwashers.

#### Silent benefits

We know that the kitchen is a central part of the home where people gather. With this in mind, we have designed our range of dishwashers to be whisper-quiet from just 42dB.

### Dishwashers | Overview

## Bosch Semi and Fully integrated dishwashers

Series 6 | SMI50M05AU

14 International place settings

Capacity

Features

AutoBrilliance™

EcoSilence Drive®

Wash programs

Rackmatic™ Plus

Cutlery basket

Flexibility

Vario™

Sound

Safety

Child lock

44dB rating

AquaStop™ Plus

Dimensions (HxWxD)

815-875 x 598 x 573mm

**Complete specifications** 

Technical diagrams see page 102

Reference guide see page 91

5 (with 2 wash options)

AquaSensor™

Water efficiency

Energy efficiency

5 Star (11 litres per wash)

4 Star (220 kWh per year)

Semi-integrated Dishwasher



Serie 6





#### Series 8 | SMI88TS01A Semi-integrated Dishwasher

Capacity 15 International place settings

Water efficiency 5 Star (12 litres per wash)

**Energy efficiency** 4 Star (235 kWh per year)

Features TFT full colour display SensorTouch buttons AutoBrilliance™ AquaSensor™ EcoSilence Drive®

Wash programs 8 (with 5 wash options)

Flexibility VarioDrawer™ Pro VarioFlex<sup>™</sup> Pro Rackmatic<sup>™</sup> Plus

Sound 42dB rating

Safety AquaStop™ Plus Child lock

Dimensions (HxWxD) 815-875 x 598 x 573mm

**Complete specifications** Reference guide see page 91 Technical diagrams see page 102

#### Series 6 | SMI68M25AU Semi-integrated Dishwasher

Capacity 15 International place settings

Water efficiency 5 Star (12 litres per wash)

**Energy efficiency** 4 Star (235 kWh per year)

Features AutoBrilliance™ AquaSensor™ EcoSilence Drive®

Wash programs 6 (with 4 wash options)

Flexibility VarioDrawer™ VarioFlex™ Rackmatic<sup>™</sup> Plus

Sound 42dB rating

Safety AquaStop™ Plus Child lock

Dimensions (HxWxD) 815-875 x 598 x 573mm

**Complete specifications** Reference guide see page 91 Technical diagrams see page 102

### Serie 8



Series 8 | SMV88TX01A **Fully Integrated Dishwasher** 

Capacity 15 International place settings

Water efficiency 5 Star (12 litres per wash)

**Energy efficiency** 4 Star (235 kWh per year)

> Features TFT full colour display TimeLight<sup>™</sup> floor projection Stainless steel interior tub AutoBrilliance™ AquaSensor™ EcoSilence Drive®

Wash programs 8 (with 5 wash options)

Flexibility VarioDrawer™ Pro VarioFlex<sup>™</sup> Pro Rackmatic<sup>™</sup> Plus

Sound 42dB rating

Safety AquaStop<sup>™</sup> Plus Child lock

Dimensions (HxWxD) 815-875 x 598 x 550mm

**Complete specifications** Reference guide see page 91 Technical diagrams see page 102 Serie 6



#### Series 6 | SMV63M10AU **Fully Integrated Dishwasher**

Capacity 14 International place settings

Water efficiency 5 Star (11 litres per wash)

**Energy efficiency** 4 Star (220 kWh per year)

Features InfoLight<sup>™</sup> floor projection Stainless steel interior tub AutoBrilliance™ AquaSensor™ EcoSilence Drive®

Wash programs 6 (with 4 wash options)

Flexibility VarioFlex™ Rackmatic<sup>™</sup> Plus Cutlery basket

Sound 42dB rating

Safety AquaStop<sup>™</sup> Plus Child lock

Dimensions (HxWxD) 815-875 x 598 x 550mm

**Complete specifications** Reference guide see page 91 Technical diagrams see page 102









All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance



#### DosageAssist<sup>™</sup> detergent system

Unique to Bosch, the DosageAssist™ feature maximises the effectiveness of detergent tablets by dropping it into a specially designed tray that is targeted by water jets, resulting in a tablet that dissolves evenly under control.

#### InfoLight™

Selected Bosch dishwashers feature InfoLight<sup>™</sup> – a red light that discreetly beams onto the floor during the wash cycle and disappears after the drying cycle is complete.


#### TimeLight™

You might not hear anything coming from your dishwasher, but it still might be on. To prevent you from interrupting the cycle, we've developed TimeLight™: an illumination that projects the remaining wash cycle time onto the floor when the dishwasher is in operation.

#### VarioSpeed<sup>™</sup> express wash option

With VarioSpeed<sup>™</sup> you can almost halve the wash program cycle time without sacrificing washing and drying results.



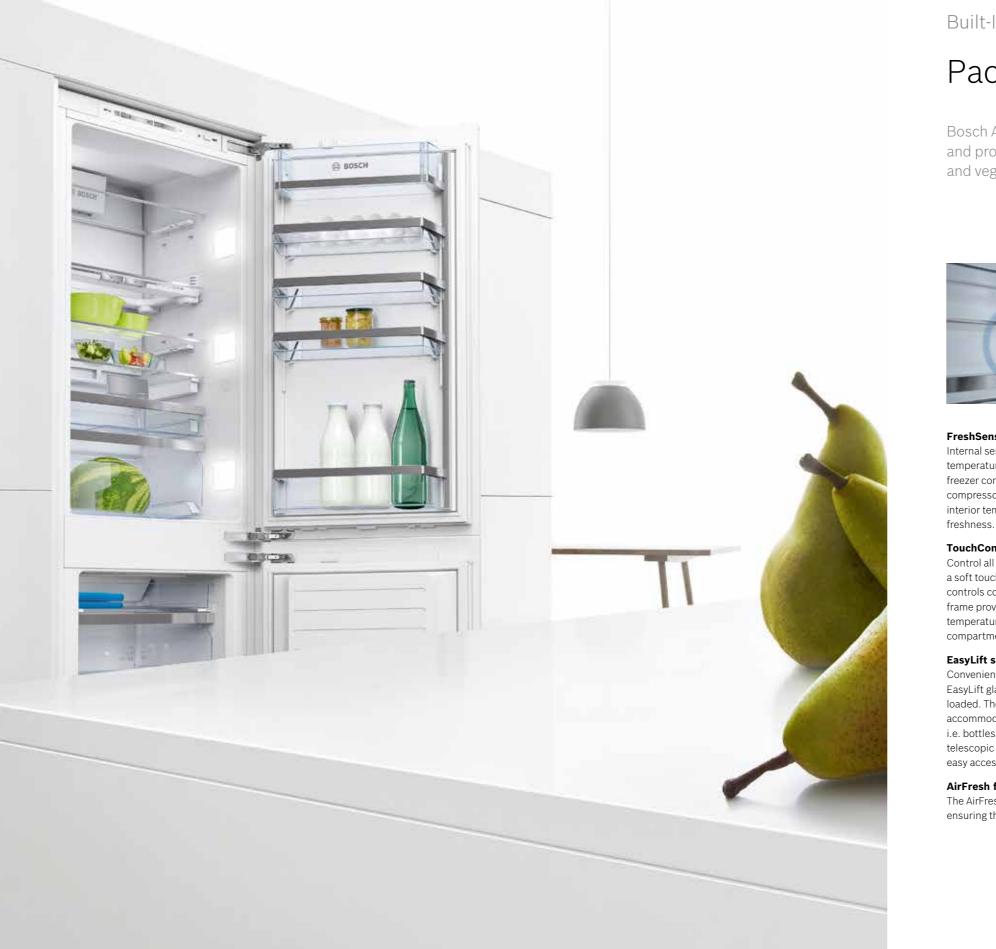

## Built-In Refrigeration | Functions and features

## Packed full of good ideas.

Bosch Active Cooling ensures your food is protected against bacterial growth and provides the ideal storage environment. Thanks to this technology, fruit and vegetables can be stored for longer, giving you more time to enjoy them.



#### FreshSense

Internal sensors constantly monitor the temperature inside and outside the fridge and freezer compartments. The cooling circuit and compressor continually adjust to ensure a stable interior temperature and provide prolonged

#### TouchControl electronic display panel

Control all functions easily and precisely with just a soft touch, using TouchControl panel. Electronic controls conveniently set into the top of the door frame provide precise and independent temperature control of both the fridge and freezer compartments.

#### EasyLift system

Convenient levers quickly and easily adjust the EasyLift glass shelf up or down even when fully loaded. The EasyLift door can be adjusted to accommodate tall items providing flexible storage i.e. bottles of different heights. A full extension telescopic rail system on the drawers ensures easy access and maximum storage.

#### AirFresh filter

The AirFresh filter neutralises odours in the fridge, ensuring that smells don't transfer between foods.

## Serie 8

#### SuperCooling

Adding new food into the fridge causes the internal temperature to rise, which means the fridge has to work harder to cool down and regulate the temperature again. SuperCooling will prepare your fridge by rapidly reducing the temperature, keeping the contents cool, while quickly cooling the new groceries down to 2°C.

#### SuperFreezing

Adding new food to the freezer can increase the internal temperature, which can partly defrost existing food. The SuperFreezing function rapidly lowers the temperature in the freezer, ensuring the fresh food is frozen quickly, while surrounding food remains frozen.

### SoftClose door

Thanks to a special damping mechanism, the fridge door closes softer and quieter than before. When it is open at a 20° angle or less, the door closes automatically and helps prevent the fridge from being left open.

#### LED lighting

Bright LED lighting across all shelves provides the highest possible visibility throughout the fridge.

## Serie | 8



DØ.

.

ALC: NO

Capacity

Total gross c Fridge gross Fridge net ca Freezer gros Freezer net

Energy 3 Star MEPS

Efficiency FrostFree Mu FreshSense

Freshness

SuperFreezi Vegetable cri BigBox extra

Conveniend

Digital tempe EasyLift shel or lowered e LED lighting Removable SoftClose do Reversible de Door open a Full ventilation

Dimensions Product (Hx) Cavity (HxW>

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

KIN34P60A			
grated Botton	n Mount Fridge Free	ezer	
	287 litres		
1 5	196 litres 189 litres		
	91 litres		
1 9	75 litres		
S 2010, 330 kW	/h per vear		
0 2010, 000 111	in por your		
, AultiAirFlow.cod	oling		
e cooling techno	•		
s & Storage			
	oling with auto-switch-	off	
	deli drawer on telesco		
ra large freezer	storage		
nce			
perature contro	ols		
	t door bins can be raise	ed	
even when fully	/ loaded		
g magnetic door	r seals for easy cleaning	z	
door system		,	
door hinges			
and temperatu			
tion through the	e plinth for ease of inst	allation	
ns			
,	m x 556mm x 545mm		
VxD): 1//5mm	x 560 mm x 550mm		



# Reference guides





## Reference Guide Ovens

lodel		HRG6767S2A	HBG6767S1A	HBG6753S1A	HBG675BS1B <sup>+</sup>	HBG672BS1A	HBG655HS1A	HBG655HW1A	HBG633BS1A
		Series 8	Series 8	Series 8	Series 8	Series 8	Series 8	Series 8	Series 8
уре		Pyrolytic Oven with	Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven	EcoClean Direct Oven
imensions	Width (cm)	Added Steam	60	60	60	60	60	60	60
intensions	Appliance dimensions (H x W x D)	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm
	Built-in dimensions (H x W x D)	585–595 x 560–568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm
	Cavity dimensions (H x W x D)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm
eating	Number of heating functions	17	13	13	13	8	13	13	10
inctions	4D HotAir	●*^#	•^#	•#	•#	•#	•#	•#	•#
	3D HotAir Plus								
	Fan-forced hot air								
	Fan-forced hot air eco								
	HotAir Eco	•^	•^	•	•	•	•	•	
	Top and bottom heating	●*^#	●^#	•#	•#	•#	•#	•#	•#
	Top and bottom heating Eco	•^	●^^	•	•	•	•	•	•
	Fan assisted top and bottom heating		•	•	•		•	•	•
	Bottom heating	•	•	•	•		•	•	•
	Intensive heating	• •*^	•^	•	•	•	•	•	•
	Hot air grilling Grill – large area	•	•	•	•	•	•		•
	Grill - small area	•	•	•	•	•			•
	Pizza setting	•	• ^	•	•	•	•	•	•
	Slow cooking	•	•	•	•	-	•	•	
	Keep warm	•*	•	•	•		•	•	
	Preheat ovenware	•	•	•	•		•	•	
	Drying	•							
	Reheating (with added steam)	•^							
	Dough proving (with added steam)	•							
	Defrost	•	•	•	•	•	•	•	•
	Sabbath mode	•	•	•	•	•	•	•	•
	Automatic rapid heat function	•	•	•	•	•	•	•	•
	Automatic temperature proposal	•	•	•	•	•	•	•	•
	Temperature display	•	•	•	•	•	•	•	•
	Electronic thermostat	•	•	•	•	•	•	•	•
nsor & tomatic	Bosch Assist (Fully automated cooking)		•						
nctions	PerfectBake <sup>™</sup> sensor	•1							
	PerfectRoast meat probe	● <sup>1</sup>	•-	• (10)	• (10)	• (10)	• (10)	• (10)	
nacity	AutoPilot (Automatic programs) Volume (usable litres)	71 litres (net)	71 litres (net)	• (10) 71 litres (net)	• (10) 71 litres (net)	● (10) 71 litres (net)	● (10) 71 litres (net)	• (10) 71 litres (net)	71 litres (net)
pacity	Water tank	1 litre (net)	/ 1 litres (lier)	/ 1 litres (lier)	/ I littles (het)	/ I littles (liet)	/ 1 lities (liet)	/ i littes (liet)	/ 1 littles (fiet)
sign		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and white glass	Stainless steel and black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display
	Electronic clock/timer with	•	•	•	•	•	•	•	•
	end-time programming								
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Dis
	SoftMove door technology	•	•	•	•	•	•	•	•
	Interior light	LED (ceiling) and Multi-level LED lighting (left and right side)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)
	No. of shelf positions	5	5	5	5	5	5	5	5
	Full glass inner door	•	•	•	•	•	•	•	•
	Removable door	•	•	•	•	•	•	•	•
	Water tank empty indicator	•							
aning	Pyrolytic cleaning function with	•	•	•	•	•			
	compatible accessories and shelving								
	EcoClean cleaning system						Ceiling, sides and rear wall (EcoClean Direct)	Ceiling, sides and rear wall (EcoClean Direct)	Rear wall (EcoClean Direct)
	Catalytic cleaning system						(Ecoclean Direct)	(Ecoclean Direct)	(Ecoclean Direct)
	Descaling	•							
	Drying	•							
ety	Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Triple-glazed door	Triple-glazed door	Triple-glazed door
	Residual heat indicator	•	•	•	•	•	•	•	•
	Automatic safety switch off	•	•	•	•	•	•	•	•
	Child lock function	● (controls & door)	● (controls & door)	● (controls & door)	• (controls & door)	• (controls & door)	● (controls & door)	● (controls & door)	● (controls & door)
	Cooling fan	•	•	•	•	•	•	•	•
hnical	Maximum temperature	300°C	300°C	300°C	300°C	300°C	300°C	300°C	300°C
uirements	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Fully extendable telescopic rails	<ul> <li>(2 fold pyrolytic proof)</li> </ul>	<ul> <li>(2 fold pyrolytic proof)</li> </ul>	<ul> <li>(2 fold pyrolytic proof)</li> </ul>			• (2 fold)	• (2 fold)	
	Partially extendable telescopic rails		2	2	2	2	2	2	1
	No. wire racks	2	2	-					
	No. wire racks No. split grill trays								
	No. wire racks No. split grill trays No. universal pans	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1	1	1
upplied ccessories	No. wire racks No. split grill trays				1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 92	1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 92	1 1 Refer to page 92	1 1 Refer to page 92	1 1 Refer to page 92

<sup>1</sup> Silicon based cookware and bakeware is not compatible for use. \*Compatible with Added steam function. ^Compatible with PerfectRoast meat probe. #Compatible with Rapid heat. \*Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

## Reference Guide Ovens

Model		HBA73R350B <sup>+</sup>	HBA63B150B <sup>+</sup>	HBA33B150A*	HBA23B151A <sup>+</sup>	HBA13B254A	HBA13B253A	HVA541NS0	HBM43S550A	HBM43B250A
		Series 6	Series 6	Series 6	Series 6	Series 6	Series 6	Series 6	Series 6	Series 6
Туре		Pyrolytic Oven			EcoClean Oven	EcoClean Oven	· · · · · · · · · · · · · · · · · · ·	Catalytic Oven	EcoClean Double Oven	EcoClean Double Oven
Dimensions	Width (cm)	60		60	60	60	60	90	60	60
	Appliance dimensions (H x W x D)	595 x 595 x 548mm	595 x 595 x 515mm	595 x 595 x 515mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 515mm	478 x 896 x 568mm	888 x 595 x 550mm	888 x 595 x 550mm
	Built-in dimensions (H x W x D)	575-597 x 560-568 x 550mm		575-597 x 560-568 x 550mm	575-597 x 560-568 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	467-470 x 860-864 x 560mm	872-886 x 560-570 x 550mm	872-886 x 560-570 x 550mm
	Cavity dimensions (H x W x D)	329 x 479 x 400mm	329 x 479 x 400mm	325 x 486 x 386mm	329 x 479 x 420mm	329 x 479 x 420mm	325 x 486 x 386mm	308 x 615 x 405	172 x 468 x 433mm (top); 329 x 482 x 418mm (bottom)	329 x 482 x 418mm (top);
leating	Number of heating functions	9	6	7	5	4	4	9	3 (top) and 5 (bottom)	2 (top) and 5 (bottom)
unctions	4D HotAir									
	3D HotAir Plus	●#	•#	•#	•#	•	•		●# (bottom)	●# (bottom)
	Fan-forced hot air							•		
	Fan-forced hot air eco							•		
	HotAir Eco	•	-	•	•			-		
	Top and bottom heating	●#	•	●#	0#			•	●# (top and bottom)	●# (top and bottom)
	Top and bottom heating Eco Fan assisted top and bottom heating							•		
	Bottom heating	•	•	•	•			•	• (bottom)	• (bottom)
	Intensive heating	•	·	·	•			•	• (bottom)	
	Hot air grilling	•	•	•	•	•	•	•	• (bottom)	• (bottom)
	Grill – large area	•	•	•	•	•	•	•	• (top and bottom)	(top and bottom)
	Grill – small area	•		•				•	• (top)	
	Pizza setting	•		•				•		
	Slow cooking									
	Keep warm									
	Preheat ovenware									
	Drying									
	Reheating (with added steam)									
	Dough proving (with added steam) Defrost	•		•	•	•	•			
	Sabbath mode	•		•	•	•	•			
	Automatic rapid heat function	•	•	•	•				•	•
	Automatic temperature proposal	•	-		•				-	•
	Temperature display									
	Electronic thermostat	•	•	•	•					
apacity	Volume (usable litres)	65 litres (net)	65 litres (net)	62 litres (net)	67 litres (net)	67 litres (net)	62 litres (net)	77 litres (net)	35 litres (net) top	35 litres (net) top
	we can								67 litres (net) bottom	67 litres (net) bottom
2:	Water tank	Ctaiplass steel with metal has bandla	Staiplass staal with matal has handle	Staiplass staal with matal has handle	Staiplass steel with motal has bandle	Chaiplage steel with motel ber handle	Staiplass steel with motal has bandla	Staiplass staal and black glass	Staiplass staal with matal has handle	Ctainland staal with motal has hand
Design	Cavity	Gray enamel cavity	Stainless steel with metal bar handle Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Grey enamel cavity	Stainless steel with metal bar handle Grey enamel cavity	Enamel cavity	Stainless steel with metal bar handle Grey enamel cavity	Grey enamel cavity
	Display						Electronic touch-control clock/timer	•	Electronic touch-control clock/timer	
	Display	with LED display	with LED display	with LED display	with LED display	with LED display	with LED display	with LED display	with LED display	with LED display
	Electronic clock/timer with	•	•	•	•	•	•	•	•	•
	end-time programming		<b>B</b>		<b>.</b>		<b>A 1 1 1 1</b>		<b>B</b>	<b>A 1 1 1</b>
	Controls	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Rotary control knobs	Sword control knobs	Rotary control knobs	Retractable rotary control knobs	Sword control knobs
	SoftMove door technology Interior light	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen	Halogen	Halogen
	interior light	Halogen (Cennig)	Halogen (Cening)	halogen (cening)	halogen (Geining)	halogen (Gennig)	Halogen (Gennig)	2 (left and right side walls)	1 (top) and 1 (bottom)	1 (top) and 1 (bottom)
	No. of shelf positions	5	5	5	5	5	5	4	2 (top) and 5 (bottom)	2 (top) and 5 (bottom)
	Full glass inner door	•	•	•	•	•	•		•	•
	Removable door	•	•	•	•	•	•	•	•	•
	Water tank empty indicator									
Cleaning	Pyrolytic cleaning function with compatible accessories and shelving	•	•							
	EcoClean cleaning system			Rear wall	Rear wall	Ceiling and rear wall	Rear wall		Ceiling, sides and rear wall	Ceiling, sides and rear wall
	Catalytic cleaning system							Side and rear walls	0,	0,
	Descaling									
	Drying									
Safety	Door	Quadruple-glazed door	Quadruple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door (top and bottom)	Triple-glazed door (top and bottom
	Residual heat indicator									
	Automatic safety switch off	•	•	•	•					
	Child lock function	•	•	•	•	•	•		•	•
	Cooling fan	•	•	•	•	•	•	•	•	•
	Maximum temperature Total connected load	300°C		270°C	270°C	270°C	270°C	250°C	275°C	275°C
Technical		3.65kW 220-240V / 50-60Hz		3.38kW	3.5kW	2.9kW	2.2kW	3.3kW	5.5kW	5.5kW
echnical equirements			220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
requirements	Power requirements	220-2400730-00H2								
	Power requirements Fully extendable telescopic rails							<ul> <li>(1 fold)</li> </ul>	<ul> <li>(1 fold – bottom)</li> </ul>	
requirements Supplied	Power requirements Fully extendable telescopic rails Partially extendable telescopic rails		2	1	1	2	2	• (1 fold) 1	• (1 fold – bottom) 3	3
requirements Supplied	Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks	• (1 fold)	2	1	1	2	2			3
equirements Supplied	Power requirements Fully extendable telescopic rails Partially extendable telescopic rails	• (1 fold)	2	1	1	-	2		3	
equirements Supplied	Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks No. split grill trays	• (1 fold)	2	1	1	1	2		3 2	1
equirements Supplied	Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans	• (1 fold)	2 1 1	1	1	1	2	1	3 2 2	1
equirements Supplied	Power requirements         Fully extendable telescopic rails         Partially extendable telescopic rails         No. wire racks         No. split grill trays         No. universal pans         No. baking trays         No. wire rack for universal pans	• (1 fold)	1	1	1	1	2	1	3 2 2	1
equirements Supplied	Power requirementsFully extendable telescopic railsPartially extendable telescopic railsNo. wire racksNo. split grill traysNo. universal pansNo. baking traysNo. wire rack for universal pansNo. yro proof pan supportsNo. enamel baking trays	• (1 fold) 2 1	1	1	1	1	2	1	3 2 2	1
equirements upplied	Power requirements         Fully extendable telescopic rails         Partially extendable telescopic rails         No. wire racks         No. split grill trays         No. universal pans         No. baking trays         No. wire rack for universal pans         No. yro proof pan supports	• (1 fold) 2 1	1	1 1 1 Refer to page 92	1 1 1 Refer to page 92	1	2	1	3 2 2	1

<sup>1</sup> Silicon based cookware and bakeware is not compatible for use. \*Compatible with Added steam function. \*Compatible with PerfectRoast meat probe. #Compatible with Rapid heat. \*Available at selected retailers, please visit www.bosch-home.com.au for list of stockists. All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

## Reference Guide Compact Appliances

Model					
		CSG656RS1A Series 8	CDG634BS1 Series 8	CMG656RS1A	CMG633BS1B Series 8
Туре		Series 8 Combination	Series 8 Pure Steam Oven	Series 8 Combination	Series 8 Combination
iype		Steam Oven		Microwave Oven	Microwave Oven
Dimensions	Width (cm)	60	60	60	60
	Appliance dimensions (H x W x D)	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm
	Built-in dimensions (H x W x D)	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm
	Cavity dimensions (H x W x D)	235 x 480 x 415mm	265 x 325 x 439mm	237 x 480 x 392mm	237 x 480 x 392mm
Heating	Number of heating functions	18	4	13	7
Functions	4D HotAir	●*^#		●^#2	<b>●</b> #2
	HotAir Eco	●^		•^	•
	Top and bottom heating	●*^#		•^#2	
	Top and bottom heating Eco	●^		•^	
	Bottom heating	•		•	
	Intensive heating	•			
	Hot air grilling	•*^		●^2	•2
	Grill – large area	•		●2	•2
	Grill – small area	•		•2	•2
	Pizza setting	•^		•^	
	Slow cooking	•		•	
	Keep warm	•*		•	
	Preheat ovenware	•		•	•
	Drying	•			
	Reheating (using steam)	•^	•		
	Dough proving (using steam)	•	•		
	Defrost (using steam)	•	•		
	Pure Steaming	•	•		
	Sabbath mode	•	-	•	
	Automatic rapid heating	•		•	•
		•	•	•	•
	Automatic temperature proposal Temperature display		•	•	
	Pure Microwave	-	-	•	•
				•	•
	Microwave with INNOWAVE inverter technology			<ul> <li>(5 power levels - 90, 180, 360, 600, 1000W)</li> </ul>	<ul> <li>(5 power levels - 90, 180, 360, 600, 1000W)</li> </ul>
Sensor &	Bosch Assist (Fully automated cooking)	•		•	
Automatic	PerfectBake™ sensor	●1		●1	
Functions	PerfectRoast meat probe	<b>●</b> 1		●1	
	AutoPilot (Automatic programs)		• (20)		● (14)
Capacity	Volume (usable litres)	47 litres (net)	38 litres (net)	45 litres (net)	45 litres (net)
	Water tank (steam ovens only)	1 litre (net)	1.3 litre (net)		
Design		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glas
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Graphic Display	TFT Touch Symbol Display
	Electronic clock/timer with end-time programming	•	•	•	•
	Bosch Control Ring with TFT Display	•	•	•	•
	SoftMove door technology	•	•	•	•
	Interior light	LED (ceiling)	Halogen (left)	LED (ceiling)	LED (ceiling)
	No. of shelf positions	3	4	3	3
	Removable door	•	•		
	Water tank empty indicator	•	•		
		-	-		
Cleaning	EcoClean cleaning system	<ul> <li>(EcoClean Direct)</li> </ul>		• (EcoClean Direct)	
Cleaning	EcoClean cleaning system in ceiling, sides and rear wall	● (EcoClean Direct)		• (EcoClean Direct)	
Cleaning		• (EcoClean Direct)		• (EcoClean Direct)	
Cleaning	in ceiling, sides and rear wall	• (EcoClean Direct)	•	• (EcoClean Direct)	
Cleaning	in ceiling, sides and rear wall Steam cleaning system	• (EcoClean Direct) • •	•	● (EcoClean Direct)	
	in ceiling, sides and rear wall Steam cleaning system Descaling program	• (EcoClean Direct) • • Triple-glazed door	• Triple-glazed door	Quadruple-glazed	Triple-glazed door
	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door	• • Triple-glazed door			
	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator	•	Triple-glazed door	Quadruple-glazed CoolTouch door	Triple-glazed door
	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off	• • Triple-glazed door		Quadruple-glazed	•
	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function	• • Triple-glazed door	Triple-glazed door	Quadruple-glazed CoolTouch door	:
Safety	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan	<ul> <li>Triple-glazed door</li> <li></li></ul>	Triple-glazed door	Quadruple-glazed CoolTouch door	:
Safety Technical	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function	• • Triple-glazed door	Triple-glazed door	Quadruple-glazed CoolTouch door	• • 300°C maximum temperature
Safety rechnical	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan	<ul> <li>Triple-glazed door</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam</li> </ul>	Triple-glazed door	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •
iafety echnical	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature	<ul> <li></li></ul>	Triple-glazed door • • • 30-100°C steam temperature	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature</li> <li>1000W maximum microwave</li> <li>power output with</li> <li>5 power levels:</li> <li>90/180/360/600/1000W</li> </ul>
afety echnical equirements	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Total connected load Power requirements	<ul> <li></li></ul>	Triple-glazed door • • 30–100°C steam temperature 1.9kW	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature</li> <li>1000W maximum microwave</li> <li>power output with</li> <li>5 power levels:</li> <li>90/180/360/600/1000W</li> <li>3.6kW</li> </ul>
afety fechnical equirements	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Total connected load Power requirements Fully extendable telescopic rails	<ul> <li>Triple-glazed door</li> <li>Triple-glazed door</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature</li> <li>3.3kW</li> <li>220-240V / 50-60Hz</li> </ul>	Triple-glazed door • • 30–100°C steam temperature 1.9kW	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperaturi</li> <li>1000W maximum microwave</li> <li>power output with</li> <li>5 power levels:</li> <li>90/180/360/600/1000W</li> <li>3.6kW</li> </ul>
afety fechnical equirements	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Total connected load Power requirements Fully extendable telescopic rails	<ul> <li>Triple-glazed door</li> <li>Triple-glazed door</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature</li> <li>3.3kW</li> <li>220-240V / 50-60Hz</li> <li>(1 fold)</li> </ul>	Triple-glazed door • • 30–100°C steam temperature 1.9kW	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	Solution of the second se
afety fechnical equirements	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Votal connected load Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks	<ul> <li>Triple-glazed door</li> <li>Triple-glazed door</li> <li>a</li> <li>b</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature; 30°C-100°C steam temperature; 3.3kW</li> <li>220-240V / 50-60Hz</li> <li>(1 fold)</li> <li>2</li> </ul>	Triple-glazed door • • 30–100°C steam temperature 1.9kW	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W</li> <li>3.6kW</li> <li>220-240V / 50-60Hz</li> </ul>
Safety Technical equirements Supplied	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Voluments Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks No. universal pans	<ul> <li>Triple-glazed door</li> <li>Triple-glazed door</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature</li> <li>3.3kW</li> <li>220-240V / 50-60Hz</li> <li>(1 fold)</li> </ul>	Triple-glazed door • • 30–100°C steam temperature 1.9kW	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	Solution of the second se
Safety Fechnical requirements Supplied	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Variant connected load Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks No. universal pans No. baking trays	<ul> <li>Triple-glazed door</li> <li>Triple-glazed door</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature</li> <li>3.3kW</li> <li>220-240V / 50-60Hz</li> <li>(1 fold)</li> <li>2</li> <li>1</li> </ul>	Triple-glazed door • • 30-100°C steam temperature 1.9kW 220-240V / 50Hz	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W</li> <li>3.6kW</li> <li>220-240V / 50-60Hz</li> </ul>
Safety Fechnical equirements Supplied	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Automatic doad Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks No. universal pans No. baking trays No. non perforated steam trays	<ul> <li>A state of the second second</li></ul>	Triple-glazed door • • 30-100°C steam temperature 1.9kW 220-240V / 50Hz 1 large	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W</li> <li>3.6kW</li> <li>220-240V / 50-60Hz</li> </ul>
Safety Technical requirements Supplied	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Cooling fan Maximum temperature United connected load Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. universal pans No. universal pans No. baking trays No. non perforated steam trays	<ul> <li>Triple-glazed door</li> <li>Triple-glazed door</li> <li>250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature</li> <li>3.3kW</li> <li>220-240V / 50-60Hz</li> <li>(1 fold)</li> <li>2</li> <li>1</li> </ul>	Triple-glazed door • • 30-100°C steam temperature 1.9kW 220-240V / 50Hz	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W</li> <li>3.6kW</li> <li>220-240V / 50-60Hz</li> </ul>
Cleaning Safety Technical requirements Supplied accessories	in ceiling, sides and rear wall Steam cleaning system Descaling program Drying Door Residual heat indicator Automatic safety switch off Child lock function Cooling fan Maximum temperature Automatic doad Power requirements Fully extendable telescopic rails Partially extendable telescopic rails No. wire racks No. universal pans No. baking trays No. non perforated steam trays	<ul> <li>A state of the second second</li></ul>	Triple-glazed door • • 30-100°C steam temperature 1.9kW 220-240V / 50Hz 1 large	Quadruple-glazed CoolTouch door • • • • • • • • • • • • • • • • • •	<ul> <li>300°C maximum temperature 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W</li> <li>3.6kW</li> <li>220-240V / 50-60Hz</li> </ul>

<sup>1</sup> Silicon based cookware and bakeware is not compatible for use. \*Compatible with Added steam function. \*Compatible with PerfectRoast meat probe. #Compatible with Rapid heat. <sup>2</sup> Compatible with Microwave function.

## Reference Guide Coffee Machine

Model		CTL636ES1	Model		BID630NS1A	BIC630NS1A
		Series 8			Series 8	Series 8
Туре		Built-in fully-automatic	Туре		60cm Built-in Warming Drawer	60cm Built-in Warming Drawer
		coffee machine	Dimensions	Appliance dimensions	290 x 595 x 548mm	140 x 595 x 548mm
Dimensions	Appliance dimensions (H x W x D)	455 x 594 x 375mm	(H x W x D)	Built-in dimensions	290 x 560-568 x 550mm	140 x 560-568 x 550mm
	Built-in dimensions (H x W x D)	449 x 558 x 354mm		Internal dimensions	242 x 468 x 458mm	92 x 468 x 458mm
Design	Stainless steel and black glass	•	Heating	Base element and	•	•
Flavour	SensoFlow System: Heating system for maximum and constant brewing temperature	•	functions	fan heating with 4 power levels	-	•
	AromaPro Concept: Optimal aroma extraction	•	Suitable for	Slow cooking	•	•
	One-touch preparation: Ristretto, Espresso,	•		Proving yeast dough	•	•
	Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffe Latte at the touch of a button			Defrosting Keeping food warm	•	•
	AromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes	•		Pre-warming cups, plates and ovenware	•	•
	Beverage temperature adjustable individually: coffee 3 levels, hot water 4 levels	•	Temperature range	from approx. 40–80°C	•	•
	Including BRITA Intenza water filter: Reduces the lime content of water and filters substances	•	Design		Stainless steel and black glass	Stainless steel and black glass
Convenience	affecting smell and taste TFT Touch Graphic Display with interactive menu	•		Cavity	52 litre interior drawer volume	20 litre interior drawer volume
	MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio	•		Electronic rotary temperature control	•	•
	of milk and espresso IndividualCup Volume: Cup sizes adjustable	•		Inner compartment ceramic glass base	•	•
	individually, to ensure your cup gets filled just		Technical	Max. weight load	25kg	25kg
	as far as you would like		requirements	Total connected load	0.81kW	0.81kW
	Coffee outlet and milk frother height-adjustable: Up to 15cm high Latte Macchiato glasses fit underneath	•		Voltage	220-240V / 50-60Hz	220-240V / 50-60Hz
	OneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities	•				
	Water tank removable for easy refilling	• (2.4 litre volume)				
	Early warning if water tank almost empty or bean container almost empty	•				
	Flexible milk solution: Decide for yourself if you prefer connecting the provided milk container or using any other container, e.g. a milk carton	•				
Performance	Short user manual always at hand inside appliance SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic	•				
	CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety	•				
	One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother	•				
	In addition to beverages also available separately: milk foam, warm milk, hot water	•				
	Reduced heat-up time: Fastest first cup	•				
	Water pump with 19 bar pressure	•				
	Separate chute for ground coffee	•				
	15,000 cup warranty: Consistently high appliance quality from the first cup to the 15,000th (valid for non-commercial use within 24 months)	•				
Hygiene	Removable brewing unit: Easy and hygienic cleaning under running water	•				
	AutoMilk Clean: Automatically steam cleans the milk system after every beverage	•				
	Milk frother removable and dishwasher-proof	•				
	SinglePortion Cleaning: Complete emptying of all pipes after each brewing process	•				
Technical	Electrical connection rating	1600W				
requirements	Current	10A				
	Voltage	220-240V / 50-60Hz				
Supplied <sub>.</sub>	1 BRITA water filter cartridge	•				
accessories	1 measuring spoon	•				
	1 milk container (insulated), connection hose and pipe	•				
	1 test strip	•				
	1 set assembly screws	• (9)				





All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

## Reference Guide Warming Drawers

## Reference Guide Electric Cooktops

Model		PXV975DC1E* Series 8	PXE875DC1E* Series 8	PXX675DC1E Series 8	PIV995DC1E* Series 8	PIV975DC1E* Series 8	PVS875FB1E Series 6	PVS675FB1E Series 6	PIE631FB1E Series 6	PIJ611BB1E Series 4	PKM875DP1A	PKG775DB1A Series 8	PKN675DB1A Series 8	PKF645D17A Series 4	PKE645C17A Series 2
Туре		FlexInduction®	FlexInduction®	FlexInduction®	Induction	Induction	Combilnduction	Combilnduction	Induction	Induction	Series 8 Ceramic	Ceramic	Ceramic	Ceramic	Ceramic
Dimensions	Width (cm)	90	80	60	90	90	80	60	60	60	80	70	60	60	60
Dimensions	Appliance dimensions (W x D)	916 x 527mm	816 x 527mm	606 x 527mm	916 x 527mm	916 x 527mm	816 x 527mm	606 x 527mm	592 x 522mm	592 x 522mm	816 x 527mm	710 x 527mm	606 x 527mm	583 x 513mm	583 x 513mm
	Cut-out dimensions (W x D)	880 x 490–500mm	750-780 x 490-500mm	560 x 490–500mm	880 x 490–500mm	880 x 490–500mm	750-780 x 490-500mm	560 x 490-500mm	560 x 490-500mm	560 x 490-500mm	780 x 500mm	560-640 x 490-500mm	560 x 500mm	560 x 490–500mm	560 x 490–500mm
												(fits cut-out for 60cm)			
Design		Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Beveled front and sides	Black ceramic glass Beveled front and sides	Black ceramic glass Beveled front and sides	Black ceramic frameless glass	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel slimline side profile Beveled front and rear	Black ceramic glass Stainless steel frame	
Burner / Zone Output		5 zones including:	4 zones including:	4 zones including:	5 zones including:	5 zones including:	4 zones including:	4 zones including:	4 zones including:	3 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
Zone Output (Size)	Front left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW (210mm)	CombiZone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)		Dual circuit zone: 1.2kW / 2.1kW (145 / 210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 2kW (180mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
	Rear left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW (210mm)	CombiZone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.2kW (145mm)	Dual circuit zone: 0.8kW / 2.0kW (120 / 180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170 / 265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
	Front centre														
	Rear centre	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)			Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)					Dual circuit zone: 1.7kW / 2.4kW (180 / 230mm)				
	Front right	Flex zone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.4kW / 2.2kW (145mm)	FlexZone: 2.2kW / 3.7kW Boost (190x240mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Dual circuit/roaster zone: 1kW / 2kW / 3.4kW / 4.6kW (120 / 180 / 270 / 370mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Dual circuit zone: 1kW / 2.2kW (145 / 210mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Standard zone: 2.0kW (180mm)
	Rear right	Flex zone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 2.6kW / 3.7kW (280mm)	FlexZone: 2.2kW / 3.7kW Boost (190x240mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	100 / 210 / 01 01 01 01	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
		*Total FlexZone: 3.3kW / 3.7kW Boost (400 x 230mm)	*Total FlexZone: 3.3kW / 3.6kW Boost (400x240mm)	*Total FlexZone: 3.3kW / 3.7kW Boost (380x240mm)											
Performance	17-stage power setting	•	•	•	•	•	•	•	•	•	•	•	•	•	
	9-stage power setting														•
	PerfectFry Sensor	•	•	•	•	•									
	PowerBoost	•	•	•	•	•	•	•	•	•	•				
	ShortBoost	•	•	•	•	•									
	FlexZone	•	•	•											
	CombiZone						•	•							
	MoveMode	3 Auto Power Levels	3 Auto Power Levels	3 Auto Power Levels			2 Auto Power Levels	2 Auto Power Levels							
Convenience	WipeProtection	•	•	•	•	•	•	•	•		•	•	•		
	Keep Warm	•	•	•	•	•			•		•	•	•		
	QuickStart ReStart	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Energy consumption display	•	•	•	•	•	•	•	•		•	•	•		
	Dual function timer with automatic switch-off	•	•	•	•	•	•	•	•	•	•	•	•		
	Automatic pot detection	•	•	•	•	•	•	•	•	•					
	Automatic boil start											•	•		
Safety	Child lock	•	•	•	•	•	•	•	•	•	•	•	•	•	
	2-stage residual heat indicators	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Residual heat indicator							-	-						•
	Automatic safety stuff-off	•	•	•	•	•	•	•	•	•	•	•	•	•	
Electronic touch-	Direct Select Premium	•	•	•	•	•	<u>.</u>				•	•	•		
touch- controls	Direct Select 1.0 TouchSelect						•	•	•	•				•	
	Rotary control knobs														•
Technical requirements		11.1kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 30mm	7.4kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 30mm	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm	11.1kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm	11.1kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 30mm	7.4kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 30mm	6.9kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm	7.4kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm if over oven: 30mm	11.2kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	6.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	7.5kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	6.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm	6.6kW total connected load; 220-240V / 50-60Hz; Min. thickness of worktop: 20mm over oven: 20mm
Optional	Griddle plate	•	•	•			•	•							
accessories	Teppan Yaki Large (40cm x 20cm)	•	•	•			•	•							
	Teppan Yaki Small (30cm x 20cm)	•	•	•			•	•							
	4 piece cookware set	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Stainless steel roasting pan with lid	•	•	•	•	•	•	•			•	•	•		
	Stainless steel wok	•	•	•	•	•	•	•	•	•	•	•	•	•	•
									-						

## Reference Guide Gas Cooktops

Model		PPQ716B21A	PPH616B21A	PCT915B9TA	PCR915B91A	PCQ715B90A	PCI815B91A	PCH615B9TA	PBH615B9TA
		Series 6	Series 2						
Туре		Gas							
Dimensions	Width (cm)	70	60	90	90	70	75	60	60
	Appliance dimensions (W x D)	710 x 520mm	590 x 520mm	915 x 520mm	915 x 520mm	702 x 520mm	762 x 520mm	582 x 520mm	580 x 510mm
	Cut-out dimensions (W x D)	560 x 480–490mm (fits cut-out for 60cm)	560 x 480-490mm	850 x 490-500mm	850 x 490–500mm	560 x 480–490mm (fits cut-out for 60cm)	560 x 480–490mm (fits cut-out for 60cm)	560 x 480-490mm	560 x 480-490mm
Design		Black tempered frameless glass	Black tempered frameless glass	Stainless steel					
Burner / Zone		5 burners including:	4 burners including:	6 burners including:	5 burners including:	5 burners including:	4 burners including:	4 burners including:	4 burners including:
Output	Front left	Economy burner: 3.6Mj/h	Standard burner: 6.5Mj/h	Dual flame wok burner: 18Mj/h	High-speed burner: 10.8Mj/h	Economy burner: 3.6Mj/h	Triple flame wok burner: 16Mj/h	Dual flame wok burner: 18Mj/h	Dual flame wok burner: 18Mj/h
	Rear left	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h	Standard burner: 6.5Mj/h		Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h
	Front centre	Triple flame wok burner: 16Mj/h		Economy burner: 3.6Mj/h	Dual flame wok burner: 18Mj/h	Triple flame wok burner: 16Mj/h	Economy burner: 3.6Mj/h		
	Rear centre			Standard burner: 6.5Mj/h			Standard burner: 6.5Mj/h		
	Front right	Standard burner: 6.5Mj/h	Economy burner: 3.6Mj/h	Dual flame wok burner: 18Mj/h	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	High-speed burner: 10.8Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h
	Rear right	High-speed burner: 10.8Mj/h	Dual flame wok burner: 12Mj/h	Standard burner: 6.5Mj/h	Standard burner: 6.5Mj/h	High-speed burner: 10.8Mj/h		High-speed burner: 10.8Mj/h	Standard burner: 6.5Mj/h
Convenience	Individual cast-iron trivets with rubber feet	•	•						
	3 piece cast-iron trivets with rubber feet			•	•				
	2 piece cast-iron trivets with rubber feet					•	•	•	•
	Enamelled steel trivets								
	Enamelled cast-iron burner caps	•	•	•	•	•	•	•	•
afety	Flame failure fitted to each burner	•	•	•	•	•	•	•	•
Controls	Rotary controls – black and stainless steel	•	•	•	•	•	•	•	
	Sword controls – silver								•
Fechnical requirements		43.4Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	28.6Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	56.2Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	45.4Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	43.4Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	36.9Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	38.9Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm	34.6Mj/h total connected load; 240V / 50Hz; Min. thickness of worktop: 30mm
Supplied	Wok ring support	1	1	1	1	1	1	1	1
ccessories	Espresso cross support	1	1	1	1	1	1	1	
	LPG conversion kit	•	•	•	•	•	•	•	•
Optional	4 piece cookware set	•	•	•	•	•	•	•	•
ccessories	Stainless steel wok	•	•	•	•	•	•	•	•
Other	Suitable for NG or LPG	•	•	•	•	•	•	•	•







## Reference Guide Rangehoods

Model		DWA097E51A	DWB091E51A	DWB097E50A	DWW097A50A		DWB09W850A#	DWW09W651A <sup>#</sup>	DWW06W851A		DHL785BAU	DHL555BAU	DFR097E50A	DFR067E50A	DFR097A50A	DFR067A50A	DFL064W50A
		Series 6	Series 6	Series 6	Series 4	Series 2	Series 2	Series 2	Series 2	Series 8	Series 6	Series 4	Series 6	Series 6	Series 4	Series 4	Series 2
Гуре		Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Integrated	Integrated	Integrated	Slideout	Slideout	Slideout	Slideout	Slideout
Dimensions	Width (cm)	90	90	90	90	90	90	90	60	86	70	53	90	60	90	60	60
	Appliance dimensions (H x W x D)	638–954 x 900 x 540mm (ducted) or 694 x 900 x 540mm (CleanAir	628–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir	642–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir	672–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir	799–976 x 900 x 500mm (ducted) or 799–976 x 900 x 500mm	642-954 x 900 x 500mm (ducted) or 642-1064 x 900 x 500mm	642-954 x 900 x 500mm (ducted) or 642-1064 x 900 x 500mm	799-976 x 600 x 500mm (ducted) or 799–976 x 600 x 500mm	418 x 860 x 282mm	418 x 700 x 282mm	255 x 530 x 380mm	426 x 898 x 290mm (fits 60 or 90cm cupboard)	426 x 598 x 290mm	426 x 898 x 290mm (fits 60cm or 90cm cupboard)	426 x 598 x 290mm	203 x 598 x 290mm
Design		module) Stainless steel	module) Stainless steel	module) Stainless steel	module) Stainless steel	(recirculated) Stainless steel	(recirculated) Stainless steel	(recirculated) Stainless steel	(recirculated) Stainless steel	Stainless steel	Stainless steel	Steel body with	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Steel body with
Design	Red LED display	and glass	•	Stanless steel	Stanness steer	Stairliess steel	Stalliess steel	Statiliess steel	Stanness steer	Stairliess steel	Stainless steel	metallic finish	Stanness steer		Stanness steer	Stanness steer	metallic finish
			-	•		-			-	-	-		•	-			
	On/Off main switch control	•	•	•	•	•	•	•	•	•	•		•	•			
	Electronic controls for power and light	•	•	•							•		•	•	•	•	
	Electronic backlit push button controls for power and light				•					•							
	Slide controls for power and light											•					
	Rocker switches for power and light					•	•	•	•								•
	Concealed power and light controls														•	•	•
	Lighting	2 x 3W LED SoftLights with dimmer function	3 x 3W LED SoftLights with dimmer function	3 x 3W LED SoftLights with dimmer function	3 x 3W LED lights	2 x 20W halogen lights	2 x 1W LED lights with dimmer function	2 x 20W halogen lights	2 x 20W halogen lights	2 x 3W LED Softlights with dimmer function	2 x 3W LED Softlights with dimmer function	2 x 3W LED lights	2 x 3W LED lights	2 x 20W halogen lights			
Power	Maximum extraction rate	690m³/h	810m³/h	730m³/h	730m³/h	780m³/h	750m³/h	650m³/h	730m³/h	820m³/h	730m³/h	650m³/h	730m³/h	730m³/h	740m³/h	740m³/h	400m³/h
Power functions	3 power levels plus 2 intensive settings	•	•	•									•	•			
	3 power levels plus 1 intensive setting				•					•	•	•			•	•	
	3 power levels					•	•	•	•								•
	Intensive setting with	•	•	•	•	•	•	•	÷	•	•		•	•	•	•	·
	automatic switch back to previous setting 6 min	•	•	•	•					•	•		•	•	•	•	
	Residual shutdown with automatic run-on time 1–10 min	•	•	•						• (30 mins)			•	•	•	•	
	Rim ventilation system		•							•	•						
	EcoSilence Drive® brushless motor	•	•	•	•					•			•	•	•	•	
	Powerful single motor with twin fan					•	•	•	•		•						
	Powerful twin motor											•					
	Powerful single motor																•
Noise*		54dB at level 2 or 350m³/h (150mm ducted)	59dB at level 2 or 430m³/h (150mm ducted)	49dB at level 2 or 360m³/h (150mm ducted)	49dB at level 2 or 360m³/h (150mm ducted)	59dB at level 2 or 450m³/h (150mm ducted)	61dB at level 2 or 460m³/h (150mm ducted)	61dB at level 2 or 430m³/h (150mm ducted)	59dB at level 2 or 420m³/h (150mm ducted)	55dB at level 2 or 400m³/h (150mm ducted)	63dB at level 2 or 540m³/h (150mm ducted)	52dB at level 2 or 320m³/h (150mm ducted)	48dB at level 2 or 320mm³/h (150mm ducted)	49dB at level 2 or 330mm³/h (150mm ducted)	50dB at level 2 or 340mm³/h (150mm ducted)	50dB at level 2 or 330mm³/h (150mm ducted)	64dB at level 2 or 340mm³/h (150mm ducted)
	Sound insulation mats		•	•	•								•	•			
	Dual layer metal grease filters		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Dishwasher-safe metal grease filter	• (1)	• (3)	• (3)	• (3)	• (3)	• (3)	• (3)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)
	Saturation indicator for filters		•	•						•			•	•			
Technical requirements		136W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	269W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	139W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	139W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	255W total connected load; 220-240V / 50Hz; 120mm tube connection diameter	290W total connected load; 220–240V / 50Hz; 120mm tube connection diameter	215W total connected load; 220-240V / 50Hz; 120mm tube connection diameter	255W total connected load; 220-240V / 50Hz; 120mm tube connection diameter	272W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	315W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	240W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	146W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	146W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	146W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	140W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	145W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter
Included accessories													Stainless steel pelmet included as seperate accessory <sup>*</sup>	Stainless steel pelmet included as seperate accessory <sup>*</sup>	Stainless steel pelmet included as seperate accessory^	Stainless steel pelmet included as seperate accessory^	Stainless steel pelmet included as seperate accessory^
Optional	CleanAir Recirculation kit	•	•	•	•								•	•	•	•	
accessory	Recirculation kit Charcoal filter for					•	•	•	•	•	•	•					•
	recirculation																
	White pelmet												•	•	•	•	•
	Black pelmet												•	•	•	•	•
	Stainless steel pelmet for front controls												•	•			
	Installation kit for 90cm cupboard												•		•		
Other	Ducted and recirculated	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. \*The dB(A) value plus approx. 10–14 units is equivalent to a dB(A) re1pW value. ^Please ask your retailer at point of purchase. \*Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

## Reference Guide Rangehoods

#### Air extraction calculation examples to help you calculate your own requirements

Kitchen dimensions: L x W x H	Room volume	Minimum extraction rate (6 x per hour)	Maximum extraction rate (12 x per hour)
3 x 4 x 2.5m =	30m³	6 x 30m³ = <b>180m³/h</b>	12 x 32m <sup>3</sup> = <b>360m<sup>3</sup>/h</b>
4 x 4 x 2.5m =	40m <sup>3</sup>	6 x 40m <sup>3</sup> = <b>240m<sup>3</sup>/h</b>	12 x 40m <sup>3</sup> = <b>480m<sup>3</sup>/h</b>
4 x 5 x 2.5m =	50m³	6 x 50m³ = <b>300m³/h</b>	12 x 50m <sup>3</sup> = <b>600m<sup>3</sup>/h</b>
Calculate yourself			


#### Measurement of air extraction as used by Bosch





net fan power without installation

net fan power in appliance but without connection to ducting system



net fan power in appliance and with connection to ducting system according to EN61591

## Reference Guide Dishwashers

Model		SMI88TS01A	SMI68M25AU	SMI50M05AU	SMV88TX01A	SMV63M10AU
		Series 8	Series 6	Series 6	Series 8	Series 6
Туре		Semi-intergrated	Semi-intergrated	Semi-intergrated	Fully Intergrated	Fully Intergrated
Water	Star rating (litres per wash)	5 Star (12L)	5 Star (12L)	5 Star (11L)	5 Star (12L)	5 Star (11L)
Energy	Star rating (kWh per year)	4 Star (235 kWh)	4 Star (235 kWh)	4 Star (220 kWh)	4 Star (235 kWh)	4 Star (220 kWh)
Dimensions	Appliance dimensions (H x W x D)	815-875 x 598 x 573mm	815-875 x 598 x 573mm	815–875 x 598 x 573mm	815–875 x 598 x 550mm	815–875 x 598 x 550mm
Capacity	International Place Settings	15	15	14	15	14
Design	TFT Full Colour Display	2 Displays			1 Display	
	TimeLight <sup>™</sup> Floor Projection				•	
	InfoLight™ Floor Projection					•
	SensorTouch Buttons	•			•	
Wash	Auto 35°-45° (delicates)	•			•	
Programs	Auto 45°-65° (normal daily)	•	•	•	•	•
	Auto 65°-75° (pots and pans)	•			•	
	Eco 45°	•	•	•	•	•
	Pots and Pans 70°		•	•		•
	Glass Wash 40°	•	•		•	•
	Super 60°	•			•	
	Quick 45°	•	•	•	•	•
	Pre-Rinse	•	•	•	•	•
Wash	VarioSpeed™	•	•	•	•	•
Options	IntensiveZone™	•	•		•	•
	HygienePlus™	•	•		•	•
	HalfLoad Plus	•	•	•	•	•
	ExtraDry	•			•	
ActiveWater	AutoBrilliance™	•	•	•	•	•
Features	AquaSensor™	•	•	•	•	•
	EcoSilence Drive®	•	•	•	•	•
	Heat Exchanger	•	•	•	•	•
Flexibility	VarioDrawer™	Pro	•		Pro	
	Basket System	VarioFlex™ Pro	VarioFlex™	Vario™	VarioFlex™ Pro	VarioFlex™
	Rackmatic™ Plus	•	•	•	•	•
	Large Item Sprayhead	•	•	•	•	•
Convenience	dB rating	42dB	42dB	44dB	42dB	42dB
	Time delay	•	•	•	•	•
Safety	AquaStop™ Plus	•	•	•	•	•
	Child lock	•	•	•	•	•

### Accessories



HEZ324000 Wire rack for universal pan Fits into the universal pan for all grilling applications. Universal pan and wire rack can be removed To suit all Bosch 60cm ovens

HEZ327000

HEZ334000

HEZ390011

HEZ36D353P

HEZ625071

HEZ631070

HEZ633001

HEZ633073

(except HBA13B253A) and all 60cm combination steam and microwave

Pizza baking stone with wooden bread paddle. Baking stone is pyrolytic proof. To suit all Bosch 60cm ovens and all 60cm combination steam and microwave ovens

For all grilling applications. To suit all Bosch 60cm ovens except HBA13B253A



Stainless steel roasting pan with glass lid, induction suitable. To suit all Bosch 60cm ovens

HEZ36D153P To suit Bosch Series 8 60cm combination steam oven CSG656RS1A, CDG634BS1



combination steam over CSG656RS1A, CDG634BS1

HEZ617000 Pizza pan To suit all Bosch 60cm ovens and all 60cm combination steam and microwave ovens



Split grill tray, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens. 60cm combination steam and microwave ovens

Enamelled baking tray

- pyrolytic proof



To suit Bosch Series 8 60cm ovens, 60cm combination steam and nicrowave ovens



HEZ632070 Universal pan, enamelled - pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens

Lid for Professional pan To suit Bosch Series 8 60cm ovens, 60cm combination steam and nicrowave ovens

Professional pan, enamelled –

To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens

pyrolytic proof



Wire rack (standard)

To suit all Bosch Series 8

To suit all Bosch 60cm ovens and

all 60cm combination steam and microwave ovens

1 level telescopic rail, full

extension - pyrolytic proof

2 level telescopic rails, full

extension - pyrolytic proof

3 level telescopic rails, full

extension - pyrolytic proof

Metal strip

CMG656RS1A

Wire rack (steam)

CSG656RS1A

and microwave ovens

Wire rack (microwave)

To suit Bosch Series 8 60cm

To suit Bosch Series 8 60cm

combination steam oven

Glass dish (pyrex style)

microwave ovens

To suit Bosch Series 8 60cm ovens,

60cm combination steam and

microwave ovens CMG633BS1B,

To suit Bosch Series 8 60cm ovens

To suit all Bosch 60cm ovens and

all 60cm steam, combination steam

To suit Bosch Series 8 60cm ovens

To suit Bosch Series 8 60cm ovens

60cm ovens

Glass pan

HEZ634000

HEZ636000

HEZ638170

HEZ638270

HEZ638370

HEZ660060

HEZ634080

HF7664070

HEZ864000

















Glass roasting dish, 5.1 L HEZ915001 To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens



vour imagination go. Also great for steamers and available in two sizes (40cm x 20cm and 30cm x 20cm).

For use on two combined cooking

zones. Evens heat to perfectly

grill your favourite meats, fish or

Griddle plate

vegetables

Teppan Yaki



tion Accesso

Enjoy induction the Japanese way! Try beef, prawns, scallops, lobster, chicken and chopped vegetables. Let



Stainless steel roasting pan (optional with steamer inset) Cook large dishes without hot spots

for results you'll be delighted with. A high performance roasting pan that no induction kitchen should be without. For use on two combined cooking zones. 4 Piece Cookware Set



4 piece induction cookware set consisting of 2 pots, 1 casserole



HEZ390090 Stainless steel wok for induction and ceramic cooktops. Includes glass lid




HEZ390220

induction cooktops PXV975DC1E, PXE875DC1E, PXX675DC1E, PIV995DC1E & PIV975DC1E

PerfectFry sensor induction pan 21cm To suit Bosch PerfectFry sensor

induction cooktops PXV975DC1E, PXE875DC1E, PXX675DC1E, PIV995DC1E & PIV975DC1E

### Rangehood Accessories



DWB097E50A, DWW097A50A

CleanAir recirculation kit Fits Bosch DWB091F51A.

Recirculation kit For Bosch DFL064W50A



DFR067E50A, DFR097A50A, DFR067A50A



DHZ5275







DSZ4680



CleanAir active carbon filter For Bosch DER097E50A





HEZ390522

Large -

Small -

HEZ390512

HEZ390511

HEZ390011

HEZ390042

HEZ390230

DSZ6200

DSZ6240

DSZ4545



Stainless steel wok



DHZ5325

**Recirculation kit** 

For Bosch DWB09W850A






----

Recirculation kit To suit DHL895CAU and DHL785BAU	DHZ5605
Charcoal filter For Bosch DHL555BAU	DHZ7305
White pelmet Fits all Bosch 60cm slideout rangehoods except models DHI623GAU	DSZ4652
Black pelmet Fits all Bosch 60cm slideout rangehoods except models DHI623GAU	DSZ4656
Stainless steel pelmet for vario control For Bosch DFR067E50A	DSZ4665
White pelmet Fits all Bosch 90cm slideout rangehoods	DSZ4952
Black pelmet Fits all 90cm Bosch slideout rangehoods	DSZ4956
Stainless steel pelmet for vario control Fits Bosch DFR097E50A	DSZ4965
Mounting kit for 90cm cupboard Fits Bosch DFR097A50A, DFR097E50A	DSZ4920




All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

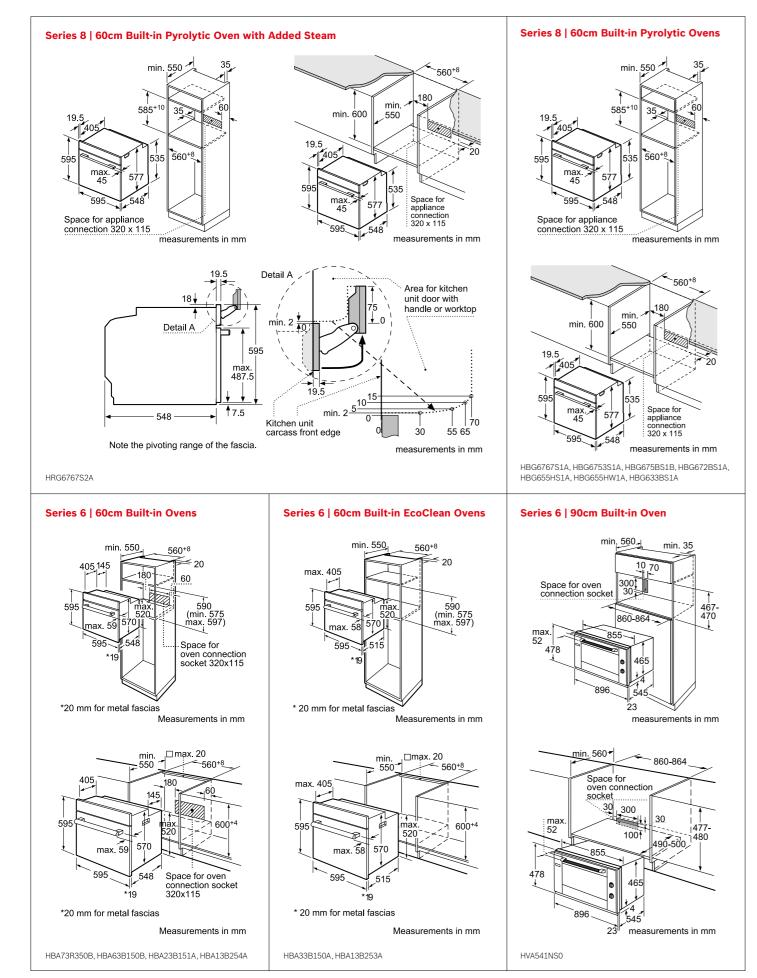

## Technical diagrams


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

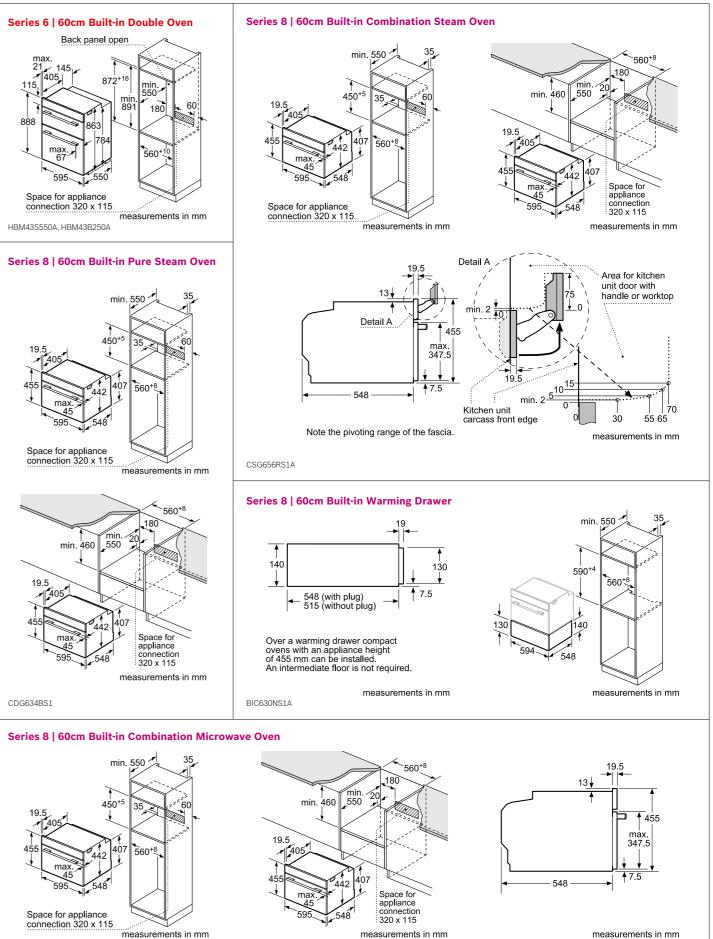

CMG656RS1A, CMG633BS1B


measurements in mm


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

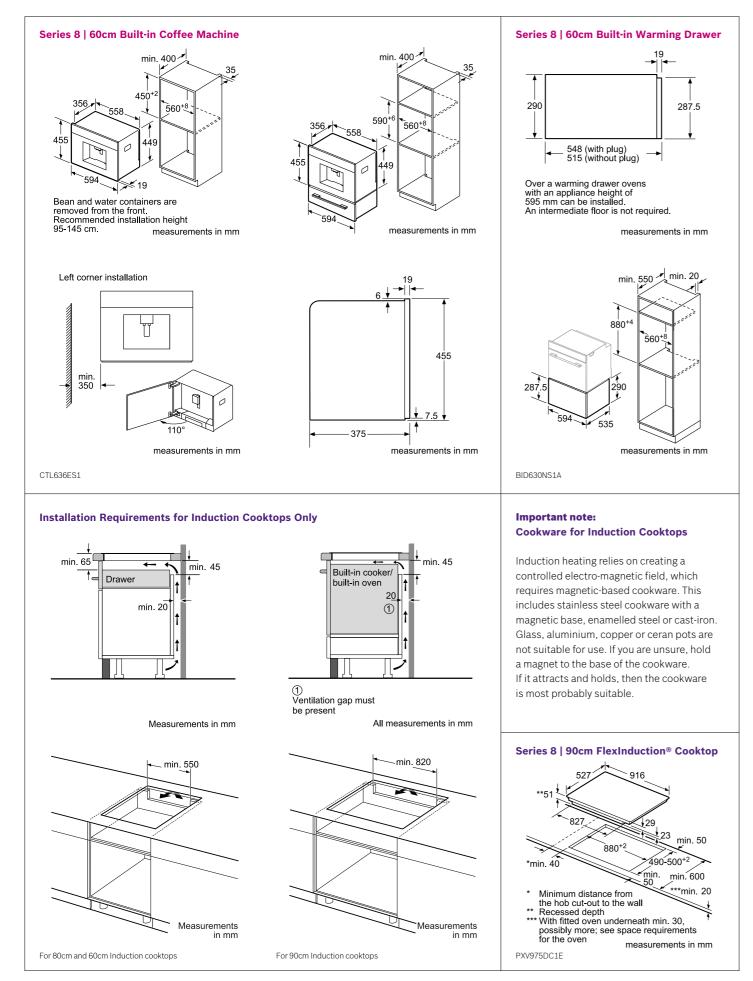


## Technical diagrams


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

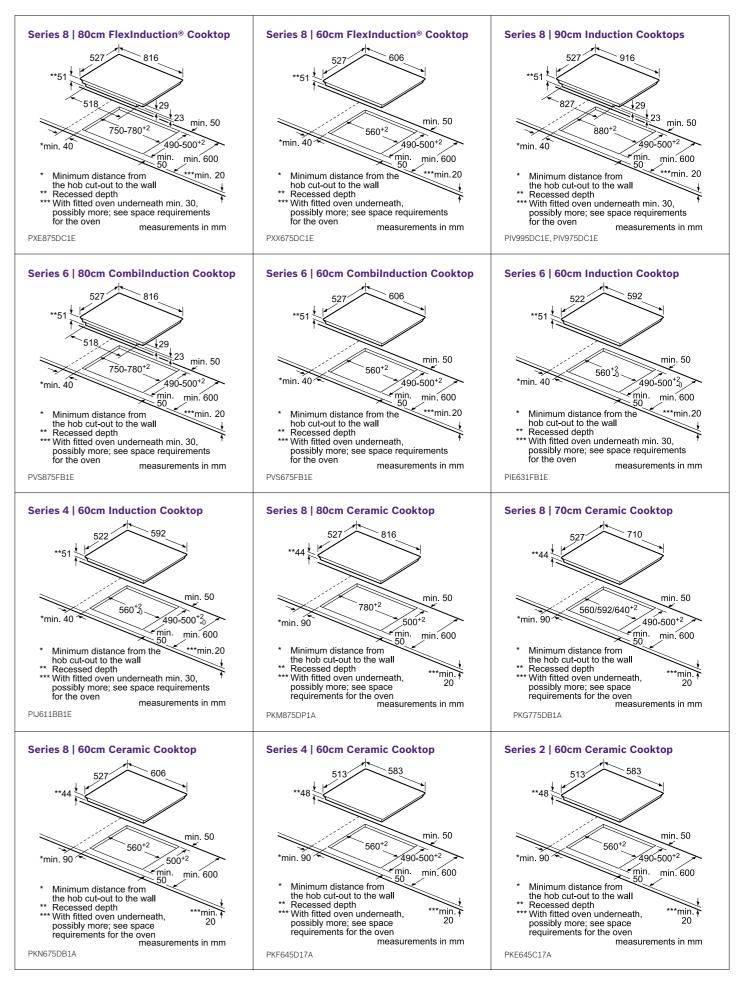




All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

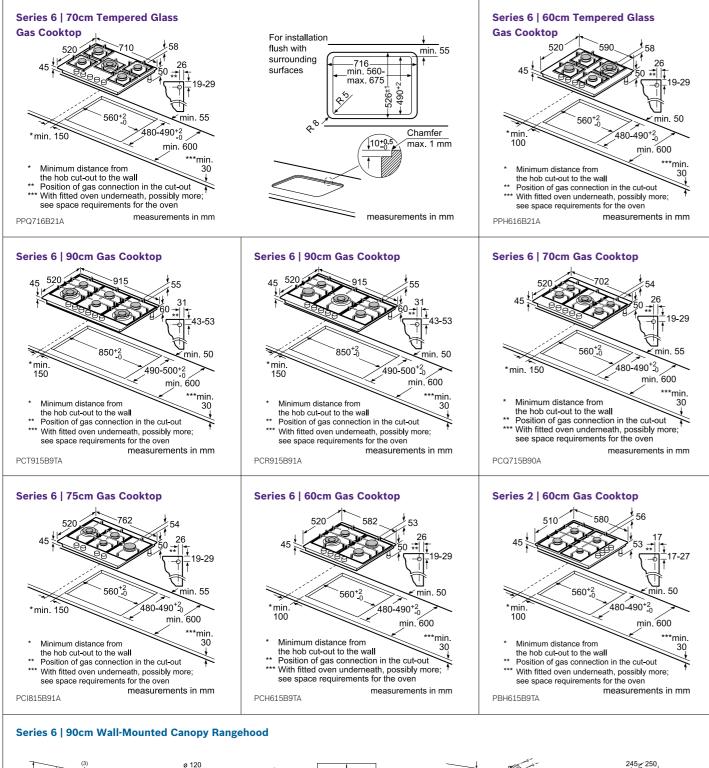


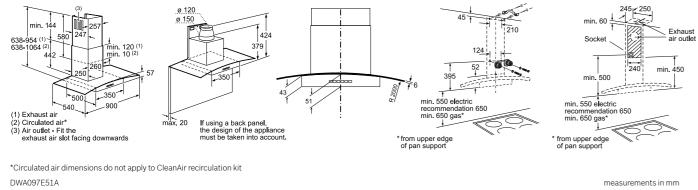



## Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

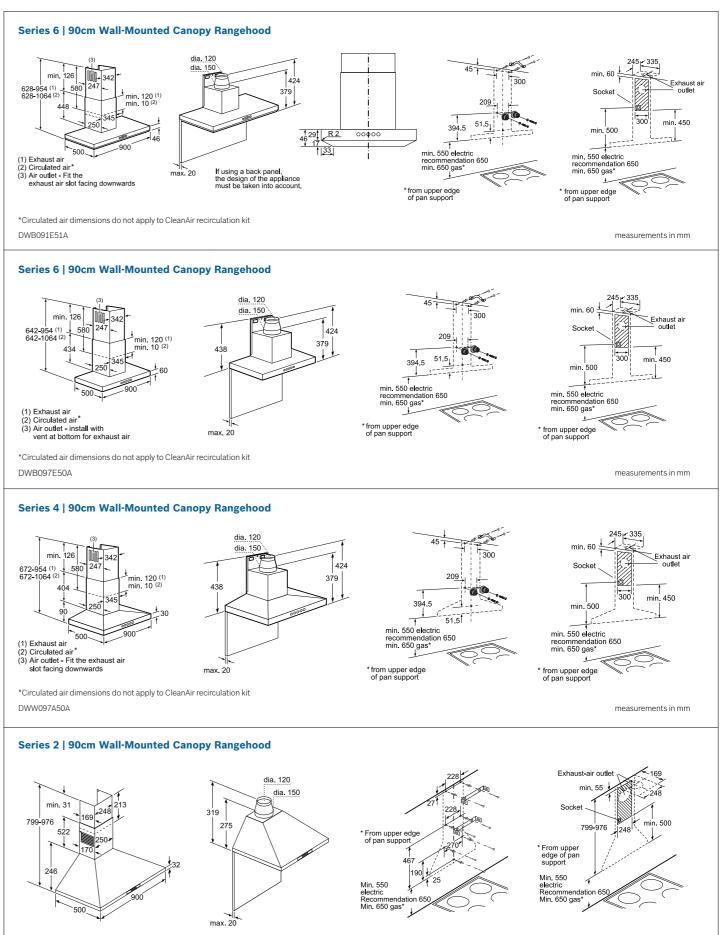

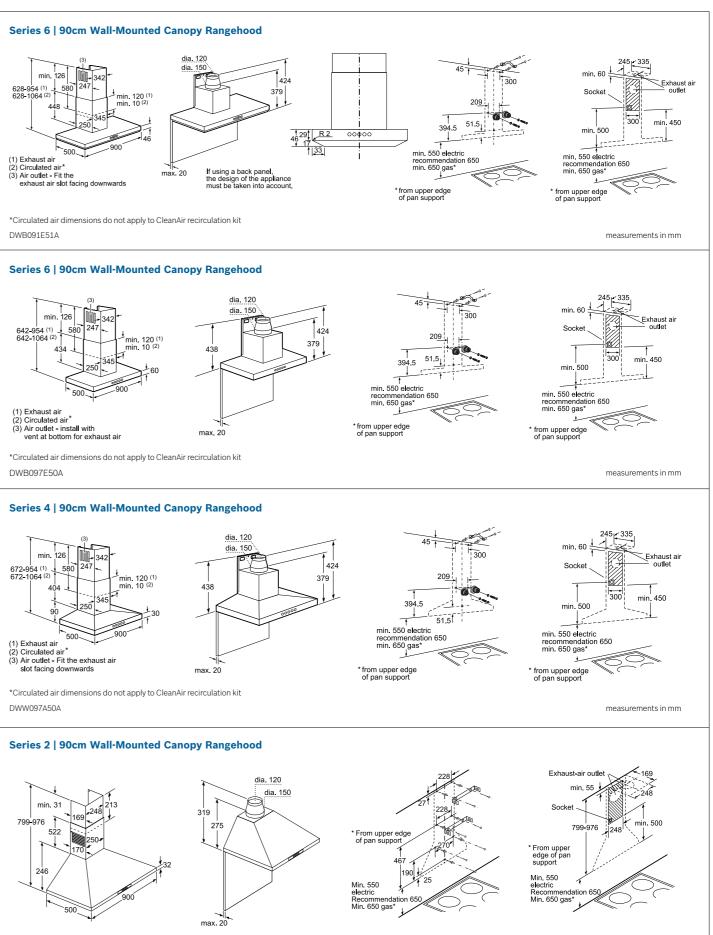




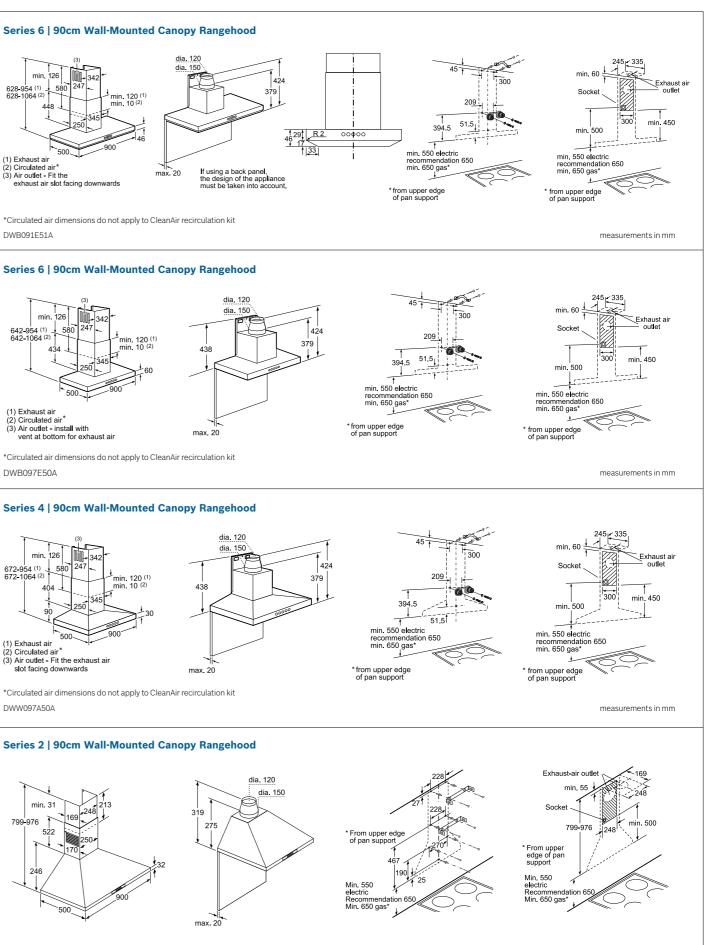

DWW09W851A, DWW09W651A


measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

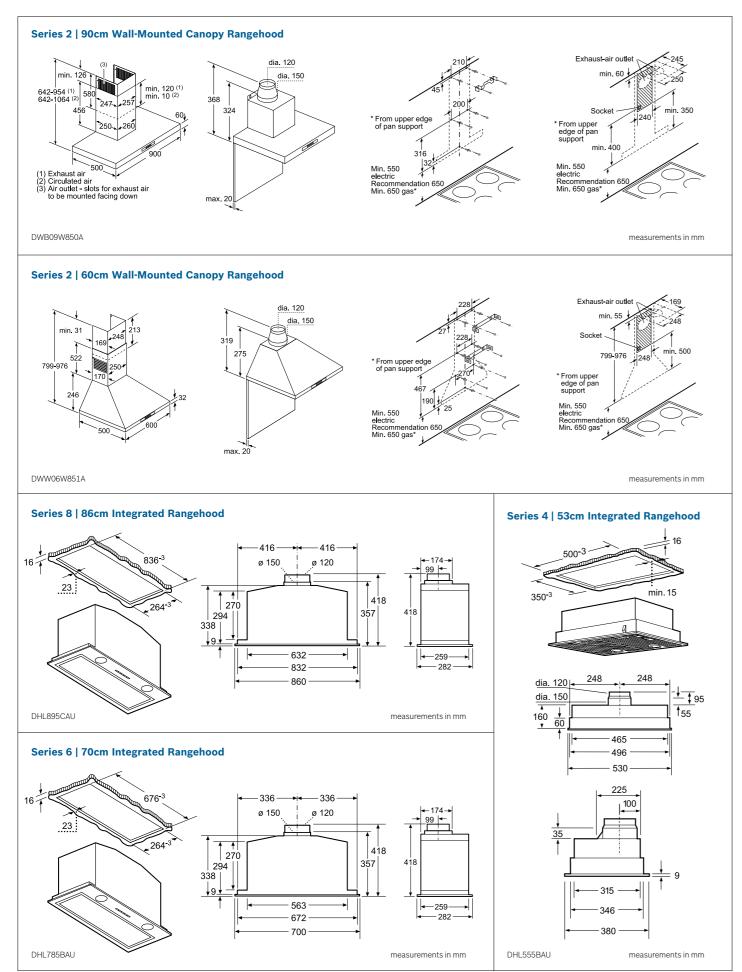


## Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

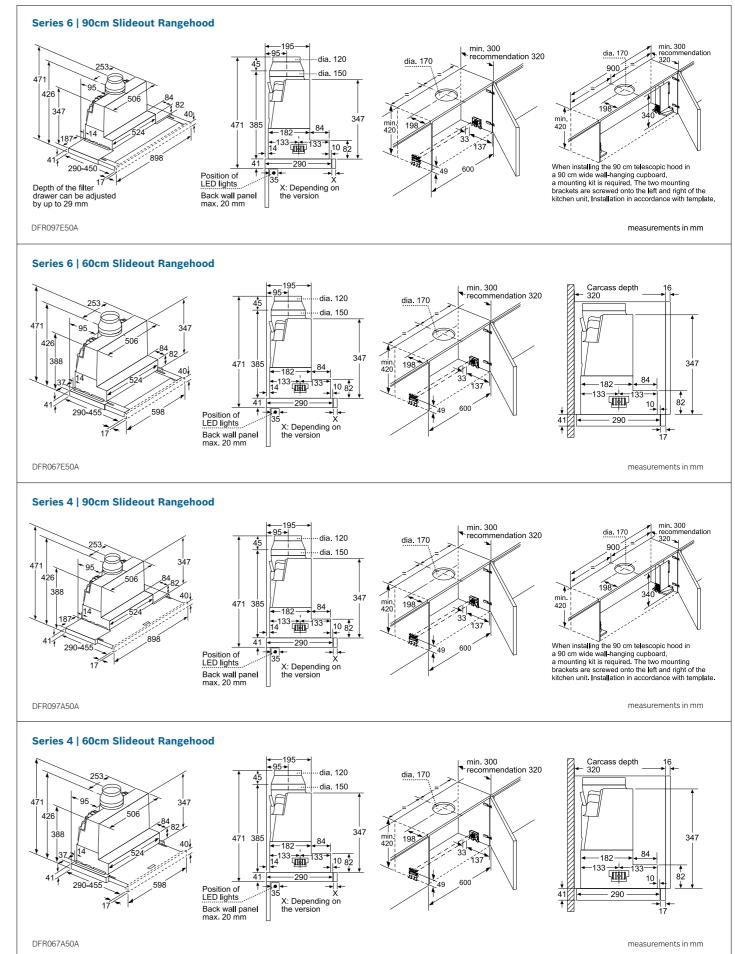


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

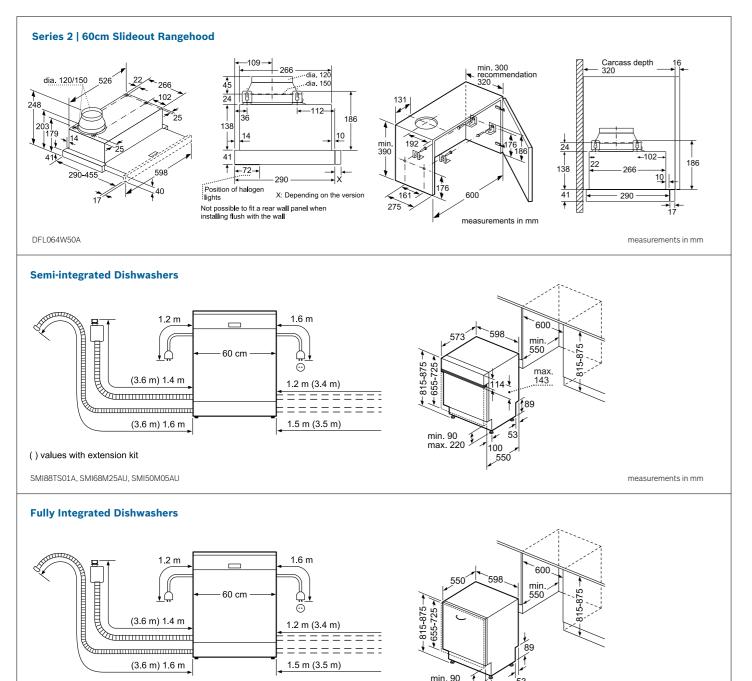


#### () values with extension kit

SMV88TX01A, SMV63M10AU

#### Series 8 | Fully Integrated Bottom Mount Fridge Freezer

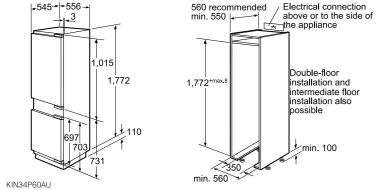



measurements in mm

max. 220

## This much is for sure: you can trust in our service.

Reliable, experienced, fast. The customer service of Bosch; before and after purchase.

#### Quality service straight from the manufacturer. Original Bosch.

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

#### Reliability guaranteed. No compromises.

All Bosch home appliances are produced with maximum care using high-quality materials. We promise it in our 2-year manufacturer's warranty on all appliances.

#### Lifetime service. It goes without saying at Bosch.

Once your warranty period is over, we are still there to assist you. You can rely on expert care and first-rate service throughout the life cycle of your appliance. From missing instruction manuals to appliance repair – we take care of everything.

#### Original accessories. Effective care products.

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

#### Extensive customer service network. Just a call away.

**Customer Care** 

Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

## Service & Repairs

### **Customer care, service** and repairs: 1300 369 744

\*Phone lines open 7am Monday until midnight on Friday.

Our team is there to provide the right advice on faults, arranging a visit of a service engineer and ordering the right accessories or spare parts.

24 Hour phone support Monday to Friday\*

#### **BSH Home Appliances Pty Ltd**

1555 Centre Road Clayton VIC 3168

#### **Postal Address**

Locked Bag 66, Clayton South VIC 3169

#### **Customer Line**

Phone: 1300 369 744

#### www.bosch-home.com.au

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Bosch retailer for the latest information.

Whilst every care has been taken in the preparation of this publication, BSH does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KRD 10/2016 - BH 2834 B

