

The easy way to perfect results.

Bosch cooking and integrated appliances

June 2017







Find the right appliance for your dream kitchen.

Ovens page 12-23



60cm Built-in single ovens

Our ovens combine high-quality stainless steel and black glass for a sleek finish on all models. Multiple cooking and cleaning options offer convenience.



Double ovens

Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



90cm Built-in single oven

With a large interior cavity, boasting 77 usable litres (net) telescopic rails and catalytic liners, the 90cm oven offers total convenience.

Compact appliances page 24-31



Combination steam and pure steam ovens

Cooking with steam helps retain vitamins and minerals in fresh foods, as well as maintain original colour, shape and consistency.



Combination microwave ovens

Add speed to your traditional cooking process without compromising on taste.



Coffee machine

Whether your preference is a skinny latte, a double shot cappuccino or a delicious hot chocolate, our coffee machine brings café-style drinks to your home.



Warming drawers

Ensure food stays at just the right serving temperature. You can also defrost, prove dough or slow cook.

Cooktops page 32-51



Gas cooktops

The cooktop of choice in most professional kitchens, the new Bosch FlameSelect gas cooktops are innovative, stylish and help you to always get perfect results.



Induction cooktops

Quite simply, Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.



Ceramic cooktops

With their electronic touch-controls and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.

Rangehoods page 52-61



Canopy wall-mounted rangehoods

Canopy wall-mounted rangehoods provide a focal point in any kitchen. Choose a design that compliments your style, plus they are also packed full of convenient features.



Integrated rangehoods

Sleek in design, Bosch fully integrated rangehoods are neatly concealed beneath the cupboard for a seamless look in the kitchen. Performance that is not seen or heard.



Slideout rangehoods

Extends when in use and slides neatly away when not in operation.

Dishwashers page 62-71



Built-under dishwashers

Can be fitted into a new or existing kitchen with style. It is height adjustable for a flush fit and can be installed with a continuous kick panel for a seamless integration with kitchen cabinetry.



Semi-integrated dishwashers

Can be fitted with a door panel to match the design of your kitchen, while providing a focal point in the visible, easy to use control panel. A continuous kick panel provides seamless integration.



Fully integrated dishwashers

Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry with a control panel that is neatly integrated into the top of the dishwasher door.

Refrigeration page 72-77



Built-in refrigeration

Concealed behind panels that match the rest of your kitchen, these fully integrated fridge-freezers fit seamlessly into your dream kitchen.



Bosch – a brand you can trust.



Design

Bosch is the No. 1 brand in design with over 300 design awards won over the past five years. This is more than any other home appliance brand and our promise to you is that every detail of every appliance has been carefully designed to make your time spent in the kitchen as enjoyable as possible.



Together with our years of experience in home appliances and latest German engineering, we manufacture quality products that are easy to use and yet deliver perfect results.



Performance

With BoschAssist and advanced sensor technology found in PerfectBake™ and PerfectRoast, your Bosch Series 8 ovens and compact appliances will modify the cooking process from start to finish for perfect baking and roasting results.



A little peace of mind for your daily life at home with Bosch sensor technology for perfect cooking results. Our FlameSelect gas cooktop technology will let you adjust power levels precisely and our self-cleaning functions will save you the trouble of cleaning up.



Sustainability

This signet denotes products that focus on energy and water efficiency while achieving top performance based on Bosch technologies – and, like all Bosch products, have been manufactured with the aim of minimizing their impact on the environment. The signet stands for the resource-efficiency of our products – quite simply, for their 'Green Technology'.

8 | Bosch built-in catalogue more information www.bosch-home.com.au | 9

Bosch | Good, Better, Best

Design your kitchen

Your every day kitchen

These appliances are perfect for first time home owners wanting reliable appliances in a contemporary design that deliver efficient value for money.



Series 4 | DFR067A50A 60cm Slideout Rangehood



Series 6 | HBA13B254A 60cm EcoClean Oven



Series 4 | PKE611D17A 60cm Ceramic Cooktop



Series 6 | PCI6A5B90A 60cm Stainless Steel Gas Cooktop

Want a bit more?


These appliances are perfect for families that need easy to operate home appliances with additional cooking features, a timeless design and German quality.



Series 4 | DWW097A50A 90cm Wall-mounted Stainless Steel Canopy Rangehood



Series 8 | HBG6753S1A 60cm Pyrolytic Oven



Series 4 | PIJ611BB1E 60cm Induction Cooktop



Series 6 | PCR7A5B90A 75cm Stainless Steel Gas Cooktop

Best in class

These appliances are perfect if you want the latest technology with a premium finish and outstanding German quality. With a self-cleaning oven, steam oven, microwave oven, coffee machine and warming draw all your cooking needs are covered. The flex induction cooktop makes cooking to perfection a breeze.



HRG6767S2A 60cm Built-in Pyrolytic Oven with added steam



CSG656RS1A 60cm Compact Built-in Combination Steam Oven



CMG656RS1A 60cm Compact Built-in Combination Microwave Oven



Series 8 | BIC630NS1A 60cm Warming Drawer



Series 8 | PXX675DC1E 60cm FlexInduction® Cooktop



Series 6 | PPQ7A6B20A 75cm Black Tempered Glass Gas Cooktop



Series 8 | DHL895CAU 86cm Integrated Rangehood



Contents

Ovens	12-23
Series 8 ovens	18-19
Series 6 ovens	20-23
Compact appliances	24-31
Series 8 compact appliances	30-31
Cooktops	32-51
Gas cooktops	34-39
Induction cooktops	40-47
FlexInduction® cooktops	42
Combilnduction cooktops	43
Induction cooktops	44-47
Ceramic cooktops	48-51
Rangehoods	52-61
Wall-mounted rangehoods	58
Integrated rangehoods	59
Retractable slideout rangehoods	60
Dishwashers	62-71
Built-under dishwashers	70
Semi and Fully integrated dishwashers	71
Refrigeration	72-77
Reference guides	78-93
Accessories	94-95
Technical diagrams	96-104
Customer service	106



14 | Bosch built-in catalogue more information www.bosch-home.com.au | 15

Ovens | Design

Put a new spin on your cooking with the Bosch Series 8 range.

With the new Bosch Series 8 control panel, cooking just became a lot easier. Everything you need at hand: Our new, intuitive control ring makes cooking easier than ever.

TFT Touch Graphic Display



The iconic control ring and clear TFT screen display, combined with the direct select TouchControl buttons, make operating the Series 8 ovens simpler than ever before. Clear, vivid food images and helpful prompts guide you through each step as you navigate through the various menu options, giving you total flexibility and control of cooking functions.

TFT Touch Symbol Display




The intuitive control ring and clear TFT display with DirectSelect icons make it easy to operate your oven. Shortcuts to the two most commonly used heating functions, helpful icons and clear descriptions inside the control ring provide all the information you need to keep track of your cooking.

Ovens | Automatic functions

With Bosch sensor technology it's the oven that cooks by itself. Automatically.

Bosch Assist

You could easily search through cookbooks and family recipes without ever finding the exact temperature or cooking time for that favourite dish. Thanks to Bosch Assist, you don't have to. The advanced sensor technology found in PerfectRoast and PerfectBake™ – combined with the functionality of automatic programs as we know them today – offers an extensive menu of food categories that help create your perfect meal. Simply select the desired dish, press start and your oven automatically sets the ideal heating mode, temperature and length of time, monitoring and modifying the cooking as required for the best results. Of course, you can also select these settings yourself every bit as easily.



PerfectBake™

Baking has never been easier, thanks to the unique PerfectBakeTM sensor. This function constantly measures the precise moisture level of your dishes and automatically adjusts the entire baking process, which means you'll never have to set the heating mode, length of time or temperature ever again. Simply choose the type of dish, such as 'Cake in Tin', press start and let your Bosch oven bake your cake to perfection*.



PerfectRoast

Achieve the perfect roast lamb, Christmas turkey, stuffed meats and fish. The PerfectRoast meat probe features three sensitive measuring points and uses the lowest temperature reading to determine the core temperature before calculating the residual cooking time. The results are simply perfect. Used manually or with Bosch Assist, you can modify the suggested core temperature (within a recommended range) and combine with microwave and steam cooking functions.



AutoPilot

The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, enter its weight and select the desired program from the menu.



16 | Bosch built-in catalogue more information www.bosch-home.com.au | 17

Ovens | Cleaning functions

At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows it can be exhausting and time-consuming. Thanks to the new EcoClean Direct and pyrolytic self-cleaning function, manual cleaning is a thing of the past. At the touch of a button, the self-cleaning pyrolytic program reduces residual food to ash, leaving your oven sparkling clean.



Ovens | Heating functions

Because there's hot, and then there's hot.

Perfect baking and roasting not only requires the right temperature, but also the appropriate heating function too. From 4D HotAir to Slow cooking, Bosch ovens offer heating functions that deliver everything from haute cuisine to everyday feasts

4D HotAir*

Thanks to 4D HotAir, you can place your food on any shelf from level one to four, and the results will be consistently perfect. The rotating fan alternates its direction during cooking to distribute heat evenly on every level. And for reliable results 'top to bottom', you can also bake and roast on up to four different levels simultaneously.^

HotAir Eco

HotAir Eco uses less energy by using a single tray. This energy efficient function distributes less heat into the oven and uses residual heat to maintain the set temperature.

Top and bottom heat*

Uses both the upper and lower heating elements. Heat travels to the centre of the oven, which is the best position to obtain the selected temperature. Suitable for traditional baking and roasting, and offers best results for cakes with moist toppings.

Top and bottom heat Eco

In addition to the Top and bottom heat function, selected Series 8 ovens feature a new eco-friendly mode, which supports cooking on a single shelf for energy efficient cooking. Prepare perfect sponges, pound cakes, delicate pastries and bread rolls while saving valuable energy.

Bottom heating

For cooking in a bain-marie and for the final baking stage. The heat is emitted from the lower heating element.

Intensive heat

Combines the top element with a more powerful bottom heating element that is perfect for crispy bases and baking in tins.

Hot air grilling*

Achieve rotisserie-style cooking for meat and poultry. The grill and fan alternate, which produces even and crisp cooking results.

Grill, large area

For grilling flat items, such as steaks and sausages, for making toast, and for cooking a gratin.

Grill, small area

For grilling small amounts of steaks or sausages, for making toast or where grilling a smaller surface area is required.

Pizza setting

Create crispy pizzas or give any dish that extra heat that's needed from underneath by using a combination of heating elements.

Keeping warm*

A new feature that keeps cooked food warm

Slow cooking

For gentle and slow cooking of seared, tender pieces of meat in ovenware without a lid.

Preheat ovenware

A new feature that is useful for preheating ovenware and even dinnerware.

Drying

A new function for drying fruits, vegetables and herbs with maximum flavour. This function can also be used for drying out the oven cavity after the added steam function has been used.

Sabbath mode

Set a maximum timer of up to 74 hours using the Sabbath function. You can keep the food in the cooking compartment warm without having to switch the oven on or off.

Rapid heating

With rapid heating, you can shorten the heat-up time for selected heating functions, including 4D HotAir and Top and bottom heating.

3D HotAir Plus

Cook on up to 3 levels simultaneously with even heat distribution.

Fan forced hot air

A fan disperses heat evenly for cakes and pastries baked on two levels.

Fan assisted top and bottom heating

Uses both upper and lower heating elements while a fan disperses heat evenly.

Defrost

Perfect for gentle defrosting of meat, poultry, bread and much more.

Reheating*

For plated meals and baked items.
Cooked food is gently reheated. The steam ensures the food does not dry out.

Dough proving*

For yeast dough and sourdough. Dough will rise considerably quicker than at room temperature. The surface of the dough does not dry out.

Features may vary depending on models. Please check individual product specifications. *Possible to use added steam for this type of heating (operation only possible when the water tank is full). *To cook on all four levels simultaneously, four wire racks are required for best results. For up to three levels, all accessories are suitable, ie. universal tray or baking tray.

Ovens | Overview

Bosch ovens bring style and elegance to your kitchen.

Serie 8



Series 8 | HRG6767S2A **60cm Pyrolytic Oven with** Added Steam

Heating functions

17 functions Added steam

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

Bosch Assist PerfectRoast meat probe PerfectBake™ sensor 2-level telescopic rails Multi-level LED lighting Temperature display Auto temperature proposal SoftMove door

Cleaning

Pyrolytic cleaning with compatible trays, telescopic rails and shelf racking^ Drying function

Safety

Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96



Series 8 | HBG6767S1A 60cm Pyrolytic Oven

Heating functions

13 functions

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

Bosch Assist PerfectRoast meat probe PerfectBake™ sensor 2-level telescopic rails Temperature display Auto temperature proposal SoftMove door

Cleaning

Pyrolytic cleaning with compatible trays, telescopic rails and shelf racking

Safety

Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96



Series 8 | HBG6753S1A 60cm Pyrolytic Oven

Heating functions

13 functions

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

AutoPilot10: 10 automatic programs 2-level telescopic rails Temperature display Auto temperature proposal SoftMove door

Pyrolytic cleaning with compatible trays, telescopic rails and shelf racking

Safety

Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96



Series 8 | HBG675BS1B* **60cm Pyrolytic Oven**

Heating functions

13 functions

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

AutoPilot10: 10 automatic programs Temperature display Auto temperature proposal SoftMove door

Cleaning

Pyrolytic cleaning with compatible trays and shelf racking

Safety

Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96



Series 8 | HBG672BS1A 60cm Pyrolytic Oven

Heating functions

8 functions

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

AutoPilot10: 10 automatic Temperature display Auto temperature proposal SoftMove door

Cleaning

Pyrolytic cleaning with compatible trays and shelf racking

Safety

Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80–81 Technical diagrams see page 96



Series 8 | HBG655HS1A 60cm EcoClean Direct Oven

Heating functions

13 functions

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

AutoPilot10: 10 automatic programs 2-level telescopic rails Temperature display Auto temperature proposal SoftMove door

Cleaning

EcoClean Direct: rear wall, side walls and ceiling

Safety

Residual heat indicator Triple-glazed door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96



Series 8 | HBG655HW1A **60cm EcoClean Direct Oven**

Heating functions

13 functions

Capacity

71 litres (net) cavity volume 5 shelf positions

Convenience

AutoPilot10: 10 automatic programs 2-level telescopic rails Temperature display Auto temperature proposal SoftMove door

Cleaning

EcoClean Direct: rear wall, side walls and ceiling

Safety

Residual heat indicator Triple-glazed door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96



Series 8 | HBG633BS1A 60cm EcoClean Direct Oven

Heating functions

10 functions

Capacity 71 litres (net) cavity volume

5 shelf positions Convenience

Temperature display Auto temperature proposal SoftMove door

Cleaning EcoClean Direct: rear wall

Safety Residual heat indicator Triple-glazed door Child lock (controls and door)

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 80-81 Technical diagrams see page 96

Ovens | Overview

Serie 6



Series 6 | HBA73R350B* 60cm Pyrolytic Oven

Heating functions

9 functions

Capacity

65 litres (net) cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/ timer with end-time programming 1-level telescopic rails

Cleaning

Pyrolytic cleaning including enamel trays with pyrolytic proof pan supports

Safety

Quadruple-glazed CoolTouch door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 82-83 Technical diagrams see page 96



Series 6 | HBA63B150B* 60cm Pyrolytic Oven

Heating functions

6 functions

Capacity

65 litres (net) cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/ timer with end-time programming

Cleaning

Pyrolytic cleaning including enamel trays with pyrolytic proof pan supports

Safety

Quadruple-glazed CoolTouch door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 82–83 Technical diagrams see page 96



Series 6 | HBA33B150A* 60cm EcoClean Oven

Heating functions

7 functions

Capacity

62 litres (net) cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/ timer with end-time programming

Cleaning

EcoClean System: Rear wall

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 515mm

Complete specifications

Reference guide see page 82–83 Technical diagrams see page 96



Series 6 | HBA23B151A* 60cm EcoClean Oven

Heating functions

5 functions

Capacity

67 litres (net) cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/ timer with end-time programming

Cleaning

EcoClean System: Rear wall

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 82–83 Technical diagrams see page 96



Series 6 | HBA13B254A 60cm EcoClean Oven

Heating functions

4 functions

Capacity

67 litres (net) cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/ timer with end-time programming

Cleaning

EcoClean System: Rear wall and ceiling liners

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

Complete specifications

Reference guide see page 82–83 Technical diagrams see page 96



Series 6 | HBA13B253A 60cm EcoClean Oven

Heating functions

4 functions

Capacity

62 litres (net) cavity volume 5 shelf positions

Convenience

Electronic touch-control clock/ timer with end-time programming

Cleaning

EcoClean System: Rear wall liner

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 515mm

Complete specifications

Reference guide see page 82–83 Technical diagrams see page 96



Series 6 | HVA541NS0 90cm Built-in Oven

Heating functions

9 functions

Capacity

77 litres (net) cavity volume 4 shelf positions

Convenience

Electronic clock/timer 1-level telescopic rails

CleaningCatalytic liners: Side and rear walls

-

Triple-glazed door

Dimensions (HxWxD) 478 x 896 x 568mm

Complete specifications

Reference guide see page 82–83 Technical diagrams see page 96

Ovens | Overview

Serie 6



Series 6 | HBM43S550A 60cm EcoClean Double Oven

Heating functions

3 functions - top oven 5 functions - bottom oven

Capacity

35 litres (net) cavity volume top oven

67 litres (net) cavity volume bottom oven

2 shelf positions – top oven 5 shelf positions - bottom oven

Convenience

Electronic touch-control clock/timer with end-time

2-level telescopic rails bottom oven

Cleaning

EcoClean System: Rear wall, side walls and ceiling liners both top and bottom ovens

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

888 x 595 x 550mm

Complete specifications

Reference guide see page 82-83 Technical diagrams see page 97



Series 6 | HBM43B250A 60cm EcoClean Double Oven

Heating functions

2 functions - top oven 5 functions - bottom oven

Capacity

335 litres (net) cavity volume -

67 litres (net) cavity volume bottom oven

2 shelf positions - top oven 5 shelf positions - bottom oven

Convenience

Electronic touch-control clock/timer with end-time programming

Cleaning

EcoClean System: Rear wall, side walls and ceiling liners both top and bottom ovens

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

888 x 595 x 550mm

Complete specifications

Reference guide see page 82-83 Technical diagrams see page 97

Ovens | Features and functions

Features and functions for everyday use.





Efficiency

Telescopic rail system

The Bosch telescopic rails are fully or partially extendable (depending on model) and are ideal for loading and removing trays with ease. Whether you choose a single or double rail option, all shelves are pyrolytic proof and compatible with microwave and steam cooking. Trays are also interchangeable between Series 8 full-sized ovens and compact appliances, excluding the pure steam compact oven.

Extra large cavity

Bosch Series 8 ovens offer up to 71 usable litres of cooking space and larger baking trays. The increased cavity creates more uniform baking results due to the improved heat circulation between the racks. Series 6 60cm ovens have an interior capacity of 67 usable litres (net), with the 90cm model boasting 77 usable litres (net).

SoftMove and SoftClose

SoftMove in Series 8 and SoftClose on Series 6 models is a special damping mechanism. Oven doors open and close softer and quieter than ever. This convenient feature not only offers a premium finish, it also protects the oven and door during the life of the oven.

Lighting

Depending on the model, Series 8 ovens and compact appliances offer our classic, halogen lighting, LED ceiling light or the new multi-level LED lighting.

Energy efficient LED lighting offers vibrant illumination and longevity. The multi-level LED lighting offers illumination on each level, which is exceptionally convenient when baking on multiple levels.

Integrated halogen lighting ensures the interior cavity is brightly lit. More efficient than standard lights, they are durable and are designed to last longer.

Simplicity

Oven clock and timer with programming

The electronic clock displays time of day and also acts as a countdown timer with an audible beep to indicate the end of the timer function. Programming adds extra convenience. Simply select the end-time (when you arrive home, eg. 6.30pm), the length of cooking, along with the cooking function and temperature, and the oven will do the rest.

CoolTouch doors

For added safety, selected Bosch single ovens are fitted with quadruple-glazed CoolTouch doors. The reflective inner glass is designed to keep the heat in, while providing a safe-to-touch door on the outside.

Residual heat indicator

When the appliance is switched off, the display ring shows the residual heat in the cooking compartment. As the residual heat cools down, the display ring becomes darker, then disappears.

Cabinetry cooling fan

The fan circulates cool air around the oven to keep the appliance and the surrounding cabinetry free from the hot air vented by the oven.

Automatic switch-off

If left unattended the oven will switch-off after a period of time

Child lock

Bosch Series 8 ovens are equipped with a child lock that prevents unwanted changes to settings. The control panel is locked so the appliance can only be switched off using the On/Off button.

Optional door lock function on selected

Performance

Added steam function

Enhance your cooking results by adding a little bit of moisture from time to time, thanks to the added steam function. Whether you're reheating dishes, proving dough, baking or roasting, you can set the oven to automatically add bursts of steam, or you can add steam manually to regulate the intensity. Create succulent roasts and perfectly browned bread crusts with ease. Added steam works with: 4D HotAir. Hot air grilling, Top and bottom heating and Keep warm functions.

Precise temperature control

Electronic thermostats monitor the ovens cavity temperature to maintain temperature consistency during the cooking process.





Serie 8

Compact appliances | Design

The perfect compliment to your Series 8 kitchen.

For lovers of cooking, Bosch compact appliances offer exceptional cutting-edge features and extra cooking functionality. Perfectly matched design panels within Series 8 allow you to mix and match these appliances with full-sized ovens for a seamless and coordinated look. With the intuitive display and Bosch control ring, operating functions are harmonised for easy use.



iF product design award

For all Series 8 ovens and compacts, built-in coffee machines and warming drawers.



German design award

For all Series 8 ovens and compacts, built-in coffee machines and warming drawers.



winner

reddot award 2015

Red Dot award

For all Series 8 ovens and compacts, built-in coffee machines and warming drawers.

Serie 8

Compact appliances | Steamers

Steams so gently, even vitamins stay for dinner.

There is no healthier or tastier way to prepare food than in a Series 8 steamer or combination steam oven. When gently cooked in steam, food retains its vitamins and aroma while bringing out the full and natural flavour. Vegetables stay fresh and crisp, while poultry and fish remain juicy and tender. With steam, you can even cook without adding oil or extra seasoning. Thanks to the integrated water tank, Bosch steamers don't require an external water connection, offering greater flexibility in choosing their position in your kitchen.



Steam oven

Menu cooking


With the Series 8 steamer, you can prepare an entire set menu using up to three levels at once. Salmon with asparagus and rosemary potatoes? Cook them all together and everything will turn out perfectly. Need to prepare dessert, too? No problem. Thanks to the moisture in the oven, there's no intermingling of flavours - each dish retains its own authentic flavour.



Combination steam oven

The best of both worlds

With the Bosch Series 8 combination steam oven, you can bake, steam or both. Combine the benefits of pure steam cooking with functions of a conventional oven and discover the results of giving your roasts and home-made bread a crispy finish. The premium combination steam oven also comes with Bosch Assist, the PefectBake™ sensor and PerfectRoast meat probe for perfect cooking and baking results.



At 90-95°C, food is gradually reheated to taste as if it was freshly cooked.

Dough proving

For yeast dough and sourdough. Dough will rise considerably quicker than at room temperature whilst not drying out the surface of the dough.

Serie 8

Serie 8

Compact appliances | Combination microwave oven and warming drawers

Fits every kitchen. And every need.

Combination microwave

Sometimes, you just can't get food to the table fast enough. Our new Series 8 combination microwave ovens help speed up the cooking process and give you perfect control over your menu and your schedule. Whether you're heating baby food, pre-cooked meals or frozen foods, you'll produce outstanding results quickly and without compromising on taste.

Automatic functions to speed up your cooking

Heat, defrost, roast or grill anything, thanks to 1000 watts and five power levels. The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, enter its weight and select the desired program from the menu.

Sensor technology for perfect results

With Bosch Assist on our premium model, press start and the oven takes care of the rest, monitoring and modifying the cooking method as required for best results. BoschAssist works in combination with the unique PerfectBake[™] sensor and PerfectRoast meat probe for perfect cooking and baking results.

Warming drawers

Our Series 8 warming drawers can do much more than just keep food and plates warm; they're also perfect for slow-cooking meat, defrosting frozen foods and proving dough.

Designed to match

The warming drawers from Bosch can be installed either separately or in combination with Series 8 ovens, compact ovens and our built-in automatic coffee machine. The practical 'push and pull' technology ensures they are always easy to open, even when you have both hands full. They come in two sizes: 140mm high with 20 usable litres (net) and 290mm high with 52 usable litres (net)

Compact appliances | Built-in coffee machine

Your favourite café is now open 24/7.

Latte, cappuccino or espresso? With the Series 8 built-in coffee machine, you can treat yourself and your guests to any beverage at the touch of a button. Bosch barista technology guarantees a full-bodied aroma and perfect crema - for coffees as delicious as those brewed in your favourite café.

SensoFlow system for a perfect aroma

The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow system heats the water to just the right temperature, for a full-bodied espresso aroma from the first to the last cup.

A choice of coffee at the touch of a button

With the OneTouch function, it'll be ready in an instant. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.

Automatic cleaning of the milk system

∄ BOSCH

INCOME

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato instead of cleaning.



Compact appliances | Overview

Designed to create perfect symmetry in your kitchen.

Serie 8



Series 8 | CSG656RS1A **60cm Combination Steam Oven**

Heating functions

18 heating functions Multi level pure steaming Conventional cooking combined with steam cooking for tender and crispy results

Capacity

47 litres (net) cavity volume 3 shelf positions 1 litre removable water tank with

empty water tank indicator Convenience

Bosch Assist

PerfectBake™ sensor

PerfectRoast meat probe

1-level telescopic rails

Temperature display

Automatic temperature proposal

SoftMove door

Stainless steel cavity

Cleaning

EcoClean Direct: rear wall, side walls and ceiling Drying function

Descaling program

Safety

Residual heat indicator Triple-glazed door

Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

Complete specifications

Reference guide see page 84 Technical diagrams see page 97



Series 8 | CDG634BS1 60cm Pure Steam Oven

Heating functions

4 heating functions Multi level pure steaming

Capacity

38 litres (net) cavity volume 4 shelf positions

1.3 litre removable water tank with empty water tank indicator

Convenience

AutoPilot20: 20 automatic programs Temperature display

Automatic temperature proposal SoftMove door

Cleaning

Descaling program

Safety

Residual heat indicator Triple-glazed door Child lock

Dimensions (HxWxD)

455 x 595 x 548mm

Series 8 | CMG656RS1A **60cm Combination Microwave Oven**

Heating functions

13 heating functions Conventional cooking combined

5 inverter microwave power levels up to 1000W

Capacity

45 litres (net) cavity volume 3 shelf positions

Convenience

Bosch Assist

PerfectBake™ sensor PerfectRoast meat probe

1-level telescopic rails

Temperature display

Automatic temperature proposal SoftMove door

Cleaning

EcoClean Direct: rear wall, side walls and ceiling

Safety

Residual heat indicator Quadruple-glazed CoolTouch door Child lock (controls and door)

Dimensions (HxWxD)

455 x 595 x 548mm

Complete specifications Complete specifications

Reference guide see page 84 Technical diagrams see page 97



Series 8 | CMG633BS1B **60cm Combination Microwave Oven**

Heating functions

7 heating functions Conventional cooking combined

5 inverter microwave power levels up to 1000W

Capacity

45 litres (net) cavity volume 3 shelf positions

Convenience

AutoPilot14: 14 automatic programs Temperature display Automatic temperature proposal SoftMove door

Safety

Residual heat indicator Triple-glazed door Child lock (controls and door)

Complete specifications

Technical diagrams see page 97

Reference guide see page 84

Dimensions (HxWxD)

455 x 595 x 548mm



Series 8 | CTL636ES1 60cm Built-in Coffee Machine

Flavour

SensoFlow System: Heating system for maximum and constant brewing temperature AromaPro Concept: Optimal aroma extraction

Convenience

TFT Touch Graphic Display with interactive menu

MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso

Performance

SilentCeram Drive: Quiet. premium grinder made from non-wearing ceramic

CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety

Hygiene

Removable brewing unit: Easy and hygienic cleaning under running water AutoMilk Clean: Automatically steam cleans the milk system after every

Dimensions (HxWxD)

455 x 594 x 375mm

Complete specifications

Reference guide see page 85 Technical diagrams see page 98



Series 8 | BID630NS1A/BIC630NS1A **60cm Warming Drawers**

Heating functions

40°C-80°C temperature control

Capacity

BID630NS1A: 52 litres (net) cavity volume BIC630NS1A: 20 litres (net) cavity volume

Convenience

Fully extendable telescopic drawer Ceramic-glass base element Suitable for: plate warming, keep warm, slow cooking, defrost and proving dough

Dimensions (HxWxD)

BID630NS1A: 290 x 595 x 548mm BIC630NS1A: 140 x 595 x 548mm


Complete specifications

Reference guide see page 85 Technical diagrams see page 97-98

Reference guide see page 84

Technical diagrams see page 97



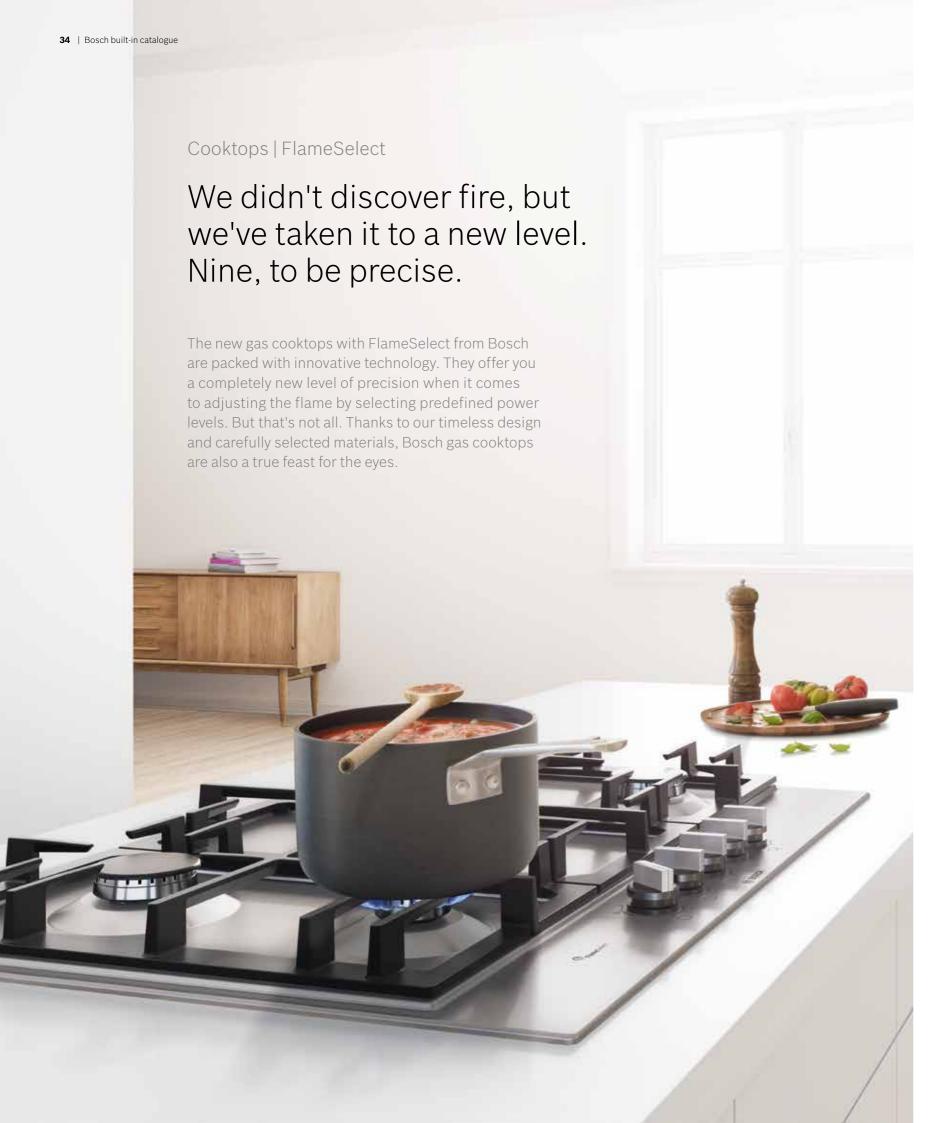


(1) FlameSelect

Stop cooking with intuition. Start cooking with perfection.

At Bosch, we want to make your cooking with gas as easy, safe and enjoyable as possible. That's why we developed FlameSelect for you. Unlike conventional gas cooktops with inaccurate power settings, FlameSelect and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels. So now, gas cooktops with FlameSelect offer you all the benefits of gas cooking combined with the comfort and precision of an electric cooktop.

Nine levels of precise power selection

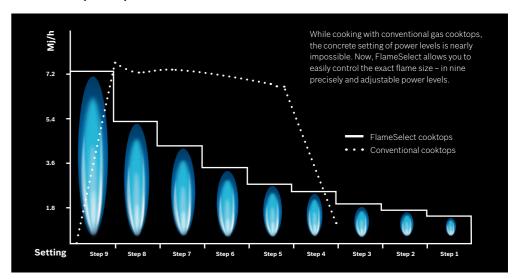

Easy to use. Easy to clean. Easy to love.



Our pan supports

When it comes to design you have the choice between single pan supports for easy handling and cleaning, or continuous pan supports for high stability for cookware. Both variants are available in cast iron and are extremely robust.



Our gas cooktop surfaces

Our cooktops are available in black tempered glass and stainless steel to perfectly match your kitchen and individual taste.

Cooktops | Gas features and functions

Features and functions for everyday use.

Cooktops | Gas cooktops

Fire that does exactly what you want.

Gas provides fast and instant versatility. Our German-designed gas cooktops all feature Bosch flame failure technology fitted to each burner and conveniently come with controls that are either front or side mounted.



Simplicity

FlameSelect

Flame failure device

flame is extinguished.

Cast-iron supports

Push and turn the ergonomically designed is also no separate ignition button to clean.

Premium models with tempered glass base are easy to clean for total convenience and completed by a frameless finish for a stylish

Cleaning rounded off to perfection

The rounded edges of our gas cooktops ensure effortless cleaning - dirt simply doesn't have anywhere to collect.



FlameSelect and its patented valve

technology offer you incremental heat

regulaton within nine precisely defined

as easy, safe and enjoyable as possible.

For added safety, all Bosch gas cooktops

feature a flame failure device. This feature

stops the supply of gas to the burners if the

power levels, making your cooking with gas

Performance

High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner, which provides up to 18Mj/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.

Flexible burners

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of the pan.



One-hand ignition

control knobs and the gas ignites automatically. As well as offering the convenience of only using one hand, there

Easy clean tempered glass

and sleek look.

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.



Gas cooktops | Overview

Gas cooktops

Serie 6



(Flame Select

Series 6 | PPS9A6B90A 90cm Black Tempered Glass **Gas Cooktop**

Heating functions

5 Burners: 1 x 15Mj/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron

pan supports Standard and semi-flush built-in option

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

915 x 520mm

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86-87 Technical diagrams see page 98



(Flame Select

Series 6 | PPQ7A6B20A 75cm Black Tempered Glass **Gas Cooktop**

Heating functions

5 Burners: 1 x 15Mj/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron

pan supports Standard and semi-flush built-in option

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

752 x 520mm

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86–87 Technical diagrams see page 98



(Flame Select

Series 6 | PPH6A6B20A **60cm Black Tempered Glass Gas Cooktop**

Heating functions

4 Burners: 1 x 13.6Mj/h wok burner, 2 standard burners, 1 economy burner

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron

pan supports Standard and semi-flush built-in option

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

590 x 520mm

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86–87 Technical diagrams see page 98



(Flame Select

Series 6 | PCT9A5B90A 90cm Stainless Steel Gas Cooktop

Heating functions

6 Burners: 2 x 19.5Mj/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron pan supports

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

915 x 520mm

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86-87 Technical diagrams see page 99



(Flame Select

Series 6 | PCR9A5B90A 90cm Stainless Steel **Gas Cooktop**

Heating functions

5 Burners: 1 x 19.5Mj/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron pan supports

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

915 x 520mm

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86-87 Technical diagrams see page 99



(Flame Select

Series 6 | PCR7A5B90A 75cm Stainless Steel **Gas Cooktop**

Heating functions

5 Burners: 1 x 19.5Mj/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron pan supports

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

750 x 520mm

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86-87 Technical diagrams see page 99



(Flame Select

Series 6 | PCI6A5B90A 60cm Stainless Steel **Gas Cooktop**

Heating functions

4 Burners: 1 x 15Mj/h wok burner, 1 high-speed burner, 1 standard burner, 1 economy

Convenience

FlameSelect valve technology: precise control in 9 steps One-hand ignition via sword control knobs Enamelled cast-iron pan supports

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

582 x 520mm

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86-87 Technical diagrams see page 99

Serie 2



Series 2 | PBH6B5B60A 60cm Stainless Steel **Gas Cooktop**

Heating functions

4 Burners: 1 x 15 Mj/h wok burner, 2 standard burners. 1 economy burner

Convenience

One-hand ignition via sword control knobs Steel pan supports with cast iron finish

Safety

Flame failure for each burner stops gas flow if flames go out

Dimensions (WxD)

580 x 510mm

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

Complete specifications

Reference guide see page 86-87 Technical diagrams see page 99


Cooktops | Induction

The best cooking needs just one ingredient: Bosch.

Modern cooking offers so many wonderful new tastes and textures, you need a cooktop that's flexible enough to keep up.







Bosch FlexInduction®

The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. The FlexZone can be used as two separate zones or combined into a single 'super-zone' where the entire zone becomes your cooking canvas.



Bosch Combilnduction

Experience the magic of CombiZone – two cooking zones can be linked, making the switch from small to large pans effortless. Plus, the MoveMode function automatically switches from boil to simmer with a simple slide of the saucepan.




Bosch Induction

Bosch's benchmark Induction cooktops put you in control with 17 power levels plus PowerBoost for each zone, dual function timer with automatic switch-off, residual heat indicators, child lock and more.

Induction speeds up your cooking

Induction cooktops offer the most efficient way of cooking at lower temperatures, ie. melting chocolate, etc.

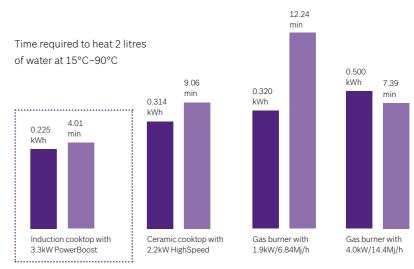

Source: BSH Hausgeräte GmbH, Germany (overseas test results)

Old pots, new technology

Most of your old pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.

42 | Bosch built-in catalogue


Cooktops | FlexInduction®

FlexInduction® cooktops

Introducing Bosch FlexInduction®, the result of decades of research and development. Introducing true freedom in the kitchen.



Ideal for small pots, large pots, multiple pots, frying pans or caserole dishes - you name it, thanks to the unique coil shapes you get the ultimate flexibility and heat distribution. At the touch of a button, two induction zones become one large FlexInduction® surface.



MoveMode

Pre-set 3 different power levels and move from boil to simmer in just seconds.

- 1. Perfect for rapid boiling (Power level 9 Front FlexZone)
- 2. Medium heat cooking (Power level 5 Middle FlexZone)
- 3. Ideal for simmering (Power level 1 Back FlexZone)



Perfect FrySensor - for a steak that is just right

With up to 5 automatic settings, the pan is heated to just the right temperature. Sensors inside the cooktop continuously measure the temperature and maintain it for perfect results. Works with Bosch PerfectFry Sensor Pans, see page 95 for details.

Cooktops | Combileduction


Combilnduction cooktops

Bosch Combilnduction lets you switch from small to large and oversized pans, like Teppan Yaki, simply and easily. So now there's no limit to the tastes you can create.



CombiZone

With Bosch Combilinduction you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard cooking zones into one large cooking zone.



MoveMode

When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next, without a hiccup, and always in control.



Cooktops | Induction overview

Induction cooktops

Serie 8



Series 8 | PXV975DC1E* 90cm FlexInduction® Cooktop

Heating functions

5 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans

320mm triple circuit zone

17 power levels

PowerBoost for each zone ShortBoost for each zone

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone

MoveMode: 3 automatic power levels

PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm

QuickStart ReStart

Energy consumption display

Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety

2-stage residual heat indicators Child lock Child lock

Dimensions (WxD)

916 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 99



Series 8 | PXE875DC1E* 80cm FlexInduction® Cooktop

Heating functions

4 induction cooking zones: 1 large FlexInduction® zone for large pans or multiple smaller pans

17 power levels

PowerBoost for each zone ShortBoost for each zone

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone

MoveMode: 3 automatic power levels

PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for

keeping food warm QuickStart

ReStart

Energy consumption display

Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety


2-stage residual heat indicators

Dimensions (WxD)

816 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 99



Series 8 | PXX675DC1E 60cm FlexInduction® Cooktop

Heating functions

4 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans

17 nower levels

PowerBoost for each zone ShortBoost for each zone

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone

MoveMode: 3 automatic power levels

PerfectFry sensor with 5 automatic frying programs Keep warm: low setting for

keeping food warm QuickStart

ReStart

Energy consumption display

Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 99



Series 8 | PIV995DC1E* 90cm Induction Cooktop

Heating functions

5 induction cooking zones: 1 large 32cm triple circuit zone

17 power levels

PowerBoost for each zone ShortBoost for each zone

Convenience

Electronic DirectSelect Premium touch-controls

Dual timer with auto switch-off for each zone

PerfectFry sensor with 5 automatic frying programs

Keep warm: low setting for

keeping food warm QuickStart ReStart

Energy consumption display

Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety

2-stage residual heat indicators Child lock


Dimensions (WxD)

916 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100

Serie 6



Series 8 | PIV975DC1E* 90cm Induction Cooktop

Heating functions

5 induction cooking zones: 1 large 32cm triple circuit zone

17 power levels

PowerBoost for each zone ShortBoost for each zone

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off

for each zone PerfectFry sensor with 5 automatic frying programs

Keep warm: low setting for keeping food warm QuickStart

Energy consumption display

Cleaning

ReStart

WipeProtection pauses all settings for easy cleaning while cooking

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

916 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100

Series 6 | PVS875FB1E 80cm Combileduction

2 combinable zones 'CombiZone' for large pans 17 power levels

PowerBoost for each zone

Electronic DirectSelect 1.0 touch-controls

Dual timer with auto switch-off for each zone

MoveMode: 2 automatic

QuickStart

Energy Consumption display

while cooking

Safety

2-stage residual heat indicators

Dimensions (WxD)

Reference guide see page 88-89 Technical diagrams see page 100

Series 6 | PVS675FB1E 60cm Combilnduction Cooktop

Heating functions

4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans 17 power levels

PowerBoost for each zone

Convenience

Electronic DirectSelect 1.0 touch-controls

Dual timer with auto switch-off for each zone

MoveMode: 2 automatic power levels

QuickStart

Energy Consumption display

Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100



Series 6 | PIE631FB1E 60cm Induction Cooktop

Heating functions

4 induction cooking zones 17 power levels PowerBoost for each zone

Convenience

Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off

for each zone MoveMode: 2 automatic

power levels Keep warm: low setting for keeping food warm

QuickStart

ReStart Energy Consumption display

Cleaning

WipeProtection pauses all settings for easy cleaning while cooking

Safety


2-stage residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm

Complete specifications

Reference guide see page 88-89



Cooktop

Heating functions

4 induction cooking zones:

Convenience

power levels

Cleaning

WipeProtection pauses all settings for easy cleaning

Child lock

802 x 522mm

Complete specifications

Technical diagrams see page 100

Cooktops | Induction features and functions

Features and functions for everyday use.

Serie 4



Series 4 | PIJ611BB1E 60cm Induction Cooktop

Heating functions

3 induction cooking zones including XL 28cm cooking zone 17 power levels

PowerBoost for each zone

Convenience

TouchSelect electronic controls Dual timer with auto switch-off for each zone QuickStart ReStart

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100



Efficiency

WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

QuickStart

Start cooking quicker. New Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

Things happen quickly in the kitchen – if you spill something on the control panel or accidentally switch-off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Energy Consumption Display*

Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Automatic pot detection

Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.



Simplicity

Dual function timer including automatic switch-off for each zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (ie. level 5.5) for up to 99 minutes - ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

Automatic safety switch-off

Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.



Performance

DirectSelect Premium

Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

DirectSelect 1.0

Enjoy total convenience with DirectSelect. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/- repeatedly.

17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

PowerBoost - now with even more power!

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.


Reduce the time to heat up pans – this boost function heats up the pan for 30 seconds at high power before automatically reducing the heat to the correct power setting.

Keep warm

Ideal setting for keeping food warm before serving at the touch of a button.

Cooktops | Ceramic

The world of Bosch ceramic cooktops.

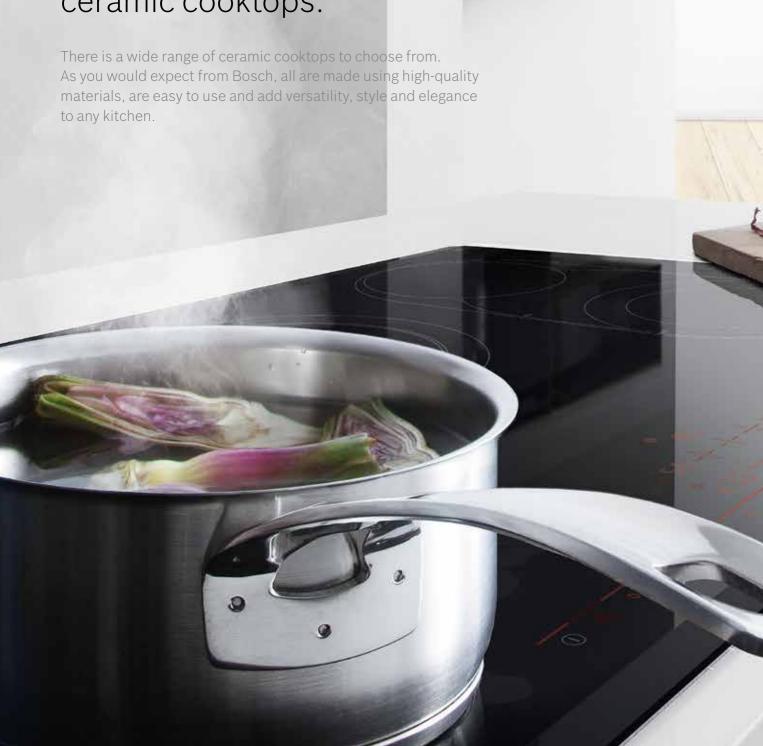

Cooktops | Ceramic features and functions

Features and functions for everyday use.







Efficiency

WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

Things happen quickly in the kitchen if you spill something on the control panel or accidentally switch off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Energy consumption display

Each time you finish cooking, your energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Simplicity

DirectSelect Premium

Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

Rotary controls

The rotary controls make the cooktop easy to operate for those who like a more hands on approach.

2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casserole and other (large) cooking dishes.

QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

Performance

17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.

Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.

PowerBoost

PowerBoost now on selected Bosch ceramic cooktops lets you heat up large volumes of water even faster than on the highest power level.

Keep warm

Ideal setting for keeping food warm before serving at the touch of a button.

Cooktops | Ceramic overview

Ceramic cooktops

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as being practical and easy-to-clean.

Serie 8



Series 8 | PKM875DP1A **80cm Ceramic Cooktop**

Heating functions

4 QuickTherm cooking zones: 2 dual circuit zones, 1 dual circuit/extended roasting zone 17 power levels PowerBoost for each zone

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone

Keep warm - low setting for keeping food warm ReStart - quickly reinstates previous settings Energy consumption display

WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

816 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100



Series 8 | PKG775DB1A 70cm Ceramic Cooktop

Heating functions

4 QuickTherm cooking zones: 2 dual circuit zone 17 power levels

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone Automatic electronic boil start

Keep warm - low setting for keeping food warm ReStart – quickly reinstates

previous settings Energy consumption display

Cleaning

WipeProtection pauses settings for easy cleaning of the control panel while cooking

2-stage residual heat indicators Child lock

Dimensions (WxD)

710 x 527mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100

Serie 4



Series 4 | PKE611D17A

60cm Ceramic Cooktop

4 QuickTherm cooking zones

Electronic TouchSelect +/-

ReStart - quickly reinstates

2-stage residual heat indicators

Heating functions

17 power levels

Convenience

touch-controls

Safety

Child lock

592 x 522mm

previous settings

Dimensions (WxD)

Complete specifications

Series 8 | PKN675DB1A **60cm Ceramic Cooktop**

Heating functions

4 QuickTherm cooking zones: 1 dual circuit zones, 1 dual circuit/extended roasting zone 17 power levels

Convenience

Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone

Automatic electronic boil start Keep warm – low setting for keeping food warm ReStart - quickly reinstates

previous settings Energy consumption display

WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety

2-stage residual heat indicators Child lock


Dimensions (WxD)

606 x 527mm

Complete specifications

Reference guide see page 88-89 Reference guide see page 88-89 Technical diagrams see page 100 Technical diagrams see page 100

Serie 2



Series 2 | PKE611CA1A **60cm Ceramic Cooktop**

Heating functions

4 QuickTherm cooking zones 9 power levels

Convenience

Sword control knobs

Safety

Residual heat indicator

Dimensions (WxD)

592 x 522mm

Complete specifications

Reference guide see page 88-89 Technical diagrams see page 100






A breath of fresh air in hood design.

The right cooker hood can reduce smells and steam and leave your kitchen feeling fresh and clean. And a Bosch hood will do it all with silent efficiency.







Accessory to be purchased separately*

*Available for selected

Bosch rangehoods

Ducted extraction

Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.


Recirculation kit

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.

What extraction rate do I need?

It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: minimum of 6 times per hour; and a maximum of 12 times per hour.

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.

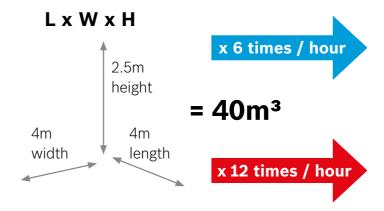

240m³

necessary air extraction rate at normal use (simmering on 2–3 hotplates)

480m³

necessary air extraction rate at intensive use (eg. strong frying activities)

Bosch extraction rates are tested inline with EU standards. See page 92 for more information.

| Bosch built-in catalogue



Rangehoods | Overview

Wall-mounted rangehoods

Powerful performance, classic design.

Serie 6

Serie 4

Serie 2



Series 6 | DWB091E51A 90cm Wall-mounted **Stainless Steel Canopy** Rangehood

Power functions

810m³/h maximum extraction capacity with rim ventilation 3 power settings + 2 intensive settings with automatic revert to previous setting

Automatic run-on time 1-10 mins FcoSilence Drive®

brushless motor

dimmer function

Whisper-quiet: 44dB at minimum level (150mm ducted) Sound insulation mats Electronic controls with LED display 3 x 3W LED SoftLights with

Cleaning

Dishwasher-safe metal grease filters Electronic filter s aturation indicator

Dimensions (HxWxD)

628-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)

Optional Accessory

DSZ6240 CleanAir recirculation kit

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 101

Series 4 | DWW097A50A 90cm Wall-mounted Stainless Steel Canopy Rangehood

Power functions

730m³/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting EcoSilence Drive® brushless motor

Convenience

Whisper-quiet: 45dB at minimum level (150mm ducted) Sound insulation mats Electronic button control 3 x 3W LED lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

622-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)

Optional Accessory

DSZ6240 CleanAir recirculation kit

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 101

Series 2 | DWW09W851A 90cm Wall-mounted Stainless Steel Canopy Rangehood

Power functions

3 power settings

Convenience

level (150mm ducted) Rocker switch controls for power and lights 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

799-976 x 900 x 500mm (ducted or recirculated)

Optional Accessory

DHZ5275 Recirculation kit

Complete specifications

Reference guide see page 90-92

Technical diagrams see page 101

780m³/h maximum extraction capacity

Very quiet: 49dB at minimum

Complete specifications

Series 2 | DWW06W851A

60cm Wall-mounted

Rangehood

Power functions

730m3/h maximum

extraction capacity

3 power settings

Convenience

power and lights

Cleaning

grease filters

Stainless Steel Canopy

Very quiet: 49dB at minimum

Rocker switch controls for

level (150mm ducted)

2 x 20W halogen lights

Dishwasher-safe metal

Dimensions (HxWxD)

799-976 x 600 x 500mm

(ducted or recirculated)

Optional Accessory

DHZ5275 Recirculation kit

Reference guide see page 90-92 Technical diagrams see page 101

Integrated rangehoods

Great performance in a tiny space. These neatly concealed rangehoods are housed underneath the kitchen unit and can be seen if you look underneath the kitchen cabinetry.

Serie 8



Series 8 | DHL895CAU

86cm Integrated Rangehood

Power functions

820m3/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting Automatic run-on time 30 mins EcoSilence Drive® brushless motor

Convenience

Whisper quiet: 41dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 1W LED lights with dimmer function

Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

Product: 418 x 860 x 282 mm Built-in: 418 x 836 x 264mm (ducted or recirculating)

Optional Accessory

DHZ5605 Recirculation kit

Complete specifications

Reference guide see page 90-92

Serie 6



Series 6 | DHL785BAU 70cm Integrated Rangehood

Power functions

730m3/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting

Convenience

Very quiet: 53dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

Product: 418 x 700 x 282 mm Built-in: 418 x 676 x 264mm (ducted or recirculating)

Optional Accessory

DH75605 Recirculation kit

Series 6 | DHL575CAU 52cm Integrated Rangehood

Power functions

610m3/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting

Convenience

Very quiet: 50dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 1W LED lights

Cleaning

Dishwasher-safe metal grease

Dimensions (HxWxD)

Product: 418 x 520 x 300 mm Built-in: 418 x 496 x 264 mm (ducted or recirculating)

Optional Accessory

DH75605 Recirculation kit

Serie 4



Series 4 | DHL555BAU 53cm Integrated Rangehood

Power functions

650m³/h maximum extraction capacity 3 power settings + 1 intensive setting

Convenience

Whisper quiet: 41dB at minimum level (150mm ducted) Slide controls for power and light 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

Product:255 x 530 x 380 mm Built-in: 255 x 500 x 350mm (ducted or recirculating))

Optional Accessory

DH77305 Charcoal filter

Complete specifications

Reference guide see page 90-92

Technical diagrams see page 102

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 102

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 102

Technical diagrams see page 102

Rangehoods | Overview

Retractable slideout rangehoods

To operate, the slideout section is pulled out, enlarging the extraction surface. The pelmet front can even be matched to your kitchen units.* So this rangehood will be almost invisible in your kitchen.

Serie 6





Series 6 | DFR097E50A 90cm Slideout Rangehood

Power functions

730m³/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1-10 mins EcoSilence Drive®

Convenience

brushless motor

minimum level (150mm ducted) Electronic controls with LED display Sound insulation mats 2 x 3W LED SoftLights with dimmer function Easy installation system

Whisper quiet: 40dR at

Cleaning

Dishwasher-safe metal grease filters Flectronic filter saturation indicator

Dimensions (HxWxD)

Product: 426 x 898 x 290 mm Built-in: 385 x 524 x 290 mm (ducted or recirculating)

Optional Accessories

DS74680 CleanAir recirculation kit DSZ4681 CleanAir active carbon filter

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 103

Serie 4



Series 4 | DFR067A50A

Power functions

740m³/h maximum

extraction capacity

to previous setting

1-10 mins

Convenience

Automatic run-on time

Whisper quiet: 43dB at

Easy installation system

Dishwasher-safe metal

Dimensions (HxWxD)

(ducted or recirculating)

Optional Accessories

Complete specifications

Reference guide see page 90-92

Technical diagrams see page 103

DS74680 CleanAir

DSZ4681 CleanAir

active carbon filter

recirculation kit

Product: 426 x 598 x 290 mm

Built-in: 385 x 524 x 290 mm

for power and light

2 x 3W LED lights

Cleaning

grease filters

60cm Slideout Rangehood

3 power settings + 1 intensive

setting with automatic revert

EcoSilence Drive® brushless

minimum level (150mm ducted)

Low-lift push button controls

Series 4 | DFR097A50A 90cm Slideout Rangehood

Power functions

740m³/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting Automatic run-on time 1-10 mins

EcoSilence Drive® brushless motor

Convenience

Whisper quiet: 43dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 3W LED lights Easy installation system

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

Product: 426 x 898 x 290 mm Built-in: 385 x 524 x 290 mm (ducted or recirculating)

Optional Accessories

DSZ4680 CleanAir recirculation kit DS74681 CleanAir active carbon filter

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 103

Serie 2



Series 2 | DFL064W50A 60cm Slideout Rangehood

Power functions

400m³/h maximum extraction capacity 3 power settings

Convenience

Quiet: 59dB at minimum level (150mm ducted) Rocker switches for power and light 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

Product: 203 x 598 x 290 mm Built-in: 162 x 526 x 290 mm (ducted or recirculating)

Optional Accessory

DS74545 Recirculation kit

Complete specifications

Reference guide see page 90-92 Technical diagrams see page 103

Rangehoods | Functions and features

Features and functions for everyday use.



Efficiency

Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.

LED lighting

The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.

Halogen lighting

Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.

Variable power settings

All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.

CleanAir Recirculation

The CleanAir module is an optional accessory for rangehoods. The special active carbon filter, when compared to ducted systems, is equal in performance for odour reduction and grease absorption It also uses up to 3 dB(A) less noise than conventional recirculation systems. Easy to install, the surface of the carbon filter is the equivalent of around 50 soccer fields offering more performance and greater energy efficiency.

Simplicity

Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.

Electronic control

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function, control at your fingertips.

Electronic button control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.

Rocker switch control

It doesn't get any easier: one switch with 3 power levels and one for turning the lights on and off.

Performance

Dishwasher-safe metal filters

For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.

Metal grease filter

Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.

Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.

Rim ventilation filter

With its smooth uninterrupted surface and grease separation of 80-92%,* the rim ventilation filter from Bosch has a multi-patented filter sealing system and flow-optimised filter system with 12-layer filter mats

Extraction rates

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height. Bosch rangehoods offer powerful maximum extraction rates for when you are cooking up a storm in the kitchen. While the variable power settings allow you to navigate just the extraction power you need for each meal.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. *For cabinetry match pelmet required from cabinet maker. Stainless Steel pelmet included, black and white available as optional accessory.





Dishwashers | Design

Integrate your dishwasher for a seamless look.

Bosch built-under, semi and fully integrated dishwashers are designed to fit your new kitchen to perfection. Semi and fully integrated dishwashers can be fitted with a door panel to match the design of your kitchen cabinetry while built-under dishwashers can easily be fitted into an existing kitchen with a continuous kick panel.

Built-under



Built-under dishwashers fit into a new or existing kitchen with style

- ► Flat control panel
- ► Adjustable height for flush fit
- ▶ Option of continuous kick panel flush with kitchen cabinetry

Semi-integrated



Integrate your dishwasher for a seamless look

- ► Can be fitted with a door panel to match the design of your kitchen cabinetry*
- ► Continuous kick panel provides seamless integration

Fully integrated



A Bosch fully integrated dishwasher is designed to fit your new kitchen to perfection

- ► Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry*
- ► Control panel neatly integrated into the top of the dishwasher door
- ► Continuous kick panel provides seamless
- ► Optional stainless steel front panel accessory



Dishwashers I Features and functions.

Features and functions for everyday use.





Efficiency

DosageAssist™ detergent system

Unique to Bosch, DosageAssist™ maximises the effectiveness of detergent tablets by dropping it into a specially engineered tray that is targeted by water jets, resulting in a tablet that dissolves evenly under control. For superior cleaning performance and a quieter wash.

AquaStop™ Plus

The AquaStop™ Plus system consists of a double-walled supply hose, a safety valve, as well as a floor sump with float switch, offering 100% protection against water damage. Guaranteed by Bosch.

Heat Exchanger

Uses residual heat to rinse and dry dishes, saving energy, reducing temperature shock, and providing hygienically clean results by not drawing air from outside the dishwasher.

Polinox inner tub

The patented Polinox inner tub is extremely durable, odourless and rust-free. German engineered with robust materials that withstand dints, scratches and discolouration, based on 10 year simulation tests.

AquaSensor™ technology

The AquaSensor™ helps you save more water as it measures the amount of soiling at the end of the pre-rinse cycle, reusing water when it can, saving up to 20% for the entire wash.

Simplicity

Anti-fingerprint finish

The anti-fingerprint stainless steel finish ensures no prints are left behind and the dishwasher always looks its best.

Child door and button locks

For added safety, the door can be locked manually to prevent children from inadvertently opening the door. The buttons can also be locked to prevent tampering during operation.

Full colour TFT display

The multi-coloured TFT display shows wash progress, time remaining, and thanks to the advanced technology, displays the predefined water and energy consumption for each wash option.

EmotionLight

Show-off your sparkling clean glassware beautifully with the interior illumination from EmotionLight. The LED lights never need to be changed and will last for the lifetime of your dishwasher.

You might not hear anything coming from your dishwasher, but it still might be on. To prevent you from interrupting the cycle, we've developed TimeLight™: an illumination that projects the remaining wash cycle time onto the floor when the dishwasher is in operation.

InfoLight™

Selected models feature InfoLight™ – a red LED light that discreetly beams onto the floor during the wash cycle and disappears after the drying cycle is complete.



Performance

EcoSilence Drive®

Our advanced motor has been built to provide you with maximum efficiency, economy, and durability whilst operating. EcoSilence Drive® wash and drain pumps work without brushes, resulting in ultra-silent performance and top results.

10 year anti-rust warranty

Our appliances are made from top quality materials and in addition to our standard appliance warranty, we provide a free-of-charge warranty against rusting-through of the dishwasher's stainless steel inner cavity.

Whisper quiet washing


Bosch dishwashers are amongst the quietest in the world. With brushless motors and advanced sound insulation technology resulting in whisper quiet operation from just 40dB. Quieter than a buzzing bee!

AutoBrilliance™ automatic detergent sensor

The AutoBrilliance™ function adapts the temperature for multi-function detergent tablets, ensuring the rinse aid is fully utilised, delivering sparkling results every time.

Three stage self-cleaning filter

An additional nozzle in the spray arm cleans the bottom of the dishwasher while also breaking down food to pass through the filter and prevent blockages.

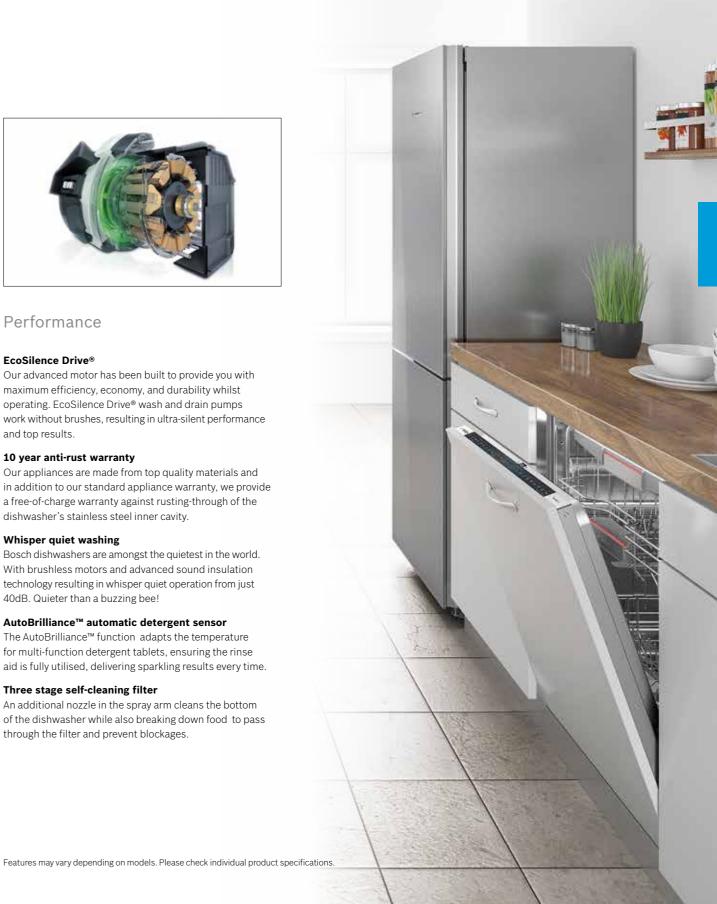



Dishwashers | Wash Programs

Your guide to our wash programs and options:

Wash programs

Automatic programs

By choosing the automatic program, your dishwasher will assess how soiled the items are and adjust the program time and temperature accordingly.

Eco Wash 45°C

Save on your utility bills and reduce the impact on our environment by using this water and energy efficient program for mixed loads.

Pots & Pans 70°C

An intensive wash cycle designed for heavily soiled dishes such as pans with baked-on food.

Quick 60mins 65°C

A 60 minute wash and dry cycle for dishes of various soiling levels for situations when time is of the essence.

Quick 29mins 45°C

A 29 minute express wash designed to clean lightly soiled dishes in a short time, such as drinking glasses at a dinner party.

ExtraQuiet 40dB 50°C

Washes dishes exceptionally quietly at just 40dB, perfect for eat-in kitchens, open spaces or running your dishwasher

Uses only cold water to rinse dishes, ideal for odour reduction of dirty dishes between full wash cycles.

Glass Wash 40°C

Gently cleans glasses such as high-quality crystal stems while providing optimum drying to add an extra sparkle to your glassware.

Super Wash 60°C

With high water pressure and high temperatures, the Super Wash program leaves even the dirtiest of dishes brilliantly clean and dry.

Wash options

SpeedPerfect® & VarioSpeed

Reduces program time by up to 50% for the fastest wash possible - perfect for when time is of the essence.

ExtraDry

Uses a higher temperature final rinse, providing even better drying results. Especially useful for drying glassware and plastics.

HalfLoad Plus

Provides perfect wash performance for up to seven place settings stacked anywhere in the dishwasher while operating resource-efficiently.

Machine Care

Helps remove grime and limescale build-up from your dishwasher to keep it clean and fresh. We recommend using this function once a month or after every 30 wash cycles.

IntensiveZone™

Transforms the entire bottom basket into a power cleaning zone by increasing the water pressure, saving you the chore of scrubbing heavily soiled pots and pans.

HygienePlus™

Utilises a hotter final rinse, perfect for removing bacteria from your cooking utensils, chopping boards and baby bottles.

For baby bottles, we recommend using traditional sanitation methods in conjunction with this option.

Accessory

Wine glasses should be washed by hand. Or by Bosch.

The GlassSecure Tray protects your glasses. Designed for Bosch dishwashers equipped with any VarioFlex™ basket system, this unique tray securely holds four long stemmed glasses in place. The locking mechanism lifts and secures all four glasses at once. Glasses are angled and positioned to provide optimum cleaning and drying with the highest glass protection.





Dishwashers | Overview

Bosch Built-under dishwashers

Serie 8



Series 8 | SMU88TS04A **Built-under Dishwasher**

Capacity

15 International place settings

Water efficiency

5 Star (12 litres per wash)

Energy efficiency

4 Star (235kW per year)

Features

Full colour TFT display EmotionLight internal lighting EcoSilence Drive®

DosageAssist™ detergent system AutoBrilliance™

AquaSensor™

Time delay

HeatExchanger 3 stage self-cleaning filter

Wash programs

8 (plus 6 wash options)

Flexibility

VarioFlex™ Pro basket system Rackmatic™ Plus

Sound

42dB rating (40dB on ExtraQuiet wash program)

Safety

AquaStop™ Plus Child lock

Dimensions (HxWxD)

815-875 x 598 x 573mm

Complete specifications

Reference guide see page 93 Technical diagrams see page 104

Serie 6



Series 6 | SMU66MS02A Built-under Dishwasher

Capacity

15 International place settings

Water efficiency

5 Star (12 litres per wash)

Energy efficiency

4 Star (235 kWh per year)

Features

Anti-fingerprint finish EcoSilence Drive®

DosageAssist™ detergent system

AutoBrilliance™

AquaSensor™ HeatExchanger

3 stage self-cleaning filter Time delay

Wash programs

6 (plus 4 wash options)

Flexibility

VarioFlex™ Plus basket system Rackmatic™ Plus

Sound

44dB rating

Safety

AquaStop™ Plus Child lock

Dimensions (HxWxD)

815-875 x 598 x 573mm

Complete specifications

Reference guide see page 93 Technical diagrams see page 104



Series 6 | SMP66MX01A **Built-under Dishwasher**

Capacity

15 International place settings

Water efficiency

5 Star (12 litres per wash)

Energy efficiency

4 Star (235 kWh per year)

InfoLight™ Floor Projection EcoSilence Drive®

DosageAssist™ detergent system

AutoBrilliance™ AquaSensor™

HeatExchanger

3 stage self-cleaning filter Time delay

Wash programs

6 (plus 4 wash options)

Flexibility

VarioFlex™ Plus basket system Rackmatic™ Plus

Sound

44dB rating

Safety

AquaStop™ Plus Child lock

Dimensions (HxWxD)

815-875 x 598 x 573mm

Complete specifications

Reference guide see page 93 Technical diagrams see page 104

Serie 4



Series 4 | SMU46GS01A Built-under Dishwasher

Capacity

14 International place settings

Water efficiency

4 Star (13.4 litres per wash)

Energy efficiency

4 Star (230 kWh per year)

Features

Anti-fingerprint finish

EcoSilence Drive® DosageAssist™ detergent system

AutoBrilliance™ AquaSensor™

HeatExchanger

3 stage self-cleaning filter Time delay

Wash programs

6 (plus 4 wash options)

Flexibility

VarioFlex[™] basket system Rackmatic™ Plus

Sound

46dB rating

Safety

AquaStop™ Plus Child lock

Dimensions (HxWxD)

815-875 x 598 x 573mm

Complete specifications

Reference guide see page 93 Technical diagrams see page 104

Serie 4



Series 4 | SMI46GS01A Semi-integrated Dishwasher

Capacity

14 International place settings

Water efficiency

4 Star (13.4 litres per wash)

Energy efficiency

4 Star (230 kWh per year)

Features

EcoSilence Drive®

DosageAssist™ detergent system

AutoBrilliance™

AquaSensor™ HeatExchanger 3 stage self-cleaning filter

Time delay

Wash programs 6 (plus 4 wash options)

Flexibility

VarioFlex[™] basket system Rackmatic™ Plus

Sound

46dB rating

Safety

AquaStop™ Plus Child lock

Dimensions (HxWxD)

815-875 x 598 x 573mm

Complete specifications

Reference guide see page 93 Technical diagrams see page 104

Serie 8





Series 8 | SMV88TX01A **Fully integrated Dishwasher**

Capacity

15 International place settings

Water efficiency 5 Star (12 litres per wash)

Energy efficiency

4 Star (235 kWh per year)

Full colour TFT display TimeLight™ Floor Projection

SensorTouch Buttons

EcoSilence Drive® DosageAssist™ detergent system

AutoBrilliance™

AquaSensor™ HeatExchanger 3 stage self-cleaning filter

Time delay

Wash programs 8 (plus 5 wash options)

Flexibility

VarioFlex™ Pro basket system Rackmatic™ Plus

Sound

42dB rating Safety

AquaStop™ Plus

Child lock

Dimensions (HxWxD) 815-875 x 598 x 550 mm

Complete specifications

Reference guide see page 93 Technical diagrams see page 104

Bosch Semi and Fully integrated dishwashers

Series 8 | SMV46GX01A **Fully integrated Dishwasher**

Capacity

14 International place settings

Water efficiency 4 Star (13.4 litres per wash)

Energy efficiency

4 Star (230 kWh per year)

Features InfoLight™ Floor Projection

EcoSilence Drive®

DosageAssist™ detergent system AutoBrilliance™

AquaSensor™

HeatExchanger 3 stage self-cleaning filter Time delay

Wash programs

6 (plus 4 wash options) Flexibility

VarioFlex[™] basket system

Rackmatic™ Plus Sound

46dB rating

Safety

AquaStop™ Plus Child lock

Dimensions (HxWxD) 815-875 x 598 x 550mm

Complete specifications Reference guide see page 93

Technical diagrams see page 104



Serie 8



Series 8 | KIN34P60AU Fully Integrated Bottom Mount Fridge Freezer

Capacity

Total gross capacity: 287 litres
Fridge gross capacity: 196 litres
Fridge net capacity: 189 litres
Freezer gross capacity: 91 litres
Freezer net capacity: 75 litres

Energy

3 Star MEPS 2010, 330kWh per year

Efficiency

FrostFree MultiAirFlow cooling

Freshness & Storage

SuperFreezing & SuperCooling with auto-switch-off Vegetable CrisperBox and deli drawer on telescopic rails BigBox extra large freezer storage

Convenience

Digital temperature controls EasyLift shelf and EasyLift door bins can be raised or lowered even when fully loaded

LED lighting

Removable magnetic door seals for easy cleaning

SoftClose door system

Reversible door hinges

Door open and temperature-rise alarm

Full ventilation through the plinth for ease of installation

Dimensions

Product (H x W x D): 1772 x 556 x 545mm Cavity (H x W x D): 1775 x 560 x 550mm

Complete specifications

Technical diagrams see page 104



Refrigeration | Features and functions

Features and functions for everyday use.





Efficiency

TouchControl electronic display panel

Control all functions easily and precisely with just a soft touch, using TouchControl panel. Electronic controls conveniently set into the top of the door frame provide precise and independent temperature control of both the fridge and freezer compartments.

Bright LED lighting across all shelves provides the highest possible visibility throughout the fridge

CrisperBox

Great space for fresh fruit and vegetables. The moistureregulated CrisperBox not only provides plenty of space for fruit and vegetables, it also helps keeps them crisp and fresh for longer.

ChillerBox

Keep fish and meat fresh and safe. The ChillerBox is a safe place to keep fish, meat and sausages: A cold current of air from the freezer section creates a temperature in the ChillerBox that is lower than in the rest of the refrigerator. Perishable food stays fresh here for much longer. The ChillerBox is also absolutely ideal for chilling drinks.

Simplicity

EasyLift system

Convenient levers quickly and easily adjust the EasyLift glass shelf up or down even when fully loaded. The EasyLift door can be adjusted to accommodate tall items providing flexible storage i.e. bottles of different heights. A full extension telescopic rail system on the drawers ensures easy access and maximum storage.

SoftClose door

Thanks to a special damping mechanism, the fridge door closes softer and quieter than before. When it is open at a 20° angle or less, the door closes automatically and helps prevent the fridge from being left open.

Telescopic rails

For easy access even to items at the back of drawers. Get even better access to your fresh fruit and vegetable drawers - they glide gently towards you on telescopic rails, which makes inserting and removing food child's play.



Performance

AirFresh filter

The AirFresh filter neutralises odours in the fridge, ensuring that smells don't transfer between foods.

SuperCooling

Adding new food into the fridge causes the internal temperature to rise, which means the fridge has to work harder to cool down and regulate the temperature again. SuperCooling will prepare your fridge by rapidly reducing the temperature, keeping the contents cool, while quickly cooling the new groceries down to 2°C.

SuperFreezing

Adding new food to the freezer can increase the internal temperature, which can partly defrost existing food. The SuperFreezing function rapidly lowers the temperature in the freezer, ensuring the fresh food is frozen quickly, while surrounding food remains frozen.

FrostFree

You'll never have to defrost your fridge-freezer again. With a FrostFree model, there's no more condensation of humidity in the appliance or on your food. The generator which draws the heat out of the freezer compartment, defrosts itself automatically from time to time. Thanks to that, there is less humidity in the appliance and practically no formation of ice. This not only saves you time but also energy - becasuse ice formation in conventional refrigerators significantly reduces energy efficiency.

MultiAirflow

Even cooling on all levels. Thanks to a constant stream of cold air on all levels, the ventilator-supported MultiAirflow ensures that there are fewer temperature fluctuations. This also means that the cool-down time is shorter. This feature protects your food and guarantees consistently optimal conditions in the entire refrigeration compartment.





Reference Guide Ovens

Model		HRG6767S2A	HBG6767S1A	HBG6753S1A	HBG675BS1B [†]	HBG672BS1A	HBG655HS1A	HBG655HW1A	HBG633BS1A
		Series 8	Series 8	Series 8	Series 8				
Гуре		Pyrolytic Oven with Added Steam	Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven	EcoClean Direct Oven
Dimensions	Width (cm)	60	60	60	60	60	60	60	60
	Appliance dimensions (H x W x D)	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm				
	Built-in dimensions (H x W x D)	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm				
	Cavity dimensions (H x W x D)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm				
leating	Number of heating functions	17	13	13	13	8	13	13	10
unctions	4D HotAir	● *^#	●^#	•#	•#	•#	•#	•#	•#
	3D HotAir Plus								
	Fan-forced hot air								
	Fan-forced hot air eco								
	HotAir Eco	•^	•^	•	•	•	•	•	
	Top and bottom heating	●*^#	●^#	•#	•#	•#	•#	•#	•#
	Top and bottom heating Eco	•^	•^	•	•	•	•	•	•
	Fan assisted top and bottom heating					•	•	•	
	Bottom heating	•	•	•	•		•	•	•
		•	•	•	•		•	•	•
	Intensive heating	● *^	•^	•	•		•	•	•
	Hot air grilling					•		-	
	Grill – large area	•	•	•	•	•	•	•	•
	Grill – small area	•	•	•	•	•	•	•	•
	Pizza setting	•^	• ^	•	•	•	•	•	•
	Slow cooking	•	•	•	•		•	•	
	Keep warm	•*	•	•	•		•	•	
	Preheat ovenware	•	•	•	•		•	•	
	Drying	•							
	Reheating (with added steam)	•^							
	Dough proving (with added steam)	•							
	Defrost	•	•	•	•	•	•	•	•
	Sabbath mode	•	•	•	•	•	•	•	•
	Automatic rapid heat function	•	•	•	•	•	•	•	•
	Automatic temperature proposal	•	•	•	•	•	•	•	•
	Temperature display	•	•	•	•	•	•	•	•
	Electronic thermostat	•	•	•	•	•	•	•	•
ensor &	Bosch Assist (Fully automated cooking)	•	•						
utomatic unctions	PerfectBake™ sensor	lacklacklack	● ¹						
anctions	PerfectRoast meat probe	$ullet^1$	●1						
	AutoPilot (Automatic programs)			● (10)	● (10)	● (10)	● (10)	● (10)	
apacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)				
	Water tank	1 litre (net)							
esign		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and white glass	Stainless steel and black glass				
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display
	Electronic clock/timer with	•	•	•	•	•	•	•	•
	end-time programming								
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Displ				
	SoftMove door technology	•	•	•	•	•	•	•	•
	Interior light	LED (ceiling) and Multi-level LED	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)	Halogen (Ceiling)
		lighting (left and right side)							
	No. of shelf positions	5	5	5	5	5	5	5	5
	Full glass inner door	•	•	•	•	•	•	•	•
	Removable door	•	•	•	•	•	•	•	•
	Water tank empty indicator	•							
leaning	Pyrolytic cleaning function with	•	•	•	•	•			
	compatible accessories and shelving EcoClean cleaning system						Ceiling, sides and rear wall	Ceiling, sides and rear wall	Rear wall
	Ecoclean cleaning system						(EcoClean Direct)	(EcoClean Direct)	(EcoClean Direct)
	Catalytic cleaning system						(2000)	(,	(2000)
	Descaling	•							
	Drying	•							
afety	Door		Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Triple-glazed door	Triple-glazed door	Triple-glazed door
	Residual heat indicator	Quadrupie glazed Coorloach Door	Quadrupie grazed coorroach boor	Quadruple glazed Coorroderr Boor	Quautuple glazed Coortouch Door	•	●	•	•
	Automatic safety switch off	•	•	•	•	•	•	•	•
	Child lock function	• (controls & door)	• (controls & door)	• (controls & door)	• (controls & door)				
	Cooling fan	• (controls & door)	• (controls & door)	• (controls & door)	• (controls & door)				
echnical	Maximum temperature	300°C	300°C	300°C	300°C	300°C	300°C	300°C	300°C
ecnnicai equirements	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW
		220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz				
upplied	Power requirements Fully extendable telescopic rails				220 2401 / 30-00012	ZZU-Z4UV / 3U-0UHZ			22U-24UV / 3U-0UHZ
01010111270	Fully extendable telescopic rails	• (2 fold pyrolytic proof)	• (2 fold pyrolytic proof)	(2 fold pyrolytic proof)			● (2 fold)	● (2 fold)	
	Partially extendable telescopic rails	2	2	2	2	2	2	2	1
		2	2	2	2	2	2	2	1
	No. wire racks								
	No. split grill trays		.,						
	No. split grill trays No. universal pans	1 (pyrolytic proof)	1	1	1				
optional	No. split grill trays	1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 94	1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 94	1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 94	1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 94	1 (pyrolytic proof) 1 (pyrolytic proof) Refer to page 94	1 1 Refer to page 94	1 1 Refer to page 94	1 1 Refer to page 94

Reference Guide Ovens

Model		HBA73R350B [†]	HBA63B150B [†]	HBA33B150A [†]	HBA23B151A [†]	HBA13B254A	HBA13B253A	HVA541NS0	HBM43S550A	HBM43B250A
		Series 6	Series 6	Series 6	Series 6					
Туре		Pyrolytic Oven	Pyrolytic Oven	EcoClean Oven	EcoClean Oven	EcoClean Oven	EcoClean Oven	Catalytic Oven	EcoClean Double Oven	EcoClean Double Oven
Dimensions	Width (cm)	60	60	60	60	60	60	90	60	60
	Appliance dimensions (H x W x D)	595 x 595 x 548mm	595 x 595 x 515mm	595 x 595 x 515mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 515mm	478 x 896 x 568mm	888 x 595 x 550mm	888 x 595 x 550mm
	Built-in dimensions (H x W x D)	575-597 x 560-568 x 550mm	575-597 x 560 x 550mm	575-597 x 560 x 550mm	467-470 x 860-864 x 560mm	872-886 x 560-570 x 550mm	872-886 x 560-570 x 550mm			
	Cavity dimensions (H x W x D)	329 x 479 x 400mm	329 x 479 x 400mm	325 x 486 x 386mm	329 x 479 x 420mm	329 x 479 x 420mm	325 x 486 x 386mm	308 x 615 x 405mm	172 x 468 x 433mm (top); 329 x 482 x 418mm (bottom)	172 x 468 x 433mm (top); 329 x 482 x 418mm (bottom)
Heating	Number of heating functions	9	6	7	5	4	4	9	3 (top) and 5 (bottom)	2 (top) and 5 (bottom)
Functions	4D HotAir									
	3D HotAir Plus	•#	•#	•#	●#	•	•		●# (bottom)	●# (bottom)
	Fan-forced hot air							•		
	Fan-forced hot air eco							•		
	HotAir Eco	•	•	•	•					- 11 · · · · · · · · · · · · · · · · · ·
	Top and bottom heating	•#	•#	•#	#			•	•# (top and bottom)	•# (top and bottom)
	Top and bottom heating Eco Fan assisted top and bottom heating							•		
	Bottom heating	•	•	•	•			•	• (bottom)	• (bottom)
	Intensive heating								- (Bottom)	• (bottom)
	Hot air grilling	•	•	•	•	•	•	•	• (bottom)	• (bottom)
	Grill – large area	•	•	•	•	•	•	•	• (top and bottom)	• (top and bottom)
	Grill - small area	•		•				•	● (top)	
	Pizza setting	•		•				•		
	Slow cooking									
	Keep warm									
	Preheat ovenware									
	Drying									
	Reheating (with added steam) Dough proving (with added steam)									
	Defrost	•		•	•	•	•			
	Sabbath mode									
	Automatic rapid heat function	•	•	•	•				•	•
	Automatic temperature proposal									
	Temperature display									
	Electronic thermostat	•	•	•	•					
Capacity	Volume (usable litres)	65 litres (net)	65 litres (net)	62 litres (net)	67 litres (net)	67 litres (net)	62 litres (net)	77 litres (net)	35 litres (net) top	35 litres (net) top
	Water tank								67 litres (net) bottom	67 litres (net) bottom
Design	water tark	Stainless steel with metal har handle	Stainless steel with metal har handle	Stainless steel with metal bar handle	Stainless steel with metal har handle	Stainless steel with metal har handle	Stainless steel with metal bar handle	Stainless steel and black place	Stainless steel with metal bar handle	Stainless steel with metal har hand
Design	Cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Grey enamel cavity	Grey enamel cavity	Enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display			Electronic touch-control clock/timer		Electronic touch-control clock/timer		•	Electronic touch-control clock/timer	
		with LED display	with LED display	with LED display	with LED display					
	Electronic clock/timer with	•	•	•	•	•	•	•	•	•
	end-time programming Controls	Retractable rotary control knobs	Rotary control knobs	Sword control knobs	Rotary control knobs	Retractable rotary control knobs	Sword control knobs			
	SoftMove door technology	richaetable rotary control knobs	rictractable rotary control knobs	richaetable rotary control knobs	rich actable rotally control knobs	notary control knobs	Sword control knobs	riotary control knobs	netractable rotary control knobs	oword control knobs
	Interior light	Halogen (Ceiling)	Halogen	Halogen	Halogen					
			3,	3,				2 (left and right side walls)	1 (top) and 1 (bottom)	1 (top) and 1 (bottom)
	No. of shelf positions	5	5	5	5	5	5	4	2 (top) and 5 (bottom)	2 (top) and 5 (bottom)
	Full glass inner door	•	•	•	•	•	•		•	•
	Removable door	•	•	•	•	•	•	•	•	•
01	Water tank empty indicator									
Cleaning	Pyrolytic cleaning function with compatible accessories and shelving	•	•							
	EcoClean cleaning system			Rear wall	Rear wall	Ceiling and rear wall	Rear wall		Ceiling, sides and rear wall	Ceiling, sides and rear wall
	Catalytic cleaning system							Side and rear walls		
	Descaling									
	Drying									
Safety	Door	Quadruple-glazed door	Quadruple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door (top and bottom)	Triple-glazed door (top and bottom
	Residual heat indicator	•	•	•						
	Automatic safety switch off	•	•	•	•	•	_		•	•
	Child lock function Cooling fan	•	•	•	•	•	•	•	•	•
Technical	Maximum temperature	300°C	300°C	270°C	270°C	270°C	270°C	250°C	275°C	275°C
requirements	Total connected load	3.65kW	2.99kW	3.38kW	3.5kW	2.9kW	2.2kW	3.3kW	5.5kW	5.5kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz					
Supplied	Fully extendable telescopic rails	● (1 fold)						● (1 fold)	• (1 fold – bottom)	
	Partially extendable telescopic rails			1	1	2	2	1	3	3
Supplied		2	2			1			2	1
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays	2	-			1				
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans	1	1	1	1	1	2		2	1
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans No. baking trays	1	-	1	1	1	2	2		1
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans No. baking trays No. wire rack for universal pans	1	1	1	1	1	2	2	2	1
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans No. baking trays No. wire rack for universal pans No. pyro proof pan supports	1 1 1	-	1	1	1	2	2	2	1
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans No. baking trays No. wire rack for universal pans No. pyro proof pan supports No. enamel baking trays	1 1 1	1	1		1	2	2	2	1
Supplied	Partially extendable telescopic rails No. wire racks No. split grill trays No. universal pans No. baking trays No. wire rack for universal pans No. pyro proof pan supports	1 1 1 Refer to page 94	1	1 1 Refer to page 94	1 1 Refer to page 94	1	2 Refer to page 94	2 Refer to page 94	2	1 1 Refer to page 94

Reference Guide Compact Appliances

Model		CSG656RS1A Series 8	CDG634BS1 Series 8	CMG656RS1A Series 8	CMG633BS1B Series 8
Туре		Combination	Pure Steam Oven	Combination	Combination
Dimensions	Width (cm)	Steam Oven 60	60	Microwave Oven	Microwave Oven 60
Difficilisions	Appliance dimensions (H x W x D)	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm
	Built-in dimensions (H x W x D)	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm
	Cavity dimensions (H x W x D)	235 x 480 x 415mm	265 x 325 x 439mm	237 x 480 x 392mm	237 x 480 x 392mm
Handler or			4		
Heating Functions	Number of heating functions	18	4	13	7
i unctions	4D HotAir	●*^#		● ^# ²	● # ²
	HotAir Eco	•^		•^	•
	Top and bottom heating	●*^#		●^# ²	
	Top and bottom heating Eco	•^		•^	
	Bottom heating	•		•	
	Intensive heating	•			
	Hot air grilling	•*^		●^2	$lackbox{}^2$
	Grill – large area	•		● ²	● ²
	Grill – small area	•		●2	●2
	Pizza setting	•^		•^	
	Slow cooking	•		•	
		•		•	
	Keep warm	•		•	_
	Preheat ovenware	•		•	₹
	Drying	•	_		
	Reheating (using steam)	●^	•		
	Dough proving (using steam)	•	•		
	Defrost (using steam)	•	•		
	Pure Steaming	●^	•		
	Sabbath mode	•		•	
	Automatic rapid heating	•		•	•
	Automatic temperature proposal	•	•	•	•
	Temperature display	•	•	•	•
	Pure Microwave			•	•
				• /5	• /5
	Microwave with INNOWAVE inverter technology			 (5 power levels − 90, 180, 360, 600, 1000W) 	 (5 power levels – 90, 180, 360, 600, 1000W)
Sensor &	Bosch Assist (Fully automated cooking)	•		•	000, 000, 100011)
Automatic		● ¹		•	
Functions	PerfectBake™ sensor			•	
	PerfectRoast meat probe	●1	- (00)	●1	- (1.0)
	AutoPilot (Automatic programs)		● (20)		● (14)
Capacity	Volume (usable litres)	47 litres (net)	38 litres (net)	45 litres (net)	45 litres (net)
	Water tank (steam ovens only)	1 litre (net)	1.3 litre (net)		
Design		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glas
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Graphic Display	TFT Touch Symbol Display
	Electronic clock/timer with end-time programming	•	•	•	•
	Bosch Control Ring with TFT Display	•	•	•	•
	SoftMove door technology	•	•	•	•
	Interior light	LED (ceiling)	Halogen (left)	LED (ceiling)	LED (ceiling)
	No. of shelf positions	3	4	3	3
	Removable door	•	•	3	3
		_			
	Water tank empty indicator	•	•		
Cleaning	EcoClean cleaning system in ceiling, sides and rear wall	• (EcoClean Direct)		(EcoClean Direct)	
	Steam cleaning system	•			
	Descaling program	-	•		
	Drying	•			
Safety	Door	Triple-glazed door	Triple-glazed door	Quadruple-glazed CoolTouch door	Triple-glazed door
	Residual heat indicator	•			•
	Automatic safety switch off	•	•	•	•
	·	•	•	•	•
	Child lock function	•	•	•	•
	Cooling fan	05000	•	•	•
Technical requirements	Maximum temperature	250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature	30-100°C steam temperature	300°C maximum temperature; 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W	300°C maximum temperatur 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W
	Total connected load Power requirements	3.3kW 220-240V / 50-60Hz	1.9kW 220-240V / 50Hz	3.6kW 220-240V / 50-60Hz	3.6kW 220-240V / 50-60Hz
	Fully extendable telescopic rails	● (1 fold)		/ 55 55/12	/ 55 55112
Supplied		- (1.0.0)		♠ (1 fold)	
Supplied accessories				● (1 fold)	
	Partially extendable telescopic rails				
	Partially extendable telescopic rails No. wire racks	2		1	1
	Partially extendable telescopic rails	2		1	1
	Partially extendable telescopic rails No. wire racks				
	Partially extendable telescopic rails No. wire racks No. universal pans		1 large	1	
Supplied accessories	Partially extendable telescopic rails No. wire racks No. universal pans No. baking trays	1	1 large 1 large	1	
	Partially extendable telescopic rails No. wire racks No. universal pans No. baking trays No. non perforated steam trays	1 1 small		1	

Reference Guide Coffee Machine

Model		CTL636ES1
		Series 8
Туре		Built-in fully-automatic coffee machine
Dimensions	Appliance dimensions (H x W x D)	455 x 594 x 375mm
	Built-in dimensions (H x W x D)	449 x 558 x 354mm
Design	Stainless steel and black glass	•
Flavour	SensoFlow System: Heating system for maximum and constant brewing temperature	•
	AromaPro Concept: Optimal aroma extraction	•
	One-touch preparation: Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffe Latte at the touch of a button	•
	AromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes	•
	Beverage temperature adjustable individually: coffee 3 levels, hot water 4 levels	•
	Including BRITA Intenza water filter: Reduces the lime content of water and filters substances affecting smell and taste	•
Convenience	TFT Touch Graphic Display with interactive menu	•
	MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso	•
	IndividualCup Volume: Cup sizes adjustable individually, to ensure your cup gets filled just as far as you would like	•
	Coffee outlet and milk frother height-adjustable: Up to 15cm high Latte Macchiato glasses fit underneath	•
	OneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities	•
	Water tank removable for easy refilling	• (2.4 litre volume)
	Early warning if water tank almost empty or bean container almost empty	•
	Flexible milk solution: Decide for yourself if you prefer connecting the provided milk container or using any other container, e.g. a milk carton	•
	Short user manual always at hand inside appliance	•
Performance	SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic	•
	CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety	•
	One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother	•
	In addition to beverages also available separately: milk foam, warm milk, hot water	•
	Reduced heat-up time: Fastest first cup	•
	Water pump with 19 bar pressure	•
	Separate chute for ground coffee	•
	15,000 cup warranty: Consistently high appliance quality from the first cup to the 15,000th (valid for non-commercial use within 24 months)	•
Hygiene	Removable brewing unit: Easy and hygienic cleaning under running water	•
	AutoMilk Clean: Automatically steam cleans the milk system after every beverage	•
	Milk frother removable and dishwasher-proof SinglePortion Cleaning: Complete emptying of all pipes after each brewing process	•
Technical	Electrical connection rating	1600W
requirements	Current	10A
	Voltage	220-240V / 50-60Hz
Supplied	1 BRITA water filter cartridge	•
accessories	1 measuring spoon	•
	1 milk container (insulated), connection hose and pipe	•
	1 test strip	• (0)
	1 set assembly screws	• (9)

Reference Guide Warming Drawers

Model		BID630NS1A	BIC630NS1A
		Series 8	Series 8
Туре		60cm Built-in Warming Drawer	60cm Built-in Warming Drawer
Dimensions	Appliance dimensions	290 x 595 x 548mm	140 x 595 x 548mm
(H x W x D)	Built-in dimensions	290 x 560-568 x 550mm	140 x 560-568 x 550mm
	Internal dimensions	242 x 468 x 458mm	92 x 468 x 458mm
Heating functions	Base element and fan heating with 4 power levels	•	•
Suitable for	Slow cooking	•	•
	Proving yeast dough	•	•
	Defrosting	•	•
	Keeping food warm	•	•
	Pre-warming cups, plates and ovenware	•	•
Temperature range	from approx. 40-80°C	•	•
Design		Stainless steel and black glass	Stainless steel and black glass
	Cavity	52 litre interior drawer volume	20 litre interior drawer volume
	Electronic rotary temperature control	•	•
	Inner compartment ceramic glass base	•	•
Technical	Max. weight load	25kg	25kg
requirements	Total connected load	0.81kW	0.81kW
	Voltage	220-240V / 50-60Hz	220-240V / 50-60Hz







All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

¹ Silicon based cookware and bakeware is not compatible for use. *Compatible with Added steam function. *Compatible with PerfectRoast meat probe. #Compatible with Rapid heat. ² Compatible with Microwave function.

Reference Guide Gas Cooktops

Model		PPS9A6B90A	PPQ7A6B20A	PPH6A6B20A	PCT9A5B90A	PCR9A5B90A	PCR7A5B90A	PCI6A5B90A	PBH6B5B60A
		Series 6	Series 2						
Туре		Gas	Gas						
Dimensions	Width (cm)	90	75	60	90	90	75	60	60
	Appliance dimensions (W x D)	915 x 520mm	752 x 520mm	590 x 520mm	915 x 520mm	915 x 520mm	750 x 520mm	582 x 520mm	580 x 510mm
	Cut-out dimensions (W x D)	850-852 x 490-502mm	560-562 x 480-492mm	560-562 x 480-492mm	850-852 x 490-502mm	850-852 x 490-502mm	560-562 x 480- 492mm	560-562 x 480 - 492mm	560 x 480 - 490mm
Design		Black tempered frameless glass	Black tempered frameless glass	Black tempered frameless glass	Stainless Steel	Stainless Steel	Stainless steel	Stainless steel	Stainless steel
Burner / Zone		5 burners including:	4 burners including:	6 burners including:	5 burners including:	5 burners including:	5 burners including:	4 burners including:	4 burners including:
Output	Front left		Economy burner 4 Mj/h	Standard Burner 6.85 Mj/h	Dual flame wok burner 19.5Mj/h	Economy burner 4Mj/h	Economy burner 4Mj/h		Wok burner 15Mj/h
	Centre left	Dual flame wok burner 15Mj/h						Wok burner 15Mj/h	
	Rear left		Standard Burner 6.85 Mj/h		Standard burner 6.5Mj/h				
	Front centre	Economy burner 4 Mj/h			Economy burner 4Mj/h			Economy burner 4 Mj/h	
	Middle centre		Dual flame wok burner 15Mj/h			Dual flame wok burner 19.5Mj/h	Dual flame wok burner 19.5Mj/h		
	Rear centre	Standard Burner 6.85 Mj/h			Standard Burner 6.85 Mj/h			Standard Burner 6.85 Mj/h	
	Front right	Standard Burner 6.85 Mj/h	Standard Burner 6.85 Mj/h	Economy burner 4 Mj/h	Dual flame wok burner 19.5Mj/h	Standard Burner 6.85 Mj/h	Standard Burner 6.85 Mj/h		Economy burner 3.8Mj/h
	Centre right							High-speed burner 11 Mj/h	
	Rear right	High-speed burner 11 Mj/h	High-speed burner 11 Mj/h	Wok burner 13.6Mj/h	High-speed burner 11 Mj/h	High-speed burner 11 Mj/h	High-speed burner 11 Mj/h		Standard burner 6.5Mj/h
Convenience	FlameSelect valve technology (precise control in 9 steps)	•	•	•	•	•	•	•	
	Individual cast-iron trivets with rubber feet	•	•	•					
	3 piece cast-iron trivets with rubber feet				•	•	•		
	2 piece cast-iron trivets with rubber feet							•	
	Steel trivets with cast iron finish and rubber feet								•
	Enamelled cast-iron burner caps	•	•	•	•	•	•	•	
	Enamelled steel burner caps								•
Safety	Flame failure fitted to each burner	•	•	•	•	•	•	•	•
Controls	Sword knob controls	•	•	•	•	•	•	•	
Technical requirements		43.7Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	43.7Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	31.3Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	67.7Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	48.2Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	48.2Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	36.85Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm	31.8Mj/h total connected load; 240V / 50Hz; Min thickness of worktop; 30mm
Supplied	Wok ring support	•	•	•	•	•	•	•	•
accessories	Espresso cross support	•	•	•	•	•	•	•	
	LPG conversion kit	•	•	•	•	•	•	•	•
Optional	4 piece cookware set HEZ390042	•	•	•	•	•	•	•	•
accessories	Stainless steel wok HEZ390090	•	•	•	•	•	•	•	•
	Simmer plate HEZ298105	•	•	•	•	•	•	•	•
Other	Suitable for NG or LPG	•	•	•	•	•	•	•	•







Reference Guide Electric Cooktops

Model		PXV975DC1E*	PXE875DC1E*	PXX675DC1E	PIV995DC1E*	PIV975DC1E*	PVS875FB1E	PVS675FB1E	PIE631FB1E	PIJ611BB1E	PKM875DP1A	PKG775DB1A	PKN675DB1A	PKE611D17A	PKE611CA1A
Tyne		Series 8 FlexInduction®	Series 8 FlexInduction®	Series 8 FlexInduction®	Series 8 Induction	Series 8	Series 6 Combileduction	Series 6 Combileduction	Series 6	Series 4	Series 8 Ceramic	Series 8 Ceramic	Series 8 Ceramic	Series 4 Ceramic	Series 2 Ceramic
Type Dimensions	Width (cm)	90	80	60	90	90	80	60	60	60	80	70	60	60	60
	Appliance dimensions (W x D)		816 x 527mm	606 x 527mm	916 x 527mm	916 x 527mm	816 x 527mm	606 x 527mm	592 x 522mm	592 x 522mm	816 x 527mm	710 x 527mm	606 x 527mm	592 x 522mm	583 x 513mm
	Cut-out dimensions (W x D)	880 x 490-500mm	750-780 x 490-500mm	560 x 490-500mm	880 x 490-500mm	880 x 490-500mm	750–780 x 490–500mm	560 x 490-500mm	560 x 490-500mm	560 x 490-500mm	780 x 500mm	560-640 x 490-500mm (fits cut-out for 60cm)	560 x 500mm	560 x 490-500mm	560 x 490-500mm
Design		Black ceramic glass Stainless steel slimline side profile Beveled	Black ceramic glass Stainless steel slimline side profile Beveled	Black ceramic glass Stainless steel slimline side profile Beveled	Black ceramic glass Stainless steel slimline side profile Beveled	Black ceramic glass Stainless steel slimline side profile Beveled	Black ceramic glass Beveled front and sides	Black ceramic glass Beveled front and sides	Black ceramic glass Beveled front and sides	Black ceramic frameless glass	Black ceramic glass Stainless steel slimline side profile. Beveled	Black ceramic glass	Black ceramic glass Stainless steel slimline side profile. Beveled	Black ceramic frameless glass	Black ceramic frameless glass
Burner /		front and rear 5 zones including:	front and rear 4 zones including:	front and rear 4 zones including:	front and rear 5 zones including:	front and rear 5 zones including:	4 zones including:	4 zones including:	4 zones including:	3 zones including:	front and rear 4 zones including:	front and rear 4 zones including:	front and rear 4 zones including:	4 zones including:	4 zones including:
Zone Output (Size)	Front left	FlexZone: 2.2kW / 3.7kW Boost (200mm W x 230mm H)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW (210mm)	CombiZone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)		Dual circuit zone: 1.2kW / 2.1kW (145 / 210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 2kW (180mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
	Rear left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW (210mm)	CombiZone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.2kW (145mm)	Dual circuit zone: 0.8kW / 2.0kW (120 / 180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170 / 265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
	Front centre														
	Rear centre	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)			Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)					Dual circuit zone: 1.7kW / 2.4kW (180 / 230mm)				
	Front right	Flex zone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.4kW / 2.2kW (145mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Dual circuit/roaster zone: 1kW / 2kW / 3.4kW / 4.6kW (120 / 180 / 270 / 370mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Dual circuit zone: 1kW / 2.2kW (145 / 210mm)	Standard zone: 2.2kW (210mm)	Standard zone: 2.0kW (180mm)
	Rear right	Flex zone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 2.6kW / 3.7kW (280mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)		Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
		*Total FlexZone: 3.3kW / 3.7kW Boost (400 x 230mm)	*Total FlexZone: 3.3kW / 3.6kW Boost (400 x 240mm)	*Total FlexZone: 3.3kW / 3.7kW Boost (380 x 240mm)											
Performance	17-stage power setting	•	•	•	•	•	•	•	•	•	•	•	•	•	
	9-stage power setting														•
	PerfectFry Sensor	•	•	•	•	•	-	_			_				
	PowerBoost ShortBoost	•	•	•	•	•	•	•	•	•	•				
	FlexZone	•	•	•	•	•									
	CombiZone						•	•							
	MoveMode	3 Auto Power Levels	3 Auto Power Levels	3 Auto Power Levels			2 Auto Power Levels	2 Auto Power Levels							
Convenience	WipeProtection	•	•	•	•	•	•	•	•		•	•	•		
	Keep Warm	•	•	•	•	•			•		•	•	•		
	QuickStart	•	•	•	•	•	•	•	•	•					
	ReStart	•	•	•	•	•	•	•	•	•	•	•	•	•	
		•	•	•	•	•	•	•	•		•	•	•		
	Dual function timer with automatic switch-off	•	•	•	•	•	•	•	•	•	•	•	•		
	Automatic pot detection Automatic boil start	•	•	•	•	•	•	•	•	•		•	•		
Safety	Child lock	•	•	•	•	•	•	•	•	•	•	•	•	•	
Salety	2-stage residual heat	•	•	•	•	•	•	•	•	•	•	•	•	•	
	indicators Residual heat indicator														
	Automatic safety stuff-off	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Electronic	Direct Select Premium	•	•	•	•	•	•	•	•	•	•	•	•	•	
touch-	Direct Select 1.0						•	•	•						
controls	TouchSelect									•				•	
	Sword control knobs														•
Technical requirements		11.1kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	11.1kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	11.1kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	6.9kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 30mm (see space requirements for oven)	7.4kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 20mm if over oven: 30mm (see space requirements for oven)	11.2kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 20mm over oven: 20mm (see space requirements for oven)	6.6kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 20mm over oven: 20mm (see space requirements for oven)	7.5kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 20mm over oven: 20mm (see space requirements for oven)	6.6kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 20mm over oven: 20mm (see space requirements for oven)	6.6kW total connected load; 220–240V / 50–60Hz; Min. thickness of worktop: 20mm over oven: 20mm (see space requirements for oven)
Optional	Griddle plate HEZ390522	•	•	•			•	•							
accessories	Teppan Yaki Large (40cm x 20cm) HEZ390512	•	•	•			•	•							
	Teppan Yaki Small	•	•	•			•	•							
	(30cm x 20cm) HEZ390511 4 piece cookware set	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	HEZ3900042 Stainless steel roasting	•	•	•			•	•							
	pan with lid HEZ390011 Stainless steel wok	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	HEZ390090 PerfectFry Sensor induction			•				-	-	-	-				-
	pan 19cm HEZ390220 PerfectFry Sensor induction		•	•	•	•									
	pan 21cm HEZ390230	•	•	•	•	•									

90 | Bosch built-in catalogue

Reference Guide Rangehoods


Model		DWB091E51A Series 6	DWW097A50A Series 4	DWW09W851A Series 2	DWW06W851A Series 2	DHL895CAU Series 8	DHL785BAU Series 6	DHL575CAU Series 6	DHL555BAU Series 4	DFR097E50A Series 6	DFR097A50A Series 4	DFR067A50A Series 4	DFL064W50A Series 2
Туре		Canopy	Canopy	Canopy	Canopy	Integrated	Integrated	Integrated	Integrated	Slideout	Slideout	Slideout	Slideout
Dimensions	Width (cm)	90	90	90	60	86	70	52	53	90	90	60	60
	Appliance dimensions (H x W x D)	628-954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	672–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	799-976 x 900 x 500mm (ducted) or 799-976 x 900 x 500mm (recirculated)	799–976 x 600 x 500mm (ducted) or 799–976 x 600 x 500mm (recirculated)	418 x 860 x 282mm	418 x 700 x 282mm	418 x 520 x 300mm	255 x 530 x 380mm	426 x 898 x290mm	426 x 898 x 290mm	426 x 598 x 290mm	203 x 598 x 290mm
	Built-in Dimensions (H x W X D)					418 x 836 x 264mm	418 x 676 x 264mm	418 x 496 x 264mm	255 x 500 x 350mm	385 x 524 x 290mm	385 x 524 x 290mm	385 x 524 x 290mm	162 x 526 x 290mm
Design		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish
	LED display	•						•		•			
	On/Off main switch control	•	•	•	•	•	•	•		•			
	Electronic controls for power and light	•					•			•	•	•	
	Electronic push button controls for power and light		•			•		•					
	Slide controls for power and light								•				
	Rocker switches for power and light			•	•								•
	Concealed power and light controls										•	•	•
	Lighting	3 x 3W LED SoftLights with dimmer function	3 x 3W LED lights	2 x 20W halogen lights	2 x 20W halogen lights	2 x 1W LED lights with dimmer function	2 x 20W halogen lights	2 x 1W LED lights	2 x 20W halogen lights	2 x 3W LED Softlights with dimmer function	2 x 3W LED lights	2 x 3W LED lights	2 x 20W halogen lights
Power	Maximum extraction rate	810m³/h	730m³/h	780m³/h	730m³/h	820m³/h	730m³/h	610m³/h	650m³/h	730m³/h	740m³/h	740m³/h	400m³/h
functions	3 power levels plus 2 intensive settings	•	·							•			
	3 power levels plus 1 intensive setting		•			•	•	•	•		•	•	
	3 power levels			•	•								•
	Intensive setting with automatic switch back	•	•			•	•	•		•	•	•	
	to previous setting 6 min Residual shutdown with automatic run-on time 1–10 min	•				• (30 mins)				•	•	•	
	Rim ventilation system	•				•	•	•					
	EcoSilence Drive® brushless motor	•	•			•				•	•	•	
	Powerful single motor with twin fan			•	•		•	•					
	Powerful twin motor								•				
	Powerful single motor												•
Noise*	Noise min./max.	44/66dB	45/55dB	49/70dB	49/70dB	41/64dB	53/66dB	50/67dB	41/59dB	40/54dB	43/55dB	43/50dB	59/68dB
	Noise max. (intensive setting)	72dB	65dB	·	·	71dB	69dB	70dB	69dB	65dB	68dB	68dB	,
	Sound insulation mats	•	•							•			
Convenience	Dual layer metal grease filters		•	•	•	•	•	•	•	•	•	•	•
	Dishwasher-safe metal grease filter	• (3)	• (3)	• (3)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)	• (2)
	Saturation indicator for filters					•				•			
Technical requirements		269W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	139W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	255W total connected load; 220-240V / 50Hz; 120mm tube connection diameter	255W total connected load; 220–240V / 50Hz; 120mm tube connection diameter	272W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	315W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	252W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	240W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	146W total connected load; 220–240V / 50Hz; 120 and 150mm tube connection diameter	146W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	140W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter	145W total connected load; 220-240V / 50Hz; 120 and 150mm tube connection diameter
Included accessories										Stainless steel pelmet included as seperate	Stainless steel pelmet included as seperate	Stainless steel pelmet included as seperate	Stainless steel pelmet included as seperate
Optional	CleanAir Recirculation kit	DSZ6240	DSZ6240							accessory* DSZ4680	accessory* DSZ4680	accessory* DSZ4680	accessory^
accessory	Recirculation kit	D320240	5520240	DHZ5275	DHZ5275	DHZ5605	DHZ5605	DHZ5605		2024000	2324000	2024000	DSZ4545
	Charcoal filter for recirculation			51125215	51120210	51120000	21120000	5/120000	DHZ7305				2024040
	White pelmet									DSZ4952	DSZ4952	DSZ4652	DSZ4652
	Black pelmet									DSZ4956	DSZ4956	DSZ4656	DSZ4656
	Stainless steel pelmet for front controls									DSZ4965			
	Installation kit for 90cm cupboard									DSZ4920	DSZ4920		
Other	Ducted and recirculated air operation	•	•	•	•	•	•	•	•	•	•	•	•

Reference Guide Rangehoods

Air extraction calculation examples to help you calculate your own requirements

Kitchen dimensions: L x W x H	Room volume	Minimum extraction rate (6 x per hour)	Maximum extraction rate (12 x per hour)
3 x 4 x 2.5m =	30m³	6 x 30m³ = 180m³/h	12 x 32m³ = 360m³/h
4 x 4 x 2.5m =	40m³	6 x 40m ³ = 240m³/h	12 x 40m³ = 480m³/h
4 x 5 x 2.5m =	50m³	6 x 50m³ = 300m³/h	12 x 50m³ = 600m³/h
Calculate yourself			

Measurement of air extraction as used by Bosch

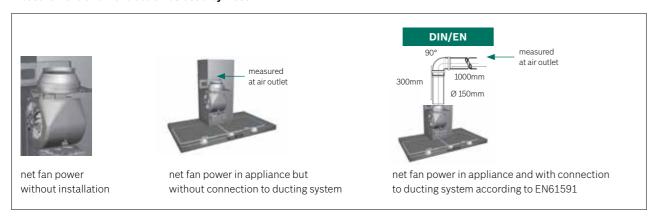

Reference Guide Dishwashers


Type Built-under Semi-integrated Fully integrated Fully integr	Fully integrated 4 Star (13.4L) 4 Star (230kWh)
Water Star rating (Litres per wash) 5 Star (12L) 5 Star (12L) 4 Star (13.4L) 4 Star (13.4L) 5 Star (12L) Energy Star rating (kWh per year) 4 Star (235kWh) 4 Star (235kWh) 4 Star (230kWh) 2 Star (230kWh) 2 Star (230kWh) 2 Star (230kWh) 2 Star (230kWh)	4 Star (13.4L) 4 Star (230kWh)
Energy Star rating (kWh per year) 4 Star (235kWh) 573 573 573 573 573 573 573 573 573 573 573 573 573 <t< th=""><th>4 Star (230kWh)</th></t<>	4 Star (230kWh)
Dimensions Appliance dimensions (H x W x D) 815-875 x 598 x 573 815-875 x 598 x	
Capacity International place settings 15 15 15 14 14 15 Design Interior tub material Stainless steel Stainless steel Polinox Polinox Stainless steel TFT Full Colour Display 2 Displays 1 Display TimeLight™ Floor Projection • • EmotionLight internal lighting • • Anti-fingerprint finish • •	815-875 x 598 x 550
Interior tub material Stainless steel Stainless steel Polinox Polinox Stainless steel TFT Full Colour Display 2 Displays 1 Display TimeLight™ Floor Projection InfoLight™ Floor Projection EmotionLight internal lighting Anti-fingerprint finish • Stainless steel Polinox Polinox Stainless steel 1 Display 1 Display	14
TFT Full Colour Display 2 Displays 1 Display TimeLight™ Floor Projection InfoLight™ Floor Projection EmotionLight internal lighting Anti-fingerprint finish 1 Display ■	Polinox
TimeLight™ Floor Projection InfoLight™ Floor Projection EmotionLight internal lighting Anti-fingerprint finish	
InfoLight™ Floor Projection EmotionLight internal lighting Anti-fingerprint finish	
EmotionLight internal lighting Anti-fingerprint finish	•
SensorTruch Buttons	
CONTRACTION UNITED TO THE CONTRACT OF THE CONT	
Auto Auto Gentle 35-45°C	
programs Auto Wash 45-65°C	•
Auto Intensive 65-75°C • • •	
Wash Pre-Rinse	•
programs Pots & Pans 70°C	•
Eco Wash 45°C	•
Quick 29min 45°C	•
Quick 60min 65°C	
ExtraQuiet 40 dB (50°C)	
Speciality Glass Wash 40°C • • •	
programs Super Wash 60°C	•
Wash SpeedPerfect® / VarioSpeed ● ● ● ●	•
options HalfLoadPlus	•
IntensiveZone™	
HygienePlus™ •	
Machine Care	•
ExtraDry	•
ActiveWater AutoBrillaince™ • • • •	•
Features AquaSensor™	•
detergent system	•
EcoSilence Drive® • • • •	•
3 stage self-cleaning filter ●	•
Heat Exchanger	•
Flexibility VarioDrawer™ Pro • Pro	
Basket System VarioFlexPro VarioFlexPlus VarioFlex VarioFlex VarioFlex VarioFlex VarioFlex™ Pro	VarioFlex
Rackmatic™ Plus	•
Cutlery basket • • • •	•
GlassSecure tray • •	
3 small item clips • •	•
Large Item Sprayhead • • • • • •	•
Vapour barrier plate • • • • • •	•
Convenience dB rating / ExtraQuiet rating 42 dB / 40 dB 44 dB 46 dB 46 dB 42 dB	46 dB
Time delay • • • • • • • • • • • • • • • • • • •	•
Safety AquaStop™ Plus • • • • • •	•
Child lock	•

Accessories

Look online at www.bosch-home.com.au/store to purchase Bosch accessories and spare parts:

Oven and Cooker Accessories	Wire rack for universal pan Fits into the universal pan for all grilling applications. Universal pan and wire rack can be removed together.	HEZ324000	Professional pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ633073
	To suit all Bosch 60cm ovens (except HBA13B253A) and all 60cm combination steam and microwave ovens	HEZ327000	Wire rack (standard) To suit all Bosch Series 8 60cm ovens	HEZ634000
	Pizza baking stone with wooden bread paddle. Baking stone is pyrolytic proof. To suit all Bosch 60cm ovens and all 60cm combination steam and microwave ovens		Glass pan To suit all Bosch 60cm ovens and all 60cm combination steam and microwave ovens	HEZ636000
	Wire rack For all grilling applications. To suit all Bosch 60cm ovens except HBA13B253A	HEZ334000	1 level telescopic rail, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638170
d Par	Stainless steel roasting pan Stainless steel roasting pan with glass lid, induction suitable. To suit all Bosch 60cm ovens except HBA13B253A	HEZ390011	2 level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638270
	Porcelain tray - small To suit Bosch Series 8 60cm combination steam oven CSG656RS1A, CDG634BS1	HEZ36D153P	3 level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638370
	Porcelain tray – large To suit Bosch Series 8 60cm combination steam oven CSG656RS1A, CDG634BS1	HEZ36D353P	Metal strip To suit all Bosch 60cm ovens and all 60cm steam, combination steam and microwave ovens	HEZ660060
	Pizza pan To suit all Bosch 60cm ovens and all 60cm combination steam and microwave ovens	HEZ617000	Wire rack (microwave) To suit Bosch Series 8 60cm microwave ovens CMG633BS1B, CMG656RS1A	HEZ634080
	Split grill tray, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ625071	Wire rack (steam) To suit Bosch Series 8 60cm combination steam oven CSG656RS1A	HEZ664070
	Enamelled baking tray – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ631070	Glass dish (pyrex style) To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ864000
	Universal pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ632070	Glass roasting dish, 5.11 To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ915001
	Lid for Professional pan To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ633001		



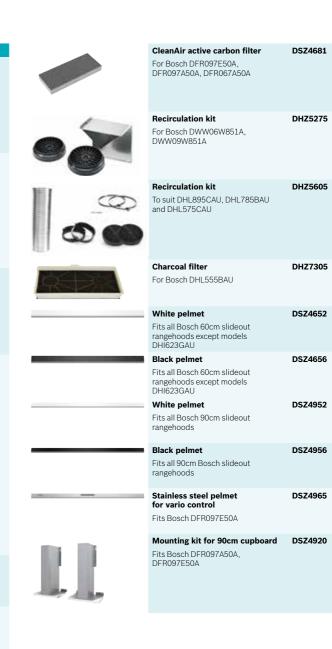



96 | Bosch built-in catalogue


Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Series 8 | 60cm Built-in Pyrolytic Oven with Added Steam







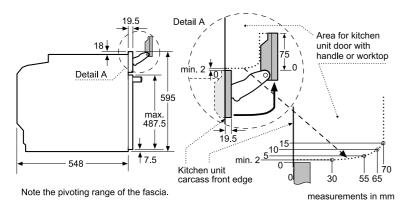

HRG6767S2A

Series 6 | 60cm Built-in Ovens







*20 mm for metal fascias

Measurements in mm

HBA73R350B, HBA63B150B, HBA23B151A, HBA13B254A

Series 6 | 60cm Built-in EcoClean Ovens







* 20 mm for metal fascias Measurements in mm

HBA33B150A, HBA13B253A


Series 8 | 60cm Built-in Pyrolytic Ovens






HBG6767S1A, HBG6753S1A, HBG675BS1B, HBG672BS1A, HBG655HS1A, HBG655HW1A, HBG633BS1A

Series 6 | 90cm Built-in Oven






Technical diagrams


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.


Series 6 | 60cm Built-in Double Oven Back panel open




HBM43S550A, HBM43B250A


Series 8 | 60cm Built-in Pure Steam Oven






Series 8 | 60cm Built-in Combination Steam Oven






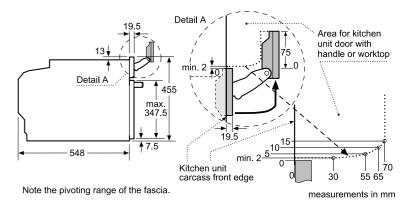


CSG656RS1A

Series 8 | 60cm Built-in Warming Drawer





Over a warming drawer compact ovens with an appliance height of 455 mm can be installed.


measurements in mm BIC630NS1A



Series 8 | 60cm Built-in Combination Microwave Oven







Minimum distance from th

*** With fitted oven underneath

possibly more; see space requirements for the oven

measurements in mm

hob cut-out to the wall

Recessed depth

PXX675DC1E

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation

details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm. Series 8 | 60cm Built-in Coffee Machine Series 8 | 60cm Built-in Warming Drawer 287.5 590 `560† 548 (with plug) 515 (without plug) Over a warming drawer ovens with an appliance height of 595 mm can be installed. removed from the front An intermediate floor is not required Recommended installation height 95-145 cm. measurements in mm measurements in mm Left corner installation min. 350 measurements in mm measurements in mm measurements in mm CTL636ES1 BID630NS1A Series 6 | 90cm Black Tempered Glass Series 6 | 75cm Black Tempered Glass FlameSelect Gas Cooktop FlameSelect Gas Cooktop For installation flush with surrounding surfaces -758 -_min. 560max. 717 480-490+2 Chamfe 90-500+2 min. 600 max. 1 mm min. 600 * Minimum distance from Minimum distance from the hob cut-out to the wall the hob cut-out to the wall ** Position of gas connection in the cut-out Position of gas connection in the cut-out With fitted oven underneath, possibly more; *** With fitted oven underneath, possibly more: see space requirements for the oven see space requirements for the over measurements in mm measurements in mm measurements in mm Series 6 | 60cm Black Tempered Glass FlameSelect Gas Cooktop For installing flush with surrounding For installation flush with -921 surrounding - 596± surfaces -560 Chamfer max. 1 mm *min. 100 Chamfer 480-490+2 max. 1 mm

Minimum distance from

PPH6A6B20A

measurements in mm

PPS9A6B90A

the hob cut-out to the wall

Position of gas connection in the cut-out

*** With fitted oven underneath, possibly more;

see space requirements for the oven

Technical diagrams

Minimum distance from

** Recessed depth

PXV975DC1E

measurements in mm


the hob cut-out to the wall

*** With fitted oven underneath min. 30,

possibly more; see space requirements for the oven

measurements in mm

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

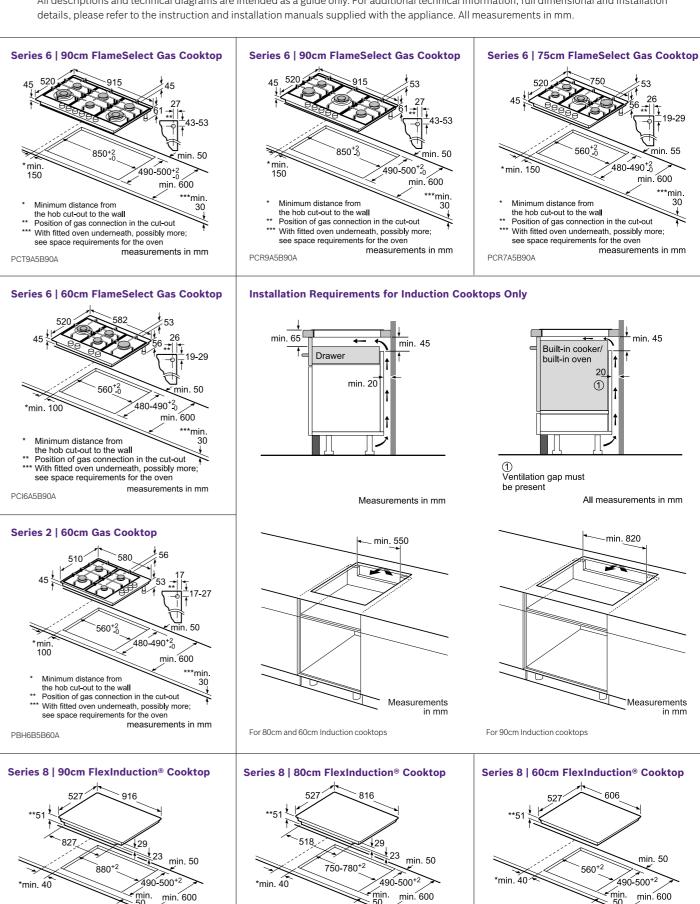

Minimum distance from

Recessed depth

PXE875DC1E

the hob cut-out to the wall


*** With fitted oven underneath min. 30,

possibly more; see space requirements for the oven

100 | Bosch built-in catalogue


Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

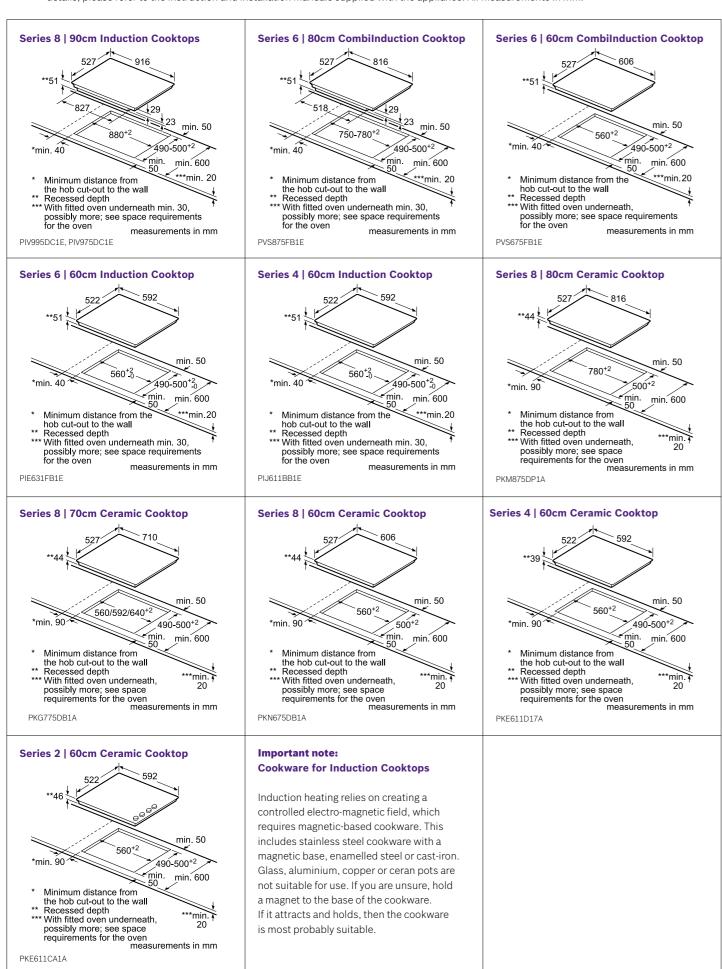


Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

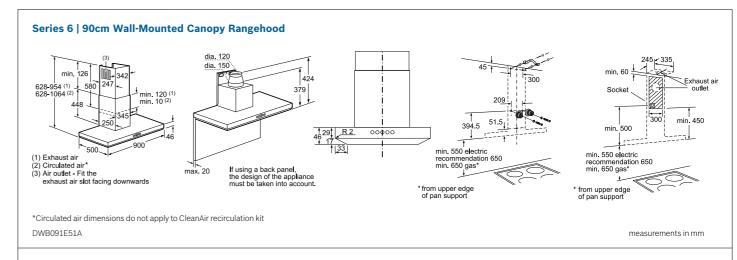



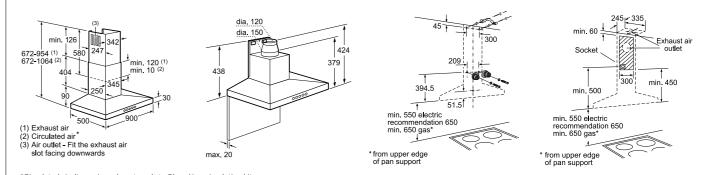


*Circulated air dimensions do not apply to CleanAir recirculation kit

DWW097A50A


measurements in mm


Series 2 | 90cm Wall-Mounted Canopy Rangehood

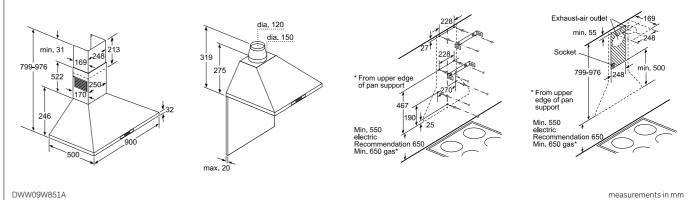


......









DWW06W851A measurements in mm


102 | Bosch built-in catalogue more information www.bosch-home.com.au | 103


Technical diagrams


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Series 8 | 86cm Integrated Rangehood ø 120 294 | ' 338 | 832 **|**-259− **- 282** -DHL895CAU measurements in mm

Series 6 | 70cm Integrated Rangehood










measurements in mm

Series 6 | 52cm Integrated Rangehood










measurements in mm

Series 4 | 53cm Integrated Rangehood








DHL555BAU measurements in mm


Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

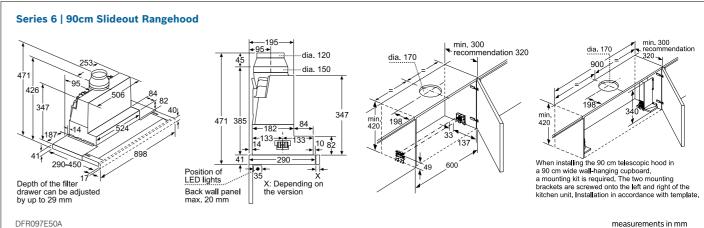


measurements in mm

Series 4 | 90cm Slideout Rangehood

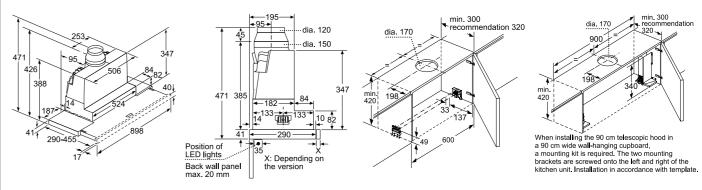


DFR097A50A measurements in mm

Series 4 | 60cm Slideout Rangehood

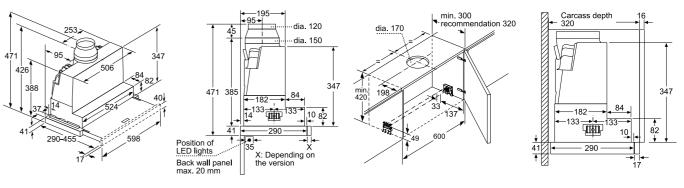

DFR067A50A



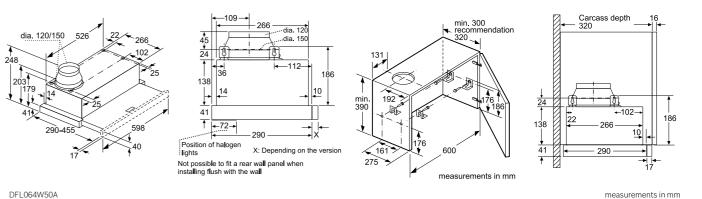

more information www.bosch-home.com.au | 105


Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.


Series 8 | Built-under Dishwashers


Series 6 | Built-under Dishwashers 600 598 573 min. 95 max. 117 max. 155

SMU66MS02A, SMP66MX01A measurements in mm



Series 4 | Semi-integrated Dishwashers

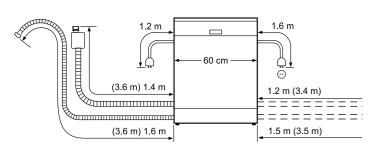




() values with extension kit


SMI46GS01A

SMU88TS04A

measurements in mm

Fully integrated Dishwashers

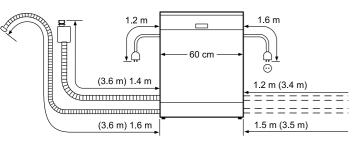





() values with extension kit


SMV88TX01A, SMV46GX01A

measurements in mm

Series 8 | Fully Integrated Bottom Mount Fridge Freezer







Notes	

This much is for sure: you can trust in our service.

Reliable, experienced, fast. The customer service of Bosch; before and after purchase.

Quality service straight from the manufacturer. Original Bosch.

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

Reliability guaranteed. No compromises.

All Bosch home appliances are produced with maximum care using high-quality materials. We promise it in our 2-year manufacturer's warranty on all appliances.

Lifetime service. It goes without saying

Once your warranty period is over, we are still there to assist you. You can rely on expert care and first-rate service throughout the life cycle of your appliance. From missing instruction manuals to appliance repair – we take care of everything.

Original accessories. Effective care products.

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

Extensive customer service network. Just a call away.

Customer Care

Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

Service & Repairs

Our team is there to provide the right advice on faults, arranging a visit of a service engineer and ordering the right accessories or spare parts.

Customer care, service and repairs: 1300 369 744

24 Hour phone support Monday to Friday*

*Phone lines open 7am Monday until midnight on Friday.











@BoschHomeAU



BSH Home Appliances Pty Ltd

1555 Centre Road Clayton VIC 3168

Postal Address

Locked Bag 66, Clayton South VIC 3169

Customer Line Phone: 1300 369 744

www.bosch-home.com.au

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Bosch retailer for the latest information.

Whilst every care has been taken in the preparation of this publication, BSH does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KRD 05/2017 - BH 3160 B







