







Bosch – a brand you can trust.



Design

Our quest for technical perfection, perceivable quality and simple operation is reflected in our designs. Bosch is the No. 1 brand in design, with over 200 design awards over the past five years. Tangible quality and engineering precision support the functions of each appliance and serve to improve quality of life for the user.



Quality

Our years of experience in home appliances paired with the latest German engineering allow us to manufacture quality products that are easy to use and deliver perfect results.



Performance

With Bosch Assist and advanced sensor technology found in PerfectBake™ and PerfectRoast™, your Bosch Series 8 ovens and compact appliances will modify the cooking process from start to finish for perfect baking and roasting results.



Convenience

A little peace of mind for your daily life at home with Bosch sensor technology for perfect cooking results. Our FlameSelect® gas cooktop technology will let you adjust power levels precisely and our self-cleaning functions will save you the trouble of cleaning up.



Sustainability

This signet denotes products that focus on energy and water efficiency while achieving top performance based on Bosch technologies - and, like all Bosch products, have been manufactured with the aim of minimising their impact on the environment. The signet stands for the resource-efficiency of our products - quite simply, for their 'Green Technology'.

Find the right appliance for your dream kitchen.

Ovens & Compact Appliances pages 12-41



60cm built-in ovens

Our ovens combine highquality stainless steel and black glass for a sleek finish on all models. Multiple cooking and cleaning options offer convenience.



Combination steam and pure steam ovens

Cooking with steam helps retain vitamins and minerals in fresh foods, as well as maintain original colour, shape and consistency.



Combination microwave and pure microwave ovens

Add speed to your traditional cooking process without compromising on taste.



Coffee machine

Whether your preference is a skinny latte, a double shot cappuccino or a delicious hot chocolate, our coffee machine brings café-style drinks to your home.



Warming drawers

Ensure food stays at just the right serving temperature. You can also defrost, prove dough or slow cook.



90cm built-in ovens

With a large interior cavity, boasting 112 usable litres (net), pyrolytic self cleaning function and telescopic rails for total convenience.



Double ovens

Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



Freestanding cookers


Freestanding cookers offer total flexibility in your kitchen layout. Our models combine the latest ovens and cooktops in one appliance with perfect precision.

Cooktops pages 42-65



2-in-1 vented cooktop

For freedom and flexibility in designing your kitchen, we've developed a 2-in-1 cooktop with integrated ventilation. This appliance combines the latest technologies of our induction cooktops and rangehoods in a single appliance.



Induction cooktops

Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.



Gas cooktops

The cooktop of choice in most professional kitchens, the new Bosch FlameSelect® gas cooktops are innovative, stylish and help you to always get perfect results.



Ceramic cooktops

With their electronic touchcontrols and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.

Rangehoods pages 66-77



Canopy wall-mounted rangehoods

Canopy wall-mounted rangehoods provide a focal point in any kitchen. Choose a design that compliments your style, plus they are also packed full of convenient features.



Integrated rangehoods

Sleek in design, Bosch fully integrated rangehoods are neatly concealed beneath the cupboard for a seamless look in the kitchen. Performance that is not seen or heard.



Slideout rangehoods

Extends when in use and slides neatly away when not in operation.

Dishwashers pages 78-93



Freestanding dishwashers

Ideal replacement dishwasher, complete with kick panel and removable worktop. You can raise the height of the dishwasher so that the control display meets the benchtop.



Under bench dishwashers

Can be fitted into a new or existing kitchen with style. It is height adjustable for a flush fit and can be installed with a continuous kick panel for a seamless integration with kitchen cabinetry.



Semi-integrated dishwashers

Can be fitted with a door panel to match the design of your kitchen, while providing a focal point in the visible, easy to use control panel. A continuous kick panel provides seamless integration.

Refrigeration pages 94-99



Fully integrated dishwashers

Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry with a control panel that is neatly integrated into the top of the dishwasher door.



Slimline 45cm dishwashers

Ideal for kitchens with limited space. Available as a freestanding stand-alone model and as an under bench model with adjustable height for a flush fit.



Modular dishwashers

Offering the freedom to perfectly coordinate your kitchen. ActiveWater™ Smart modular dishwashers can be installed individually. Ideal for grouping together with matching Bosch appliances.



Built-in refrigeration

Concealed behind panels that match the rest of your kitchen, this fully integrated fridge-freezer fits seamlessly into your dream kitchen.

Freestanding refrigeration

Freestanding fridges fit any kitchen to suit your needs.



Contents

Ovens & Compact Appliances	
Built-in ovens & compacts	24-33
Series 8 black glass ovens & compacts	24-25
Series 8 stainless steel ovens & compacts	26-29
Series 6, 4 & 2 stainless steel ovens & compacts	30-33
Large capacity ovens	36-37
90cm ovens	36
Double ovens	37
Freestanding cookers	40-41
Cooktops	
2-in-1 Cooktop with integrated ventilation	49
Induction cooktops	52-54
Gas cooktops	58-60
Ceramic cooktops	64-65
Rangehoods	
Wall-mounted rangehoods	72-73
Integrated rangehoods	74-75
Retractable slideout rangehoods	76
Dishwashers	
Fully integrated dishwashers	86
Semi-integrated dishwashers	87
Under bench dishwashers	88-89
Freestanding dishwashers	90-92
Slimline & compact dishwashers	93
Refrigeration	
Built-in refrigeration	97
Freestanding refrigeration	98
Reference guides	100-129
Accessories	130-131
Technical diagrams	132-145
Customer service	146



Bosch | Good, Better, Best

Design your kitchen

Your every day kitchen: Look for Series 2 & 4

These appliances are perfect for first time home owners wanting reliable appliances in a contemporary design that deliver value for money.



Series 4 | DFS067A50A 60cm Slideout Rangehood



Series 4 | HBA534ES0A EcoClean Direct Oven



Series 4 | PIJ611BB1E 60cm Induction Cooktop



Series 2 | PBH6B5B90A 60cm Stainless Steel Gas Cooktop



Series 4 | SMS46KI01A Freestanding dishwasher


Want a bit more? Look for Series 6

These appliances are perfect for families that need easy to operate home appliances with additional cooking features, a timeless design and German quality.

OR



Series 6 | COA565GS0A Microwave Oven with Steam Function



Series 6 | PVS675FB5E 60cm Combilnduction® Cooktop



Series 6 | DWB97LM50A 90cm Wall-mounted Stainless Steel Canopy Rangehood



Series 6 | HBT578FS2A 60cm Pyrolytic Oven



Series 6 | PCR7A5B90A 75cm Stainless Steel Gas Cooktop



Series 6 | SMI66MS01A Semi-integrated Dishwasher

Best in class: Look for Series 8

These appliances are perfect if you want the latest technology with a premium finish and outstanding German quality. With a self-cleaning oven, steam oven, microwave oven, coffee machine and warming drawer all your cooking needs are covered. The FlexInduction® cooktop makes cooking to perfection a breeze.



Series 8 | HRG6769B2A 60cm Pyrolytic Oven with Added Steam




Series 8 | CSG656RB1A 60cm Combination Steam Oven



Series 8 | CMG633BB1A 60cm Combination Microwave Oven



Series 8 | BIC630NS1A 60cm Warming Drawer



OR

Series 8 | PXX675DC1E 60cm FlexInduction® Cooktop



Series 6 | PPS9A6B90A 90cm Black Tempered Glass Gas Cooktop



Series 8 | DHL895DAU 86cm Integrated Rangehood



Series 8 | SMV88TX02A Fully Integrated Dishwasher



Ovens & Compact Appliances



Design

Put a new spin on your cooking with the Bosch oven range.

Each Bosch control panel is simple and intuitive, making cooking easier than ever.

Series 8 TFT Touch Graphic Display



The iconic control ring and clear TFT screen display, combined with the DirectSelect TouchControl buttons, make operating the Series 8 ovens simpler than ever before. Food images and helpful prompts guide you through each step, giving you total flexibility and control of cooking functions.

Series 8 TFT Touch Symbol Display



The intuitive control ring and clear TFT display with DirectSelect icons make it easy to operate your oven. Shortcuts to the two most commonly used heating functions, helpful icons and clear descriptions inside the control ring provide all the information you need to keep track of your cooking.

Series 6 LCD-display



Series 6 ovens are equipped with a white LCD-display and retractable knobs. The temperature appears in the display and can be set using the +/- knob. During preheating, the rising temperature is indicated by the lengthening of the red light line. When the AutoPilot function is used, this red line becomes shorter as the program progresses.

Series 4 LED-display



The new LED-display is equipped with pop-out knobs for easier cleaning and comes with a red display. Up to 10 AutoPilot programs and cleaning functions as well as temperature adjustments are controlled via the display.

Premium Design

Using the highest quality stainless steel and glass, our ovens and compact appliances combine beautifully to deliver a timeless, elegant and stylish finish to any kitchen with sleek, co-ordinated lines and matching panels.



Technology

Bosch Assist

Bosch sensor technology. The oven that cooks by itself.



Bosch Assist

The advanced sensor technology found in PerfectRoast™ and PerfectBake™ offers an extensive menu of food categories that help create your perfect meal. Simply select the desired dish, press start and your oven automatically sets the ideal heating mode, temperature and length of time, monitoring and modifying the cooking as required for the best results. Of course, you can also select these settings yourself every bit as easily.



PerfectBake™

Baking has never been easier, thanks to the unique PerfectBake™ sensor. This function constantly measures the precise moisture level of your dishes and automatically adjusts the entire baking process, which means you'll never have to set the heating mode, length of time or temperature ever again. Simply choose the type of dish, such as 'Cake in Tin', press start and let your Bosch oven bake your cake to perfection*.



PerfectRoast™ meat probe

Achieve the perfect roast lamb, Christmas turkey, stuffed meats and fish. The PerfectRoast™ meat probe features three sensitive measuring points and uses the lowest temperature reading to determine the core temperature before calculating the residual cooking time. The results are simply perfect. Used manually or with Bosch Assist, you can modify the suggested core temperature (within a recommended range) and combine with microwave and steam cooking functions.

AutoPilot



AutoPilot automatic programs

The AutoPilot program helps achieve the best possible results with very little effort. Just insert your dish, enter its weight and select the desired program from the menu. AutoPilot then determines the cooking mode, temperature and cooking duration.

Your favourite café is now open 24/7.

Latte, cappuccino or espresso? With the Series 8 built-in coffee machine, you can treat yourself and your guests to any beverage at the touch of a button. Bosch barista technology guarantees a full-bodied aroma and perfect crema - for coffees as delicious as those brewed by your favourite café.

SensoFlow System for a perfect aroma

The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow System heats the water to just the right temperature, for a full-bodied espresso aroma from the first to the last cup.

Your choice of coffee at the touch of a button

With the MyCoffee function, save your 8 favourite beverages with individual names. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.

Automatic cleaning of the milk system

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato instead of cleaning.



Warming drawers

Our Series 8 warming drawers can do much more than just keep food and plates warm; they're also perfect for slow-cooking meat, defrosting frozen foods and proving dough.

The warming drawer's from Bosch can be installed either separately or in combination with Series 8 ovens, compact ovens and our built-in automatic coffee machine. The practical 'push and pull' technology ensures they are always easy to open, even when you have both hands full. They come in two sizes: 140mm high with 20 usable litres (net) and 290mm high with 52 usable litres (net).



Technology

Steams so gently that even vitamins stay for dinner.

There's no healthier or tastier way to prepare food than steaming. Cooked in gentle steam, foods retain their original vitamins and aromas while releasing their full natural flavour. Vegetables stay crisp, poultry and fish become juicy and tender. If you prefer, you can even cook without fat. Thanks to an integrated water tank, no direct water connection is needed, giving you much more flexibility in deciding where to place your oven.




Steam oven

With the Series 8 steam oven you can prepare an entire meal on up to three levels at once - for example, cook salmon, asparagus and rosemary potatoes simultaneously – and everything will turn out perfectly. Or perhaps you'd rather cook a sweet dessert at the same time? No problem: The humidity prevents flavours from intermingling so that each dish retains its own authentic flavour.

Combination steam oven

With the Series 8 combination steam oven, you can bake, steam or both. Combine the benefits of pure steam cooking with functions of a conventional oven and discover the results of giving your roasts and home-made bread a crispy finish. The premium combination steam oven also comes with Bosch Assist, the PerfectBake™ sensor and PerfectRoast™ meat probe for perfect cooking and baking results.



Preserving vitamins and minerals

Dishes that are cooked in hot steam not only retain their vitamins and minerals, but also their full, natural flavour. So you can also go easy on the extra seasoning and use much less salt when cooking. In short, healthy food has never tasted better.

Added steam function

Enhance your cooking results by adding a little bit of moisture from time to time, thanks to the added steam function. Whether you're reheating dishes, proving dough, baking or roasting, you can set the oven to automatically add bursts of steam, or you can add steam manually to regulate the intensity. Create succulent roasts and perfectly browned bread crusts with ease

Your every wish fulfilled.

Our built-in microwave with steam function is equipped with an added grill – perfect for grilling with up to 2000W. Of course, it also serves as a microwave – for example, for quickly defrosting or warming up dishes. Because it has a water tank, this compact oven can be used both as an added steam microwave and for pure steam cooking.



Microwave with steam function

With the new Series 6 microwave with steam function, you can prepare your dishes on a single level with perfect results. And it isn't just the preparation that's easy: cleaning and the occasional descaling can also be performed with minimal of fuss.

Combination microwaves

Sometimes you just can't get the food on the table fast enough. All our microwave ovens help you maintain perfect control over your menu and your schedule. Whether you're heating up baby food, pre-cooked meals or frozen foods, you'll get outstanding results quickly, hygienically and without compromising on taste. So instead of killing time waiting for dinner to be ready, you and your loved ones will have much more time to enjoy it.



Automatic functions to speed up your cooking

Heat, defrost, roast or grill anything, thanks to up to 1000 watts and up to five power levels. The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, enter its weight and select the desired program from the

Technology

Features and functions for everyday use.



Half Trays

The new Series 6, 4 and 2 slim sized universal pans are ideal for preparing two versions of the same dish. They're also perfect for smaller quantities. For example, cook potato wedges on one slim tray and stuffed tomatoes on a second one. Because the trays are separated, the liquid from the tomatoes won't flow into the potatoes. And when dishes need to be refrigerated before or after cooking, they also fit inside Bosch refrigerators - as well as our dishwashers for cleaning.




CoolTouch doors

Bosch ovens meet the highest safety standards: The best Bosch CoolTouch oven doors reach a maximum temperature of only 30°C^{*} . This means that curious children are even better protected against burns. The extra measure of safety is made possible by 30% better ventilation. It gives you a good feeling to know that with Bosch ovens nothing can go wrong.



Precise temperature control

Electronic thermostats monitor the oven cavity temperature to maintain temperature consistency during the cooking process.



Telescopic rail system

The Bosch telescopic rails are fully or partially extendable (depending on model) and are ideal for loading and removing trays with ease. Whether you choose a single or double rail option, all shelves are pyrolytic proof and compatible with microwave and steam cooking. Trays are also interchangeable between Series 8 full-sized ovens and compact appliances, excluding the pure steam compact oven.



SoftMove and SoftClose

SoftMove on Series 8 and SoftClose on Series 6 models is a special damping mechanism. Oven doors open and close softer and guieter than ever. This convenient feature not only offers a premium finish, it also protects the oven and door during the life of the oven.



Lighting

Depending on the model, Bosch ovens and compact appliances offer our classic halogen lighting, LED ceiling light or the new multi-level LED lighting.



Energy-efficient LED lighting offers vibrant illumination and longevity. The multi-level LED lighting offers illumination on each level, which is exceptionally convenient when baking on multiple levels.



Integrated halogen lighting ensures the interior cavity is brightly lit. More efficient than standard lights, they are durable and are designed to last longer.



ClipRail telescopic rails

Standard shelf systems provide no more than three positions for telescopic rails. For Series 6 ovens, Bosch is now offering one telescopic rail system for all levels. These new rails can be installed on any level - including the grill level for more convenient toasting. The level-independent rails are easy to install and uninstall. Therefore they can be easily clicked on a different level.

Features explained

Perfect baking and roasting not only requires the right temperature, but also the appropriate heating function too. From 4D HotAir to slow cooking, Bosch ovens offer heating functions that deliver everything from haute cuisine to everyday feasts.



4D HotAir*

Thanks to 4D Hot Air, you can place your food on any shelf from level one to four, and the results will be consistently perfect. The rotating fan alternates its direction during cooking to distribute heat evenly on every level. And for reliable results 'top to bottom', you can also bake and roast on up to four different levels simultaneously.^



3D HotAir

3D HotAir distributes the heat quickly and evenly throughout the entire oven cavity, allowing you to cook on up to three levels simultaneously. It's especially convenient when you need to cook both sweet and savoury dishes simultaneously without intermingling the flavours.



HotAir Eco/Gentle

HotAir Eco/Gentle uses less energy by using a single tray. This energy-efficient function distributes less heat into the oven and uses residual heat to maintain the set temperature.



Top and bottom heating*

Uses both the upper and lower heating elements. Heat travels to the centre of the oven, which is the best position to obtain the selected temperature. Suitable for traditional baking and roasting, and offers best results for cakes with moist toppings.



Top and bottom heat Eco

In addition to the top and bottom heat function, selected Series 8 ovens feature a new eco-friendly mode, which supports cooking on a single shelf for energy-efficient cooking. Prepare perfect sponges, pound cakes, delicate pastries and bread rolls while saving valuable energy.



Bottom heating

For cooking in a bain-marie and for the final baking stage. The heat is emitted from the lower heating element



Intensive heating

Combines the top element with a more powerful bottom heating element that is perfect for crispy bases and baking in tins.



Hot air grilling*

Achieve rotisserie-style cooking for meat and poultry. The grill and fan alternate, which produces even and crisp cooking results.



Grill, small area or large area

For grilling flat items, such as steaks and sausages, for making toast, and for cooking a gratin.



Pizza setting

Create crispy pizzas or give any dish that extra heat that's needed from underneath by using a combination of heating elements.



Keep warm*

A new feature that keeps cooked food warm.



Slow cooking

For gentle and slow cooking of seared, tender pieces of meat in ovenware without a lid.



Preheat ovenware

A new feature that is useful for preheating ovenware and even dinnerware.



A new function for drying fruits, vegetables and herbs with maximum flavour. This function can also be used for drying out the oven cavity after the added steam function has been used.



Sabbath mode

Set a maximum timer of up to 74 hours using the Sabbath function. You can keep the food in the cooking compartment warm without having to switch the oven on or off



Rapid heating

With rapid heating, you can shorten the heat-up time for selected heating functions, including 4D HotAir and top and bottom heating.



Fan forced hot air

A fan disperses heat evenly for cakes and pastries baked on two levels.



Fan assisted top and bottom heating

Uses both upper and lower heating elements while a fan disperses heat evenly.



Perfect for gentle defrosting of meat, poultry, bread and much more.



Reheating*

For plated meals and baked items. Cooked food is gently reheated. The steam ensures the food does not dry out.



Dough proving*

For yeast dough and sourdough. Dough will rise considerably quicker than at room temperature. The surface of the dough does not dry out.

Features may vary depending on models. Please check individual product specifications. *Possible to use added steam for this type of heating (operation only possible when the water tank is full). ^To cook on all four levels simultaneously, four wire racks are required for best results. For up to three levels, all accessories are suitable, ie. universal tray or baking tray.

Cleaning

At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. This chore is now a thing of the past, thanks to pyrolytic self-cleaning and EcoClean Direct.

Pyrolytic self-cleaning: the oven that cleans itself

During the pyrolytic cleaning function, the oven heats up to 480°C to burn off grease and food residue*. This means you never have to clean your oven again.

Simply follow these 3 steps:

- 1. Activate the pyrolytic cleaning function.
- 2. Choose from three different cleaning levels, depending on the degree of residue that has accumulated.
- 3. Once the program is finished, wipe off the thin layer of ash in the base of the oven.



EcoClean Direct: makes cleaning easier

While your dishes bake or roast, the special direct coating of microfine ceramic particles on the oven cavity walls absorbs grease and residue and breaks them down through oxidation.

Simply follow the below steps and reduce your cleaning time significantly*:

- 1. Activate the EcoClean Direct cleaning program.
- 2. Once completed, clean remaining surfaces that don't have the special coating.
- 3. Wipe the base of the oven and inside of the glass door.



Universal pan and baking tray with ceramic non-stick coating

In addition to the classic universal pan, Bosch is now offering a new universal pan and baking tray for Series 6, 4 and 2 ovens with a ceramic non-stick coating. This special non-stick coating makes the surface easy to clean. And the ceramic coating has another advantage: You no longer need to use parchment paper or to grease the tray, which makes baking, roasting and cleaning much easier.





Serie | 8 Black glass oven & compact range

Pyrolytic ovens.















































60x60cm Pyrolytic Oven

HRG6769B2A 60x60cm Pyrolytic Oven with Added Steam

Key Features

- ▶ 17 heating functions
- ▶ 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Graphic Display
- ► Added steam 1 litre removable water tank with empty tank indicator

60x60cm Pyrolytic Oven

Key Features

HBG6753B1A

- ▶ 13 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Symbol Display

Key Features

HBG675BB2A

- ▶ 13 heating functions
- ► 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Symbol Display

Cleaning

- ► Pyrolytic self-cleaning
- ► Drying function
- ► Descaling program

Cleaning

Convenience

► SoftMove door

► Halogen lighting

► Temperature display

► Pyrolytic self-cleaning

Cleaning

Convenience

► SoftMove door

► Temperature display

► Halogen Lightning

► Pyrolytic self-cleaning

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Multi-level LED lighting
- ► Bosch Assist
- ► PerfectRoast[™] 3 point meat probe
- ▶ PerfectBake[™] sensor
- ► 3-level telescopic rails (pyro-proof)

► Quadruple-glazed CoolTouch door

► Automatic temperature proposal

► AutoPilot10: 10 automatic programs

► 2-level telescopic rails (pyro-proof)

- ► Residual heat indicator

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

Safety

► Quadruple-glazed CoolTouch door

► Automatic temperature proposal

► AutoPilot10: 10 automatic programs

- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

► Residual heat indicator **Supplied Accessories**

▶ 2 wire racks

Safety

► 1 universal pan (pyro-proof)

► Child lock (controls & door)

► 1 grill tray (pyro-proof)

Dimensions (HxWxD) 595 x 594 x 548mm

EcoClean oven.

















HBG633BB1B 60x60cm EcoClean Direct Oven

Key Features

- ► 10 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Symbol Display

Cleaning

► EcoClean Direct: rear wall

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen Lightning

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 grill tray

Dimensions (HxWxD)

595 x 594 x 548mm

Compacts.



























CSG656RB1A 60x45cm Combination Steam Oven

Key Features

- ► 18 heating functions
- ► 47 litres (net) capacity
- ▶ 3 shelf positions
- ► TFT Touch Graphic Display
- ► Multi-level pure steaming 1 litre removable water tank with empty tank indicator

Cleaning

- ► EcoClean Direct: rear wall, side walls and ceiling
- ► Drying function
- ► Descaling program

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► Bosch Assist
- ► PerfectRoast[™] 3 point meat probe
- ► PerfectBake[™] sensor
- ► 1-level telescopic rails

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 non-perforated steam tray
- ► 2 perforated steam trays

Key Features

CMG633BB1A

- ► 7 heating functions
- ► 45 litres (net) capacity
- ▶ 3 shelf positions
- ► TFT Touch Symbol Display
- ► Conventional cooking combined with microwave (up to 900W power)

60x45cm Combination Microwave Oven

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► AutoPilot14: 14 automatic programs

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 1 wire rack
- ► 1 universal pan

Dimensions (HxWxD) 455 x 594 x 548mm

Serie | 8 Stainless steel oven & compact range

Pyrolytic ovens.



























































HRG6767S2A 60x60cm Pyrolytic Oven with Added Steam

Key Features

- ▶ 17 heating functions
- ► 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Graphic Display
- ► Added steam 1 litre removable water tank with empty tank indicator

HBG6767S1A 60x60cm Pyrolytic Oven

Key Features

- ► 13 heating functions
- ▶ 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Graphic Display

Key Features

HBG6753S1A

▶ 13 heating functions

60x60cm Pyrolytic Oven

- ► 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Symbol Display

Cleaning

- ► Pyrolytic self-cleaning
- ► Drying function
- ► Descaling program

Cleaning

► Pyrolytic self-cleaning

Cleaning

► Pyrolytic self-cleaning

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Multi-level LED lighting
- ► Bosch Assist
- ► PerfectRoast[™] 3 point meat probe
- ► PerfectBake[™] sensor
- ► 2-level telescopic rails (pyro-proof)

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► Bosch Assist
- ► PerfectRoast[™] 3 point meat probe
- ► PerfectBake[™] sensor
- ► 2-level telescopic rails (pyro-proof)

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot10: 10 automatic programs
- ► 2-level telescopic rails (pyro-proof)

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

Dimensions (HxWxD) 595 x 594 x 548mm

EcoClean oven.











































60x60cm EcoClean Direct Oven





HBG675BS1B 60x60cm Pyrolytic Oven

Key Features

- ► 13 heating functions
- ▶ 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Symbol Display

Key Features

HBG672BS1A

- ▶ 8 heating functions
- ▶ 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Symbol Display

60x60cm Pyrolytic Oven

Key Features

HBG633BS1A

- ► 10 heating functions
- ► 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Symbol Display

Cleaning

► Pyrolytic self-cleaning

Cleaning

► Pyrolytic self-cleaning

Cleaning

► EcoClean Direct: rear wall

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot10: 10 automatic programs

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot10: 10 automatic programs

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ▶ 1 universal pan
- ► 1 grill tray

Dimensions (HxWxD) 595 x 594 x 548mm

Serie | 8 Stainless steel oven & compact range

Compact appliances.

























..

















CSG656RS2A 60x45cm Combination Steam Oven

Key Features

- ► 18 heating functions
- ▶ 47 litres (net) capacity
- ▶ 3 shelf positions
- ► TFT Touch Graphic Display
- ► Multi-level pure steaming 1 litre removable water tank with empty tank indicator

CDG634BS1 60x45cm Pure Steam Oven

Key Features

- ► 4 heating functions
- ► 38 litres (net) capacity
- ▶ 4 shelf positions
- ► TFT Touch Symbol Display
- ► Multi-level pure steaming 1.3 litre removable water tank with empty tank indicator

CMG656RS1A **60x45cm Combination Microwave Oven Key Features**

- ▶ 13 heating functions
- ▶ 45 litres (net) capacity
- ▶ 3 shelf positions
- ► TFT Touch Graphic Display
- ► Conventional cooking combined with microwave (up to 900W power)

Cleaning

- ► EcoClean Direct: rear wall, side walls and ceiling
- ► Drying function
- ► Descaling program

Cleaning

► Descaling program

Cleaning

► EcoClean Direct: rear wall, side walls and ceiling

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► Bosch Assist
- ► PerfectRoast[™] 3 point meat probe
- ▶ PerfectBake[™] sensor
- ► 1-level telescopic rails

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot20: 20 automatic programs

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► Bosch Assist
- ► PerfectRoast[™] 3 point meat probe
- ► PerfectBake[™] sensor
- ► 1-level telescopic rails

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Safety

- ► Double-glazed door
- ► Child lock (controls)

Safety

- ► Triple-glazed door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 1 wire rack
- ▶ 1 universal pan
- ► 1 non-perforated steam tray
- ► 2 perforated steam trays

Supplied Accessories

- ► 1 non-perforated steam tray
- ▶ 1 perforated steam tray
- ▶ 1 cleaning sponge

Supplied Accessories

- ▶ 1 wire rack
- ▶ 1 universal pan
- ▶ 1 baking tray

Dimensions (HxWxD) 455 x 594 x 548mm

















Coffee machine.















Warming drawers.







CMG633BS1B 60x45cm Combination Microwave Oven

Key Features

- ▶ 7 heating functions
- ► 45 litres (net) capacity
- ▶ 3 shelf positions
- ► TFT Touch Symbol Display
- ► Conventional cooking combined with microwave (up to 900W power)

CTL636ES1 60x45cm Built-in Coffee Machine

Key Features

- ► One-touch preparation
- ► AromaPro Concept: Optimal aroma extraction
- ► SensoFlow System
- ► TFT Touch Graphic Display

Hygiene

- ► Removable brewing unit
- ► AutoMilk Clean

BID630NS1A/BIC630NS1A **60cm Warming Drawers**

Key Features

- ► 40°C-80°C temperature control
- ► BID630NS1A: 52 litres (net) capacity
- ► BIC630NS1A: 20 litres (net) capacity

Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► AutoPilot14: 14 automatic programs

Convenience

- ► MyCoffee function
- ► CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety
- ► SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic

Convenience

- ► Fully extendable telescopic drawer
- ► Ceramic-glass base element
- ► Suitable for: plate warming, keep warm, slow cooking, defrost and proving dough

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 1 wire rack
- ► 1 universal pan

Supplied Accessories

- ▶ 1 BRITA water filter cartridge
- ► 1 measuring spoon
- 1 milk container, connection hose and pipe
- ▶ 1 test strip
- ▶ 1 set assembly screws

Dimensions (HxWxD)

455 x 594 x 375mm

Dimensions (HxWxD)

BID630NS1A: 290 x 594 x 548mm BIC630NS1A: 140 x 594 x 548mm

Dimensions (HxWxD)

455 x 594 x 548mm

Serie 6 Stainless steel oven & compact range

Pyrolytic oven.

































































HBT578FS2A 60x60cm Pyrolytic Oven

Key Features

- ► 10 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display

HBG5575S0A 60x60cm EcoClean Direct Oven

Key Features

- ▶ 7 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display

HBA5570S0A 60x60cm EcoClean Direct Oven

Key Features

- ▶ 7 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display

Cleaning

► Pyrolytic self-cleaning

► EcoClean Direct: rear wall, side walls and ceiling

► EcoClean Direct: rear wall, side walls and ceiling

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 30: 30 automatic programs
- ► 1-level telescopic rails
- ► SoftClose door
- ► Temperature display
- ► Single point meat probe
- ► Automatic temperature proposal

- ► AutoPilot 10: 10 automatic programs
- ► 1 ClipRail telescopic rails
- ► Temperature display

- Convenience
- ► Retractable control knobs ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 10: 10 automatic programs
- ► 1 ClipRail telescopic rails

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ▶ 1 universal pan
- ► 1 grill tray
- ► 1 half tray

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming

- ► SoftClose door
- ► Single point meat probe

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ▶ 1 universal pan
- ► 1 grill tray

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- 2 wire racks
- ▶ 1 universal pan
- ► 1 grill tray

Dimensions (HxWxD) 595 x 594 x 548mm

Compact combination ovens & microwaves.















































COA565GS0A 60x45cm Microwave with Pure Steam

Key Features

- ▶ 4 heating functions
- ► 36 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display
- ► Grill function with up to 2000W
- ► 5 microwave power levels up to 1000W
- ► Pure steaming function 0.8 litre removable water tank with empty tank indicator

CMA585MS0A **60x45cm Combination Microwave Oven**

Key Features

- ► 5 heating functions
- ► 44 litres (net) capacity
- ► LCD Display
- ► Grill function with up to 1750W
- ► Conventional cooking combined with microwave (up to 900W power)

BEL554MS0A 60cm Built-in Microwave

Key Features

- ▶ 5 microwave power levels up to 900W
- ► 25 litres (net) capacity
- ► LED Display
- ► Grill function with up to 1200W

Cleaning

- ► Steam cleaning system for water pipe
- ► Descaling program

Convenience

- ► Retractable control knobs
- ► LED lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 15: 15 automatic programs

Convenience

- ► Retractable control knobs
- ► LED lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 15: 15 automatic programs

Convenience

- ► Retractable control knobs
- ► LED lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 8: 8 automatic programs

Safety

- ► Triple-glazed door
- ► Child lock (controls)

Safety

- ► Triple-glazed door
- ► Child lock (controls)

Safety

► Single-glazed door

Supplied Accessories

- ► Plug-in grid
- ► Glass pan
- ► Steam container

- **Supplied Accessories** ▶ 1 grid high / 1 grid flat
- ▶ 1 turntable

Supplied Accessories

- ► 1 grid high
- ▶ 1 turntable

Dimensions (HxWxD) 382 x 594 x 388 mm

Dimensions (HxWxD) 455 x 594 x 545mm

Dimensions (HxWxD) 454 x 594 x 570 mm

Serie | 4 Stainless steel oven range

Pyrolytic oven.

































HBA574BS0A 60x60cm Pyrolytic Oven

Key Features

- ▶ 7 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

HBA534ES0A 60x60cm EcoClean Direct Oven

Key Features

- ▶ 7 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

Cleaning

► Pyrolytic self-cleaning

Cleaning

► EcoClean Direct: rear wall

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► Temperature display
- ► AutoPilot 10: 10 automatic programs

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1-level telescopic rails

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)

Safety

- ► Triple-glazed door
- ► Child lock (controls)

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 split grill tray

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 split grill tray

Dimensions (HxWxD) 595 x 594 x 548mm

Serie | 2

EcoClean oven.

















HBF133BS0A 60x60cm EcoClean Direct Oven

Key Features

- ► 5 heating functions
- ► 66 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

Cleaning

► EcoClean Direct: rear wall

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming

Safety

- ► Triple-glazed door
- ► Child lock (controls)

Supplied Accessories

- ► 1 wire rack
- ► 1 universal pan
- ► 1 baking tray

Dimensions (HxWxD)

595 x 594 x 548mm





Large capacity ovens.

More room for your favourite dishes.



With up to 112 usable litres of oven capacity, you have even more space for roasting and baking your favourite dishes. The larger capacity, combined with Bosch HotAir even heat distribution means you can cook simultaneously on all levels. The wider trays provide more surface area for roasting big batches of potatoes and vegetables. This makes our 90cm ovens perfect for entertaining your friends and family.

Double ovens



Enjoy the convenience of cooking multiple dishes at the same time with our double ovens. Perfect for entertainers or large families.

Choosing a double oven can also be a great way to save energy; if you would like to cook a small meal, you have the flexibility of using only the smaller cavity oven.

90cm ovens



XXL Cavity - 112 usable litres

The full-size 90cm oven offers 112 usable litres of cooking space and larger baking trays. The increased cavity creates uniform baking results on up to five levels due to the improved heat circulation between the racks.

XL Cavity - 85 usable litres

The compact 90cm oven models have an interior capacity of 85 usable litres. It also comes with the large baking trays which can be used on up to four levels.


90cm oven range

Pyrolytic oven.

Compact 90cm ovens.

Serie 6

















Serie 4





















VBD578FS0 90x60cm Pyrolytic Oven

Key Features

- ► 10 heating functions
- ▶ 112 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display
- ▶ 1 rotisserie kit

VBC578FS0 90x48cm Pyrolytic Oven

Key Features

- ► 10 heating functions
- ▶ 85 litres (net) capacity
- ▶ 4 shelf positions
- ► LCD Display
- ▶ 1 rotisserie kit

VBC5540S0 90x48cm EcoClean Direct Oven

Key Features

- ▶ 7 heating functions
- ▶ 85 litres (net) capacity
- ▶ 4 shelf positions
- ► LED Display

Cleaning

Convenience

► Halogen lighting

programming

► Pyrolytic self-cleaning

► Retractable control knobs

► 1 ClipRail telescopic rails

► Temperature display

► Electronic clock/timer with end-time

► Pyrolytic self-cleaning

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails
- ► Temperature display

Cleaning

► EcoClean Direct: rear wall and side walls

Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ▶ 1 baking tray
- ▶ 1 universal pan insert grid

Dimensions (HxWxD) 594 x 896 x 570mm

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ▶ 1 baking tray
- ▶ 1 universal pan insert grid

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Supplied Accessories

- ▶ 1 wire rack
- ► 1 universal pan
- ▶ 1 baking tray

Dimensions (HxWxD) 475 x 896 x 572mm

Double oven range

Serie | 6





















MBG5787S0A 60x89cm Pyrolytic Double Oven

Key Features

► LCD display

Top Oven

- ▶ 4 functions
- ► 34 litres (net) cavity volume
- ▶ 3 shelf positions

Bottom Oven

- ► 10 functions
- ► 71 litres (net) cavity volume
- ► 5 shelf positions

Cleaning

► Pyrolytic self-cleaning (top and bottom oven)

Convenience

- ► Retractable control knobs
- ► Halogen lighting (top & bottom)
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails
- ► Temperature display
- ► AutoPilot 30: 30 automatic programs
- ► Single point meat probe
- ► SoftClose door
- ► Automatic temperature proposal

Safety

- ► Quadruple-glazed CoolTouch door (top & bottom)
- ► Child lock (controls & door)

Supplied Accessories

- ▶ 2 wire racks
- ▶ 1 universal pan
- ▶ 1 grill tray



Serie 4









MBA534BS0A 60x89cm EcoClean Direct Double Oven

Key Features

► LED display

Top Oven

- ▶ 3 functions
- ► 34 litres (net) cavity volume
- ▶ 3 shelf positions

Bottom Oven

- ▶ 7 functions
- ► 71 litres (net) cavity volume
- ▶ 5 shelf positions

Cleaning

► EcoClean Direct: rear wall

Convenience

- ► Retractable control knobs
- ► Halogen lighting (ceiling)
- ► Electronic clock/timer with end-time programming

- ► Triple-glazed door (top & bottom)
- ► Child lock (controls)

Supplied Accessories

- ▶ 2 wire racks
- ▶ 1 universal pan
- ► 1 grill tray

Dimensions (HxWxD) 888 x 594 x 550mm

Overview

Freestanding cookers from Bosch let you plan your kitchen the way you want.

With a Bosch freestanding cooker, you can be totally flexible in your kitchen layout and in the way you cook. Our models combine the latest ovens and cooktops in one appliance with perfect precision. Induction cooktops allow for faster and more flexible cooking, electric cooktops ensure maximum convenience and our gas cooktops let you cook like a professional.

Freestanding cookers with gas cooktops

Professionally fired up.





High-power wok burner

The powerful wok burner provides up to 14 MJ/h. It is suitable for use with flat-based pans or with a wok using the wok ring provided.



Cast-iron supports

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.

Freestanding cookers with induction cooktops

Flexible on the outside, intelligent on the inside.





CombiZone

With CombiZone you have the freedom to use your biggest pans and trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard zones into one large cooking zone.





MoveMode

You are always in control.

When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is perfect for you. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first highpowered cooking task to the next.



Practical drawer for more storage space for your kitchen utensils.

Our oven features

Fit every kitchen and every need.





3D HotAir

3D HotAir distributes the heat quickly and evenly

throughout the entire oven cavity, allowing you to cook on up to three levels simultaneously.





AutoPilot with up to 30 automatic programs

The AutoPilot program

helps achieve the best possible results with very little effort. Just insert your dish, enter its weight and select the desired program from the menu.





Rotary spit

The rotary spit is ideal for grilling large roasts, such as

rolled roasting joints or poultry. The meat becomes crispy, well-browned and cooked evenly. Uniform grilling from all sides - easily done in your kitchen.





CoolTouch door and child lock

For added safety, selected

Bosch freestanding cookers are fitted with quadruple-glazed CoolTouch doors. The reflective inner glass is designed to keep heat in, while providing a safe-to-touch door on the outside. Child lock doors and displays make the cookers even safer.

Pyrolytic self-cleaning: the oven that cleans itself. During the pyrolytic cleaning function, the oven heats up to 480°C to burn off grease and food residue. Once the program is finished, simply wipe off the thin layer of ash in the base of the oven.

90cm freestanding cookers

LED Displa

Serie 8











HSB838357A 90x90cm Freestanding **Dual Fuel Pyrolytic Cooker**

Key Features

- ▶ 9 heating functions
- ▶ 112 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

Cleaning

► Pyrolytic self-cleaning

Convenience

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ▶ 2 Halogen lights (left & right)
- ► Electronic clock/timer
- ► 1-level telescopic rails
- ► SoftClose door

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

Cooktop **Key Features**

- ► 6 gas burners:
 - 1 x 14 MJ/h wok burner
 - 1 x high-speed burner
 - 2 x standard burners
 - 2 x economy burners
- ► Suitable for NG (ex factory) and LPG (via included conversion kit)

Convenience

- ► One-hand electronic ignition via controls
- ► Continuous enamelled cast-iron trivets with rubber feet

Safety

► Flame failure device fitted to each burner

Serie 6





Height Adjustable







HSB738357A 90x90cm Freestanding

Key Features

▶ 8 heating functions

Dual Fuel Cooker

- ▶ 112 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

Cleaning

► Catalytic liners: rear wall and side walls

Convenience

- ► Height adjustable legs by 50mm
- ▶ 21cm utensil drawer
- ▶ 2 Halogen lights (left & right)
- ► Electronic clock/timer
- ► 1-level telescopic rails

Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

Cooktop

Key Features

- ► 6 gas burners:
 - 1 x 14 MJ/h wok burner
 - 1 x high-speed burner
 - 2 x standard burners
 - 2 x economy burners
- ► Suitable for NG (ex factory) and LPG (via included conversion kit)

Convenience

- ► One-hand electronic ignition via controls
- ► Continuous enamelled cast-iron trivets with rubber feet

Safety

► Flame failure device fitted to each burner

Serie 4











HSB738354A 90x90cm Freestanding **Dual Fuel Cooker**

Key Features

- ▶ 6 heating functions
- ▶ 112 litres (net) capacity
- ► 5 shelf positions

Cleaning

► Catalytic liners: rear wall

Convenience

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ► Halogen lighting
- ► Timer

Safety

► Triple-glazed door

Cooktop **Key Features**

- ► 5 gas burners:
 - 1 x 14 MJ/h wok burner
 - 1 x high-speed burner
 - 2 x standard burners
 - 1 x economy burner
- ► Suitable for NG (ex factory) and LPG (via included conversion kit)

Convenience

- ► One-hand electronic ignition via controls
- ► Continuous enamelled cast-iron trivets with rubber feet

Safety

► Flame failure device fitted to each burner

Dimensions (HxWxD) 900 x 898 x 600mm

Serie 4

60cm freestanding cookers

Serie | 6



















||30



Height Adjustable

60x85cm Freestanding

Ceramic/Pyrolytic Cooker









LED Display

Oven

HXR39KI50A

Key Features

► LED Display

Convenience

Cleaning

Dual Fuel Cooker

▶ 7 heating functions

▶ 5 shelf positions

► 66 litres (net) capacity

► Catalytic liners: rear wall. side walls and ceiling





60x85cm Freestanding

HLS79R350A 60x85cm Freestanding Induction/Pyrolytic Cooker

Key Features

- ▶ 8 heating functions
- ► 66 litres (net) capacity
- ▶ 5 shelf positions
- ► LCD Display

Cleaning

► Pyrolytic self-cleaning (oven)

Key Features

HKS79R250A

- ▶ 8 heating functions
- ▶ 63 litres (net) capacity
- ▶ 5 shelf positions
- ► LCD Display

Cleaning

► Pyrolytic self-cleaning (oven)

Convenience

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ► Halogen lighting
- ► Electronic clock/timer
- ► Retractable knobs
- ► SoftClose door
- ► Temperature display
- ► AutoPilot 30: 30 automatic programs
- ► Automatic temperature proposal

Convenience

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ► Halogen lighting
- ► Electronic clock/timer
- ► Retractable knobs
- ► SoftClose door
- ► Temperature display
- ► AutoPilot 30: 30 automatic programs

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ► Halogen lighting
- ► Electronic clock/timer
- ► Retractable knobs
- ► SoftClose door
- ▶ 2-level telescopic rails

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Automatic safety switch off

Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Automatic safety switch off

Safety

- ► Triple-glazed door
- ► Child lock (controls)

Cooktop

Key Features

- ▶ 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ▶ 17 power levels
- ► PowerBoost for each zone

Cooktop

Key Features

- ▶ 4 QuickTherm cooking zones: 1 dual circuit zone, 1 dual circuit/extended roasting zone
- ▶ 9 power levels

Cooktop

Key Features

- ► 4 gas burners:
 - 1 x 13.5 MJ/h wok burner
 - 2 x standard burners
 - 1 x economy burner

Cleaning

► WipeProtection

Convenience

- ► MoveMode, QuickStart, ReStart
- ► Dual timer with automatic switch-off
- ► Energy consumption display

Convenience

► Electronic -/+ touch-controls and timer for each zone (cooktop)

Convenience

- ► One-hand electronic ignition via controls
- ► Enamelled cast-iron trivets with rubber feet

Safety

- ► 2-stage residual heat indicator
- ► Child lock

Safety

2-stage residual heat indicator

Safety

► Flame failure device fitted to each burner

Dimensions (HxWxD) 850 x 600 x 600mm



Cooktops



Cooktops | Induction

The best cooking needs just one ingredient: Bosch.

Modern cooking offers so many wonderful new tastes and textures, you need a cooktop that's flexible enough to keep up.





Bosch FlexInduction®

The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. The FlexZone can be used as two separate zones or combined into a single 'super-zone' where the entire zone becomes your cooking canvas.



Bosch Combilnduction®

Experience the magic of CombiZone - two cooking zones can be linked, making the switch from small to large pans effortless. Plus, the MoveMode function automatically switches from boil to simmer with a simple slide of the saucepan.




Bosch Induction

Bosch's benchmark Induction cooktops put you in control with 17 power levels plus PowerBoost for each zone, dual function timer with automatic switch-off, residual heat indicators, child lock and more.

Induction speeds up your cooking

Induction cooktops offer the most efficient way of cooking at lower temperatures, ie. melting chocolate, etc.

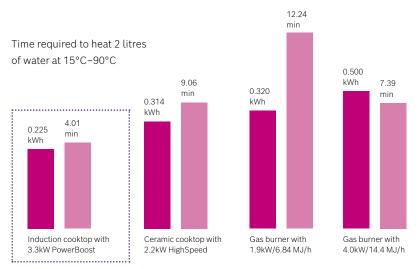

Source: BSH Hausgeräte GmbH, Germany (overseas test results)

Old pots, new technology

Most of your old pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.

The 2-in-1 cooktop with integrated ventilation

For some, it's a cooktop that ventilates perfectly.

For others, it's a rangehood that also cooks perfectly.



CombiZone

If you need more space for a long single piece of cookware, such as a roaster, you can combine two individual cooking zones into one large one with a combined heat level at the touch of a button with CombiZone. The CombiZone is perfect for Teppan Yaki plates.



DirectSelect 1.0 touch control.

Easy to understand, even easier to use: the intuitive operation lets you select cooking zones with ease and directly set the desired individual temperature levels. Also adjusting the ventilation level is quite easy.



QuickStart and ReStart.

Just start cooking: the new QuickStart function detects where you have placed the pot and automatically displays the corresponding cooking zone on the control interface. You can get started straight away and select the desired cooking level for your pot without delay.



A perfect kitchen serves many functions: relaxed cooking, eating, or simply sitting down with family and friends. To allow you more freedom and flexibility in designing your kitchen, we've developed a 2-in-1 cooktop with integrated ventilation. This appliance combines the latest technologies of our induction cooktops and rangehoods in a single appliance.



Even if something goes wrong, everything turns out right.

In the event of a spill or water boiling over, the integrated ventilation module is well prepared for every mishap, large or small: The raised air intake grill keeps out overflowing liquids. In the unlikely event that liquid does enter the module, it is diverted to a reservoir that easily holds up to 200ml. In the unlikely event of a larger spill, another safety reservoir accommodates up to two litres, ensuring optimal protection of the appliance. And if you spill even more liquid,



Superior technology.

Cooking steam rises at a maximum speed of one meter per second. The Bosch 2-in-1 cooktop with integrated ventilation, however, generates a powerful cross-current. As a result, the steam is extracted directly from your pots, pans or roasters and never has a chance to rise. This means that the integrated ventilation module operates extremely efficiently and allows far fewer grease and odour particles into the room, protecting your furniture and fabrics.



The EcoSilence Drive® motor. Cuts electricity, not performance.

The brushless EcoSilence Drive® is driven by a permanent magnet, which means it's subject to neither friction nor wear. This also means your ventilation module has an extraordinarily long service life, extreme efficiency, and low noise. Optimised air flow inside the ventilation module reduces operating noise - even at full power.



PerfectFry™ sensor

Anyone can cook. Now everyone can cook perfectly.

In addition to using premium quality beef, the most important step in frying the perfect steak is to heat the pan to the ideal temperature. If the pan is too hot, even the best cut of meat fries too quickly or even burns. Regardless of how you like your steak, from now on it's easy to fry it to perfection with our PerfectFry™ sensor. While the steak is frying, the sensor integrated in the cooktop continuously monitors the temperature of the pan and precisely adjusts it as needed. Whether you prefer rare, medium, or well-done, your steak is always cooked perfectly.

Here's a shortcut to your perfect steak. The PerfectFry™ sensor - how it works:



Select your desired cooking zone.

Simply activate PerfectFry™ via the controls.

Finally, select the optimal temperature level. The cooktop now heats the pan and notifies you both visually and acoustically as soon as the desired temperature has been reached. Because the cooktop continues to regulate the temperature automatically, you can fry your steak at the optimal temperature.

Set to the optimum level. Cooked to the perfect point.

No matter what dishes you conjure up in your pan, PerfectFry™ helps you fry everything to perfection – without having to constantly monitor the temperature. To fry at the ideal temperature, just select one of four temperature levels, enter the desired frying time, and PerfectFry™ does the rest.

Achieving perfect results using the four PerfectFry™ temperature settings:



Suitable for frying with virgin olive oil or for omelettes



Medium-low For perfectly frying fish, meatballs or sausages



Medium-high Perfectly fries steaks (medium or well done), ragout or vegetables




High Perfect for fried potatoes or rare steaks



Serie 6

2-in-1 cooktop with integrated ventilation



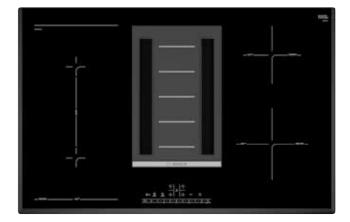

Ventilation options accessories required



HEZ381401 **Ducted Extraction Kit**

- ▶ Direct air outlet onto 220 x 90mm flat duct system or with 90° diverter element and outlet for continuation of ducting with 220 x 90mm flat duct system.
- 3 mountable depth adapters (40mm, 80mm, 120mm) for different worktop depths from 600mm to 750mm, 90° diverter element, connector element for continuation with 220 x 90mm flat ducting.



HEZ381501 Recirculation kit

- ► The CleanAir high performance odour filter is specifically optimised for all cooking applications and has an odour reduction rate of 85% and a lifetime of approximately 1 year.
- ► Optimised for quick and flexible installation in all common furniture (Minimum plinth height: 100mm)

3 horizontal adapter elements (40mm, 80mm, 120mm) for worktop depths from 600mm to 750mm, upper 90° diverter element, flexible telescopic element (for additional height, depth and lateral adjustability), 4 height adapter elements (50mm each) for furniture corpus heights from 675mm to 900mm, housing element for CleanAir filter drawer casette (optionally 180° reversible), CleanAir high performance odour filter, lower 90° diverter with air outlet (optionally 180° reversible), adaptive air diffuser element, element to affix to bottom panel of furniture.

80cm Induction cooktop with integrated ventilation

Heating functions

- ▶ 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ► 17 power levels
- ► PowerBoost for each zone

Design

► Frameless with bevelled front and sides

Convenience

- ► Electronic DirectSelect 1.0 touch-control
- ► MoveMode: 2 automatic power levels
- ► PerfectFry[™] sensor with 4 automatic frying programs
- ► Timer with automatic switch off for all zones
- ▶ QuickStart
- ▶ ReStart
- ► Automatic pan recognition sensor
- ► Energy consumption display

Cleaning

▶ WipeProtection

Safety

- ► Automatic safety switch-off
- ► 2-stage residual heat indicators
- ► Child lock

Ventilation

- ► 689m³/h maximum extraction capacity
- ► Noise min./max. Normal Level: 42/70 dB
- ▶ 9 power settings + 1 intensive
- ► AutoOn: Starts the ventilation module on power level 3 when you start cooking
- Automatic run-on time 30 mins
- ► EcoSilence Drive® brushless motor
- ► Dishwasher-safe metal grease filter
- ► Electronic filter saturation indicator
- ► Heat resistant air inlet grid, dishwasher safe

Dimensions (HxWxD)

198 x 802 x 522mm


Cooktops | FlexInduction®

FlexInduction® cooktops

Introducing Bosch FlexInduction®, the result of decades of research and development. Introducing true freedom in the kitchen.



Ideal for small pots, large pots, multiple pots, frying pans or casserole dishes - you name it, thanks to the unique coil shapes you get the ultimate flexibility and heat distribution. At the touch of a button, two induction zones become one large FlexInduction® surface.



MoveMode

Pre-set 3 different power levels and move from boil to simmer in just seconds.

- 1. Perfect for rapid boiling (Power level 9 Front FlexZone)
- 2. Medium heat cooking (Power level 5 Middle FlexZone)
- 3. Ideal for simmering (Power level 1 Back FlexZone)



PerfectFry™ sensor - for a steak that is just right

With up to 5 automatic settings, the pan is heated to just the right temperature. Sensors inside the cooktop continuously measure the temperature and maintain it for perfect results. Works with Bosch PerfectFry™ sensor pans, see page 131 for details.

Cooktops | Combilnduction®

Combilnduction® cooktops

Bosch Combilnduction® lets you switch from small to large and oversized pans, like Teppan Yaki, simply and easily. So now there's no limit to the tastes you can create.



CombiZone

With Bosch Combilnduction® you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard cooking zones into one large cooking zone.



MoveMode


When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next, without a hiccup, you are always in control.




Induction cooktops

FlexInduction®

Serie 8









PXV975DC1E 90cm FlexInduction® Cooktop

Heating functions

- ▶ 5 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans
- ▶ 32cm triple circuit zone
- ▶ 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

PXE875DC1E 80cm FlexInduction® Cooktop

Heating functions

- ▶ 4 induction cooking zones: 1 large FlexInduction® zone for large pans or multiple smaller pans
- ► 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

PXX675DC1E 60cm FlexInduction® Cooktop

Heating functions

- ▶ 4 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans
- ▶ 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

PIV995DC1E* 90cm Induction Cooktop

Heating functions

Induction.

- ▶ 5 induction cooking zones: 1 large 32cm triple circuit zone
- 17 power levels
- PowerBoost for each zone
- ShortBoost for each zone

Convenience

- ► Electronic DirectSelect Premium touch-controls
- ▶ Dual timer with auto switch-off for each zone
- ▶ QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry[™] sensor with 5 automatic frying programs
- ► MoveMode: 3 automatic power levels

Cleaning

► WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 916 x 527mm

Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry[™] sensor with 5 automatic frying programs
- ► MoveMode: 3 automatic power levels

Cleaning

► WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD)

Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry[™] sensor with 5 automatic frying programs
- ► MoveMode: 3 automatic power levels

Convenience

- ► Electronic DirectSelect Premium touch-controls
- Dual timer with auto switch-off for each zone
- ► QuickStart
- ▶ ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry[™] sensor with 5 automatic frying programs

Cleaning

► WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 606 x 527mm

Cleaning

► WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 916 x 527mm

^{*}Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.



Combilinduction®

Serie 6











PIV975DC1E* 90cm Induction Cooktop

Heating functions

- ► 5 induction cooking zones: 1 large 32cm triple circuit zone
- ► 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

PVS875FB5E 80cm Combilnduction® Cooktop

Heating functions

- ► 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ► 17 power levels
- ► PowerBoost for each zone

PVS675FB5E 60cm Combilnduction® Cooktop

Heating functions

- ▶ 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ► 17 power levels
- ► PowerBoost for each zone

PXE651FC1E 60cm FlexInduction® Cooktop

Heating functions

- ► 4 induction cooking zones: 1 large FlexInduction® zone for large pans or multiple smaller pans
- ▶ 17 power levels
- ► PowerBoost for each zone

Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry[™] sensor with 5 automatic frying programs

Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► MoveMode: 2 automatic power levels

Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► MoveMode: 2 automatic power levels

Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- ► Dual timer with auto switch-off for each zone
- ▶ QuickStart
- ► ReStart
- ► Energy consumption display
- ► PerfectFry[™] sensor with 4 automatic frying programs

Cleaning

▶ WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 916 x 527mm

Cleaning

▶ WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 816 x 527mm

Cleaning

► WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 606 x 527mm

Cleaning

► WipeProtection

Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD)

Induction cooktops

Features and functions for everyday use.

Induction.

Serie 6



Serie 4



60cm Induction Cooktop

► 3 induction cooking zones

► PowerBoost for each zone

including large 28cm cooking

Heating functions

► 17 power levels

60cm Induction Cooktop

Heating functions

- ► 4 induction cooking zones
- ► 17 power levels
- ► PowerBoost for each zone

Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- ► Dual timer with auto switch-off for each zone
- ▶ QuickStart
- ► ReStart
- ► Energy consumption display
- Keep warm setting

Convenience

- ► TouchSelect electronic controls
- ► Dual timer with auto switch-off for each zone
- ▶ QuickStart
- ► ReStart



Safety & Cleaning

WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h' - residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Child lock

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

Automatic safety switch-off

Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.

Cleaning

► WipeProtection

Safety

- ▶ 2-stage residual heat indicators
- ▶ Child lock

Safety

- ► 2-stage residual heat indicators
- ► Child lock







Convenience

Dual function timer including automatic switch-off for each zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (ie. level 5.5) for up to 99 minutes – ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

QuickStart

Start cooking quicker. New Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

ReStart

Things happen quickly in the kitchen - spilling something on the control panel or accidentally switching off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Energy consumption display

Each time you finish cooking, your Energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Automatic pot detection

Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.

Keep warm

Ideal setting for keeping food warm before serving at the touch of a button.

Performance

DirectSelect Premium

Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

DirectSelect 1.0

Enjoy total convenience with DirectSelect 1.0. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/- repeatedly.

TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

PowerBoost - now with even more power!

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.

ShortBoost

Reduce the time to heat up pans – this boost function heats up the pan for 30 seconds at high power before automatically reducing the heat to the correct power setting.

Overview

Cooktops | FlameSelect®

We didn't discover fire, but we've taken it to a new level. Nine, to be precise.

The new gas cooktops with FlameSelect® from Bosch are packed with innovative technology. They offer you a completely new level of precision when it comes to adjusting the flame by selecting predefined power levels. But that's not all. Thanks to our timeless design and carefully selected materials, Bosch gas cooktops are also a true feast for the eyes.




(1) FlameSelect®

Stop cooking with intuition. Start cooking with perfection.

At Bosch, we want to make your cooking with gas as easy, safe and enjoyable as possible. That's why we developed FlameSelect® for you. Unlike conventional gas cooktops with inaccurate power settings, FlameSelect® and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels. So now, gas cooktops with FlameSelect® offer you all the benefits of gas cooking combined with the comfort and precision of an electric cooktop.

Nine levels of precise power selection

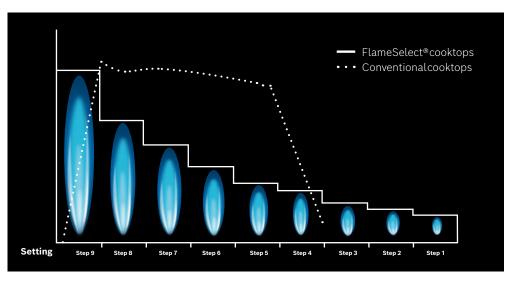

Easy to use. Easy to clean. Easy to love.



Our pan supports

When it comes to design you have the choice between single pan supports for easy handling and cleaning, or continuous pan supports for high stability of cookware. Both variants are available in cast iron and are extremely robust.



Our gas cooktop surfaces

Our cooktops are available in black tempered glass and stainless steel to perfectly match your kitchen and individual taste.

Gas cooktops

FlameSelect® black tempered glass.

Serie 6







(FlameSelect®



(FlameSelect®

PPS9A6B90A 90cm Black Tempered Glass **Gas Cooktop**

Heating functions

- ► 5 Burners:
 - 1 x 15 MJ/h wok burner
 - 1 x high-speed burner,
 - 2 x standard burners
 - 1 x economy burner

PPQ7A6B20A 75cm Black Tempered Glass **Gas Cooktop**

Heating functions

- ▶ 5 Burners:
 - 1 x 15 MJ/h wok burner
 - 1 x high-speed burner
 - 2 x standard burners
 - 1 x economy burner

PPH6A6B20A 60cm Black Tempered Glass **Gas Cooktop**

Heating functions

- ▶ 4 Burners:
 - 1 x 13.6 MJ/h wok burner
 - 2 x standard burners
 - 1 x economy burner

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports
- Standard and semi-flush built-in option

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports
- ► Standard and semi-flush built-in option

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports
- Standard and semi-flush built-in option

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (WxD)

915 x 520mm

Dimensions (WxD) 752 x 520mm

Dimensions (WxD)

590 x 520mm



FlameSelect® stainless steel.







(Flame Select®



(Flame Select®



() FlameSelect®

PCT9A5B90A 90cm Stainless Steel **Gas Cooktop**

Heating functions

- ► 6 Burners:
 - 2 x 19.5 MJ/h dual flame wok burners
- 1 x high-speed burner
- 2 x standard burners
- 1 x economy burner

PCR9A5B90A 90cm Stainless Steel Gas Cooktop

Heating functions

- ► 5 Burners:
- 1 x 19.5 MJ/h dual flame wok burner
- 1 x high-speed burner
- 2 x standard burners
- 1 x economy burner

PCR7A5B90A 75cm Stainless Steel **Gas Cooktop**

Heating functions

- ► 5 Burners:
- 1 x 19.5 MJ/h dual flame wok burner
- 1 x high-speed burner
- 2 x standard burners
- 1 x economy burner

PCI6A5B90A 60cm Stainless Steel **Gas Cooktop**

Heating functions

- ▶ 4 Burners:
 - 1 x 15 MJ/h wok burner
 - 1 x high-speed burner
 - 1 x standard burner
 - 1 x economy burner

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

Convenience

- ► FlameSelect® valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (WxD) 915 x 520mm

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (WxD)

915 x 520mm

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (WxD)

750 x 520mm

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (WxD)

582 x 520mm

Gas cooktops



Stainless steel.

Serie 2





PBH6B5B90A 60cm Stainless Steel **Gas Cooktop**

Heating functions

▶ 4 Burners: 1 x 15 MJ/h wok burner 2 x standard burners 1 x economy burner

60cm Stainless Steel Gas Cooktop

Heating functions

▶ 4 Burners:

PBH6B5B60A

- 1 x 15 MJ/h wok burner 2 x standard burners
- 1 x economy burner

Convenience

- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

Convenience

- ► One-hand ignition via sword control knobs
- ► Steel pan supports with cast-iron finish

Domino stainless steel.

Serie 4



PGB3B5B80A 30cm Stainless Steel **Gas Cooktop**

Heating functions

▶ 2 Burners:

1 x high-speed burner 1 x economy burner

Convenience

- ► One-hand ignition via sword control knobs
- ► Steel pan supports with rubber feet

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Safety

► Flame failure for each burner stops gas flow if flames go out

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (WxD) 580 x 510mm

Dimensions (WxD)

288 x 505mm



Cooktops | Gas features and functions

Features and functions for everyday use.







Efficiency

One-hand ignition

Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one hand, there is also no separate ignition button to clean.

Easy clean tempered glass

Premium models with tempered glass base are easy to clean for total convenience with a frameless finish for a stylish and sleek look.

Cleaning rounded off to perfection

The rounded edges of our gas cooktops ensure effortless cleaning – dirt simply doesn't have anywhere to collect.

Simplicity

FlameSelect®

FlameSelect® and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels, making your cooking with gas as easy, safe and enjoyable as possible.

Flame failure device

For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

Cast-iron supports

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.

Performance

High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner, which provides up to 19.5 MJ/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.

Flexible burners

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of your pan.



Cooktops | Ceramic

The world of Bosch ceramic cooktops.

There is a wide range of ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.





Cooktops | Ceramic features and functions

Features and functions for everyday use.







Safety & Cleaning

WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Convenience

Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.

ReStart

Things happen quickly in the kitchen if you spill something on the control panel or accidentally switch off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Energy consumption display*

Each time you finish cooking, your energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casseroles and other (large) cooking dishes.

Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.

Keep warm

Ideal setting for keeping food warm before serving at the touch of a button.

Performance

DirectSelect Premium

Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

PowerBoost


PowerBoost now on selected Bosch ceramic cooktops lets you heat up large volumes of water even faster than on the highest power level.

Ceramic cooktops

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as practical and easy-to-clean.

Serie 8







Serie 4



PKM875DP1A **80cm Ceramic Cooktop**

Heating functions

- ► 4 QuickTherm cooking zones: 2 dual circuit zones, 1 dual circuit/extended roasting zone
- ► 17 power levels
- ► PowerBoost for each zone

PKG775DB1A 70cm Ceramic Cooktop

Heating functions

- ► 4 QuickTherm cooking zones: 2 dual circuit zone
- ► 17 power levels

PKN675DB1A **60cm Ceramic Cooktop**

Heating functions

- ► 4 QuickTherm cooking zones: 1 dual circuit zones, 1 dual circuit/extended roasting zone
- ► 17 power levels

PKE611D17A 60cm Ceramic Cooktop

Heating functions

- ▶ 4 QuickTherm cooking zones
- ► 17 power levels

Convenience

- ▶ Electronic DirectSelect Premium touch-controls
- ► ReStart quickly reinstates previous settings
- Dual timer with auto switch-off for each zone
- ► Keep warm setting
- ► Energy consumption display

Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► ReStart quickly reinstates previous settings
- ► Dual timer with auto switch-off for each zone
- ► Keep warm setting
- ► Energy consumption display
- ► Automatic electronic boil start

Convenience

- ▶ Electronic DirectSelect Premium touch-controls
- ► ReStart quickly reinstates previous settings
- ► Dual timer with auto switch-off for each zone
- ► Keep warm setting
- ► Energy consumption display
- ► Automatic electronic boil start

Convenience

- ► Electronic TouchSelect +/touch-controls
- ► ReStart quickly reinstates previous settings

Cleaning

▶ WipeProtection

Cleaning

► WipeProtection

Cleaning

► WipeProtection

- 2-stage residual heat indicators
- ► Child lock

- 2-stage residual heat indicators
- ► Child lock

Safety

- ► 2-stage residual heat indicators
- ► Child lock

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 816 x 527mm

Dimensions (WxD) 710 x 527mm


Dimensions (WxD) 606 x 527mm

Dimensions (WxD)

592 x 522mm



Serie | 2



PKE611CA1A 60cm Ceramic Cooktop

Heating functions

- ► 4 QuickTherm cooking zones
- ► 9 power levels

Convenience

► Side control sword knobs

► Residual heat indicator

Dimensions (WxD) 592 x 522mm







Rangehoods






Rangehoods

A breath of fresh air in hood design.

The right rangehood can reduce odours and steam and leave your kitchen feeling fresh and clean. And a Bosch hood will do it all with silent efficiency.





Ducted extraction

Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.


Recirculation kit

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.

What extraction rate do I need?

It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: a minimum of 6 times per hour; and a maximum of 12 times per hour.

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.

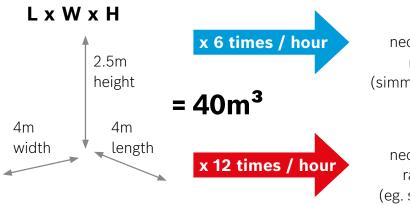

240m³


necessary air extraction rate at normal use (simmering on 2–3 hotplates)

480m³

necessary air extraction rate at intensive use (eg. strong frying activities)

Bosch extraction rates are tested in line with EU standards. See page 122 for more information.

Silence

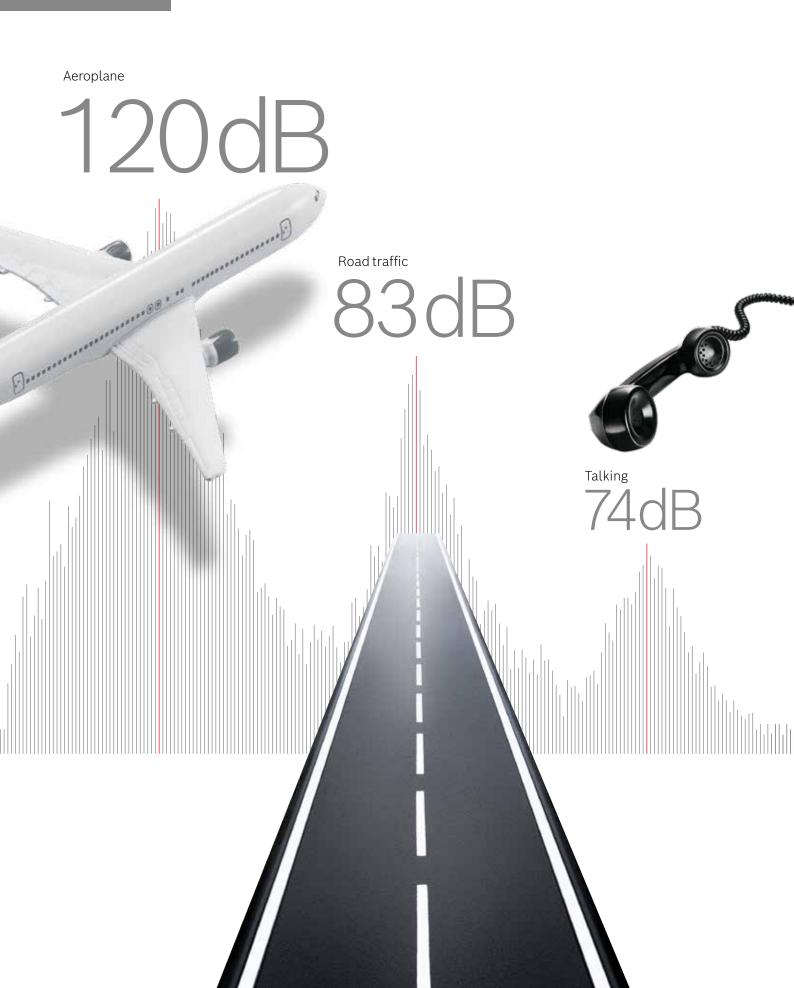

Rangehoods

Relax in a quieter kitchen with family and friends.

A few decibels can make the difference between harmful, loud and pleasant. Operating at 40dB(A), our quietest rangehood means you can have it on while listening to music, enjoying a conversation or while your baby rests.


Silence

Noise is measured in numeric decibels or dB(A). It is important to note that a few decibels can make a huge difference.

EcoSilence Drive® motor

The EcoSilence Drive® motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. The result: low noise levels with high power.



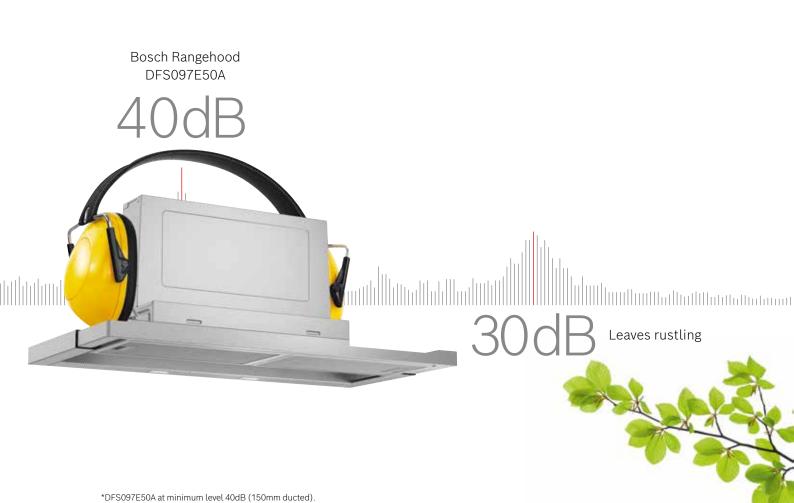

Wall-mounted rangehoods

Stainless steel.

Serie 8



DWB91PR50A 90cm Canopy Rangehood

Power functions

- ▶ 964m³/h maximum extraction capacity
- ▶ 3 power settings + 2 intensive settings with automatic revert
- ► Automatic run-on time 10 mins
- ► EcoSilence Drive® brushless motor

Convenience

- ► Whisper quiet: 45dB at minimum level (150mm ducted)
- ► 3 x 1.5 W LED SoftLights with dimmer function
- ► Electronic controls via TouchControl with lightline
- ► Sound insulation mats
- ► PerfectAir sensor: automatically detects cooking intensity and adjusts power level
- ► Cooktop-based hood control ready

Cleaning

- ► Dishwasher-safe metal grease filters
- ► Electronic filter saturation indicator

Optional Accessory

► DHZ5345 Recirculation kit

Dimensions (HxWxD)

628-954 x 898 x 500mm (ducted) or 628-1064 x 898 x 500mm (recirculating)

Serie 6



DWB97LM50A 90cm Canopy Rangehood

Power functions

- ► 697m³/h maximum extraction capacity
- ▶ 3 power settings + 1 intensive setting with automatic revert
- ► EcoSilence Drive® brushless motor

Convenience

- ► Whisper quiet: 45dB at minimum level (150mm ducted)
- ► 3 x 1.5 W LED lights
- ► Electronic controls via TouchControl with LED display
- Sound insulation mats

Serie 2



DWB96BC50A 90cm Canopy Rangehood

Power functions

- ► 590m³/h maximum extraction capacity
- ▶ 3 power settings

Convenience

- ► Very guiet: 49dB at minimum level (150mm ducted)
- ► 2 x 1.5 W LED lights
- ► Push button control

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessory

► DHZ5345 Recirculation kit

Dimensions (HxWxD)

628-954 x 898 x 500mm (ducted) or 628-1064 x 898 x 500mm (recirculating)

► Dishwasher-safe metal grease filters

Optional Accessory

► DWZ0DX0U0 Recirculation kit

Dimensions (HxWxD)

635-965 x 900 x 500mm (ducted) or 635-1075 x 900 x 500mm (recirculating)





DWP96BC50A 90cm Canopy Rangehood

Power functions

- ► 600m³/h maximum extraction capacity
- ▶ 3 power settings

DWP66BC50A 60cm Canopy Rangehood

Power functions

- ► 570m³/h maximum extraction capacity
- ► 3 power settings

Convenience

- ► Very quiet: 51dB at minimum level (150mm ducted)
- ► 2 x 1.5W LED lights
- ► Push button control

Convenience

- ► Very quiet: 49dB at minimum level (150mm ducted)
- ► 2 x 1.5W LED lights
- ► Push button control

Cleaning

► Dishwasher-safe metal grease filters

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessory

► DHZ5275 Recirculation kit

Dimensions (HxWxD)

799-975 x 900 x 500mm (ducted or recirculating)

Optional Accessory

► DHZ5275 Recirculation kit

Dimensions (HxWxD)

799-975 x 600 x 500mm (ducted or recirculating)

Integrated rangehoods

Great performance in a tiny space. These neatly concealed rangehoods are housed underneath the kitchen unit and can only be seen if you look underneath the kitchen cabinetry.

Serie 8

Serie | 6

Serie 4









DHL895DAU 86cm Integrated Rangehood

Power functions

- ► 800m³/h maximum extraction capacity with rim ventilation
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- ► Automatic run-on time 30 mins
- ► EcoSilence Drive® brushless motor

Convenience

- ► Whisper quiet: 41dB at minimum level (150mm ducted)
- 2 x 1W LED lights with dimmer function
- Low-lift push button controls for power and light

Cleaning

- ► Dishwasher-safe metal grease filters
- ► Electronic filter saturation indicator

Optional Accessory

► DHZ5605 Recirculation kit

Dimensions (HxWxD)

Product: 418 x 860 x 282mm Built-in: 418 x 836 x 264mm (ducted or recirculating)

DHL785BAU 70cm Integrated Rangehood

Power functions

- ► 730m³/h maximum extraction capacity with rim ventilation
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting

DHL575CAU 52cm Integrated Rangehood

Power functions

- ► 610m³/h maximum extraction capacity with rim ventilation
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting

DHL555BAU 53cm Integrated Rangehood

Power functions

- ► 650m³/h maximum extraction capacity
- 3 power settings + 1 intensive setting

Convenience

- ► Very quiet: 53dB at minimum level (150mm ducted)
- ► 2 x 1W LED lights
- ► Low-lift push button controls for power and light

Convenience

- ► Very quiet: 50dB at minimum level (150mm ducted)
- ► 2 x 1W LED lights
- ► Low-lift push button controls for power and light

Convenience

- ► Whisper quiet: 41dB at minimum level (150mm ducted)
- ► 2 x 2W LED lights
- ► Slide controls for power and light

Cleaning

► Dishwasher-safe metal grease filters

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessory

► DHZ5605 Recirculation kit

Dimensions (HxWxD)

Product: 418 x 520 x 300mm Built-in: 418 x 496 x 264mm (ducted or recirculating)

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessory

► DHZ7305 Charcoal filter

Dimensions (HxWxD)

Product: 255 x 530 x 380mm Built-in: 255 x 500 x 350mm (ducted or recirculating)

Optional Accessory ► DHZ5605 Recirculation kit

Dimensions (HxWxD) Product: 418 x 700 x 282mm Built-in: 418 x 676 x 264mm (ducted or recirculating)





DLN54AA70A 53cm Integrated Rangehood

Power functions

- ► 420m³/h maximum extraction capacity
- ► 3 power settings

Convenience

- ► Very quiet: 55dB at minimum level (150mm ducted)
- ► 2 x 3W LED lights
- ► Slide controls for power and light

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessory

► DWZ0IN0T0 Recirculation kit

Dimensions (HxWxD)

Product: 208 x 534 x 300 mm Built-in: 208 x 493 x 257 mm (ducted or recirculating)



Retractable slideout rangehoods

To operate, the slideout section is pulled out, enlarging the extraction surface. The pelmet front can even be matched to your kitchen units.* So this rangehood will be almost invisible in your kitchen.

Serie 6

Serie | 4

Serie 2









DFS097E50A 90cm Slideout Rangehood

Power functions

- ► 730m³/h maximum extraction capacity
- ▶ 3 power settings + 2 intensive settings with automatic revert to previous setting
- ► Automatic run-on time 1-10 mins
- ► EcoSilence Drive® brushless motor

Convenience

- ► Whisper quiet: 40dB at minimum level (150mm ducted)
- 2 x 3W LED SoftLights with dimmer function
- ► Electronic controls with LED-display
- ► Easy installation system
- ► Sound insulation mats

Cleaning

- ► Dishwasher-safe metal grease filters
- ► Electronic filter saturation indicator

Optional Accessories

► DSZ4565 Recirculation kit

DFS097A50A 90cm Slideout Rangehood

Power functions

- ► 740m³/h maximum extraction capacity
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- ► Automatic run-on time 1-10 mins
- ► EcoSilence Drive® brushless motor

Convenience

Cleaning

- ► Whisper quiet: 43dB at minimum level (150mm ducted)
- ► 2 x 3W LED lights
- Low-lift push button controls for power and light
- ► Easy installation system

► Dishwasher-safe metal

grease filters

DFS067A50A 60cm Slideout Rangehood

Power functions

- ► 740m³/h maximum extraction capacity
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- Automatic run-on time 1-10 mins
- ► EcoSilence Drive® brushless motor

Convenience

- ► Whisper quiet: 43dB at minimum level (150mm ducted)
- ► 2 x 3W LED lights
- ► Low-lift push button controls for power and light
- ► Easy installation system

DFM064W50A 60cm Slideout Rangehood

Power functions

- ► 400m³/h maximum extraction capacity
- 3 power settings

Convenience

- ► Quiet: 59dB at minimum level (150mm ducted)
- 2 x 20W halogen lights
- ► Rocker switches for power and light

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessories

► DSZ4565 Recirculation kit

Optional Accessories

► DSZ4565 Recirculation kit

Dimensions (HxWxD)

Product: 426 x 598 x 290mm Built-in: 385 x 524 x 290mm (ducted or recirculating)

Cleaning

► Dishwasher-safe metal grease filters

Optional Accessory

► DSZ4545 Recirculation kit

Dimensions (HxWxD)

Product: 203 x 598 x 290mm Built-in: 162 x 526 x 290mm (ducted or recirculating)


Dimensions (HxWxD) Product: 426 x 898 x 290mm Built-in: 385 x 524 x 290mm (ducted or recirculating)

^{*}For cabinetry match pelmet required from cabinet maker. Stainless Steel pelmet included, black and white available as optional accessory. Reference guide see page 121. Technical diagrams see pages 142-143.

Features and functions for everyday use.







Cleaning

Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.

LED lighting

The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.

Halogen lighting

Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.

Variable power settings

All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.

Convenience

PerfectAir sensor

PerfectAir continuously monitors the air and automatically adapts the extraction rate to the amount of odour present. At the same time, it reduces the noise level because it only activates the lowest extraction rate necessary.

Cooktop-based hood control

Control your rangehood via your cooktop with cooktop-based hood control. When the cooktop is turned on, the hood also switches on and thanks to PerfectAir, automatically extracts at the correct power level. If preferred, the rangehood can be controlled manually.

Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.

Electronic control

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function; control at your fingertips.

Electronic button control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.

Rocker switch control

It doesn't get any easier: one switch with 3 power levels and one for turning the lights on and off.

Performance

Dishwasher-safe metal filters

For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.

Metal grease filter

Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.

Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.

Rim ventilation filter

With its smooth uninterrupted surface and grease separation of 80-92%,* the rim ventilation filter from Bosch has a multi-patented filter sealing system and flow-optimised filter system.

Extraction rates


Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height. Bosch rangehoods offer powerful maximum extraction rates for when you are cooking up a storm in the kitchen. While the variable power settings allow you to navigate just the extraction power you need for each meal.

No space for a rangehood? See our 2-in-1 cooktop with integrated ventilation on pages 46-49





Dishwashers

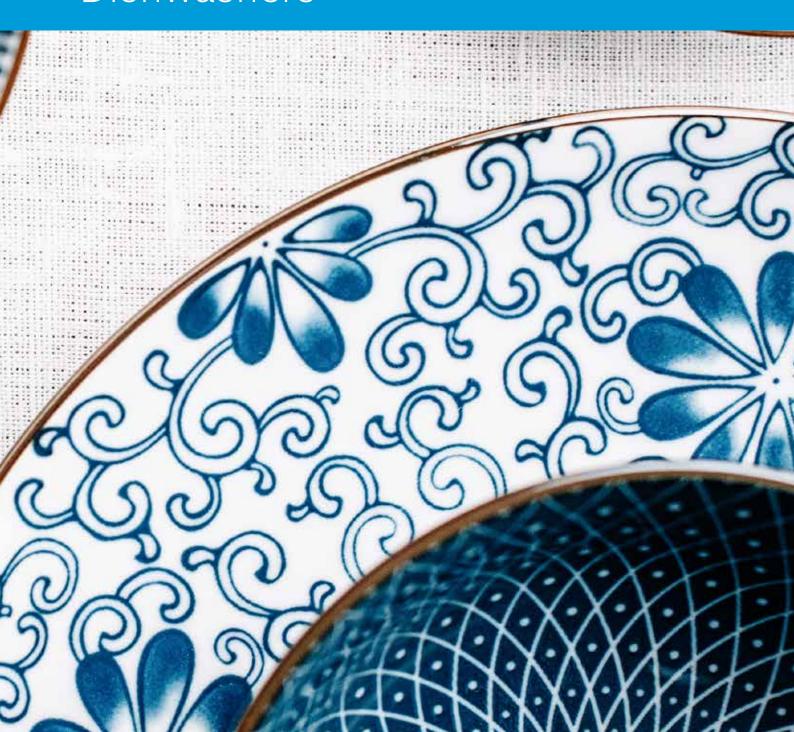

Design



*For dishwashers. Source: Euromonitor, volume sales, 2018

Integrate your dishwasher for a seamless look.

Bosch under bench, semi and fully integrated dishwashers are designed to fit your new kitchen to perfection. Semi and fully integrated dishwashers can be fitted with a door panel to match the design of your kitchen cabinetry while under bench dishwashers can easily be fitted into an existing kitchen with a continuous kick panel.

Freestanding

Freestanding dishwashers can be installed anywhere in your kitchen

- ▶ Designed to stand alone
- ► Removable worktop (to accommodate benchtop height)
- ► Elegant curved fascia

Under bench

Under bench dishwashers fit into a new or existing kitchen with style

- ► Flat control panel
- ► Adjustable height for flush fit
- ► Option of continuous kick panel flush with kitchen cabinetry





Compact built-in

These compact dishwashers offer the freedom to perfectly coordinate your kitchen

- ► ActiveWater[™] Smart compact dishwashers can be installed individually
- ▶ Ideal for grouping together with matching Bosch appliances

Semi-integrated

Integrate your dishwasher for a seamless look

- ▶ Can be fitted with a door panel to match the design of your kitchen cabinetry#
- ► Continuous kick panel provides seamless integration



Slimline

These slimline 45cm dishwashers are ideal for kitchens with limited space


- ▶ Available as a freestanding stand-alone model
- ► Available as a built-under model with adjustable height for a flush fit

Fully integrated

Fully integrated dishwashers are designed to fit your new kitchen to perfection

- ► Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry#
- ► Control panel neatly integrated into the top of the dishwasher door
- ► Continuous kick panel provides seamless
- ▶ Optional stainless steel front panel accessory

*Door panel not included.

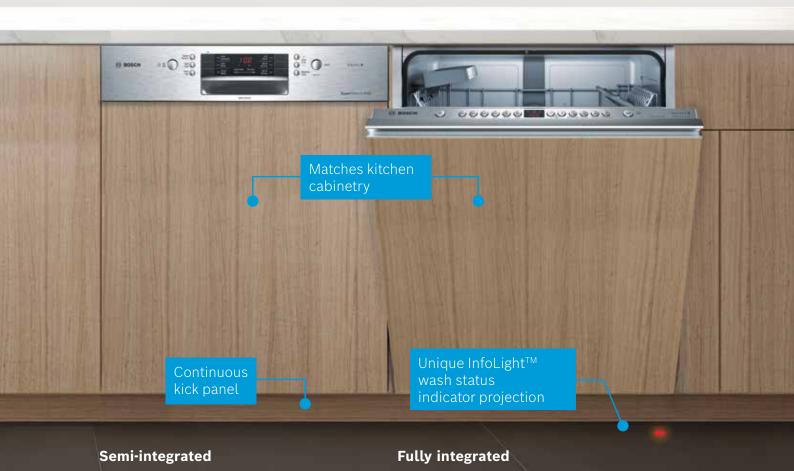

Technology

Discover the features available as standard in our range of dishwashers.

Bosch dishwashers come with many convenient features included as standard. Quieter, more efficient and with improved safety features, you can enjoy more family time and perfectly clean dishes every wash.

We've increased our standard. So you can do the same.

EcoSilence Drive®

Our advanced motor has been built to provide you with maximum efficiency, economy and durability. EcoSilence Drive® wash and drain pumps work without brushes, resulting in ultra-silent performance and top results.

DosageAssist™ detergent system

Unique to Bosch, DosageAssist™ maximises the effectiveness of the detergent tablet by dropping it into a specially engineered tray that is targeted by water jets, resulting in a tablet that dissolves evenly. For superior cleaning performance and a quieter wash.

Heat Exchanger

Uses residual heat to rinse and dry dishes, saving energy, reducing temperature shock, and providing hygienically clean results by not drawing air from outside of the dishwasher.

AquaStop™ Plus

The AquaStop™ Plus system consists of a double-walled supply hose, a safety valve, as well as a floor sump with float switch, offering 100% protection against water damage. Guaranteed by Bosch.

Last Program Used Memory

The last program used is remembered for ultimate convenience. Simply press 'Start' for clean dishes

Anti-fingerprint finish

The anti-fingerprint stainless steel finish ensures no prints are left behind and the dishwasher always looks its best.

Child door and button locks

For added safety, the door can be locked manually to prevent children from inadvertently opening the door. The buttons can also be locked to prevent tampering during operation.

Whisper quiet washing

Bosch dishwashers are amongst the quietest in the world. With brushless motors and advanced sound insulation technology for whisper quiet operation from just 40dB. Quieter than a buzzing bee!

Three stage self-cleaning filter

An additional nozzle in the spray arm cleans the bottom of the dishwasher while also breaking down food to pass through the filter and prevent blockages.

AutoBrilliance™ automatic detergent sensor

The AutoBrilliance™ function adapts the temperature for multi-function detergent tablets, ensuring the rinse aid is fully utilised, delivering sparkling results every time.

AquaSensor™ technology

The AquaSensor™ helps you save more water as it measures the amount of soiling at the end of the pre-rinse cycle, reusing water when it can, saving up to 20% for the entire wash.



Introducing our innovative features in selected models.

Our clever dishwashers include advanced features that offer you even more convenience and flexibility.



TimeLight™

You might not hear anything coming from your dishwasher, but it may still be on. To prevent you from interrupting the cycle, the TimeLight™ illumination projects the remaining wash cycle time onto the floor when the dishwasher is in operation.




EmotionLight

Show off your sparkling clean glassware beautifully with the interior illumination from EmotionLight. The LED lights never need to be changed and will last for the lifetime of your dishwasher.



10 year anti-rust warranty

Our appliances are made from top-quality materials and, in addition to our standard appliance warranty, we provide a 10 year warranty against rusting-through of the dishwasher's stainless steel inner cavity.



InfoLight™

Selected models feature InfoLight™ - a red LED light that discreetly beams onto the floor during the wash cycle and disappears after the drying cycle is complete.



Full colour TFT display

The multi-coloured TFT display shows wash progress, time remaining, and thanks to the advanced technology, displays the predefined water and energy consumption for each wash option.



Polinox® inner tub

Extremely durable, odourless and rust-free, the patented Polinox® inner tub on Series 4 and selected Series 6 models is German engineered with robust materials that withstand dints, scratches and discolouration, based on 10 year simulation tests.



Technology

Your guide to our wash programs and options:

Wash programs

Automatic programs

By choosing the automatic program, your dishwasher will assess how soiled the items are and adjust the program time and temperature accordingly.

Eco Wash 45°C

Save on your utility bills and reduce the impact on our environment by using this water and energy efficient program for mixed loads.

Pots & Pans 70°C

An intensive wash cycle designed for heavily soiled dishes such as pans with baked-on food.

Quick 60mins 65°C

A 60 minute wash and dry cycle for dishes of various soiling levels for situations when time is of the essence.

Quick 29mins 45°C

A 29 minute* express wash designed to clean lightly soiled dishes in a short time, such as drinking glasses at a dinner party.

ExtraQuiet 40dB 50°C

Washes dishes exceptionally quietly at just 40dB, perfect for eat-in kitchens, open spaces or running your dishwasher at night.

Pre-Rinse

Uses only cold water to rinse dishes, ideal for odour reduction of dirty dishes between full wash cycles.

Glass Wash 40°C

Gently cleans glasses such as high-quality crystal stems while providing optimum drying to add an extra sparkle to your glassware.

Super Wash 60°C

With high water pressure and high temperatures, the Super Wash program leaves even the dirtiest of dishes brilliantly clean and dry.

Wash options

SpeedPerfect® & VarioSpeed

Reduces program time by up to 50% for the fastest wash possible - perfect for when time is of the essence.

ExtraDry

Uses a higher temperature final rinse, providing even better drying results. Especially useful for drying glassware and plastics.

HalfLoad Plus

Provides perfect wash performance for up to seven place settings stacked anywhere in the dishwasher while operating resourceefficiently.

Machine Care

Helps remove grime and limescale build-up from your dishwasher to keep it clean and fresh. We recommend using this function once a month or after every 30 wash cycles.

IntensiveZone™

Transforms the entire bottom basket into a power cleaning zone by increasing the water pressure, saving you the chore of scrubbing heavily soiled pots and pans.

HygienePlus™

Utilises a hotter final rinse, perfect for removing bacteria from your cooking utensils, chopping boards and baby bottles.

For baby bottles, we recommend using traditional sanitation methods in conjunction with this option.

Accessory

Wine glasses should be washed by hand. Or by Bosch.

The GlassSecure Tray protects your glasses. Designed for Bosch dishwashers equipped with any VarioFlex® basket system, this unique tray securely holds four long stemmed glasses in place. The locking mechanism lifts and secures all four glasses at once. Glasses are angled and positioned to provide optimum cleaning and drying with the highest glass protection.



Dishwashers | Silence

So quiet we had to add a light to let you know it's running.

At Bosch we know that the kitchen is a central part of the home where people gather. With this in mind, we have designed a range of whisper quiet dishwashers with an ExtraQuiet program that operates at just 40dB. That's even quieter than the sound of a buzzing bee!



Fully integrated dishwashers

Serie 8

Serie 6

Serie 4









SMV88TX02A **Fully Integrated Dishwasher**

Key Features

- ▶ 15 place settings
- ► 8 wash programs (plus 6 wash options)
- ▶ 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 42dB(A) rating (40dB(A) on ExtraQuiet program)
- 1 TFT Display with SensorTouch buttons

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► TimeLight[™] floor projection
- ► EmotionLight internal lighting

Flexibility

- ▶ VarioDrawer[™] Pro
- ► Cutlery Basket
- ► VarioFlex® Pro basket system
- ▶ Rackmatic™ Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

SMV66MX01A **Fully Integrated Dishwasher**

Kev Features

- ▶ 15 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 44dB(A) rating
- ► LED display

SMV66JX01A **Fully Integrated Dishwasher**

Key Features

- ▶ 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (11 litres per wash)
- ► 4 Star energy (220 kWh per year)
- ► 44dB(A) rating
- ► LED display

SMV46GX01A **Fully Integrated Dishwasher**

Key Features

- ▶ 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 4 Star water rating (13.4 litres per wash)
- ► 4 Star energy (230 kWh per year)
- ► 46dB(A) rating
- ► LED display

Convenience

- ► EcoSilence Drive®
- ► DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ▶ Heat exchanger
- ► 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► InfoLight[™] Floor Projection

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ▶ Heat exchanger
- ► 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► InfoLight[™] Floor Projection

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ▶ Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► InfoLight[™] Floor Projection

Flexibility

Safety

- ► VarioDrawer[™]
- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ▶ Rackmatic[™] Plus

► AquaStop™ Plus

► Child lock (door)

Flexibility

- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ► Rackmatic[™] Plus

Flexibility

- ► Cutlery Basket
- ► VarioFlex® basket system
- ► Rackmatic[™] Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Dimensions (HxWxD) 815-875 x 598 x 550

Semi-integrated dishwashers

Serie 8

Serie 6

Serie 4









SMI88TS02A Semi-integrated Dishwasher

Key Features

- ▶ 15 place settings
- ▶ 8 wash programs (plus 6 wash options)
- ► 5 Star water rating (12 litres per wash)
- ▶ 4 Star energy (235 kWh per year)
- ► 42dB(A) rating (40dB(A) on ExtraQuiet program)
- ▶ 2 TFT Displays with SensorTouch Buttons

Semi-integrated Dishwasher

Key Features

SMI66MS01A

- ▶ 15 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 44dB(A) rating
- ► LED display

SMI66JS01A **Semi-integrated Dishwasher**

Key Features

- ▶ 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (11 litres per wash)
- ► 4 Star energy (220 kWh per year)
- ► 44dB(A) rating
- ► LED display

SMI46GS01A Semi-integrated Dishwasher

Key Features

- ▶ 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 4 Star water rating (13.4 litres per wash)
- ► 4 Star energy (230 kWh per year)
- ► 46dB(A) rating
- ► LED display

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ▶ AquaSensor™
- ► AutoBrilliance™
- ► Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► EmotionLightinternallighting

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay

Convenience

- ► EcoSilence Drive®
- ► DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay

Flexibility

- VarioDrawer™ Pro
- ► Cutlery Basket
- ► VarioFlex® Pro basket system
- ▶ Rackmatic™ Plus

► AquaStop™ Plus

Safety

► Child lock (door)

Flexibility

- ► VarioDrawer[™]
- Cutlery Basket
- ► VarioFlex® Plus basket system
- ▶ Rackmatic™ Plus

Flexibility

- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ► Rackmatic[™] Plus

Flexibility

- ► Cutlery Basket
- ► VarioFlex® basket system
- ▶ Rackmatic™ Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Dimensions (HxWxD) 815-875 x 598 x 573

Under bench dishwashers

Serie 8

Serie 6



SMU88TS04A **Under Bench Dishwasher**

Key Features

- ► 15 place settings
- ▶ 8 wash programs (plus 6 wash options)
- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 42dB(A) rating (40dB(A) on ExtraQuiet program)
- ▶ 2 TFT Displays with SensorTouch Buttons

Convenience

- ▶ FcoSilence Drive®
- ▶ DosageAssist™
- ▶ AquaSensor[™]
- ▶ AutoBrilliance™
- ▶ Heat exchanger
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► EmotionLight internal lighting

Flexibility

- ▶ VarioDrawer™ Pro
- ► Cutlery Basket
- ► VarioFlex® Pro basket system
- ▶ Rackmatic[™] Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

SMP66MX01A **Under Bench Dishwasher**

Key Features

- ► 15 place settings
- ► 6 wash programs
- ► 5 Star water rating
- ► 4 Star energy (235 kWh per year)
- ► 44dB(A) rating

SMP66MX03A* **Under Bench Dishwasher**

- (plus 4 wash options)
- (12 litres per wash)

- ► Integrated LED display

Key Features

- ► 15 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 44dB(A) rating
- ► Integrated LED display

SMP66MX02A **Under Bench Dishwasher**

Key Features

- ► 15 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 44dB(A) rating
- ► Integrated LED display

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor™
- ► AutoBrilliance™
- ► Heat exchanger

Flexibility

► VarioDrawer™

► Cutlery Basket

► Rackmatic™ Plus

- ► 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► InfoLight™ Floor Projection

► VarioFlex® Plus basket system

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor™
- ► AutoBrilliance™
- ► Heat exchanger
- ▶ 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► InfoLight™ Floor Projection

Flexibility

- ▶ VarioDrawer™
- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ► Rackmatic™ Plus

► AquaSensor™

AutoBrilliance™

Convenience

► EcoSilence Drive®

▶ DosageAssist™

- ► Heat exchanger
- ► 3 stage self-cleaning filter
- 1-24 hours time delay
- ► InfoLight™ Floor Projection

Flexibility

- ▶ VarioDrawer™
- Cutlery Basket
- ► VarioFlex® Plus basket system
- ▶ Rackmatic™ Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Dimensions (HxWxD) 815-875 x 598 x 573mm

Serie 4







SMU66JS01A **Under Bench Dishwasher**

Key Features

- ► 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (11 litres per wash)
- ► 4 Star energy (220 kWh per year)
- ► 44dB(A) rating
- ► LED display

Convenience

- ► EcoSilence Drive®
- ► DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► Heat exchanger
- ▶ 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► Anti-fingerprint finish

Flexibility

- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ▶ Rackmatic™ Plus

Safety

- ▶ AquaStop™ Plus
- Child lock (buttons & door)

SMU46KS01A **Under Bench Dishwasher**

Key Features

- ► 14 place settings
- ► 6 wash programs (plus 4 wash options)
- 4 Star water rating (13.4 litres per wash)
- ► 4 Star energy (230 kWh per year)
- ► 46dB(A) rating
- ► LED display

Under Bench Dishwasher

Key Features ▶ 14 place settings

SMU46GS01A

- ► 6 wash programs (plus 4 wash options)
- ▶ 4 Star water rating (13.4 litres per wash)
- ► 4 Star energy (230 kWh per year)
- ► 46dB(A) rating
- ► LED display

Convenience

► EcoSilence Drive®

► DosageAssist™

► AquaSensor™

► AutoBrilliance™

► Heat exchanger

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ▶ AquaSensor™
- ► AutoBrilliance™
- ► Heat exchanger

Flexibility

▶ VarioDrawer™

► Cutlery Basket

► Rackmatic[™] Plus

- ► 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► Anti-fingerprint finish

- **Flexibility** ► Cutlery Basket
- ► VarioFlex® basket system

▶ 3 stage self-cleaning filter

► 1-24 hours time delay

► Anti-fingerprint finish

► Rackmatic[™] Plus

- Safety ► AquaStop™ Plus
- ► Child lock (buttons & door)

► VarioFlex® basket system

Dimensions (HxWxD) 815-875 x 598 x 573mm

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Dimensions (HxWxD) 815-875 x 598 x 573mm

Freestanding dishwashers

Stainless steel.

Serie 8



Serie 6





SMS88TI01A Freestanding Dishwasher

Key Features

- ▶ 15 place settings
- ▶ 8 wash programs (plus 5 wash options)
- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 42dB(A) rating
- ▶ 2 TFT Displays with SensorTouch **Buttons**

Key Features

SMS66MI02A

- ▶ 15 place settings
- ► 6 wash programs (plus 4 wash options)

Freestanding Dishwasher

- ► 5 Star water rating (12 litres per wash)
- ► 4 Star energy (235 kWh per year)
- ► 44dB(A) rating
- ► Large LED display

SMS66JI01A Freestanding Dishwasher

Key Features

- ► 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 5 Star water rating (11 litres per wash)
- ► 4 Star energy (220 kWh per year)
- ► 44dB(A) rating
- ► Large LED display

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™ ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► Anti-fingerprint finish
- ▶ Heat Exchanger

Flexibility

- ► VarioDrawer™ Pro
- ► Cutlery Basket
- ► VarioFlex® Pro basket system
- ► Rackmatic[™] Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► Anti-fingerprint finish
- ► Heat exchanger

Flexibility

- ▶ VarioDrawer™
- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ► Rackmatic[™] Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor™
- ► AutoBrilliance™
- ► 3 stage self-cleaning filter
- ▶ 1-24 hours time delay
- ► Anti-fingerprint finish
- ► Heat exchanger

Flexibility

- ► Cutlery Basket
- ► VarioFlex® Plus basket system
- ► Rackmatic™ Plus

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Dimensions (HxWxD) 845 x 600 x 600mm. Height with top removed: 815mm

Serie 4





Serie 2



SMS46KI01A Freestanding Dishwasher

Key Features

- ► 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 4 Star water rating (13.4 litres per wash)
- ► 4 Star energy (230 kWh per year)
- ► 46dB(A) rating
- ► LED display

SMS46GI01A Freestanding Dishwasher

Key Features

- ► 14 place settings
- ► 6 wash programs (plus 4 wash options)
- ► 4 Star water rating (13.4 litres per wash)
- ► 4 Star energy (230 kWh per year)
- ► 46dB(A) rating
- ► LED display

SMS40E08AU **Freestanding Dishwasher**

Key Features

- ► 13 place settings
- ▶ 4 wash programs (plus 1 wash options)
- ► 3.5 Star water rating (13.5 litres per wash)
- ► 3 Star energy (268 kWh per year)
- ► 50dB(A) rating

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor™
- ► AutoBrilliance™
- ▶ 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► Anti-fingerprint finish
- ► Heat exchanger

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► Anti-fingerprint finish
- ► Heat exchanger

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™ ► AquaSensor[™]
- ► AutoBrilliance™
- ▶ 3 stage self-cleaning filter
- ▶ 3, 6 or 9 hours time delay
- ► Anti-fingerprint finish

Flexibility

- ▶ VarioDrawer™
- ► Cutlery Basket
- ► VarioFlex® basket system
- ▶ Rackmatic[™] Plus

Flexibility

- ► Cutlery Basket
- ► VarioFlex® basket system
- ► Rackmatic[™] Plus

Flexibility

- ► Cutlery Basket
- ► Vario® basket system

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Safety

- ► AquaStop™ Plus
- ► Child lock (door)

Dimensions (HxWxD) 845 x 600 x 600mm. Height with top removed: 815mm

Freestanding dishwashers

White finish.

Serie | **6**



► Child lock (buttons & door)

Serie | **4**





► Child lock (door)

SMS66MW01A Freestanding Dishwasher	SMS46GW01A Freestanding Dishwasher	SMS50E32AU Freestanding Dishwasher
 Key Features ▶ 15 place settings ▶ 6 wash programs (plus 4 wash options) ▶ 5 Star water rating (12 litres per wash) ▶ 4 Star energy (235 kWh per year) ▶ 44dB(A) rating ▶ Large LED display 	 Key Features ▶ 14 place settings ▶ 6 wash programs (plus 4 wash options) ▶ 4 Star water rating (13.4 litres per wash) ▶ 4 Star energy (230 kWh per year) ▶ 46dB(A) rating ▶ LED display 	 Key Features ► 14 place settings ► 5 wash programs (plus 1 wash options) ► 4 Star water rating (13.5 litres per wash) ► 3.5 Star energy (268 kWh per year) ► 48dB(A) rating ► LED display
Convenience ► EcoSilence Drive® ► DosageAssist™ ► AquaSensor™ ► AutoBrilliance™ ► 3 stage self-cleaning filter ► 1-24 hours time delay ► Heat exchanger	Convenience ► EcoSilence Drive® ► DosageAssist™ ► AquaSensor™ ► AutoBrilliance™ ► 3 stage self-cleaning filter ► 1-24 hours time delay ► Heat exchanger	Convenience ► EcoSilence Drive® ► DosageAssist™ ► AquaSensor™ ► AutoBrilliance™ ► 3 stage self-cleaning filter ► 1-24 hours time delay
Flexibility ► VarioDrawer [™] ► Cutlery Basket ► VarioFlex® Plus basket system ► Rackmatic [™] Plus	Flexibility ► Cutlery Basket ► VarioFlex® basket system ► Rackmatic™ Plus	Flexibility ► Cutlery Basket ► Vario® basket system
Safety ► AquaStop™ Plus	Safety ► AquaStop™ Plus	Safety ► AquaStop™ Plus

Dimensions (HxWxD) $845 \times 600 \times 600$ mm. Height with top removed: 815mm

► Child lock (buttons & door)

Slimline & compact dishwashers

Stainless steel

Serie 6







SPU68M05AU

Dishwasher

Key Features

▶ 11 place settings

▶ 6 wash programs

► 4 Star water rating

► 3.5 Star energy

► 46dB(A) rating

► LED display

Convenience

► EcoSilence Drive®

► DosageAssist™

► AutoBrilliance™

► AquaSensor[™]

(plus 2 wash options)

(10.9 litres per wash)

(205 kWh per year)

Slimline Under Bench



SCE53M05AU Compact Built-In Dishwasher **Key Features**

▶ 8 place settings

- ► 5 wash programs (plus 3 wash options)
- ► 3 Star water rating (10.1 litres per wash)
- ► 3 Star energy (180 kWh per year)
- ► 47dB(A) rating
- ► LED display

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ▶ 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ▶ Heat exchanger

Flexibility

- ► Cutlery Basket
- ▶ Vario® basket system

- - **Dimensions (HxWxD)**

595 x 595 x 500mm

SKE53M05AU Compact Built-In . Dishwasher

Key Features

- ► 6 place settings
- ► 5 wash programs (plus 3 wash options)
- 3.5 Star water rating (7.2 litres per wash)
- ▶ 3 Star energy (135 kWh per year)
- ► 47dB(A) rating
- ► LED display

Convenience

- ► EcoSilence Drive®
- ▶ DosageAssist™
- ▶ AquaSensor™
- ► AutoBrilliance™
- ► 3 stage self-cleaning filter
- ► 1-24 hours time delay
- Heat exchanger

- **Flexibility**

Safety

- ► Cutlery Basket
- ▶ Vario® basket system

▶ AquaStop™ Plus

► Child lock (buttons)

Flexibility

- ► VarioDrawer[™]
- ► VarioFlex® basket system

▶ 3 stage self-cleaning filter

► 1-24 hours time delay

► Rackmatic[™] Plus

SPS60M08AU **Slimline Freestanding** Dishwasher

Key Features

- ► 10 place settings
- ► 6 wash programs (plus 2 wash options)
- ► 3.5 Star water rating (10.9 litres per wash)
- ► 3 Star energy (197 kWh per year)
- ► 50dB(A) rating
- ► LED display

Convenience

- ► EcoSilence Drive®
- ► DosageAssist™
- ► AquaSensor[™]
- ► AutoBrilliance™
- ▶ 3 stage self-cleaning filter
- ► 1-24 hours time delay
- ► Anti-fingerprint finish

Flexibility

- ► Cutlery Basket
- ► Vario® basket system

Safety

- ▶ AquaStop™ Plus
- ► Child lock (buttons)

Dimensions (HxWxD)

454 x 595 x 500mm

Safety

- ► AquaStop™ Plus
- ► Child lock (buttons & door)

Dimensions (HxWxD) 815-875 x 448 x 573mm

Safety

- ▶ AquaStop™ Plus
- ► Child lock (buttons & door)

Dimensions (HxWxD)

845 x 450 x 600mm Height with top removed: 815mm





Refrigerators







Serie | 8 Built-in fridge freezer



KIN34P60AU Fully Integrated Bottom Mount Fridge Freezer

Capacity

287 litres ► Total gross capacity: ► Fridge gross capacity: 196 litres ► Fridge net capacity: 189 litres ► Freezer gross capacity: 91 litres ► Freezer net capacity: 75 litres

Energy

▶ 3 Star MEPS 2010, 330 kWh per year

Freshness & Storage

- ► SuperFreezing & SuperCooling
- ► Vegetable CrisperBox and deli drawer on telescopic rails
- ► BigBox extra large freezer storage

Convenience

- ► Digital temperature controls
- EasyLift shelf and EasyLift door bins can be raised or lowered even when fully loaded
- ► LED lighting
- ► SoftClose door system
- ► Reversible door hinges
- ► Door open and temperature-rise alarm
- ► Full ventilation through the plinth for ease of installation

Dimensions (HxWxD)

Product: 1772 x 556 x 545mm Cavity: 1775 x 560 x 550mm

Reference guide see page 128. Technical diagrams see page 145.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Serie | 4 Freestanding fridge freezers



FrostFree Side-by-side Fridge Freezer

Capacity

► Total gross capacity: 652 litres ► Fridge gross capacity: 402 litres ► Fridge net capacity: 380 litres ► Freezer gross capacity: 250 litres ► Freezer net capacity: 224 litres

Energy

▶ 3 Star MEPS 2010, 549 kWh per year

Freshness & Storage

- ► VitaFresh
- ► FrostFree
- ► SuperFreezing function & SuperCooling Function

Convenience

- ► Digital temperature controls
- ► Stainless steel doors with EasyClean finish
- ► MultiAirflow Cooling System
- ► LED lighting
- ► Door open alarm

Dimensions (HxWxD) 1756 x 912 x 732mm



KGN53XI25A FrostFree Bottom Mount Fridge Freezer

Capacity

► Total gross capacity: 452 litres 332 litres ► Fridge gross capacity: ► Fridge net capacity: 323 litres ► Freezer gross capacity: 120 litres ► Freezer net capacity: 86 litres

Energy

▶ 2.5 Star MEPS 2010, 448 kWh per year

Freshness & Storage

- ► AirFresh filter
- ► FrostFree
- ► SuperFreezing function
- ▶ 2 Vegetable drawers with rippled base

Convenience

- ► Digital temperature controls
- ► Stainless steel doors with EasyClean finish
- ► MultiAirflow Cooling System
- ► Reversible door hinges

Dimensions (HxWxD)

1700 x 700 x 770mm

Refrigeration | Features and functions

Features and functions for everyday use.



Freshness & Storage

CrisperBox

Great space for fresh fruit and vegetables. The moisture-regulated CrisperBox not only provides plenty of space for fruit and vegetables, it also helps to keep them crisp and fresh for longer.

ChillerBox

Keep fish and meat fresh and safe. The ChillerBox is a safe place to keep fish, meat and sausages. A cold current of air from the freezer section creates a temperature in the ChillerBox that is lower than in the rest of the refrigerator. Perishable food stays fresh here for much longer. The ChillerBox is also absolutely ideal for chilling drinks.

SuperCooling

Adding new food into the fridge causes the internal temperature to rise, which means the fridge has to work harder to cool down and regulate the temperature again. SuperCooling will prepare your fridge by rapidly reducing the temperature, keeping the contents cool, while quickly cooling the new groceries down to 2°C.

SuperFreezing

Adding new food to the freezer can increase the internal temperature, which can partly defrost existing food. The SuperFreezing function rapidly lowers the temperature in the freezer, ensuring the fresh food is frozen quickly, while surrounding food remains frozen.

Features may vary depending on models. Please check individual product specifications.



Convenience

EasyLift system

Convenient levers quickly and easily adjust the EasyLift glass shelf up or down even when fully loaded. The EasyLift door can be adjusted to accommodate tall items providing flexible storage i.e. bottles of different heights. A full extension telescopic rail system on the drawers ensures easy access and maximum storage.

SoftClose door

Thanks to a special damping mechanism, the fridge door closes softer and quieter than before. When it is open at a 20° angle or less, the door closes automatically and helps prevent the fridge from being left

Telescopic rails

For easy access even to items at the back of drawers. Get even better access to your fresh fruit and vegetable drawers - they glide gently towards you on telescopic rails, which makes inserting and removing food child's play.

TouchControl electronic display panel

Control all functions easily and precisely with just a soft touch, using TouchControl panel. Electronic controls conveniently set into the top of the door frame provide precise and independent temperature control of both the fridge and freezer compartments.

LED lighting

Bright LED lighting across all shelves provides the highest possible visibility throughout the fridge.



Performance

FrostFree

You'll never have to defrost your fridgefreezer again. With a FrostFree model, there's no more condensation of humidity in the appliance or on your food. The generator which draws the heat out of the freezer compartment, defrosts itself automatically from time to time. Thanks to that, there is less humidity in the appliance and practically no formation of ice. This not only saves you time but also energy because ice formation in conventional refrigerators significantly reduces energy efficiency.

MultiAirflow

Even cooling on all levels. Thanks to a constant stream of cold air on all levels, the ventilator-supported MultiAirflow ensures that there are fewer temperature fluctuations. This also means that the cool-down time is shorter. This feature protects your food and guarantees consistently optimal conditions in the entire refrigeration compartment.







Reference guides



Reference Guide Black Glass Ovens

Model		HRG6769B2A Series 8	HBG6753B1A Series 8	HBG675BB2A Series 8	HBG633BB1B Series 8
Туре		Pyrolytic Oven with	Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven
Dimensions.	Wiidala (ana)	Added Steam	60	60	60
Dimensions	Width (cm) Appliance dimensions (H x W x D)	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm
		585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm
	Built-in dimensions (H x W x D)				
11 41	Cavity dimensions (H x W x D)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm
Heating Functions	Number of heating functions	17	13	13	10
Functions	4D HotAir	●*^#	●#	●#	•*
	3D HotAir				
	HotAir Eco/Gentle	•^	•	•	•
	Top and bottom heating	●*^#	•*	•*	•*
	Top and bottom heating Eco	•^	•	•	•
	Fan assisted top and bottom heating				
	Bottom heating	•	•	•	•
	Intensive heating	•			
	Hot air grilling	•*^	•	•	•
	Grill – large area	•	•	•	•
	Grill – small area	•	•	•	•
	Pizza setting	•^	•	•	•
	, and the second	•	•	•	
	Slow cooking	•*			
	Keep warm	•	•	•	
	Preheat ovenware			•	
	Drying	•			
	Reheating (with added steam)	•^			
	Dough proving (with added steam)	•			
	Defrost	•	•	•	•
	Sabbath mode	•	•	•	•
	Automatic rapid heat function	•	•	•	•
	Automatic temperature proposal	•	•	•	•
	Temperature display	•	•	•	•
	Electronic thermostat	•	•	•	•
Sensor &	Bosch Assist (Fully automated cooking)	•			
Automatic	PerfectBake™ sensor	● 1			
Functions		● 1			
	PerfectRoast™ meat probe	•	• (40)	• (40)	
	AutoPilot (Automatic programs)		• (10)	• (10)	
Capacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)
	Water tank	1 litre (net)			
Design		Black glass	Black glass	Black glass	Black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display
	Electronic clock/timer with	•	•	•	•
	end-time programming				
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
	SoftMove door technology	•	•	•	•
	Interior light	LED (ceiling) and Multi-level LED	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)
		lighting (left and right side)			
	No. of shelf positions	5	5	5	5
	Full glass inner door	•	•	•	•
	Removable door	•	•	•	•
	Water tank empty indicator	•			
Cleaning	Pyrolytic cleaning function with	•	•	•	
	compatible accessories and shelving				
	EcoClean Direct cleaning system				• (rear wall)
	Catalytic cleaning system				
	Descaling	•			
	Drying	•			
Safety	Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Triple-glazed door
	Residual heat indicator	•	•	•	•
	Automatic safety switch-off	•	•	•	•
	Child lock function	• (controls & door)	• (controls & door)	• (controls & door)	• (controls)
				, ,	
	Cooling fan	•	•	•	•
Technical	Maximum temperature	300°C	300°C	300°C	300°C
requirements	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied	Fully extendable telescopic rails	• (3-level pyrolytic proof)	• (2-level pyrolytic proof)		
accessories	No. wire racks	2	2	2	2
	No. split grill trays	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1
				1 (pyrolytic proof)	1
	No. universal pans	1 (pyrolytic proof)	1 (pyrolytic proof)	(pyrotytic proor)	•
		1 (pyrolytic proof)	r (pyrotytic proor)	r (pyrodytic proof)	·
Optional	No. universal pans No. baking trays	1 (pyrolytic proof) Refer to page 130	Refer to page 130	Refer to page 130	Refer to page 130

¹ Silicon based cookware and bakeware is not compatible for use. 2 Compatible with Microwave function. *Compatible with Added steam function. *Compatible with PerfectRoast™ meat probe. *Compatible with Rapid heat. *Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

Reference Guide Black Glass Compact Appliances

Model		CSG656RB1A Series 8	CMG633BB1A Series 8
Туре		Combination Steam Oven	Combination Microwave Oven
Dimensions	Width (cm)	60	60
	Appliance dimensions (H x W x D)	455 x 594 x 548mm	455 x 594 x 548mm
	Built-in dimensions (H x W x D)	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm
	Cavity dimensions (H x W x D)	235 x 480 x 415mm	237 x 480 x 392mm
Heating	Number of heating functions	18	7
Functions	4D HotAir	●*^#	●#2
	3D HotAir		
	HotAir Eco/Gentle	•^	•
	Top and bottom heating	●*^*	
	Top and bottom heating Eco	•^	
	Bottom heating	•	
	Intensive heating	●*	
	Hot air grilling	●*^	•2
	Grill – large area	•	$lackbox{}^2$
	Grill – small area	•	●2
	Pizza setting	•^	
	Slow cooking	•	
	Keep warm	●*	
	Preheat ovenware	•	•
	Drying	•	
	Reheating (using steam)	•^	
	Dough proving (using steam)	•	
	Defrost (using steam)	•	
	Pure Steaming	•^	
	Sabbath mode	•	•
	Automatic rapid heating	•	•
	Automatic temperature proposal	•	•
	Temperature display	•	•
	Pure Microwave		•
	Microwave with INNOWAVE inverter technology		• (5 power levels - 90, 180, 360, 600, 900W)
	Electronic thermostat	•	•
Sensor &	Bosch Assist (Fully automated cooking)	•	
Automatic Functions	PerfectBake™ sensor	● ¹	
runctions	PerfectRoast™ meat probe	● ¹	
	AutoPilot (Automatic programs)		● (14)
Capacity	Volume (usable litres)	47 litres (net)	45 litres (net)
	Water tank	1 litre (net)	
Design		Black glass	Black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Symbol Display
	Electronic clock/timer with end-time programming	•	•
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
	SoftMove door technology	•	•
	Interior light	LED (ceiling)	LED (ceiling)
	No. of shelf positions	3	3
	Full glass inner door	•	
	Removable door	•	
	Water tank empty indicator	•	
Cleaning	EcoClean Direct cleaning system	 (ceiling, sides and rear wall) 	
	Steam cleaning system	•	
	Descaling program	•	
	Drying	•	
Safety	Door	Triple-glazed door	Triple-glazed door
	Residual heat indicator	•	•
	Automatic safety switch-off	•	•
	Child lock function	● (controls)	• (controls)
	Cooling fan	•	•
Technical requirements	Maximum temperature	250°C maximum top and bottom heating temperature; 30°C–100°C steam temperature	275°C maximum temperature; 900W maximum microwave power output with 5 power levels: 90/180/360/600/900W
	Total connected load	3.3kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied	Fully extendable telescopic rails	● (1-level)	
accessories	No. wire racks	2	1
	No. universal pans / Baking trays	1 pan	1 pan
	No. non perforated steam trays	1 small	
	No. perforated steam trays	1 small, 1 extra large	
Optional		Refer to page 130	Refer to page 130
accessories			

Reference Guide Stainless Steel Ovens

Heating Functions Sensor & Automatic Functions	Width (cm) Appliance dimensions (H x W x D) Built-in dimensions (H x W x D) Cavity dimensions (H x W x D) Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	Series 8 Pyrolytic Oven with Added Steam 60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 17 •*** •* • • • • • • • • • •	Series 8 Pyrolytic Oven 60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 ^^* ^^ ^ ^ ^ ^	Series 8 Pyrolytic Oven 60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 • ' • • • • • • • • • • • • • • • • •	Series 8 Pyrolytic Oven 60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 •' • • • • • • • • • • • •
Dimensions Heating Functions Sensor & Automatic Functions	Appliance dimensions (H x W x D) Built-in dimensions (H x W x D) Cavity dimensions (H x W x D) Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	Added Steam 60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 17 **** A ** A ** ** ** ** ** *	60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 ^* ^^ ^ ^ ^ ^ ^ ^	60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 •' • • • • • • • • • • •	60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 •' • • • • • • • • • • • • •
Heating Functions Sensor & Automatic Functions	Appliance dimensions (H x W x D) Built-in dimensions (H x W x D) Cavity dimensions (H x W x D) Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	60 595 x 594 x 548mm 585 - 595 x 560 - 568 x 550mm 357 x 480 x 415mm 17 • *** • * • * • * • * • * • * • * • * •	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 ^* ^^ ^^ ^^ ^^ ^^ ^^ ^^ ^^ ^	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 • • • • • • • • • • • • •	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 •' • • • • • • • • • • • •
Heating Functions Sensor & Automatic Functions	Appliance dimensions (H x W x D) Built-in dimensions (H x W x D) Cavity dimensions (H x W x D) Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 17 • * ^ * • ^ • ^ • ^ • ^ • ^ • ^	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 ^* ^^ ^^ ^^ ^^ ^^ ^^ ^^ ^^ ^	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 • • • • • • • • • • • • •	595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm 13 •' • • • • • • • • • • • •
Heating Functions Sensor & Automatic Functions	Built-in dimensions (H x W x D) Cavity dimensions (H x W x D) Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Intensive heating Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	357 x 480 x 415mm 17 • *^* • ^ • * ^ • ^ • ^ • ^ • ^	357 x 480 x 415mm 13 ^* ^* ^^ ^^ ^^ ^^ ^^ ^^ ^^ ^	357 x 480 x 415mm 13 • ' • • • • • • • • • • • • •	357 x 480 x 415mm 13 •' • • • • • • • • • • • •
Heating Functions Sensor & Automatic Functions	Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	17 • **A* • **A* • ** • • • • • • • • • • • • • • • • •	13 • ^* • ^ • ^ • ^ • ^ • ^ • ^ •	13 •' • • • • • • • • • • • • •	13 • ' • • • • • • • • • • • • •
Heating Functions Sensor & Automatic Functions	Number of heating functions 4D HotAir 3D HotAir HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	• A	• A • • • • • • • • • • • • • • • • • •	•	• • • • • • • • • • • • • • • • • • •
Sensor & Automatic Functions	3D HotAir HotAir Eco/Gentle Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	•	•
Sensor & Automatic Functions	HotAir Eco/Gentle Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	***** **** *** *** ** ** ** **	• • • • • • • • • • • • • • • • • • •	•	•
Sensor & Automatic Functions	Top and bottom heating Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	***** **** *** *** ** ** ** **	• • • • • • • • • • • • • • • • • • •	•	•
Sensor & Automatic Functions	Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	• • • • • • • • • • • • • • • • • • •	•^ • • • • • • • •	•	•
Sensor & Automatic Functions	Top and bottom heating Eco Fan assisted top and bottom heating Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	• • • • • • • • • • • • • • • • • • •	• • • • • • • •	•	•
Sensor & Automatic Functions	Bottom heating Intensive heating Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	•	•
Sensor & Automatic Functions	Intensive heating Hot air grilling Grill – large area Grill – small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	• • • • • • • • • • • • • • • • • • •	• • • • • • • • • • • • • • • • • • •	•	•
Sensor & Automatic Functions	Hot air grilling Grill - large area Grill - small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	• • • •	•	•
Sensor & Automatic Functions	Grill – large area Grill – small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	0 0 0 0 0 0 0 0	• • • •	•	•
Sensor & Automatic Functions	Grill – small area Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	•	•	•
Sensor & Automatic Functions	Pizza setting Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	•	•	•
Sensor & Automatic Functions	Slow cooking Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	•	•	•
Sensor & Automatic Functions	Keep warm Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	0' 0 0 0 0 0	•	•	•
Sensor & Automatic Functions	Preheat ovenware Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	•	•	•	-
Sensor & Automatic Functions	Drying Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	•^	•	•	•
Sensor & Automatic Functions	Reheating (with added steam) Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	•^			
Sensor & Automatic Functions	Dough proving (with added steam) Defrost Sabbath mode Automatic rapid heat function	•			
Sensor & Automatic Functions	Defrost Sabbath mode Automatic rapid heat function	•			
Sensor & Automatic Functions	Sabbath mode Automatic rapid heat function				
Sensor & Automatic Functions	Automatic rapid heat function	•	•	•	•
Sensor & Automatic Functions		•	•	•	•
Sensor & Automatic Functions	A CONTRACTOR OF THE CONTRACTOR	•	•	•	•
Sensor & Automatic Functions	Automatic temperature proposal	•	•	•	•
Sensor & Automatic Functions	Temperature display	•	•	•	•
Automatic Functions	Electronic thermostat	•	•	•	•
Functions	Bosch Assist (Fully automated cooking)	•	•		
	PerfectBake™ sensor	●1	● ¹		
	PerfectRoast™ meat probe	●1	●1		
Capacity	AutoPilot (Automatic programs)			● (10)	● (10)
	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)
	Water tank	1 litre (net)			
Design		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display
	Electronic clock/timer with	•	•	•	•
	end-time programming				
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
	SoftMove door technology	•	•	•	•
	Interior light	LED (ceiling) and Multi-level LED lighting (left and right side)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)
	No. of shelf positions	5	5	5	5
	Full glass inner door	•	•	•	•
	Removable door	•	•		•
	Water tank empty indicator	•	•		
	Pyrolytic cleaning function with	•	•	•	•
Cteaning	compatible accessories and shelving		•		
	EcoClean Direct cleaning system				
	Catalytic cleaning system				
	Descaling	•			
	Drying	•			
Safety	Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door
	Residual heat indicator	•	•	•	•
	Automatic safety switch-off	•	•	•	•
	Child lock function	• (controls & door)	• (controls & door)	• (controls & door)	● (controls & door)
	Cooling fan	•	•	•	•
Technical	Maximum temperature	300°C	300°C	300°C	300°C
requirements	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Fully extendable telescopic rails	• (2-level pyrolytic proof)	• (2-level pyrolytic proof)	• (2-level pyrolytic proof)	
	No. wire racks	2	2	2	2
	No. split grill trays	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)
	No. universal pans	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)
	No. baking trays				
Optional	ito. bailing trayo	Refer to page 130	Refer to page 130	Refer to page 130	Refer to page 130

¹ Silicon based cookware and bakeware is not compatible for use. *Compatible with Added steam function. ^Compatible with PerfectRoast™ meat probe. *Compatible with Rapid heat. †Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

HBG672BS1A	HBG633BS1A
Series 8	Series 8
Pyrolytic Oven	EcoClean Direct Oven
60	60
595 x 594 x 548mm	595 x 594 x 548mm
585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm
357 x 480 x 415mm	357 x 480 x 415mm
8 ●*	10 •*
•	
•	•
•*	•*
•	•
	_
	•
•	•
•	•
	•
•	•
•	•
•	•
•	•
•	•
•	•
→ (10)	
● (10) 71 litres (net)	71 litres (net)
, , dates (nec)	, i de es (liet)
Stainless steel and black glass	Stainless steel and black glass
Anthracite enamel cavity	Anthracite enamel cavity
TFT Touch Symbol Display	TFT Touch Symbol Display
•	•
Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
•	•
Halogen (ceiling)	Halogen (ceiling)
5	5
•	•
•	•
•	
	• (rear wall)
Quadruple glazed CoolTough Dans	Triple glazed door
Quadruple-glazed CoolTouch Door	Triple-glazed door
•	•
● (controls & door)	• (controls)
•	•
300°C	300°C
3.6kW	3.6kW
220-240V / 50-60Hz	220-240V / 50-60Hz
2	2
1 (pyrolytic proof)	1
1 (pyrolytic proof)	1
Refer to page 130	Refer to page 130

Reference Guide Stainless Steel Compact Appliances

Model		CSG656RS2A Series 8	CDG634BS1 Series 8	CMG656RS1A Series 8
уре		Combination Steam Oven	Pure Steam Oven	Combination Microwave Oven
Dimensions	Width (cm)	60	60	60
	Appliance dimensions (H x W x D)	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm
	Built-in dimensions (H x W x D)	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm
	Cavity dimensions (H x W x D)	235 x 480 x 415mm	265 x 325 x 439mm	
				237 x 480 x 392mm
leating unctions	Number of heating functions	18	4	13
anctions	4D HotAir	●*^#		●^#2
	3D HotAir			
	Hot Air			
	HotAir Eco/Gentle	•^		•^
	Top and bottom heating	•*^*		●^#2
	Top and bottom heating Eco	^ ^		△ ^
	,	•		•
	Bottom heating			•
	Intensive heating	•*		
	Hot air grilling	● *^		●^2
	Grill – large area	•		$lackbox{0.5}{\bullet}^2$
	Grill – small area	•		$lackbox{}^2$
	Pizza setting	•^		•^
	Slow cooking	•		•
		•*		•
	Keep warm	•		•
	Preheat ovenware	•		•
	Drying	•		
	Reheating (using steam)	•^	•	
	Dough proving (using steam)	•	•	
	Defrost (using steam)	•	•	
	Pure Steaming	•^	•	
	Sabbath mode	•		•
		•		•
	Automatic rapid heating	•	_	•
	Automatic temperature proposal	•	•	•
	Temperature display	•	•	•
	Pure Microwave			•
	Microwave with INNOWAVE inverter technology			• (5 power levels - 90, 180, 360, 600, 900W)
	Electronic thermostat	•		
nsor &	Bosch Assist (Fully automated cooking)	•		•
itomatic	PerfectBake™ sensor	● 1		● 1
inctions		•		
	PerfectRoast™ meat probe	•1		•1
	AutoPilot (Automatic programs)		● (20)	
apacity	Volume (usable litres)	47 litres (net)	38 litres (net)	45 litres (net)
	Water tank	1 litre (net)	1.3 litre (net)	
esign		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Graphic Display
		Trouch Grapine Display	11 1 Toden Symbot Disptay	Troden drapnie bisplay
	Electronic clock/timer with end-time programming		•	
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
	SoftMove door technology	•	•	•
	Interior light	LED (ceiling)	Halogen (left)	LED (ceiling)
	No. of shelf positions	3	4	3
	Full glass inner door	•	•	
	Removable door	•	•	
		-	· ·	
	Water tank empty indicator	• ();	•	• ();
eaning	EcoClean Direct cleaning system	● (ceiling, sides and rear wall)		● (ceiling, sides and rear wall)
	Steam cleaning system	•		
	Descaling program	•	•	
	Drying	•		
fety	Door	Triple-glazed door	Double-glazed door	Triple-glazed door
	Residual heat indicator	•	0 0	•
	Automatic safety switch-off	•	•	•
		• () ()		
	Child lock function	• (controls)	• (controls)	• (controls & door)
	Cooling fan	•	•	•
chnical quirements	Maximum temperature	250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature	30-100°C steam temperature	300°C maximum temperature; 900W maximum microwave power output with 5 power levels: 90/180/360/600/900W
	Total connected load	3.3kW	1.75kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	•		220 240V / JUTUUNZ	220 2401/00 0002
pplied cessories	Fully extendable telescopic rails	• (1-level)		• (4.1 I)
ecosones	Partially extendable telescopic rails			● (1-level)
	No. wire racks	1		1
	No. universal pans / Baking trays	1 pan		1 pan / 1 tray
	No. non perforated steam trays	1 small	1 large	
	No. perforated steam trays	1 small, 1 extra large	1 large	
			•	
			•	
	Cleaning sponge			
	Grid high / Grid flat			
	Grid high / Grid flat Turntable			
	Grid high / Grid flat			

¹ Silicon based cookware and bakeware is not compatible for use. *Compatible with Added steam function. ^Compatible with PerfectRoast™ meat probe. #Compatible with Rapid heat. ² Compatible with Microwave function.

	CMG633BS1B	COA565GS0A	CMA585MS0A	BEL554MS0A
!	Series 8	Series 6	Series 6	Series 6
(Combination Microwave Oven	Microwave with Steam Function	Combination Microwave Oven	Microwave
(60	60	60	60
	155 x 594 x 548mm	455 x 594 x 545mm	454 x 594 x 570mm	382 x 594 x 388mm
	150-455 x 560-568 x 550mm	450-452 x 560-568 x 550mm	450-452 x 560-568 x 550mm	382 x 560 x 550mm
	237 x 480 x 392mm	236 x 432 x 350mm	250 x 420 x 420mm	208 x 328 x 369mm
	7	4	5	200 x 320 x 30311111
	#2	+	3	
)-			
			•'	
•				
	2		●#2	
	2	●² (2000W)	●² (1750W)	●² (1200W)
	2	• (2000W)	• (1750W)	• (1200W)
	•	•	- 4	
			•'	
•				
		_		
		•		
•				
•		•	•	
•	•			
•	•			
		•	• (5 power levels - 90, 180, 360, 600, 900W)	• (5 power levels - 90, 180, 360, 600, 900
	(5 power levels - 90, 180, 360, 600, 900W)	• (5 power levels – 90, 180, 360, 600, 1000W)	• (e pener terete es, 150, 550, 550, 550, 550)	• (o poner teres) = 50, 150, 550, 550, 550
			-	
•	•	•	•	
	(14)	● (15)	● (15)	• (8)
	• (14) 15 litres (net)	• (15) 36 litres (net)	● (15) 44 litres (net)	● (8) 25 litres (net)
	● (14) 15 litres (net)	36 litres (net)	● (15) 44 litres (net)	● (8) 25 litres (net)
4	15 litres (net)	36 litres (net) 0.8 litres (net)	44 litres (net)	25 litres (net)
4	15 litres (net) Stainless steel and black glass	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle	44 litres (net) Stainless steel with metal bar handle	25 litres (net) Black glass with stainless steel trims
	15 litres (net) Stainless steel and black glass Anthracite enamel cavity	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel	44 litres (net) Stainless steel with metal bar handle Stainless steel	25 litres (net) Black glass with stainless steel trims Stainless steel
	15 litres (net) Stainless steel and black glass	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle	44 litres (net) Stainless steel with metal bar handle	25 litres (net) Black glass with stainless steel trims
	15 litres (net) Stainless steel and black glass Anthracite enamel cavity	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel	44 litres (net) Stainless steel with metal bar handle Stainless steel	25 litres (net) Black glass with stainless steel trims Stainless steel
	15 litres (net) Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white)	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white)
	15 litres (net) Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white)	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white)
	IS litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white)
	IS litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
:	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) Bright Symbol Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Basch Control Ring with TFT Display LED (ceiling) B	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Basch Control Ring with TFT Display LED (ceiling) Basch Control Ring with TFT Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Basch Control Ring with TFT Display LED (ceiling) B	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Basch Control Ring with TFT Display LED (ceiling) Basch Control Ring with TFT Display	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) Griple-glazed door (controls)	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) (controls) (controls) 175°C maximum temperature; 900W maximum nicrowave power output with 5 power levels:	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) (controls) (controls) 275°C maximum temperature; 900W maximum microwave power output with 5 power levels: 900/180/360/600/900W	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door
	Is litres (net) Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) (controls) (controls) 175°C maximum temperature; 900W maximum nicrowave power output with 5 power levels:	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls)	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)
	Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) (controls) (controls) 275°C maximum temperature; 900W maximum microwave power output with 5 power levels: 900/180/360/600/900W	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door
	Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) (controls) 275°C maximum temperature; 900W maximum microwave power output with 5 power levels: 30/180/360/600/900W 8.6kW	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity IFT Touch Symbol Display Bosch Control Ring with TFT Display LED (ceiling) (controls) 275°C maximum temperature; 900W maximum microwave power output with 5 power levels: 30/180/360/600/900W 8.6kW	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Criple-glazed door (controls) Controls) Controls Contro	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Criple-glazed door (controls) Controls) Controls Contro	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) Triple-glazed door (controls) 40-230°C	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 Litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) (ceiling) (controls) 40-230°C 3.35kW 230-240V / 50Hz	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW 220-230V / 50Hz
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 Litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) (ceiling) (controls) 40-230°C 3.35kW 230-240V / 50Hz	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW 220-230V / 50Hz
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW 220-240V / 50Hz	44 Litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) (ceiling) (controls) 40-230°C 3.35kW 230-240V / 50Hz	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling) Single-glazed door 1.45kW 220-230V / 50Hz
	Stainless steel and black glass Anthracite enamel cavity FFT Touch Symbol Display Bosch Control Ring with TFT Display Bosch Ceiling) Ceiling) Criple-glazed door Controls) Controls) Controls) Controls) Controls Contr	36 litres (net) 0.8 litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) 4 Triple-glazed door (controls) 3.1kW	44 Litres (net) Stainless steel with metal bar handle Stainless steel LCD-display control (white) Retractable rotary control knobs LED (ceiling) (ceiling) (controls) 40-230°C 3.35kW 230-240V / 50Hz	25 litres (net) Black glass with stainless steel trims Stainless steel LED-display control (white) Retractable rotary control knobs LED (ceiling)

Reference Guide Stainless Steel Ovens

Model		HBT578FS2A Series 6	HBG5575S0A Series 6	HBA5570S0A Series 6	HBA574BS0A Series 4
Туре		Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven	Pyrolytic Oven
Dimensions	Width (cm)	60	60	60	60
	Appliance dimensions (H x W x D)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm
	Built-in dimensions (H x W x D)	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm
	Cavity dimensions (H x W x D)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm
Heating	Number of heating functions	10	7	7	7
Functions	4D HotAir				
	3D HotAir	●^#	●^ <i>*</i>	•*	•*
	HotAir Eco/Gentle	•^	•^	•	•
	Top and bottom heating	•^*	•^*	•	•
	Top and bottom heating Eco				
	Fan assisted top and bottom heating				
	Bottom heating	•	•	•	•
	Intensive heating				
	Hot air grilling	•^	•^	•	•
	Grill – large area	•	•	•	•
	Grill – small area				
	Pizza setting	•^	•^	•	•
	Slow cooking	•			
	Keep warm	•			
	Preheat ovenware				
	Drying				
	Reheating (with added steam)				
	Dough proving (with added steam)				
	Defrost	•			
	Sabbath mode	•			
	Rapid heat function	•	•	•	•
	Automatic temperature proposal	•			
	Temperature display	•			•
	Electronic thermostat				
Sensor &	Bosch Assist (Fully automated cooking)				
Automatic	PerfectBake™ sensor				
Functions	PerfectRoast™ meat probe				
	Single point meat probe	•	•		
	AutoPilot (Automatic programs)	● (30)	● (10)	● (10)	● (10)
Capacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)
Design		Stainless steel with	Stainless steel with	Stainless steel with	Stainless steel with
		metal bar handle	metal bar handle	metal bar handle	metal bar handle
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LCD-display control (white)	LCD-display control (white)	LCD-display control (white)	LED-display control (red)
	Electronic clock/timer with end-time programming	•	•	•	•
	Controls	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	SoftClose door	•	• The ractable rotally control knobs	Thetractable rotary control knobs	netractable rotally control mobs
	Interior light	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)
	No. of shelf positions	5	5	5	5
	Full glass inner door	•	•	•	•
	Removable door	•	•		•
Cleaning	Pyrolytic cleaning function	•		•	•
Cleaning	EcoClean Direct cleaning system		• (ceiling, sides and rear wall)	• (ceiling, sides and rear wall)	
	Catalytic cleaning system		Certing, sides and real watt)	(certing, sides and real watt)	
Safety	Door	Quadruple-glazed	Triple-glazed door	Triple-glazed door	Quadruple-glazed
Sarety	D001	CoolTouch door	Tripte-glazed door	ITIpte-gtazed door	CoolTouch door
	Residual heat indicator	•	•	•	
	Automatic safety switch-off	•			•
	Child lock function	• (controls & door)	• (controls)	• (controls)	• (controls & door)
	Cooling fan	•	•	•	•
Technical	Maximum temperature	30-275°C	50 -275°C	50 -275°C	50-275°C
requirements	Total connected load	3.6kW	3.4kW	3.4kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied	ClipRail telescopic rails	, 00 002	1	1	,
accessories	Partially extendable telescopic rails	● (1-level)	•		
	No. wire racks	2	2	2	2
	No. split grill trays	1	1	1	1
	No. universal pans	1	1	1	1
	No. baking trays				·
	No. of half trays (slimline universal pans)	1 (consists of 2 parts)			
Optional	ivo. or nau days (sumune universal pans)	Refer to page 130	Refer to page 130	Refer to page 130	Refer to page 130
accessories		πειει το μαβε 130	Herer to page 130	neier to page 100	Note: to page 100

¹ Silicon based cookware and bakeware is not compatible for use. ^Compatible with single point meat probe. #Compatible with Rapid heat. [†]Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

HBA534ES0A	HBF133BS0A
Series 4	Series 2
EcoClean Direct Oven	EcoClean Direct Oven
60	60
595 x 594 x 548mm	595 x 594 x 548mm
585-595 x 560-568 x 550mm	575-597 x 560-568 x 550mm
357 x 480 x 415mm	329 x 479 x 420mm 5
T .	5
•*	•*
•	•
•	•
•	
•	•
•	•
•	•
•	
•	•
71 litres (net)	66 litres (net)
	,
Stainless steel with metal bar handle	Stainless steel with metal bar handle
Grey enamel cavity	Grey enamel cavity
LED-display control (red)	LED-display control (red)
•	•
Retractable rotary control knobs	Retractable rotary control knobs
Halogen (ceiling)	Halogen (ceiling)
5	5
•	•
•	•
• (rear wall)	• (rear wall)
Triple-glazed door	Triple-glazed door
● (controls)	• (controls)
•	•
50-275°C	50-275°C
3.4kW	3.3kW
220-240V / 50-60Hz	220-240V / 50-60Hz
• (1-level)	
2 (1-tevet)	1
1	·
1	1
	1
Refer to page 130	Refer to page 130

Reference Guide 90cm Ovens

Model		VBD578FS0 Series 6	VBC578FS0 Series 6	VBC5540S0 Series 4
Туре		Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven
Dimensions	Width (cm)	90	90	90
	Appliance dimensions (H x W x D) Built-in dimensions (H x W x D) Cavity dimensions (H x W x D)	594 x 896 x 570mm 600–604 x 860–864 x 560mm 371 x 724 x 417mm	475 x 896 x 572mm 477–480 x 860–864 x 560mm 282 x 724 x 417mm	475 x 896 x 572 mm 477-480 x 860-864 x 560 mm 282 x 724 x 417mm
Heating Functions	Number of heating functions 4D HotAir	10	10	7
	3D HotAir	•	•	•
	HotAir Eco/Gentle			
	Top and bottom heating	•	•	•
	Top and bottom heating Eco	•	•	•
	Fan assisted top and bottom heating	•	•	
	Bottom heating	•	•	•
	Intensive heating Hot air grilling	•	•	•
	Grill – large area	•	•	•
	Grill - small area	•	•	•
	Pizza setting	•	•	•
	Rotisserie	•	•	
	Slow cooking			
	Keep warm			
	Preheat ovenware			
	Drying			
	Reheating (with added steam) Dough proving (with added steam)			
	Defrost	•	•	
	Sabbath mode	•	•	
	Automatic rapid heat function	•	•	•
	Automatic temperature proposal			
	Temperature display	•	•	
	Electronic thermostat	•	•	
Sensor & Automatic	Bosch Assist (Fully automated cooking)			
Functions	PerfectBake™ sensor			
	PerfectRoast™ meat probe			
	Single point meat probe AutoPilot (Automatic programs)			
Capacity	Volume (usable litres)	112 litres (net)	85 litres (net)	85 litres (net)
		, ,	, ,	
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LCD-display control (white)	LCD-display control (white)	LED-display control (red)
	Electronic clock/timer with end-time programming	•	•	•
	Controls SoftClose door	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	Interior light	2 Halogen	2 Halogen	2 Halogen
	interior ugit	(left and right side walls)	(left and right side walls)	(left and right side walls)
	No. of shelf positions	5	4	4
	Full glass inner door	•	•	•
	Removable door	•	•	•
Cleaning	Pyrolytic cleaning function EcoClean Direct cleaning system	•	•	• (sides and rear wall)
	Catalytic cleaning system			• (sides and rear wall)
Safety	Door	Quadruple-glazed	Quadruple-glazed	Triple-glazed door
Guicty	200.	CoolTouch door	CoolTouch door	mpto bazed door
	Residual heat indicator	•	•	
	Automatic safety switch-off	•	•	•
	Child lock function	• (controls & door)	• (controls & door)	• (controls)
Technical	Cooling fan Maximum temperature	● 50-280°C	● 50-280°C	● 30-250°C
requirements	Total connected load	4.2kW	3.3kW	3.1kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied	ClipRail telescopic rails	1	1	1
accessories	Partially extendable telescopic rails			
	No. wire racks	2	2	1
	No. split grill trays	1 universal pan insert grid	1 universal pan insert grid	
	No. universal pans	1	1	1
	No. baking trays	1	1	1
Optional	No of rotary spit	1 Refer to page 130	1 Refer to page 130	Refer to page 130
accessories		nerer to page 150	Herer to page 100	neier to page 100

Reference Guide Double Ovens

Model		MBG5787S0A	MBA534BS0A	
		Series 6	Series 4	
Туре		Pyrolytic Double Oven	EcoClean Direct Double Oven	
Dimensions	Width (cm)	60	60	
	Appliance dimensions (H x W x D)	888 x 594 x 550mm	888 x 594 x 550mm	
	Built-in dimensions (H x W x D)	875-888 x 560-568 x 550mm	875-888 x 560-568 x 550mm	
	Cavity dimensions (H x W x D)	166 x 480 x 426mm (top)	166 x 480 x 426mm (top)	
	Number of beating fronting	357 x 480 x 415mm (bottom)	357 x 480 x 415mm (bottom)	
Heating Functions	Number of heating functions 4D HotAir	4 (top) and 10 (bottom)	3 (top) and 7 (bottom)	
	3D HotAir	•" (bottom)	• (bottom)	
	HotAir Eco/Gentle	• (bottom)	• (bottom)	
	Top and bottom heating	•" (top and bottom)	•" (top and bottom)	
	Top and bottom heating Eco	- (- (
	Fan assisted top and bottom heating			
	Bottom heating	• (top and bottom)	• (bottom)	
	Intensive heating			
	Hot air grilling	• (bottom)	• (bottom)	
	Grill – large area	● (top and bottom)	• (top and bottom)	
	Grill – small area	● (top)	● (top)	
	Pizza setting	● (bottom)	• (bottom)	
	Slow cooking	• (bottom)		
	Keep warm	• (bottom)		
	Preheat ovenware			
	Drying			
	Reheating (with added steam)			
	Dough proving (with added steam)			
	Defrost	• (bottom)		
	Sabbath mode	•		
	Automatic rapid heat function	•		
	Automatic temperature proposal	•		
	Temperature display Electronic thermostat	•		
Sensor &	Bosch Assist (Fully automated cooking)	•		
Automatic	PerfectBake™ sensor			
Functions	PerfectRoast™ meat probe			
	Single point meat probe	•		
	AutoPilot (Automatic programs)	• (30)		
Capacity	Volume (usable litres)	34 litres (net) top	34 litres (net) top	
		71 litres (net) bottom	71 litres (net) bottom	
Design		Stainless steel with	Stainless steel with	
	Cavity	metal bar handle Grey enamel cavity	metal bar handle Grey enamel cavity	
	Display	LCD-display control (white)	LED-display control (red)	
	Electronic clock/timer with	display control (write)	LED display control (red)	
	end-time programming	Y	•	
	Controls	Retractable rotary control knobs	Retractable rotary control knob	
	SoftClose door	•		
	Interior light	Halogen	Halogen	
		1 (top) and 1 (bottom)	1 (top) and 1 (bottom)	
	No. of shelf positions	3 (top) and 5 (bottom)	3 (top) and 5 (bottom)	
	Full glass inner door	•	•	
01	Removable door	•	•	
Cleaning	Pyrolytic cleaning function		• (rear wall)	
	EcoClean Direct cleaning system Catalytic cleaning system		→ (rear wall)	
Safety	Door	Quadruple-glazed CoolTouch	Triple-glazed door	
ourcty	200.	door (top and bottom)	(top and bottom)	
	Residual heat indicator			
	Automatic safety switch-off			
	Child lock function	● (controls & door)	● (controls)	
	Cooling fan	•	•	
Technical	Maximum temperature	30-275°C	50-275°C	
requirements	Total connected load	6.3kW	5.9kW	
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	
	ClipRail telescopic rails	1		
	f. Double H. Consequence Laboration and Consequence	• (1-level – bottom)		
	Partially extendable telescopic rails			
	No. wire racks	2	2	
	No. wire racks No. grill trays	1	1	
	No. wire racks No. grill trays No. universal pans			
	No. wire racks No. grill trays No. universal pans No. baking trays	1	1	
Supplied accessories Optional	No. wire racks No. grill trays No. universal pans	1	1	

Reference Guide Freestanding Cookers

		HSB838357A	HSB738357A	HSB738354A	HXR39KI50A
		Series 8	Series 6	Series 4	Series 4
Туре		Dual Fuel Pyrolytic Cooker	Dual Fuel Cooker	Dual Fuel Cooker	Dual Fuel Cooker
Dimensions	Width (cm)	90cm	90cm	90cm	60cm
	Appliance dimensions (H x W x D)	900 x 898 x 600mm	900 x 898 x 600mm	900 x 898 x 600mm	850 x 600 x 600mm
Heating	Oven				
unctions	Number of heating functions	9	8	6	7
	HotAir	•	•	•	•
	Hot Air Eco / Gentle				•
	Top and bottom Heating	•	•	•	•
	Top and bottom Heating Eco	•	•		
	Fan assisted top and bottom Heating	•	•	•	
	Hot Air and bottom heat	•	•	-	
	Bottom heat		•		•
	Bottom heating and fan			•	-
	-				•
	Pizza setting				•
	Automatic rapid heat function	_	_	_	•
	Hot Air grilling	•	•	•	•
	Grill - large area	•	•	•	•
	Rotisserie	•	•		
Capacity	Volume (usable litres)	112	112	112	66
Design	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LED-display control (red)	LED-display control (red)		LED-display control (red)
	Electronic clock/timer	•	•		•
	Mechanical timer			•	
	Controls	Sword control knobs	Sword control knobs	Sword control knobs	Retractable rotary control
					knobs
	SoftClose door	•			•
	Interior light	2 Halogen lights (left and right)	2 Halogen lights (left and right)	1 Halogen light	1 Halogen light
	No. of shelf positions	5	5	5	5
	Full glass inner door	•	•	•	•
	Removable door	•	•	•	•
	21cm utensil drawer	•	•		•
	Height adjustable legs (50mm)	•	•	•	•
Cleaning	Pyrolytic cleaning function	•			
	EcoClean Direct cleaning system				• (ceiling, sides and rear w
	Catalytic liners		• (sides and rear wall)	• (rear wall)	, , , , , , , , , , , , , , , , , , ,
Safety	Door	Quadruple-glazed	Triple-glazed door	Triple-glazed door	Triple-glazed door
		CoolTouch door			
	Residual heat indicator	•	•		
	Automatic safety switch-off	•	•	•	
	Child lock function	● (controls & door)	• (controls)		• (controls)
	Cooling fan	•	•	•	•
Burner /	Cookton				
	Cooktop	6 hurners including	6 hurners including:	5 hurners including:	A hurners including:
Zone Output		6 burners including:	6 burners including:	5 burners including:	4 burners including:
Zone Output	Front left	Wok burner 14 MJ/h	Wok burner 14 MJ/h	High-speed burner 12 MJ/h	Wok burner 13.5 MJ/h
Zone Output	Front left Rear left	Wok burner 14 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h		-
Zone Output	Front left Rear left Front centre	Wok burner 14 MJ/h	Wok burner 14 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h
Zone Output	Front left Rear left Front centre Middle centre	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h	High-speed burner 12 MJ/h	Wok burner 13.5 MJ/h
Zone Output	Front left Rear left Front centre Middle centre Rear centre	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h
Zone Output	Front left Rear left Front centre Middle centre Rear centre Front right	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h
Zone Output	Front left Rear left Front centre Middle centre Rear centre Front right Rear right	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h
Zone Output (Size)	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h
Zone Output (Size)	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Zone Output (Size) Convenience	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h •	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Zone Output (Size) Convenience Safety Controls	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h •	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h •	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Convenience Gafety Controls Fechnical	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • 260°C	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h • 50-275°C
Convenience Gafety Controls Fechnical	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • • • 260°C 4.2kW	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h • 50–275°C 3.3kW
Convenience Gafety Controls Fechnical	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • 260°C	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h • 50-275°C
Convenience Controls Fechnical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • • • 260°C 4.2kW	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h • 50-275°C 3.3kW
Convenience Controls Technical equirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • • 260°C 4.2kW 220-240V / 50-60Hz	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Convenience Controls Fechnical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Convenience Safety Controls Fechnical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Convenience Safety Controls Fechnical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • 260°C 3.2kW 220-240V / 50-60Hz	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Convenience Safety Controls Fechnical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • 260°C 3.2kW 220-240V / 50-60Hz	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Standard burner 6.5 MJ/h Standard burner 6.5 MJ/h
Convenience Controls Fechnical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • 260°C 3.2kW 220-240V / 50-60Hz	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h 50-275°C 3.3kW 220-240V / 50-60Hz 2 1 1
Convenience Safety Controls Technical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h 260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1 1	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h
Convenience Safety Controls Technical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support Espresso cross support	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h 260°C 3.2kW 220-240V / 50-60Hz 1	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h 50-275°C 3.3kW 220-240V / 50-60Hz 2 1 1
Burner / Zone Output (Size) Convenience Safety Controls Technical requirements Supplied accessories	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support Espresso cross support LPG conversion kit	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h • • • 260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1 1	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h 50-275°C 3.3kW 220-240V / 50-60Hz 2 1 1
Convenience Safety Controls Technical requirements Supplied	Front left Rear left Front centre Middle centre Rear centre Front right Rear right Continuous enamelled cast-iron trivets with rubber feet Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support Espresso cross support	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	Wok burner 14 MJ/h Standard burner 7 MJ/h High-speed burner 12 MJ/h Economy burner 4 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h	High-speed burner 12 MJ/h Standard burner 7 MJ/h Wok burner 14 MJ/h Economy burner 4 MJ/h Standard burner 7 MJ/h 260°C 3.2kW 220-240V / 50-60Hz 1	Wok burner 13.5 MJ/h Standard burner 6.5 MJ/h Economy burner 4 MJ/h Standard burner 6.5 MJ/h 50-275°C 3.3kW 220-240V / 50-60Hz 2 1 1

Model		HLS79R350A	HKS79R250A
		Series 6	Series 6
Туре		Induction/Pyrolytic Cooker	Ceramic/Pyrolytic Cooker
Dimensions	Width (cm)	60cm	60cm
	Appliance dimensions (H x W x D)	850 x 600 x 600mm	850 x 600 x 600mm
Heating Functions	Oven	0	0
	Number of heating functions 3D HotAir	8	8
	Hot Air Eco / Gentle	•	•
	Top and bottom Heating	•	•
	Bottom Heating	•	•
	Hot Air grilling	•	•
	Grill - large area	•	•
	Pizza setting	•	•
	Slow cooking	•	•
	Sabbath mode	•	•
	Automatic rapid heat function	•	•
	Automatic temperature proposal	•	
	Temperature display	•	•
	Electronic thermostat	•	•
	AutoPilot (Automatic programs)	● (30)	• (30)
Capacity	Volume (usable litres)	66	63
Design	Cavity	Grey enamel cavity	Grey enamel cavity
	Display	LCD-display control (white)	LCD-display control (white)
	Electronic clock/timer	•	•
	Controls	Retractable rotary control knobs	Retractable rotary control knobs
	SoftClose door	•	•
	Interior light	1 Halogen light	1 Halogen light
	No. of shelf positions	5	5
	Full glass inner door	•	•
	Removable door	•	•
	21cm utensil drawer	•	•
	Height adjustable legs (50mm)	•	•
Cleaning	Pyrolytic cleaning function	•	•
Safety	Door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door
	Automatic safety switch-off	•	•
	Child lock function	• (controls & door)	• (controls & door)
	Cooling fan	•	•
Burner / Zone Output	Cooktop	4 zones including:	4 zones including:
	Front left	CombiZone:	Standard zone:
(Size)			1.8kW (180mm)
(Size)	Front tert	1.8kW (180mm)	
(Size)	Rear left	1.8kW (180mm) CombiZone:	Dual circuit zone:
(Size)	Rear left	CombiZone: 1.8kW (180mm)	Dual circuit zone: 2.4kW (170 / 260mm)
(Size)		CombiZone: 1.8kW (180mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone:
(Size)	Rear left Front right	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm)
(Size)	Rear left	CombiZone: 1.8kW (180mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone:
	Rear left Front right	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone:
	Rear left Front right Rear right	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone:
	Rear left Front right Rear right 17-stage power setting	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
	Rear left Front right Rear right 17-stage power setting 9-stage power setting	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
[⊋] erformance	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm) •	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety Fechnical requirements	Rear left Front right Rear right 17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety Technical requirements Supplied	Rear left Front right Rear right 17-stage power setting 9-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety Technical requirements Supplied	Rear left Front right Rear right 17-stage power setting 9-stage power setting 9-owerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks No. of split grill trays	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)
Performance Convenience Safety Technical requirements Supplied accessories	Rear left Front right Rear right 17-stage power setting 9-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks	CombiZone: 1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	Dual circuit zone: 2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)

Model		CTL636ES1
		Series 8
Туре		Built-in fully-automatic coffee machine
Dimensions	Appliance dimensions (H x W x D)	455 x 594 x 375mm
	Built-in dimensions (H x W x D)	449 x 558 x 354mm
Design	Stainless steel and black glass	•
Flavour	SensoFlow System: Heating system for maximum and constant brewing temperature AromaPro Concept: Optimal aroma extraction	•
	One-touch preparation: Ristretto, Espresso,	•
	Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffè Latte at the touch of a button	_
	AromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes	•
	Beverage temperature adjustable individually: coffee 3 levels, hot water 4 levels	•
	Including BRITA Intenza water filter: Reduces the lime content of water and filters substances affecting smell and taste	•
Convenience	TFT Touch Graphic Display with interactive menu	•
	MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso	•
	IndividualCup Volume: Cup sizes adjustable individually, to ensure your cup gets filled just as far as you would like	•
	Coffee outlet and milk frother height-adjustable: Up to 15cm high Latte Macchiato glasses fit underneath	•
	OneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities	•
	Water tank removable for easy refilling	• (2.4 litre volume)
	Early warning if water tank almost empty or bean container almost empty	•
	Flexible milk solution: Decide for yourself if you prefer connecting the provided milk container or using any other container, e.g. a milk carton	•
Performance	Short user manual always at hand inside appliance SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic	•
	CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety	•
	One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother	•
	In addition to beverages also available separately: milk foam, warm milk, hot water	•
	Reduced heat-up time: Fastest first cup	•
	Water pump with 19 bar pressure Separate chute for ground coffee	•
	15,000 cup warranty: Consistently high appliance quality from the first cup to the 15,000th (valid for	•
Hygiene	non-commercial use within 24 months) Removable brewing unit: Easy and hygienic cleaning under running water	•
	AutoMilk Clean: Automatically steam cleans the milk system after every beverage	•
	Milk frother removable and dishwasher-proof SinglePortion Cleaning: Complete emptying	•
Technical	of all pipes after each brewing process Electrical connection rating	1600W
requirements	Current	10A
	Voltage	220-240V / 50-60Hz
Supplied _.	1 BRITA water filter cartridge	•
accessories	1 measuring spoon	•
	1 milk container (insulated), connection hose and pipe	•
	1 test strip 1 set assembly screws	• (9)
	r set assembly screws	→ (3)

Reference Guide Coffee Machine Reference Guide Warming Drawers

Model		BID630NS1A	BIC630NS1A
		Series 8	Series 8
Туре		60cm Built-in Warming Drawer	60cm Built-in Warming Drawer
Dimensions	Appliancedimensions	290 x 594 x 548mm	140 x 594 x 548mm
(H x W x D)	Built-in dimensions	290 x 560-568 x 550mm	140 x 560-568 x 550mm
	Internal dimensions	242 x 468 x 458mm	92 x 468 x 458mm
Heating functions	Base element and fan heating with 4 power levels	•	•
Suitable for	Slow cooking	•	•
	Proving yeast dough	•	•
	Defrosting	•	•
	Keeping food warm	•	•
	Pre-warming cups, plates and ovenware	•	•
Temperature range	from approx. 40-80°C	•	•
Design		Stainless steel and black glass	Stainless steel and black glass
	Cavity	52 litre interior drawer volume	20 litre interior drawer volume
	Electronic rotary temperature control	•	•
	Inner compartment ceramic glass base	•	•
Technical	Max. weight load	25kg	25kg
requirements	Total connected load	0.81kW	0.81kW
	Voltage	220-240V / 50-60Hz	220-240V / 50-60Hz







Reference Guide 2-in-1 Cooktop with integrated ventilation

Model		PVS851F21E
		Series 6
Туре		2-in-1 Cooktop with integrated ventilation
Dimensions	Width (cm)	80
	Appliance dimensions (W x D)	802 x 522mm
	Built-in dimensions (W x D)	198 x 780 x 490–500mm
Design		Black ceramic glass, frameless with beveled front and sides
Burner /		4 zones including:
Zone Output (Size)	Front left	CombiZone: 2.2kW / 3.7kW (210mm)
	Rear left	CombiZone: 2.2kW / 3.7kW (210mm)
	Front right	Standard zone: 1.8kW / 3.1kW (180mm)
	Rear right	Standard zone: 1.4kW / 2.2kW (145mm)
Performance	17-stage power setting	•
	PerfectFry™ Sensor	● (4 levels)
	PowerBoost	•
	CombiZone	•
	MoveMode	2 Auto Power Levels
Convenience	WipeProtection	•
	QuickStart	•
	ReStart	•
	Energy consumption display	•
	Dual function timer with automatic switch-off	•
	Automatic pot detection	•
Safety	Child lock	•
Curciy	2-stage residual heat indicators	•
	Automatic safety stuff-off	•
Electronictouch-controls	DirectSelect 1.0	•
Extraction rate	Maximum normal use	551m³/h
according to EN 61591	Intensive	689m³/h
(ducted)	Intensive	
Extraction rate according to EN 61591	Maximum normal use	557m³/h
(recirculated)	Intensive	620m³/h
Ventilation performance	Suitable for ducted or recirculated extraction (accessory is respectively required)	•
	Ducted extraction kit	HEZ381401
	Recirculation extraction kit	HEZ381501
	Power levels	9
	Intensive setting with automatic switch back	•
	to previous setting 6 min	
	Residual shutdown with automatic run-on time 30 min	•
	AutoOn	•
	EcoSilence Drive® brushless motor	•
Noise* level (ducted)	Noise levels (min/max)	42dB / 70dB
	Intensive	75 dB
Noise*level (recirculated)	Noise levels (min/max)	42dB / 73dB
	Intensive	75dB
Cleaning	Saturation indicator	•
	Cast-iron air inlet grid, heat resistant, dishwasher safe	•
	Dishwasher safe 12 layer stainless steel grease filters	•
	200ml dishwasher safe liquid collector unit	•
	2000ml dishwasher safe liquid spillover safety tank	•
Technical requirements	Total connected load	6.9kW
- conficult requirements	Power requirements	220-240V / 50-60Hz
	Minimum worktop thickness	20mm
Optional accessories	Griddle plate HEZ390522	•
optional accessories	Teppan Yaki Large (40 x 20cm) HEZ390512	•
	4 piece cookware set HEZ3900042	•
	Stainless steel roasting pan with lid HEZ390011	
	Stainless steet roasting pan with tid HEZ390011 Stainless steet wok HEZ390090	•
	PerfectFry™ Sensor induction pan 21cm HEZ390230	
	refrectify Sensor induction part 2 term ne 2390230	•


Reference Guide Electric Cooktops

Model		PXV975DC1E Series 8	PXE875DC1E Series 8	PXX675DC1E Series 8	PIV995DC1E Series 8	PIV975DC1E Series 8	PVS875FB5E Series 6	PXE651FC1E Series 6
Туре		FlexInduction®	FlexInduction®	FlexInduction®	Induction	Induction	Combilnduction®	FlexInduction®
Dimensions	Width (cm)	90	80	60	90	90	80	60
	Appliance dimensions (W x D)	916 x 527mm	816 x 527mm	606 x 527mm	916 x 527mm	916 x 527mm	816 x 527mm	592 x 522mm
	Cut-out dimensions (W x D)	880 x 490-500mm	750-780 x 490-500mm	560 x 490-500mm	880 x 490-500mm	880 x 490-500mm	750-780 x 490-500mm	560 x 490-500mm
Design		Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear		Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear		Black ceramic glass, frameless with beveled front and sides
Burner / Zone Output	E 6	5 zones including:	4 zones including:	4 zones including:	5 zones including:	5 zones including:	4 zones including:	4 zones including:
(Size)	Front left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	(190 x 240mm)	(180mm)	(180mm)	(190 x 210mm)	(240 x 200mm)
	Rear left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW Boost (190 x 210mm)	FlexZone: 2.2kW / 3.7kW Boost (240 x 200mm)
	Front centre							
	Rear centre	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)			Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)		
	Front right	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.4kW / 2.2kW (145mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 2.2kW / 3.7kW (210mm)
	Rear right	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm) *Total FlexZone: 3.3kW / 3.7kW Boost (400 x 230mm)	Standard zone: 2.6kW / 3.7kW (280mm) *Total FlexZone: 3.3kW / 3.6kW Boost (400 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm) *Total FlexZone: 3.3kW / 3.7kW Boost (380 x 240mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 2.6kW / 3.7kW (280mm) *Total CombiZone: 3.6kW (380 x 210mm)	Standard zone: 1.4kW / 2.2kW (145mm)
Performance	17-stage power setting	•	•	•	•	•	•	•
	9-stage power setting							
	PerfectFry™ Sensor	•	•	•	•	•		● (4 levels)
	PowerBoost	•	•	•	•	•	•	•
	ShortBoost	•	•	•	•	•		
	FlexZone	•	•	•				•
	CombiZone						•	
	MoveMode	3 Auto Power Levels	3 Auto Power Levels	3 Auto Power Levels			2 Auto Power Levels	
Convenience	WipeProtection	•	•	•	•	•	•	•
	Keep Warm QuickStart	•	•	•	•	•	_	_
	ReStart	•	•	•	•	•	•	•
	Energy consumption	•	•	•	•	•	•	•
	display Dual function timer with automatic switch-off	•	•	•	•	•	•	•
	Automatic pot detection	•	•	•	•	•	•	•
	Automatic boil start							
Safety	Child lock	•	•	•	•	•	•	•
	2-stage residual heat indicators Residual heat indicator	•	•	•	•	•	•	•
	Automatic safety switch-off	•	•	•	•	•	•	•
Electronic	DirectSelect Premium	•	•	•	•	•		
touch- controls	DirectSelect 1.0						•	•
Controts	TouchSelect							
	Sword control knobs							
Technical	Total connected load	11.1kW	7.4kW	7.4kW	11.1kW	11.1kW	7.4kW	7.4kW
requirements	Power requirements	220-240V / 50-60Hz		,	220-240V / 50-60Hz	•	,	,
	Minimum worktop thickness	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)
Optional accessories	Griddle plate HEZ390522	•	•	•			•	•
	Teppan Yaki Large (40 x 20cm) HEZ390512	•	•	•			•	•
	4 piece cookware set HEZ3900042	•	•	•	•	•	•	•
	Stainless steel roasting	•	•	•			•	•
	pan with lid HEZ390011 Stainless steel wok	•	•	•	•	•	•	•
	HEZ390090	_	_	_	_	_	-	_
	PerfectFry™ Sensor induction pan 21cm HEZ390230	•	•	•	•	•		•

PVS675FB5E Series 6	PIE631FB1E Series 6	PIJ611BB1E Series 4	PKM875DP1A Series 8	PKG775DB1A Series 8	PKN675DB1A Series 8	PKE611D17A Series 4	PKE611CA1A Series 2
			·				
Combilnduction®	Induction	Induction	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic
60	60	60	80	70	60	60	60
606 x 527mm	592 x 522mm	592 x 522mm	816 x 527mm	710 x 527mm	606 x 527mm	592 x 522mm	583 x 513mm
560 x 490-500mm	560 x 490-500mm	560 x 490-500mm	780 x 500mm	560-640 x 490-500mm (fits cut-out for 60cm)	560 x 500mm	560 x 490-500mm	560 x 490-500mm
Black ceramic glass, beveled front and back with stainless steel trim	Black ceramic glass, beveled front	Black ceramic frameless glass	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic frameless glass	Black ceramic frameless glass
4 zones including:	4 zones including:	3 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
CombiZone: 2.2kW / 3.7kW Boost (190 x 210mm)	Standard zone: 1.8kW / 3.1kW (180mm)		Dual circuit zone: 1.2kW / 2.1kW (145 / 210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 2kW (180mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
CombiZone: 2.2kW / 3.7kW Boost (190 x 210mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.2kW (145mm)	Dual circuit zone: 0.8kW / 2.0kW (120 / 180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170 / 265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
			Dual circuit zone: 1.7kW / 2.4kW (180 / 230mm)				
Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Dual circuit/roaster zone: 1kW / 2kW / 3.4kW / 4.6kW (120 / 180 / 270 / 370mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Dual circuit zone: 1kW / 2.2kW (145 / 210mm)	Standard zone: 2.2kW (210mm)	Standard zone: 2.0kW (180mm)
Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)		Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
*Total CombiZone: 3.6kW (380 x 210mm)							
•	•	•	•	•	•	•	
							•
•	•	•	•				
•	•	•	•				
•							
2 Auto Power Levels							
•	•		•	•	•		
	•		•	•	•		
•	•	•					
•	•	•	•	•	•	•	
•	•	•	•	•	•	•	
•	•		•	•	•		
•	•	•	•	•	•		
•	•	_					
•	•	•	•	•	•		
_	_	_	-	_	-	_	
•	•	•	•	•	•	•	
•	•	•	•	•	•	•	
							•
•	•	•	•	•	•	•	
			•	•	•		
•	•						
		•				•	
							•
6.9kW	7.4kW	7.4kW	11.2kW	6.6kW	7.5kW	6.6kW	6.6kW
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60H
30mm (see space requirements for oven)	30mm (see space	20mm (30mm over oven, see space	20mm (see space requirements for oven)	20mm (see space requirements for oven)	20mm (see space requirements for oven)	20mm (see space requirements for oven)	20mm (see space requirements for ove
		requirements for oven)					
•							
•							
•	•	•	•	•	•	•	•
•							
•	•	•	•	•	•	•	•

Reference Guide Gas Cooktops

Model		PPS9A6B90A	PPQ7A6B20A	PPH6A6B20A	PCT9A5B90A
		Series 6	Series 6	Series 6	Series 6
Туре		Gas	Gas	Gas	Gas
Dimensions	Width (cm)	90	75	60	90
	Appliance dimensions (W x D)	915 x 520mm	752 x 520mm	590 x 520mm	915 x 520mm
	Cut-out dimensions (W x D)	850-852 x 490-502mm	560-562 x 480-492mm	560-562 x 480-492mm	850-852 x 490-502mm
Design		Black tempered frameless glass	Black tempered frameless glass	Black tempered frameless glass	Stainless Steel
Burner / Zone		5 burners including:	5 burners including:	4 burners including:	6 burners including:
Output	Front left		Economy burner 4 MJ/h	Standard Burner 6.85 MJ/h	Dual flame wok burner 19.5 MJ/h
	Centre left	Wok burner 15 MJ/h			
	Rear left		Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h
	Front centre	Economy burner 4 MJ/h			Economy burner 4 MJ/h
	Middle centre		Wok burner 15 MJ/h		
	Rear centre	Standard burner 6.85 MJ/h			Standard burner 6.85 MJ/h
	Front right	Standard burner 6.85 MJ/h	Standard Burner 6.85 MJ/h	Economy burner 4 MJ/h	Dual flame wok burner 19.5 MJ/h
	Centre right				
	Rear right	High-speed burner 11 MJ/h	High-speed burner 11 MJ/h	Wok burner 13.6 MJ/h	High-speed burner 11 MJ/h
Convenience	FlameSelect® valve technology (precise control in 9 steps)	•	•	•	•
	Individual cast-iron trivets with rubber feet	•	•	•	
	3 piece cast-iron trivets with rubber feet				•
	2 piece cast-iron trivets with rubber feet				
	Steel trivets with cast iron finish and rubber feet				
	Steel trivets with rubber feet				
	Enamelled cast-iron burner caps	•	•	•	•
Safety	Flame failure fitted to each burner	•	•	•	•
Controls	Sword knob controls	•	•	•	•
Technical	Total connected load	43.7 MJ/h	43.7 MJ/h	31.3 MJ/h	67.7 MJ/h
requirements	Power requirements	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz
	Minimum worktop thickness	30mm	30mm	30mm	30mm
Supplied	Wok ring support	•	•	•	•
accessories	Espresso cross support	•	•	•	•
	LPG conversion kit	•	•	•	•
Optional	4 piece cookware set HEZ390042	•	•	•	•
accessories	Stainless steel wok HEZ390090	•	•	•	•
Other	Suitable for NG or LPG	•	•	•	•







PCR9A5B90A	PCR7A5B90A	PCI6A5B90A	PBH6B5B90A	PBH6B5B60A	PGB3B5B80A
Series 6	Series 6	Series 6	Series 2	Series 2	Series 4
Gas	Gas	Gas	Gas	Gas	Gas
90	75	60	60	60	30
915 x 520mm	750 x 520mm	582 x 520mm	580 x 510mm	580 x 510mm	288 x 505mm
850-852 x 490-502mm	560-562 x 480-492mm	560-562 x 480-492mm	560 x 480-490mm	560 x 480-490mm	268-270 x 490-492mm
Stainless Steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
5 burners including:	5 burners including:	4 burners including:	4 burners including:	4 burners including:	2 burners including:
Economy burner 4 MJ/h	Economy burner 4 MJ/h		Wok burner 15 MJ/h	Wok burner 15 MJ/h	
		Wok burner 15 MJ/h			
Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h		Standard burner 6.5 MJ/h	Standard burner 6.5 MJ/h	
		Economy burner 4 MJ/h			Economy burner 3.8 MJ/h
Dual flame wok burner 19.5 MJ/h	Dual flame wok burner 19.5 MJ/h				
		Standard burner 6.85 MJ/h			High-speed burner 11.25 MJ/h
Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h		Economy burner 4 MJ/h	Economy burner 4 MJ/h	
		High-speed burner 11 MJ/h			
High-speed burner 11 MJ/h	High-speed burner 11 MJ/h		Standard burner 6.5 MJ/h	Standard burner 6.5 MJ/h	
•	•	•			
•	•				
		•	•		
				•	
					•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
48.2 MJ/h	48.2 MJ/h	36.85 MJ/h	32 MJ/h	32 MJ/h	15.05 MJ/h
240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz
30mm	30mm	30mm	30mm	30mm	30mm
•	•	•	•	•	
•	•	•			
•	•	•	•	•	•
•	•	•	•	•	
•	•	•	•	•	
•	•	•	•	•	•


Reference Guide Rangehoods


Model		DWB91PR50A	DWB97LM50A	DWB96BC50A	DWP96BC50A	DWP66BC50A
		Series 8	Series 6	Series 2	Series 2	Series 2
Туре		Canopy	Canopy	Canopy	Canopy	Canopy
Dimensions	Width (cm)	90	90	90	90	60
	Appliance dimensions (H x W x D)	628–954 x 898 x 500mm (ducted) or 628–1064 x 898 x 500mm (recirculating)	628–954 x 898 x 500mm (ducted) or 628–1064 x 898 x 500mm (recirculating)	635–965 x 900 x 500mm (ducted) or 635–1075 x 900 x 500mm (recirculating)	799–975 x 900 x 500mm (ducted or recirculating)	799–975 x 600 x 500mm (ducted or recirculating)
	Built-in Dimensions (H x W X D)					
Design		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
	TouchControls	•	•			
	Lightline	•				
	LED-display		•			
	On/Off main switch control	•	•	•	•	•
	Electronic controls for power and light	•	•			
	Push button controls for power and light			•	•	•
	Slide controls for power and light					
	Rocker switches for power and light					
	Concealed power and light controls					
	Lighting	3 x 1.5W LED SoftLights with dimmer function	3 x 1.5W LED lights	2 x 1.5W LED lights	2 x 1.5W LED lights	2 x 1.5W LED lights
Power	Maximum extraction rate	964m³/h	697m³/h	590m³/h	600m³/h	570m³/h
functions	3 power levels plus 2 intensive settings	•				
	3 power levels plus 1 intensive setting		•			
	3 power levels			•	•	•
	Intensive setting with automatic switch back to previous setting 6min	•	•			
	Residual shutdown with automatic run-on time 1–10min	•				
	Rim ventilation system					
	EcoSilence Drive® brushless motor	•	•			
	Powerful single motor with twin fan			•	•	•
	Powerful twin motor					
	Powerful single motor					
Noise*	Noise min. / max.	45dB / 64dB	45dB / 55dB	49dB / 70dB	51dB / 69dB	49dB / 69dB
	Noise max. (intensive setting)	73dB	66dB			
	Sound insulation mats	•	•			
Convenience	PerfectAir sensor	•				
	Cooktop-based hood control ready	•				
	Dual layer metal grease filters	•	•			
	Dishwasher-safe metal grease filter	● (3)	● (3)	● (3)	● (3)	● (2)
	Saturation indicator for filters	•				
	Back-pressure flap (one-way)	•	•	•	•	•
Technical	Total connected load	265W	145W	220W	220W	220W
requirements	Power requirements	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Ducting connection diameter	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm
Included accessories						
Optional	Recirculation kit	DHZ5345	DHZ5345	DWZ0DX0U0	DHZ5275	DHZ5275
accessory	Charcoal filter for recirculation					
	Stainless steel pelmet for front controls					
	Installation kit for 90cm cupboard					
Other	Ducted and recirculated air operation	•	•	•	•	•

DHL895DAU Series 8	DHL785BAU Series 6	DHL575CAU Series 6	DHL555BAU Series 4	DLN54AA70A Series 2	DFS097E50A Series 6	DFS097A50A Series 4	DFS067A50A Series 4	DFM064W50A Series 2
Integrated	Integrated	Integrated	Integrated	Integrated	Slideout	Slideout	Slideout	Slideout
86	70	52	53	53	90	90	60	60
418 x 860 x 282mm	418 x 700 x 282mm	418 x 520 x 300mm	255 x 530 x 380mm	208 x 534 x 300mm	426 x 898 x 290mm	426 x 898 x 290mm	426 x 598 x 290mm	203 x 598 x 290mm
418 x 836 x 264mm	418 x 676 x 264mm	418 x 496 x 264mm	255 x 500 x 350mm	208 x 493 x 257mm	385 x 524 x 290mm	385 x 524 x 290mm	385 x 524 x 290mm	162 x 526 x 290mm
Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish	Stainless Steel	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish
					•			
•	•	•			•	•	•	
•								
			•	•				•
						•	•	•
2 x 1W LED lights with dimmer function	2 x 20W halogen lights	2 x 1W LED lights	2 x 20W halogen lights	2 x 3W LED lights	2 x 3W LED Softlights with dimmer function	2 x 3W LED lights	2 x 3W LED lights	2 x 20W halogen lights
800m³/h	730m³/h	610m³/h	650m³/h	420m³/h	730m³/h	740m³/h	740m³/h	400m³/h
					•			
•	•	•	•			•	•	
				•				•
•	•	•			•	•	•	
● (30 mins)					•	•	•	
•	•	•						
•					•	•	•	
	•	•						
			•					
				•				•
41dB / 64dB	53dB / 66dB	50dB / 67dB	41dB / 59dB	55dB / 67dB	40dB / 54dB	43dB / 55dB	43dB / 50dB	59dB / 68dB
70dB	69dB	70dB	69dB		65dB	68dB	68dB	
					•			
•	•	•	•		•	•	•	•
● (2)	● (2)	● (2)	● (2)	● (1)	● (2)	● (2)	● (2)	● (2)
•					•			
				•				
172W	315W	252W	240W	121W	146W	146W	140W	145W
220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm
					Stainless steel pelmet included as separate accessory*	Stainless steel pelmet included as separate accessory*	Stainless steel pelmet included as separate accessory*	Stainless steel pelmet included as separate accessory^
DHZ5605	DHZ5605	DHZ5605		DWZ0IN0T0	DSZ4565	DSZ4565	DSZ4565	DSZ4545
			DHZ7305					
					DSZ4965			
					DSZ4920	DSZ4920		
•	•	•	•	•	•	•	•	•

Rangehood extraction options

There are two ways to clean the air in your kitchen: ducting or recirculation. Both methods remove odours effectively. Choose the best extraction option for your kitchen:

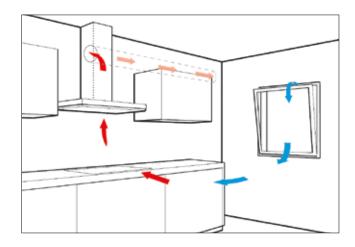



Ducted extraction



Ducting is the most effective way to clear the air in your kitchen.



A ducted rangehood directs air from the kitchen to the outside through a metal duct.



The rangehood needs to be situated on or close to an outside wall, so the outside can be reached via ducting.

Recirculation kit




Odours are extracted and filtered, through a carbon filter, then purified air is returned to the room.



Can be installed anywhere – without the need to install a duct pipe through the wall or ceiling.



To maintain performance, the carbon filter needs to be replaced on a regular basis.

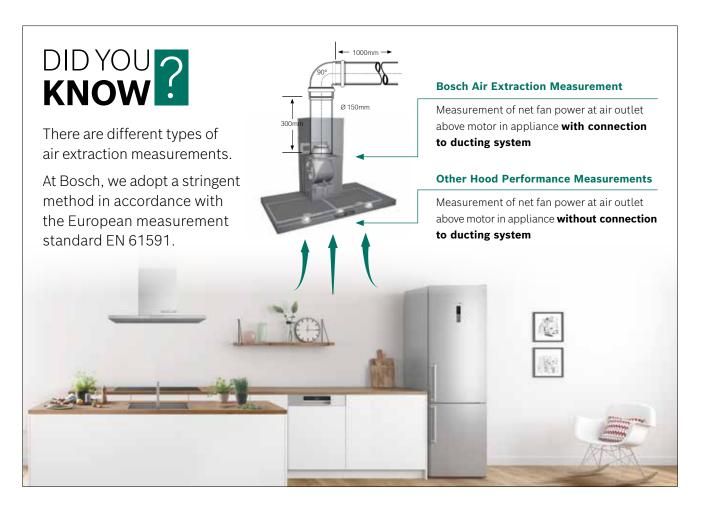

Calculate the extraction power you need

When choosing a rangehood, always match its air extraction power to the size of your kitchen. An effective rangehood should be able to replace the air in your kitchen up to 12 times per hour.



Reference Guide Dishwashers

Model		SMV88TX02A Series 8	SMV66MX01A Series 6	SMV66JX01A Series 6	SMV46GX01A Series 4	SMI88TS02A Series 8	SMI66MS01A Series 6
Туре		Fully Integrated	Fully Integrated	Fully Integrated	Fully Integrated	Semi-integrated	Semi-integrated
Water	Star rating (litres per wash)	5 Star (12L)	5 Star (12L)	5 Star (11L)	4 Star (13.4L)	5 Star (12L)	5 Star (12L)
Energy	Star rating (kWh per year)	4 Star (235 kWh)	4 Star (235 kWh)	4 Star (220 kWh)	4 Star (230 kWh)	4 Star (235 kWh)	4 Star (235 kWh)
Dimensions	Appliance dimensions (H x W x D)	815-875 x 598 x 550mm		815-875 x 598 x 550mm		815-875 x 598 x 573mm	815-875 x 598 x 573mm
Capacity	International place settings	15	15	14	14	15	15
Design	Interior tub material	Stainless steel	Stainless steel	Stainless steel	Polinox®	Stainless steel	Stainless steel
	Display type	1 TFT Display	LED	LED	LED	2 TFT Displays	LED
	TimeLight™ Floor Projection	•					
	InfoLight™ Floor Projection		•	•	•		
	EmotionLight internal lighting	•				•	
	Anti-fingerprint finish						
	SensorTouch Buttons	•				•	
Wash	Auto Gentle 35–45°C	•				•	
programs	Auto Wash 45-65°C	•	•	•	•	•	•
	Auto Intensive 65–75°C	•	•	•		•	•
	Eco Wash 45°C	•	•	•	•	•	•
	Normal 45°C	•	•	•	•	•	•
	Intensive 65°C						
					_		
	Pots & Pans 70°C				•		
	Glass Wash 40°C	•	_	_	_	•	_
	Super Wash 60°C		•	•	•		•
	Quick Wash 60min 65°C	•	•	•		•	•
	Quick Wash 29min 45°C*	•	•	•	•	•	•
	Pre-Rinse				•		
	ExtraQuiet 40dB 50°C	•				•	
Wash options	h SpeedPerfect® / VarioSpeed • • • • • •	•					
options	HalfLoadPlus	•	•	•	•	•	•
	IntensiveZone™	•				•	
	HygienePlus™	•				•	
	Machine Care	•	•	•	•	•	•
	ExtraDry	•	•	•	•	•	•
ActiveWater	AutoBrillaince™	•	•	•	•	•	•
Features	AquaSensor™	•	•	•	•	•	•
	DosageAssist™	•	•	•	•	•	•
	detergent system EcoSilence Drive®	•	•	•	_	•	
		•	•	•	•	•	•
	3 stage self-cleaning filter	•	•	•	•	•	•
	Heat Exchanger	•	•	•	•	•	•
Flexibility	VarioDrawer™ (cutlery drawer)	Pro	•			Pro	•
	Basket System	VarioFlex®Pro	VarioFlex®Plus	VarioFlex®Plus	VarioFlex®	VarioFlex®Pro	VarioFlex®Plus
	Rackmatic™ Plus	•	•	•	•	•	•
	Top basket roll on/roll off adjust						
Accessories	Cutlery basket	•	•	•	•	•	•
	GlassSecure tray	•				•	
	3 small item clips		•	•	•		•
	Large Item Sprayhead	•	•	•	•	•	•
	Toe kick panel						
	Vapour barrier plate	•	•	•	•	•	•
Convenience	dB rating / ExtraQuiet rating	42dB / 40dB	44dB	44dB	46dB	42dB / 40dB	44dB
	Time delay	1-24 hours					
Safety	AquaStop™ Plus	•	•	•	•	•	•
	Child button lock						•
	Child door lock	•	•	•	•	•	•

SMI66JS01A	SMI46GS01A	SMU88TS04A	SMP66MX01A	SMP66MX03A	SMP66MX02A	SMU66JS01A	SMU46KS01A
Series 6	Series 4	Series 8	Series 6	Series 6	Series 6	Series 6	Series 4
Semi-integrated	Semi-integrated	Under Bench					
5 Star (11L)	4 Star (13.4L)	5 Star (12L)	5 Star (12L)	5 Star (12L)	5 Star (12L)	5 Star (11L)	4 Star (13.4L)
4 Star (220 kWh)	4 Star (230 kWh)	4 Star (235 kWh)	4 Star (220 kWh)	4 Star (230 kWh)			
815-875 x 598 x 573mm							
14	14	15	15	15	15	14	14
Stainless steel	Polinox®	Stainless steel	Polinox®				
LED	LED	2 TFT Displays	Integrated LED	Integrated LED	Integrated LED	LED	LED
			•	•	•		
		•					
		•				•	•
		•				•	•
		•					
		•					
•	•	•	•	•	•	•	•
•		•	•	•	•	•	
•	•	•	•	•	•	•	•
	•						•
			•	•	•		
•	•	•				•	•
•		•	•	•	•	•	
•	•	•	•	•	•	•	•
	•	•	•	•	•	•	•
	•	•					•
		•					
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
		•					
		•					
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
		Pro	•	•	•		•
VarioFlex®Plus	Vario®Flex	VarioFlex®Pro	VarioFlex®Plus	VarioFlex®Plus	VarioFlex®Plus	VarioFlex®Plus	VarioFlex®
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
			•	•	•		
•	•	•	-	-	-	•	•
•	•	•	•	•	•	•	•
-	-	•	•	•	•		•
_	_	•	•	•	•	•	•
•	•	•	•	•	•	•	•
44dB	46dB	42dB / 40dB	44dB	44dB	44dB	44dB	46dB
1-24 hours							
•	•	•	•	•	•	•	•
•	•					•	•
•	•	•	•	•	•	•	•

Reference Guide Dishwashers

Model		SMU46GS01A Series 4	SMS88TI01A Series 8	SMS66MI02A Series 6	SMS66JI01A Series 6	SMS46KI01A Series 4	SMS46GI01A Series 4	
Туре		Under Bench	Freestanding Stainless Steel					
Water	Star rating (litres per wash)	4 Star (13.4L)	5 Star (12L)	5 Star (12L)	5 Star (11L)	4 Star (13.4L)	4 Star (13.4L)	
Energy	Star rating (kWh per year)	4 Star (230 kWh)	4 Star (235 kWh)	4 Star (235 kWh)	4 Star (220 kWh)	4 Star (230 kWh)	4 Star (230 kWh)	
Dimensions	Appliance dimensions (H x W x D)	815-875 x 598 x 573mm	845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	
Capacity	International place settings	14	15	15	14	14	14	
Design	Interior tub material	Polinox®	Stainless steel	Stainless steel	Stainless steel	Polinox®	Polinox®	
	Display type	LED	2 TFT Displays	Large LED	Large LED	LED	LED	
	TimeLight™ Floor Projection							
	InfoLight™ Floor Projection							
	EmotionLight internal lighting							
	Anti-fingerprint finish	•	•	•	•	•	•	
	SensorTouch Buttons		•					
Wash programs	Auto Gentle 35–45°C		•					
programs	Auto Wash 45-65°C	•	•	•	•	•	•	
	Auto Intensive 65–75°C		•	•	•			
	Eco Wash 45°C	•	•	•	•	•	•	
	Normal 45°C							
	Intensive 65°C							
	Pots & Pans 70°C	•				•	•	
	Glass Wash 40°C		•					
	Super Wash 60°C	•	•	•	•	•	•	
	Quick Wash 60min 65°C			•	•			
Р	Quick Wash 29min 45°C*	•	•	•	•	•	•	
	Pre-Rinse	•	•			•	•	
	ExtraQuiet 40dB 50°C							
Wash options	ExtraQuiet 40dB 50°C sh SpeedPerfect® / VarioSpeed ● ● ● ●	•						
options	HalfLoadPlus	•	•	•	•	•	•	
	IntensiveZone™		•					
	HygienePlus™		•					
	Machine Care	•		•	•	•	•	
	ExtraDry	•	•	•	•	•	•	
ActiveWater Features	AutoBrillaince™	•	•	•	•	•	•	
reatures	AquaSensor™	•	•	•	•	•	•	
	DosageAssist™ detergent system	•	•	•	•	•	•	
	EcoSilence Drive®	•	•	•	•	•	•	
	3 stage self-cleaning filter	•	•	•	•	•	•	
	Heat Exchanger	•	•	•	•	•	•	
Flexibility	VarioDrawer™ (cutlery drawer)		Pro	•		•		
	Basket System	VarioFlex®	VarioFlex®Pro	VarioFlex®Plus	VarioFlex®Plus	VarioFlex®	VarioFlex®	
	Rackmatic™ Plus	•	•	•	•	•	•	
	Top basket roll on/roll off adjust							
Accessories	Cutlery basket	•	•	•	•	•	•	
	GlassSecure tray							
	3 small item clips	•		•	•	•	•	
	Large Item Sprayhead	•	•	•	•	•	•	
	Toe kick panel	•	•	•	•	•	•	
	Vapour barrier plate	•						
Convenience		46dB	42dB	44dB	44dB	46dB	46dB	
	Time delay	1–24 hours	1–24 hours	1–24 hours	1–24 hours	1–24 hours	1–24 hours	
Safety	AquaStop™ Plus	•	•	•	•	•	•	
	Child button lock	•		•	•	•	•	
	Child door lock	•	•	•	•	•	•	

SMS40E08AU Series 2	SMS66MW01A Series 6	SMS46GW01A Series 4	SMS50E32AU Series 4	SCE53M05AU Series 6	SKE53M05AU Series 6	SPU68M05AU Series 6	SPS60M08AU Series 6
Freestanding Stainless Steel	Freestanding White	Freestanding White	Freestanding White	Compact Built-in	Compact Built-in	Slimline Under Bench	Stimline Freestanding
3.5 Star (13.5L)	5 Star (12L)	4 Star (13.4L)	4 Star (13.5L)	3 Star (10.1L)	3.5 Star (7.2L)	4 Star (10.9L)	3.5 Star (10.9L)
3 Star (268 kWh)	4 Star (235 kWh)	4 Star (230 kWh)	3.5 Star (268 kWh)	3 Star (180 kWh)	3 Star (135 kWh)	3.5 Star (205 kWh)	3 Star (197 kWh)
845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	845 x 600 x 600mm Height with top removed: 815mm	595 x 595 x 500mm	454 x 595 x 500mm	815-875 x 448 x 573mm	845 x 450 x 600mm Height with top removed: 815mm
13	15	14	14	8	6	11	10
Polinox®	Stainless steel	Polinox®	Polinox®	Polinox®	Polinox®	Stainless steel	Stainless steel
	Large LED	LED	LED	LED	LED	LED	LED
•							•
•	•	•		•	•	•	•
•	•	•				•	•
			•	•	•		
•		•	•	•	•	•	•
						•	•
	•	•					
•	•	•	•	•	•	•	•
		•	•	•	•	•	•
•	•	•	•	•	•	•	•
	•	•		•	•	•	•
				-	-	-	
	•	•		•			
	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•
	•	•		•	•		
	•					•	
Vario®	VarioFlex®Plus	VarioFlex®	Vario®	Vario®	Vario®	VarioFlex®	Vario®
	•	•				•	
			•				•
•	•	•	•	•	•		•
	•	•					
	•	•					
•	•	•	•				
50dB	44dB	46dB	48dB	47dB	47 dB	46dB	50dB
3, 6 or 9 hours	1–24 hours	1–24 hours	1–24 hours	1–24 hours	1–24 hours	1–24 hours	1-24 hours
•	●	•	●	•	●	•	•
	•	•		•	•	•	•
•	•	•	•			•	•

Reference Guide Refrigeration

Model		KIN34P60AU	KAN92VI30A	KGN53XI25A
		Series 8	Series 4	Series 4
Туре		Integrated	Freestanding Stainless Steel	Freestanding Stainless Steel
Description		287 litre integrated	652 litre side-by-side	452 litre bottom mount
Dimensions	Appliance dimensions (HxWxD)	1772 x 556 x 545mm	1756 x 912 x 732mm	1700 x 700 x 750mm
Capacity	Capacity gross (Fridge & Freezer)	287L	652L	452L
	Fridge gross capacity	196L	402L	332L
	Freezer gross capacity	91L	250L	120L
Design		White	Stainless steel fingerprint resistant	Stainless steel
Category		Integrated	Freestanding	Freestanding
Energy	Star rating (kWh per year)	3 Star (330 kWh)	3 Star (549 kWh)	2.5 Star (448 kWh)
Performance	FrostFree	•	•	•
	MultiAirflow system	•	•	•
	LED lighting	•	•	
	Active warning system for temperature increase	•		
	Intelligent Inverter Technology	•	•	
Description Dimensions Capacity Capacity Fridge gross Freezer gros Category Energy Performance FrostFree MultiAirflow LED lighting Active warnin Intelligent In Acoustic doc Freshness Storage ChillerBox VitaFresh SuperCoolin SuperFreezi AirFresh Filt Non-spill saf Bottle rack Reversible d	Acoustic door open alarm		•	
Freshness	ChillerBox	•	•	•
& Storage	CrisperBox	•		•
	VitaFresh		•	
	SuperCooling	•	•	•
	SuperFreezing	•	•	•
	AirFresh Filter with Antibacteria			•
Convenience	Telescopic rails	•	•	
	Easy Lift	•		
	Non-spill safety glass shelves	5	4	4
	Bottle rack			•
	Reversible door hinge	•		•
	Electronic Touch Control	•	•	•
	Ice	1 ice cube tray	Easy Twist Ice Dispenser	2 ice cube trays



Accessories

Look online at www.bosch-home.com.au/store to purchase Bosch accessories and spare parts:

Oven and Cooker Accessories			Lid for Professional pan	HEZ633001
	Wire rack for universal pan Fits into the universal pan for all grilling applications. Universal pan and wire rack can be removed together. To suit all Bosch Series 8 60cm ovens	HEZ324000	To suit Bosch Series 8 60cm ovens	
	To suit att Bosch Series 8 ooch ovens		Professional pan, enamelled -	HEZ633073
	Pizza stone Pizza baking stone with wooden bread paddle. Baking stone is pyrolytic proof. To suit all Bosch 60cm ovens	HEZ327000	pyrolytic proof To suit Bosch Series 8 60cm ovens	
	Stainless steel roasting pan Stainless steel roasting pan with glass lid, induction suitable. To suit all Bosch 60cm ovens	HEZ390011	Wire rack (standard) To suit all Bosch Series 8 60cm ovens	HEZ634000
	Pizza pan To suit all Bosch 60cm ovens and all Series 8 60cm combination steam and microwave ovens	HEZ617000	Glass pan To suit all Bosch Series 8 60cm ovens and 60cm combination steam and microwave ovens	HEZ636000
	Split grill tray, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ625071	2-level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638270
	Enamelled baking tray – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ631070	3-level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638370
	Universal pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ632070	ClipRail telescopic rails To suit all Bosch Series 6 and 4 60cm ovens	HEZ538000
	Universal pan with ceramic non-stick coating To suit all Bosch Series 6 and 4 60cm ovens	HEZ532010	2-level telescopic extension rails To suit all Bosch Series 6 and 4 60cm ovens	HEZ538200
	Baking tray with ceramic non-stick coating To suit all Bosch Series 6 and 4 60cm ovens	HEZ531010	Wire rack (microwave) To suit Bosch Series 8 60cm microwave ovens CMG633BS1B, CMG656RS1A	HEZ634080
	Half trays (slimline universal pan) Slim sizes trays are perfect when cooking smaller quantities of food. To suit all Bosch Series 6 and 4 60cm ovens. Consists of 2 parts and fits perfectly in Bosch dishwashers and Bosch integrated fridges	HEZ530000	Heat resistant and dishwasher safe glass dish To suit Bosch Series 8 60cm ovens	HEZ864000

Griddle plate	HEZ390522
For use on two combined cooking zones. Evens heat to perfectly grill your favourite meats, fish or vegetables.	
To suit Bosch FlexInduction® and Combilinduction® cooktops PXV975DC1E, PXEA75DC1E, PXE651FC1E, PXX675DC1E, PVS875FB5E, PVS675FB5E	
Teppan Yaki	Large -
Enjoy induction the Japanese way! Try beef, prawns, scallops, lobster, chicken and chopped vegetables. Also great for steamers and available in 40 x 20cm size.	HEZ390512
To suit Bosch FlexInduction® and Combilnduction® cooktops PXV975DC1E, PXE875DC1E, PXS675DC1E, PXS675DC1E, PVS875FB5E, PVS675FB5E	
Stainless steel roasting pan (optional with steamer inset)	HEZ390011
Cook large dishes without hot spots for results you'll be delighted with. A high performance roasting pan that no induction kitchen should be without. For use on two combined cooking zones.	
To suit all Bosch 60cm ovens	
PerfectFry™ sensor induction pan 21cm	HEZ390230
To suit Bosch PerfectFry™ sensor induction cooktops PXV975DC1E, PXE875DC1E, PXE651FC1E, PXX675DC1E, PIV995DC1E, PIV975DC1E	
4 Piece Cookware Set	HEZ390042
4 piece induction cookware set consisting of 2 pots, 1 casserole and 1 fry pan.	
Stainless steel wok	HEZ390090
Stainless steel wok for induction and	
	For use on two combined cooking zones. Evens heat to perfectly grill your favourite meats, fish or vegetables. To suit Bosch FlexInduction® and Combilnduction® cooktops PXV975DC1E, PXE875DC1E, PXE875DC1E, PXE875FB5E Teppan Yaki Enjoy induction the Japanese way! Try beef, prawns, scallops, lobster, chicken and chopped vegetables. Also great for steamers and available in 40 x 20cm size. To suit Bosch FlexInduction® and Combilnduction® cooktops PXV975DC1E, PXE875DC1E, PXE875DC1E, PXS675FB5E Stainless steel roasting pan (optional with steamer inset) Cook large dishes without hot spots for results you'll be delighted with. A high performance roasting pan that no induction kitchen should be without. For use on two combined cooking zones. To suit Bosch PerfectFry™ sensor induction pan 21cm To suit Bosch PerfectFry™ sensor induction pan 21cm To suit Bosch PerfectFry™ sensor induction pan 21cm To suit Bosch PerfectFry™ sensor induction cooktops PXV975DC1E, PXE875DC1E, PXE87




measurements in mm

HBT578FS2A . HBA574BS0A. HBA534ES0A

HBA5570S0A, HBG5575S0A

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

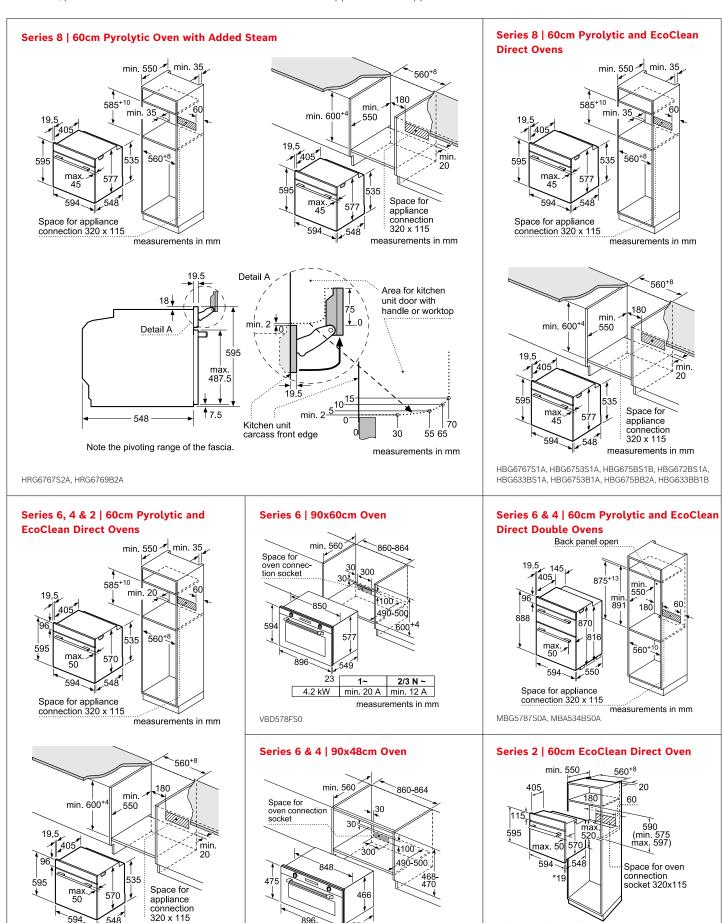

measurements in mm

VBC578FS0, VBC5540S0


* 20 mm for metal fascias

HBF133BS0A


measurements in mm

CTI 636FS1


 $All \ descriptions \ and \ technical \ diagrams \ are \ intended \ as \ a \ guide \ only. \ For \ additional \ technical \ information, full \ dimensional \ and \ installation$ details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

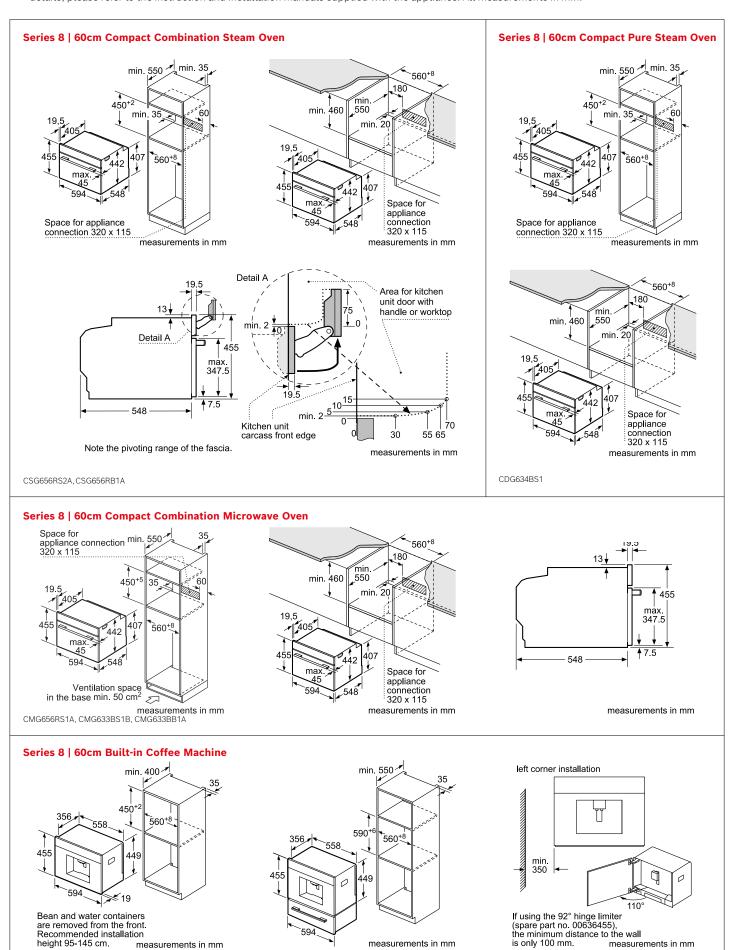


 $All \ descriptions \ and \ technical \ diagrams \ are \ intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$ details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

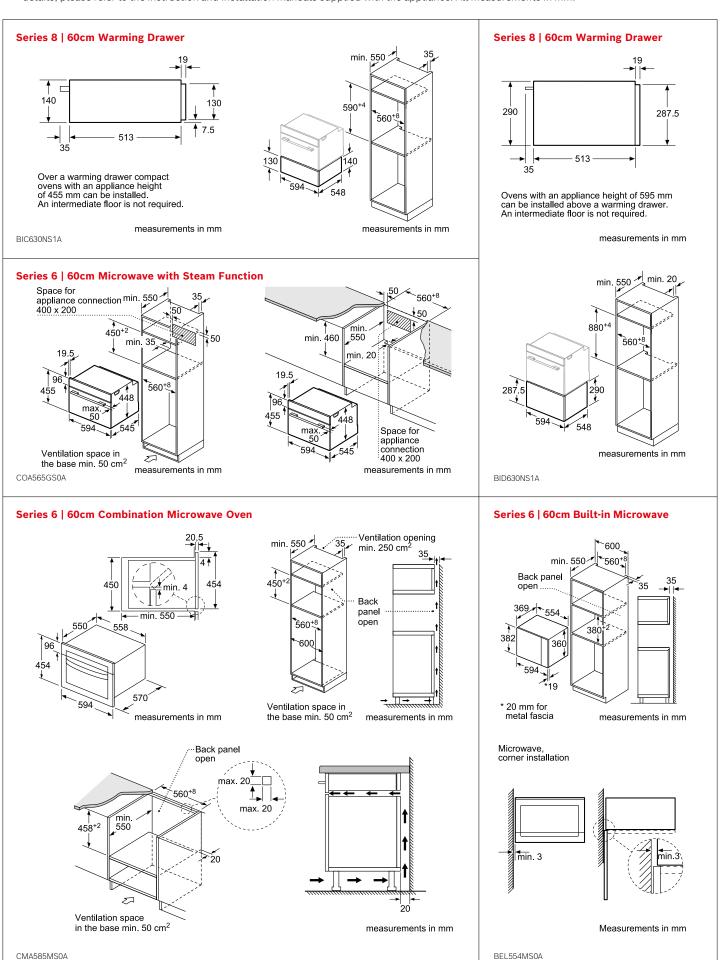


 $All \ descriptions \ and \ technical \ diagrams \ are \ intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$ $details, please \ refer \ to \ the \ instruction \ and \ installation \ manuals \ supplied \ with \ the \ appliance. \ All \ measurements \ in \ mm.$

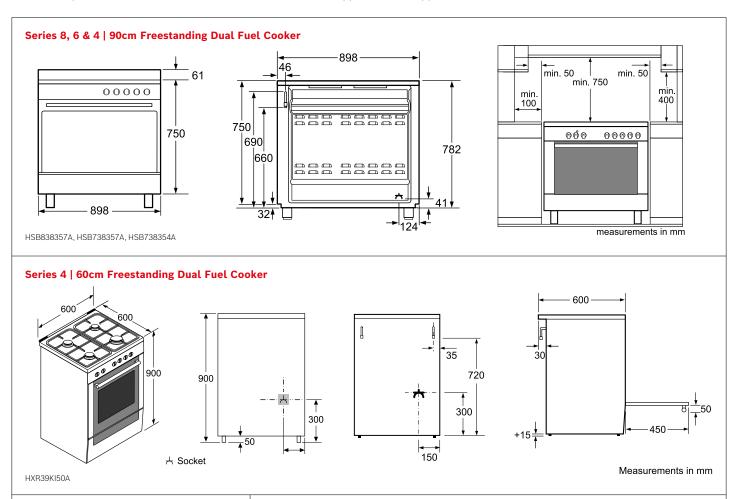





 $All \ descriptions \ and \ technical \ diagrams \ are intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$ details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

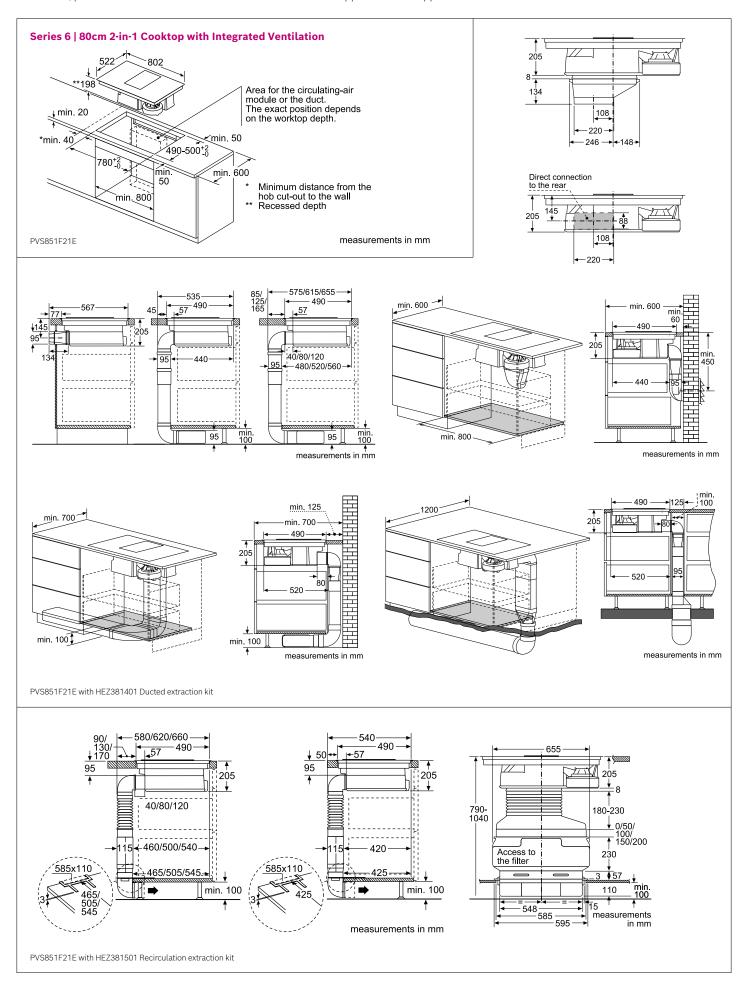


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation

details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm. Series 6 | 90cm Black Tempered Glass Series 6 | 75cm Black Tempered Glass FlameSelect® Gas Cooktop FlameSelect® Gas Cooktop For installation flush with surrounding min. 55 surfaces _min. 560 max. 717 min. 55 min. 50 490+2 Chamfer min. 150 500+2 min. 600 √10<u>+</u>8 max. 1 mm min. 600 min* Minimum distance from Minimum distance from the hob cut-out to the wall the hob cut-out to the wall Position of gas connection in the cut-out Position of gas connection in the cut-out With fitted oven underneath, possibly more: With fitted oven underneath, possibly more; see space requirements for the oven measurements in mm measurements in mm see space requirements for the oven PPQ7A6R20A measurements in mm Series 6 | 60cm Black Tempered Glass FlameSelect® Gas Cooktop For installing flush with surrounding surfaces R 8 min. 50 921 850 R 5 490+2 524^{±1} For installation flush with **526**± 503 surrounding surfaces Chamfer min 50 10±8 max. 1 mm chamfer * min. 100 480-490+2₀ max. 1 mm min. 600 *min Minimum distance from the hob cut-out to the wall Position of gas connection in the cut-out With fitted oven underneath, possibly more; measurements in mm see space requirements for the oven measurements in mm measurements in mm PPH6A6R20A PPS9A6B90A Series 6 | 90cm FlameSelect® Gas Cooktop Series 6 | 90cm FlameSelect® Gas Cooktop Series 6 | 75cm FlameSelect® Gas Cooktop 19-29 min. 55 min. 50 min. 150 180-490⁺²0 min 490-500⁺²0 *min. 150 490-500+2 min. 600 min 600 min 600 *min Minimum distance from the hob cut-out to the wall Minimum distance from Minimum distance from 30 the hob cut-out to the wall Position of gas connection in the cut-out the hob cut-out to the wall Position of gas connection in the cut-out Position of gas connection in the cut-out With fitted oven underneath, possibly more; With fitted oven underneath, possibly more; With fitted oven underneath, possibly more; see space requirements for the oven see space requirements for the oven see space requirements for the oven measurements in mm measurements in mm measurements in mm PCR9A5B90A PCR7A5B90A РСТ9А5В90А Series 2 | 60cm Gas Cooktop Series 6 | 60cm FlameSelect® Gas Cooktop Series 2 | 60cm Gas Cooktop 19-29 min. 50 min. 50





PRH6R5R90A




All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.


Important note: Cookware for Induction Cooktops

Induction heating relies on creating a controlled electromagnetic field, which requires magnetic-based cookware. This includes stainless steel cookware with a magnetic base, enamelled steel or cast-iron. Glass, aluminium, copper or ceran pots are not suitable for use. If you are unsure, hold a magnet to the base of the cookware. If it attracts and holds, then the cookware is most probably suitable.


Series 8 | 90cm FlexInduction® Cooktop



Installation Requirements for Induction Cooktops Only




Measurements in mm




① Ventilation gap must be present


All measurements in mm



For 80cm and 60cm Induction cooktops



Series 8 | 80cm FlexInduction® Cooktop




PXE875DC1E

PVS875FB5E


PXV975DC1E

Series 8 | 60cm FlexInduction® Cooktop




PXX675DC1E

PXE651FC1E




Series 8 | 90cm Induction Cooktops




PIV995DC1E, PIV975DC1E

Series 6 | 80cm Combilnduction® Cooktop


measurements in mm



Series 6 | 60cm FlexInduction® Cooktop




Series 6 | 60cm Combilnduction® Cooktop




measurements in mm PVS675FB5E

 $All \ descriptions \ and \ technical \ diagrams \ are \ intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$ details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

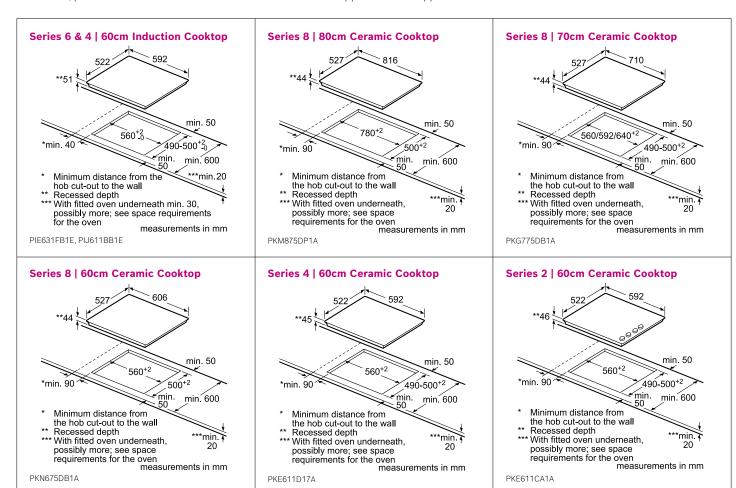


 $All \ descriptions \ and \ technical \ diagrams \ are \ intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$ details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

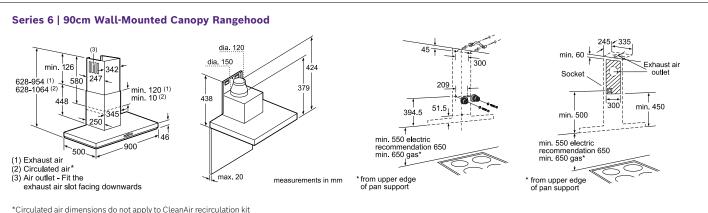



^{*}Circulated air dimensions do not apply to CleanAir recirculation kit DWB91PR50A


measurements in mm

Series 4 | 90cm Wall-Mounted Canopy Rangehood











*Circulated air dimensions do not apply to CleanAir recirculation kit DWB97LM50A

measurements in mm

Series 2 | 90cm Wall-Mounted Canopy Rangehood




DWB96BC50A




If a back panel is used, the design of the appliance must be considered.

319


246



Series 2 | 90cm Wall-Mounted Canopy Rangehood



If a back panel is used, the design of the appliance must be considered.




A: Socket **B:** Exhaust air: ≥ 280; circulated air: ≥ 490


C: electric


D: Gas, from upper edge of pan support


measurements in mm

 $All \ descriptions \ and \ technical \ diagrams \ are intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$

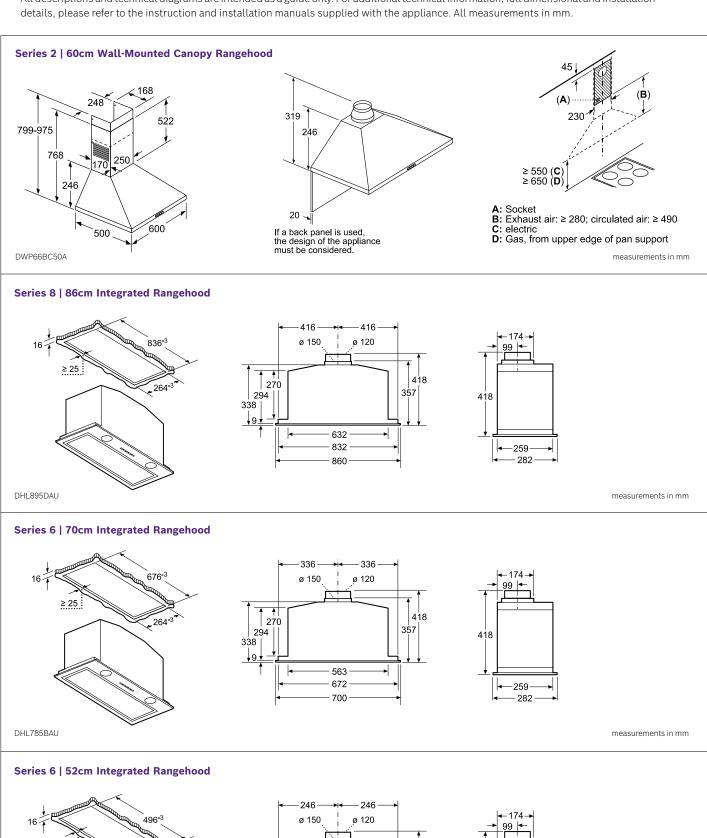










DHL575CAU measurements in mm

 $All \ descriptions \ and \ technical \ diagrams \ are intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$

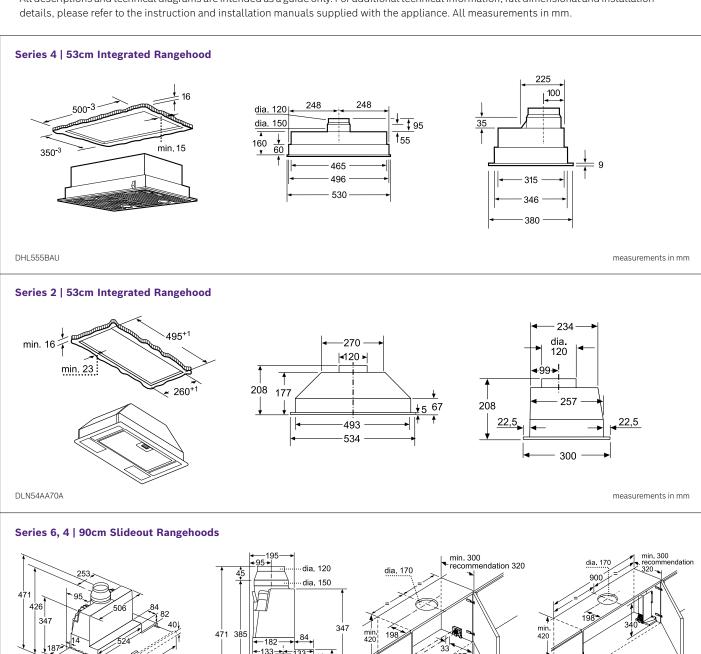





DFS097E50A, DFS097A50A measurements in mm

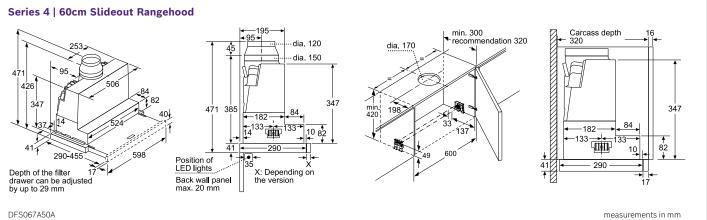


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

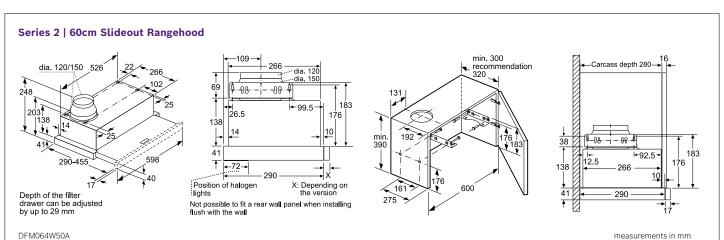


Series 8 | Under Bench Dishwashers 600 573 min. 550 815-875 720 min. 95 53 max. 117 SMU88TS04A measurements in mm








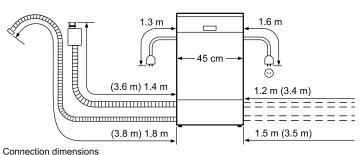

for all 45 cm dishwashers () values with extension kit SZ 72010


SPU68M05AU



* Because of height-adjustable screw feet Base height (when appliance height is 815): 95 mm Base height (when appliance height is 875): 155 mm


measurements in mm

Series 8 | Semi-integrated Dishwashers




() values with extension kit

SMI88TS02A




measurements in mm

 $All \ descriptions \ and \ technical \ diagrams \ are \ intended \ as \ a \ guide \ only. For \ additional \ technical \ information, full \ dimensional \ and \ installation$ details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

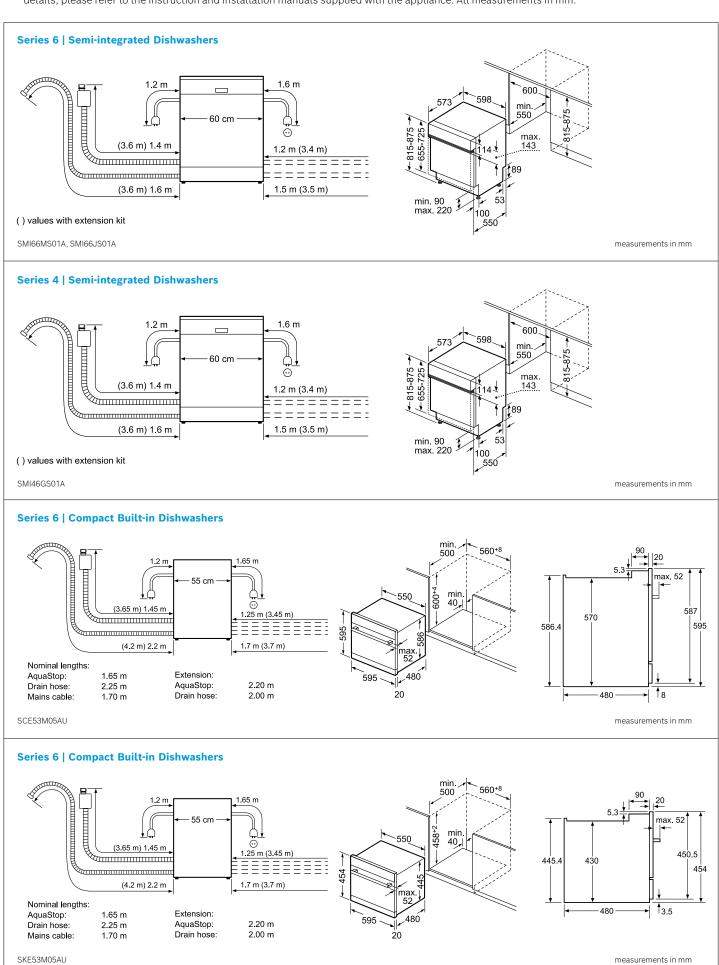


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation

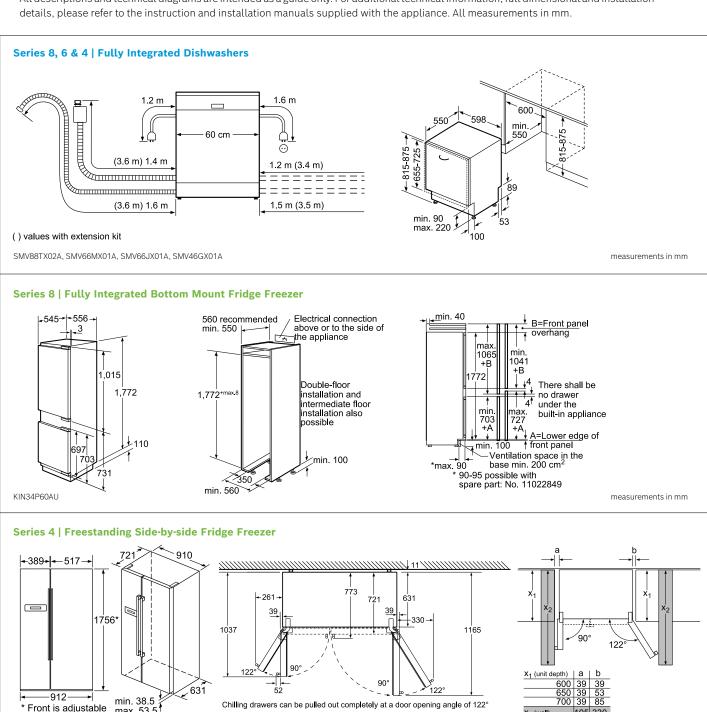

Series 4 | Freestanding Bottom Mount Fridge Freezer

Appliance name	а	b	С	d	е	f	g
KGN53 (outer handle)	1700	690	770	700	730	1380	800



from 1747 to 1762

KAN92VI30A

Specification

- Height
- Width
 - Depth with door closed, without handle
- Cabinet depth
- Width with door opened to 90°
- Depth with door opened
- Depth with door closed, with handle

measurements in mm

measurements in mm

This much is for sure: you can trust our service.

Reliable, experienced, fast. The customer service of Bosch; before and after purchase.

Quality service straight from the manufacturer. Original Bosch.

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

Reliability guaranteed. No compromises.

All Bosch home appliances are produced with maximum care using high-quality materials. We promise it in our two year manufacturer's warranty on all appliances.

Original accessories. Effective care products.

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

Extensive customer service network. Just a call away.

Customer Care

Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

Service & Repairs

Our team is there to provide the right advice on faults, arranging a visit of a service engineer and ordering the right accessories or spare parts.

Customer care, service and repairs: 1300 369 744

24 hour phone support Monday to Friday.*

*Phone lines open 7am Monday until midnight on Friday.













BSH Home Appliances Pty Ltd

1555 Centre Road Clayton VIC 3168

Postal Address

Locked Bag 66, Clayton South VIC 3169

Customer Line Phone: 1300 369 744

www.bosch-home.com.au

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without $% \left(1\right) =\left(1\right) \left(1\right) \left$ $prior\ notice.\ Please\ contact\ your\ local\ Bosch\ retailer\ for\ the\ latest\ information.$

 $Whilst\,every\,care\,has\,been\,taken\,in\,the\,preparation\,of\,this\,publication,\,BSH\,does\,not\,allower and\,been\,taken\,in\,the\,preparation\,of\,this\,publication\,general and\,been\,taken\,in\,the\,preparation\,general and\,been\,taken\,in\,the\,preparation\,general and\,been\,taken\,in\,the\,general and\,been\,taken\,i$ warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KRD 10/2019 - BH 4647 B







