30" Induction Slide-in Range

Benchmark® Series - Stainless Steel HIIP057C





HIIP057C Stainless Steel

The full-depth induction slide-in range combines FlexInduction® technology with an oven featuring a QuietClose® door.

Features & Benefits

FlexInduction® combines two cooking zones into one surface for larger pans.

Induction cooking is faster and more efficient than gas and electric.

Dampened hinges softly and quietly guide the QuietClose® door shut.

The warming drawer keeps your meals warm and ready to serve.

The EasyGlide™ telescopic rack provides a smooth glide for heavy dishes.

Convection Pro combines a third heating element with a back fan for even browning and time savings by using multiple racks at one time.

General Properties			
Cooking modes	Bake, Variable Broil (hi & low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Convection Multi-Rack, Convection Conversion, Pizza, Fast Preheat, Sabbath		
Cleaning type		Self Clean	
Interior lights		2	
Kitchen timer		Yes	
Drawer type		Warming Drawer	
Oven Performance			
Bake / broil element watts		2,400 / 3,800 W	
Convection element watts		2,000 W	
Element Performance			
Total cooktop elements		4	
Power of front left element watts		2,200 W (3,600 w/ boost)	
Power of back left element watts		2,200 W (3,600 w/ boost)	
Power of back right element watts		2,600 W (3,700 w/ boost)	
Power of front right element watts		1,400 W (2,200 w/ boost)	
Element Size			
Dimension of FlexInduction® zone		16" x 9"	
Dimension of front left heating element		8" x 9"	
Dimension of back left heating element		8" x 9"	
Dimension of back right heating element		11"	
Dimension of front right heating element		6"	

Technical Details		
Watts	11,700 / 14,000 W	
Circuit breaker	40 or 50 A*	
Volts	208 V / 240 V	
Frequency	60 Hz	
Power cord length	1.5 meter	
Plug type	208/240V - 4 prong	
Energy source	Electric	
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	36 1/2"-38" x 31 1/2" x 28 7/8"	
Required cutout size (HxWxD)	35 1/2"-37" x 30" x 25"	
Adjustable range height	1 1/2"	
Oven cavity size	4.6 cu. ft.	
Overall oven interior dimensions (HxWxD)	17 13/16" x 24 1/8" x 18"	
Usable oven interior dimensions (HxWxD)	12 5/16" x 23 1/4" x 15 1/4"	
Net weight	239 lbs	
Accessories-Included		

Use and care manual, installation guide, temperature probe, 2 standard racks, 1 telescopic rack

Accessories-Optional



HEZTR301 30" Telescopic rack



HEZBS3014" Low backguard (stainless steel)



*Varies by location, check local code

Accessories: To purchase Bosch accessories, cleaners & parts please call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST), Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


30" Induction Slide-in Range


Benchmark® Series - Stainless Steel HIIP057C



Installation Details

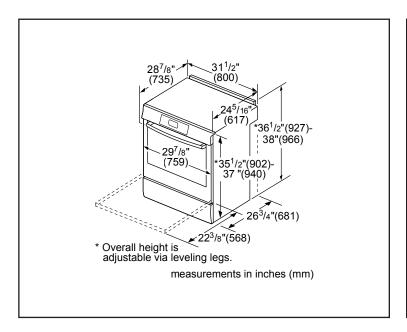

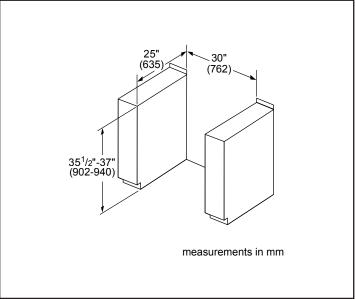

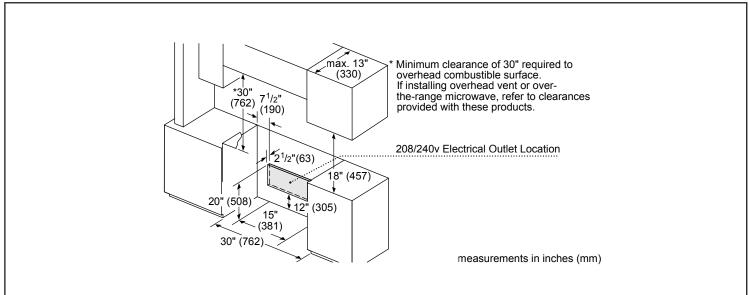

Accessories: To purchase Bosch accessories, cleaners & parts please call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.