



Why Choose Bosch?



2 | Bosch kitchen appliance catalogue

For Bosch Series | 8 accent|line Premium Built In Generation

Bosch Series | 8 accent | line Premium Built-in Generation.

The Bosch Series | 8 kitchen range reveals the value of pursuing a consistent brand language combined with functional quality and simple yet striking form. Intriguing details tempt the user to explore further, turning cooking into a haptic as well as an olfactory experience.



For Bosch Series | 8 and accent|line Induction Cooktops

Good Design Award 2023.

Bosch Series | 8 and accent|line cooktops combine exceptional design, thoughtful user interfaces and premium features like the PerfectFry Plus and CookingSensor Plus.*

*Available with selected models



reddot winner 2023

For Bosch User Interface Generation Digital Ring

Red Dot Design Award 2023.

Bosch has been awarded reddot winner 2023 for the user interface of the Bosch Digital Control Ring. The ring functions as a rotary knob for settings and programs, it is engraved in the glass and features a colour display. "The intuitive operation gives the user a sense of control and precision and makes even complicated settings surprisingly easy," the jury commented in its statement.



Australia's Most Trusted Brand for Ovens 2022.

Bosch has been awarded Australia's Most Trusted Brand 2022 for Ovens as voted by Australians, revealed exclusively by Reader's Digest. Australian Reader's Digest engaged an independent market research agency to conduct a stand-alone survey of a representative sample of more than 3,000 Australians.



Since 2020, the Bosch Group with its more than 400 locations worldwide has been climate neutral (scopes 1 and 2)*. An independent auditing company has officially

*For this, remaining emissions of 0.7 million metric tons of CO₂ were offset by carbon credits in 2022. Scopes 1, 2, and 3 are used in accordance with the Greenhouse Gas Protocol Corporate Accounting and Reporting Standard.



Bosch - a brand you can trust.

Over 130 years of experience paired with the latest German engineering allows Bosch to manufacture quality products that make everyday life easier.





Remote Controlling and Monitoring.

Ever left the house only to go back to check that you've turned off the oven? With Wi-Fi enabled Bosch cooking appliances and the Home Connect App, you can monitor and control the status of your appliance directly from your phone.



Voice Assistants.

Enjoy the party and get out of the kitchen with Home Connect. Simply pair your smart speaker to your Wi-Fi enabled Bosch appliance and enjoy voice activated commands. Ask your coffee machine to prepare a cappuccino, or ask your oven "When will dinner be ready?".



Home Connect

CoffeeWorld and CoffeePlaylist.

Control your built-in Bosch coffee machine with any smart device. Try CoffeeWorld, the tech that offers a variety of international coffee specialities for your coffee machine to create. Use CoffeePlaylist to add various beverages into a list and prepare them one after another.



works with
Google Assistant

Recipe World.

alexa

With full access to an entire world of exciting recipes, Home Connect transfers your selected recipe's cooking setting requirements directly to your oven. To enjoy this feature, just connect your oven to your registered Home Connect account.



Contents

Series 8 and accent line O	vens	Series 6, 4 and 2 Ovens	
Ovens	22-24	Ovens	28-31
Compact Ovens	25-26	Microwaves	32-33
Complementary Appliances	26-27	Large capacity ovens	34–37
Coffee Machines	26	90cm ovens	34-35
Warming Drawers	27	Double ovens	36-37

Cooktops	
Induction cooktops	38-51
Induction cookware	43
2-in-1 cooktops with integrated ventilation	44-45
Gas cooktops	52-57
Ceramic cooktops	58-59

Rangenoods		
Integrated GlassVisor rangehoods	60-	61
GlassDraft integrated ventilation	62-	63
Integrated rangehoods	63-	64
Wall-mounted rangehoods	65-	-66
Retractable slideout rangehoods		67
Range overview	70-	95
Accessories	96-	97
Customer service		98



accent | line

A superior look that allows for an equally superior cooking experience. The thin carbon-black handle with an embossed Bosch logo highlights the elegant design. Your cooking experience is supported by a vibrant high-resolution TFT Touch Display.

Available with accent line





Available for selected models

Available with Series | 8





Available for selected models

Series 8

Modes

Discreet elements of the Series | 8 range highlight the elegant nuances in the beautiful seamless design. The intuitive TFT Touch Display of the Series | 8 range with the Digital Control Ring engraved in the glass and the stainless steel-look handle with an embossed Bosch logo offer a contemporary kitchen design.

more information www.bosch-home.com.au | 9

Available on all accent line and Series | 8 ovens.



Air Fry Function.

Air frying requires less oil than deep frying for a delicious and crispy dish. Making it a great option for healthy cooking at home, that can now be done in your oven!



Bosch Assist.

With the Assist Function simply select the dish you're cooking on the food display, and your oven does the rest. The ideal heating function, temperature and preparation time are all set automatically.





Steam, the Perfect Ingredient for Healthy Cooking Results.





Steam Function Plus.

Vegetables cooked with full steam stay crunchy and retain natural aroma, vitamins and nutrients. The new Steam Function Plus steams at a temperature of up to 120°C so that your dishes are cooked faster and retain even more of their vitamins and nutrients. For example: potatoes are steamed up to 35% faster, whereas green beans and carrots are ready even up to 50% quicker!*

*Steam Function Plus compared to 100°C steam, BSH laboratory test.



More vitamins and nutrients.

Steaming broccoli at a temperature over 100°C, retains up to 26% more nutrients and up to 8% more Vitamin C than conventional cooking methods. Whereas steaming red pepper at a temperature over 100°C retains up to 12% more Vitamin C!* They also keep their full, natural flavour, so you can go easy on the extra seasoning and use much less salt when cooking. In short – healthy food has never tasted better.

"Steam Function Plus compared to cooking in boiled water, University of Hohenheim test results 5/2022.





Steam Boost Function.

Home-made bread tastes best. Take control of the steam process by baking with the Steam Boost Function. You can inject individual shots of steam as needed – for home-made bread that's crisp outside and nice and fluffy inside.





Added Steam

Enhance your cooking results to create succulent roasts and perfectly browned bread crusts with ease by adding various levels of steam: low, medium or high. The Perfect Steam sensor automatically measures the humidity inside the oven to ensure consistent results.

Air Fry Function.



You can make your very own potato or veggie chips – simply place thin slices on the Air Fry and Grill tray, add a little oil, select the Air Fry Function, and soon you'll have yummy snacks ready to go! The program combines fast air movement and heat from the grill to achieve a crispy finish.

Applies to accent|line and Series | 8 ovens.



Crisp Finish Function.



Do you want to give your roast a final crispy finish? It doesn't get any easier than the Crisp Function, which removes moisture directly from the oven cavity during the roasting or baking process. This gives your finished dish the extra crispiness you want.

*Available with selected model



Digital Control Ring.



With the Digital Control Ring, you can adjust your oven settings intuitively. Just move your finger across the ring engraved in the glass and confirm the desired setting.

Applies to accent|line and Series | 8 ovens.

For the Bosch User Interface Generation Digital Ring



Individual Browning.



Everyone has their own baking preferences. Now you can tell your Bosch oven exactly what that is. Thanks to Artificial Intelligence in our top of the range model HNG978QB1A, the integrated Oven Camera will detect when compatible dishes are browned to your liking and stop the cooking process. Perfection has never been easier. To enjoy 'Individual Browning', just connect the oven to the registered Home Connect account.





Oven Camera.

Thanks to your Oven Camera, you can now have a quick sneak peek into the oven from anywhere, through your smart device! The Home Connect app lets you know when your dish is ready and switches off the oven for you. So you can relax knowing that dinner is taken care of.

nore information www.bosch-home.com.au | 13

*Available in oven model HNG978QB1A.





Bosch Ovens with Microwave Gourmet Food in just a Short Time.

If you'd like to make a home cooked meal but don't have the time, the new Series | 8 ovens with microwave function can help. Speed up the roasting, baking and cooking process with the intelligent combination of conventional heating methods and the microwave function. If all you need to do is reheat your food the classic microwave function is also available.

Coffee Made How You Like It.

Whether your preference is a flat white, latte or a double shot cappuccino, the new Series | 8 built-in coffee machines bring café-style drinks to your home. Plus, with the Favourite function you can save your coffee preferences to make the perfect cup of coffee time and time again.



Aroma Select.

Enjoy espresso just the way you like it. With Aroma Select, you can adjust the strength of the coffee to your personal preferences. Simply choose between three different aroma profiles: mild, balanced or distinctive.



more information www.bosch-home.com.au | 17

Home Connect

Coffee World.

You can effortlessly create international coffee specialties – at the touch of a button. With up to 20 coffee variations from 8 countries, simply select the type of coffee you want in the Home Connect app, and let your Bosch espresso machine do the rest.



Sometimes our Best Ideas end up in a Drawer.

The new multi-functional warming drawers can do much more than just keep food and plates warm. They're perfect for slow-cooking meat, defrosting frozen foods, melting chocolate, drying fruit and proving dough.



Warming Drawers

The new Bosch Warming Drawers can be seamlessly combined with matching 60cm ovens, compact ovens or built-in coffee machines. The convenient Push & Pull technology on all models ensures that they are always easy to open and close.

With the Home Connect app, the warming drawers can be controlled on the go. Monitor the on/off status of heating programs, set a timer to turn off the drawer, and personalise your favourite settings.



Vacuum-sealing Drawer.*

Vacuum-seal fresh fruit, vegetables or leftovers and freeze them easily – nutrients, vitamins and flavours are retained longer than with conventional freezing.

*Applies to BVE9101B1.



Sous Vide.

Cooks vacuum-sealed food at low temperatures and 100% steam, retaining nutrients and flavours.

Select the Right Appliances for your Kitchen.

Whether you're designing a new kitchen or simply updating one of your appliances, we have a wide variety of cooking appliances available with the latest innovations. For optimum design co-ordination, choose appliances belonging to the same series. Create seamless lines in your kitchen, as panels and sizes are matching across the range.



60cm Ovens

The accent|**line** oven range not only exceeds in performance but also in design. With an elegant dark-glass exterior, carbon-black handle and brilliant TFT Touch Display.



45cm Compact Ovens

Choose from a microwave or steam oven, packed with great features and programs. Combine with a 14cm warming drawer and place next to full size oven for a seamless kitchen design.



Warming Drawers

Ensure food stays at just the right serving temperature. You can also defrost, prove dough or slow cook.



Double Ovens

Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



90cm Ovens

A large interior cavity, boasting 112 usable litres (net), perfect for extra-wide trays and greater cooking demands.



Microwave

Built-in microwave used for thawing, heating and food preparation. Every dish is a perfect success thanks to 8 pre-set automatic programs.

Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. This chore is now a thing of the past, thanks to Pyrolytic Self-cleaning and EcoClean Direct.



Pyrolytic Self-cleaning*.

The oven heats up to 480°C, burning away grease or food residue* – no chemicals required. Once the oven has cooled down, simply wipe out the ash.



EcoClean Direct*.

A special coating on the oven walls and roof gently breaks down grease spatters while you roast or bake. Minimum cleaning effort required, just wipe the base of the oven and the glass door. For optimum cleaning, simply activate the regeneration cycle from time to time'.



Pour approximately 400ml of water with a drop of liquid detergent to the bottom of the oven cavity and select the Cleaning Assistance program. It will soften baked-on residue, making it much easier to wipe away afterwards.

- vailable with all Series | 8 and accent|line or





Full Extension Clip Rails.

Usually, telescopic rails are permanently installed on one specific level. That's not the case with the new Series 8 ovens. Thanks to the Full Extension Clip Rails, you can choose the level on which you want your rails to be placed. There are specific rails with coatings to suit either steam ovens or Pyrolytic cleaning ovens.

Programs and Functions.

Perfect baking and roasting not only require the right temperature, but also the appropriate heating function for each dish. From 4D HotAir to Slow Cooking, Bosch ovens are there for all your cooking needs.



4D HotAir

Heat is distributed swiftly and evenly throughout your oven's interior. Place your tray or rack on any level from one to four and enjoy consistently perfect results from top to bottom.*



3D HotAir

By maintaining the right temperature across three 3D HotAir shelf levels, consistently even cooking results are



HotAir Gentle

The fan distributes the heat evenly throughout the oven cavity, which can help save energy. When baking on a single level - such as small baked goods, cakes in tins or cakes on a baking tray - no preheating is necessary.



Top and Bottom Heat

Uses both the upper and lower heating elements. Heat travels to the centre of the oven which is the best position to obtain the selected temperature. Suitable for traditional baking and roasting and offers best results for cakes with moist toppings.



Top and Bottom Heat Gentle

With this heating mode, you can prepare small baked goods, bread and rolls to perfection every time. Depending on the particular food and method of preparation, you can also save energy.



This targeted form of heat is especially suited for dishes cooked in a water bath or in need of additional baking or browning on the bottom.



Intensive Heat

A combination of top heat and extreme bottom heat – for superior baking results with a crisp base and moist filling – for example, for a tarte flambé or cheesecake.



HotAir Grill

Once the desired temperature has been reached, the fan switches on and optimally distributes the hot air, especially around large dishes. Ideal for perfectly crisp roasts, poultry and whole fish.



Grill, Small Area or Large Area

Especially suited for grilling large/small quantities - for example, steaks, sausages, fish or vegetables.



Pizza Setting

Create crispy pizzas or give any dish that extra heat that's needed from underneath by using a combination of heating elements.



Keep Warm

This function keeps dishes warm - to help you serve multiple dishes.



Slow Cooking

For slow and gentle cooking at low temperature, e.g. 85 °C, for super-tender vegetables or poultry.



Preheat Ovenware

This function pre-heats your plates to the perfect temperature so that foods stay hot longer after serving.



A function for drying fruits, vegetables and herbs with maximum flavour. This function can also be used for drying out the oven cavity after the added steam function has been used.



Fast Pre-heating

With rapid heating you can shorten the heat-up time for selected heating functions, including 4D HotAir and top and bottom heating.



Fan Forced HotAir

A fan disperses heat evenly for cakes and pastries baked on two levels.



Fan Assisted Top and Bottom Heating

Uses both upper and lower heating elements while a fan disperses heat evenly.



Gently defrosts food evenly and more quickly than it would take on the kitchen counter.



For plated meals and baked items. Cooked food is gently reheated. The steam ensures the food does



Dough Proving

For yeast dough and sourdough, dough will rise considerably more quickly than at room temperature. The surface of the dough does not dry out.



Use with steam bowl for delicious baking HotAirsteam and roasting results.



SoftMove door.

A special damping mechanism prevents the oven door from slamming. It prevents the door from fully closing and then gently and quietly closes itself. When opening the door, it gently comes to a stop.



AutoPilot 30

Every dish is a perfect success thanks to 30 pre-set automatic programs.

Features may vary depending on models. Please check individual product specifications

*To cook on all four levels simultaneously, four wire racks are required for best results. For up to three levels, all accessories are suitable, ie. universal tray or baking tray.

Built-in Series | 8 Oven Range.

Built-in accent line Oven Range.

accent | line

Series 8

accent line









60cm Pyrolytic Oven with Added Steam and Microwave

► Individual Browning with camera



HNG978QB1A

▶ 28 heating functions

► Steam Boost Function

► Microwave Boost (800W)

Key Features

► Added Steam

► Air Fry Function

► PerfectRoast Plus

► PerfectBake Plus

► Pyrolytic Self-cleaning

► TFT Touch Display Pro

► Dual LED Illumination

5 Shelf positions

▶ SoftMove door

▶ 67 litres (net) cavity volume

Crisp Finish

► Bosch Assist **Cleaning Support**

Design

HSG958DB1A 60cm EcoClean Direct Oven with Full Steam

Home Connect

Key Features

- ▶ 24 heating functions
- ► Steam Function Plus
- ► Sous Vide
- ► Added Steam
- ► Steam Boost Function
- ► Air Fry Function ► PerfectRoast Plus
- ► PerfectBake Plus
- ▶ Bosch Assist

Cleaning Support

► EcoClean Direct (roof, sides and back panel)

- ▶ 71 litres (net) cavity volume
- 5 shelf positions
- ► TFT Touch Display Pro ▶ SoftMove door
- ► LED Lighting

► Child lock

Safety

- Safety ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator
- ► Low door temperature during pyrolytic cleaning

Included Accessories

- ► 1 level telescopic rails (pyrolytic proof)
- ► 3-point meat probe ► 1 Universal pan
- ► 1 Air Fry and Grill Tray
- ▶ 2 Wire racks

Included Accessories

► Triple-glazed door

► Residual heat indicator

- ► 1 set, level independent telescopic rails
- ► 3-point meat probe
- ► 1 Universal pan
- ▶ 1 Air Fry and Grill tray
- ► 2 Wire racks
- ▶ 2 Steam containers, perforated (size XL, M)
- ► 1 Steam container, unperforated (size M)

accent | line









Home Connect

HRG978NB1A 60cm Pyrolytic Oven with Added Steam

Key Features

- ▶ 22 heating functions ► Added Steam
- ► Steam Boost Function
- ► Air Fry Function ► PerfectRoast Plus
- ► PerfectBake Plus
- ► Crisp Finish
- ► Bosch Assist

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ▶ 71 litres (net) cavity volume
- ▶ 5 shelf positions
- ► TFT Touch Display Pro
- ▶ SoftMove door
- ► LED Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door ► Residual heat indicator
- ► Low door temperature during pyrolytic cleaning


Included Accessories

- ► 1 set, level independent telescopic rails (pyrolytic proof)
- ► 3-point meat probe
- ► 1 Universal pan
- ▶ 1 Air Fry and Grill Tray
- ► 2 Wire racks

Dimensions (HxWxD) 595 x 594 x 548mm

accent | line

















60cm Pyrolytic Oven

Key Features

- ▶ 14 heating functions ► Air Fry Function
- ► PerfectRoast Plus

HBG976MB1A

- ► Bosch Assist

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ▶ 71 litres (net) cavity volume
- 5 shelf positions ► TFT Touch Display Plus
- ▶ SoftMove door
- ► LED Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator
- ► Low door temperature during pyrolytic cleaning

Included Accessories

- ► 1 set, level independent telescopic rails (pyrolytic proof)
- ▶ 3-point meat probe
- ▶ 1 Universal pan
- ▶ 1 Air Fry and Grill Tray
- ► 2 Wire racks









Home Connect

HRG776MB1A

60cm Pyrolytic Oven with Added Steam

HMG7761B1A

- **Key Features**
- ▶ 20 heating functions ► Microwave Boost (800W)

60cm Pyrolytic Oven with Microwave

- ► Air Fry Function
- ► Crisp Finish
- ► Bosch Assist

Cleaning Support

5 shelf positions

▶ SoftMove door

► LED Lighting

► Child lock

Design

► Pyrolytic Self-cleaning

► TFT Touch Display Plus

► Residual heat indicator

Included Accessories

► 1 Air Fry and Grill Tray

► 1 Universal pan

▶ 2 Wire racks

▶ 67 litres (net) cavity volume

► Quadruple-glazed CoolTouch door

Dimensions (HxWxD) 595 x 594 x 548mm

Key Features ▶ 20 heating functions

- ► Added Steam
- ► Steam Boost Function ► Air Fry Function
- ► PerfectRoast Plus
- ► Bosch Assist

Cleaning Support

- ▶ 71 litres (net) cavity volume
- 5 shelf positions

► Pyrolytic Self-cleaning

- ► TFT Touch Display Plus
- ► SoftMove door ► LED Lighting

- ► Child lock
- ► Quadruple-glazed CoolTouch door ► Residual heat indicator
- ► Low door temperature
- during pyrolytic cleaning

Included Accessories

- ► 1 set, level independent telescopic rails (pyrolytic proof)
- ▶ 3-point meat probe
- ► 1 Universal pan ▶ 1 Air Fry and Grill Tray
- ▶ 2 Wire racks

accent | line

Built-in Series | 8 Oven Range.

Series 8









Home Connect

HBG776MB1A 60cm Pyrolytic Oven

► 14 heating functions

► Air Fry Function ► PerfectRoast Plus

► Bosch Assist

Key Features

















60cm Pyrolytic Oven

Kev Features

- ► 14 heating functions
- ► Air Fry Function
- ► Bosch Assist

Kev Features ▶ 14 heating functions

Home Connect

60cm EcoClean Direct Oven

► Air Fry Function

Cleaning Support

► 5 shelf positions

► SoftMove door

► Halogen Lighting

► Triple-glazed door

► Residual heat indicator

► TFT Touch Display

Design

Safety

► Child lock

► EcoClean Direct (back panel)

► 71 litres (net) cavity volume

► Bosch Assist

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ► 71 litres (net) cavity volume
- ► 5 shelf positions
- ► TFT Touch Display Plus ► SoftMove door
- ► LED Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator
- ► Low door temperature during pyrolytic cleaning

Included Accessories

- ▶ 1 set, level independent telescopic rails (pyrolytic proof)
- 3-point meat probe
- ▶ 1 Universal pan
- ▶ 1 Air Fry and Grill Tray
- ▶ 2 Wire racks

Cleaning Support

► Pyrolytic Self-cleaning

- ► 71 litres (net) cavity volume
- ▶ 5 shelf positions
- ► TFT Touch Display
- ► SoftMove door ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator
- Low door temperature during pyrolytic cleaning

Included Accessories

- ▶ 1 Universal pan
- ▶ 1 Air Fry and Grill Tray
- ▶ 2 Wire racks

Included Accessories ► 1 Universal pan

- ▶ 1 Air Fry and Grill Tray
- ► 2 Wire racks

Dimensions (HxWxD) 595 x 594 x 548mm

Built-in Compact Oven Range.

Series 8

accent | line accent | line











Home Connect

















••



CMG936AB1A

with Microwave

► Air Fry Function

► Crisp Finish

► Bosch Assist

Cleaning Support

▶ 3 shelf positions

► SoftMove door

► LED Lighting

Design

Safety ► Child lock

► EcoClean Direct (Back panel)

► 45 litre (net) cavity volume

► TFT Touch Display Plus

► 20 heating functions

► Microwave Boost (900W)

Kev Features

45cm EcoClean Direct Compact Oven

CSG958DB1 45cm EcoClean Direct Compact Oven with Full Steam

Kev Features

- ▶ 24 heating functions
- ► Steam Function Plus
- Sous Vide ► Added Steam
- ► Steam Boost Function
- ► Air Fry Function
- ► PerfectRoast Plus
- ► PerfectBake Plus ► Bosch Assist

Cleaning Support

► EcoClean Direct (Roof, back panel and side liners)

Design

- ► 47 litre (net) cavity volume
- ▶ 3 shelf positions ► TFT Touch Display Pro
- ► SoftMove door
- ► LED Lighting

Safety

- ▶ Child lock
- ► Triple-glazed door
- ► Residual heat indicator

Included Accessories

- ► 1 set, level independent telescopic rails ► 1 Universal pan
- ► 1 Wire rack
- ▶ 1 Baking tray
- ► 2 Steam containers, perforated (size XL, M) ► 1 Steam container, unperforated (size M)
- ► 1 Sponge

CMG978NB1A 45cm Pyrolytic Compact Oven with Microwave

- **Key Features** ► 22 heating functions
- ► Microwave Boost (900W)
- ► Air Fry Function ► PerfectRoast Plus
- ► PerfectBake Plus
- ► Crisp Finish
- ► Bosch Assist

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ▶ 45 litre (net) cavity volume
- ▶ 3 shelf positions ► TFT Touch Display Pro
- ► SoftMove door
- ► LED Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door

Dimensions (HxWxD) 455 x 594 x 548mm

► Residual heat indicator

- ► 1 level telescopic rails
- ▶ 1 Universal pan
- ▶ 1 Air Fry and Grill Tray ▶ 1 Wire racks

Included Accessories Included Accessories ▶ 1 level telescopic rails

▶ 1 Universal pan

► Triple-glazed door

► Residual heat indicator

- ▶ 1 Air Fry and Grill Tray
- ▶ 1 Wire racks

accent | line

Built-in Compact Built-in Coffee Oven Range. Machine Range.

Series 8

Series 8

accent | line





16



•• LED Lighting











Home Connect

CTL9181B0 45cm Fully Automatic Coffee Machine

► OneTouch DoubleCup

Kev Features

Favourites ► CoffeeWorld

► AromaSelect

Cleaning Support

▶ AutoMilk Clean

► TFT Touch Display Pro

► SilentCeram Drive

► Height adjustable beverage outlet

▶ 2.4 litre removable water tank

► Calc'n'Clean

Design



-6













- 6











Home Connect

45cm Fully Automatic Coffee Machine

► OneTouch DoubleCup

CTL7181B0

Kev Features

▶ Favourites

► CoffeeWorld

Cleaning Support

▶ AutoMilk Clean

► TFT Touch Display Pro

► SilentCeram Drive

► Height adjustable beverage outlet

▶ 2.4 litre removable water tank

► Calc'n'Clean

Design

▶ AromaSelect

CMG7241B1A 45cm Compact Oven with Microwave

Key Features

► 16 heating functions

Home Connect

- ► Microwave Boost (900W)
- ► Air Fry Function
- ► Bosch Assist

Cleaning Support

► Cleaning Assist (HydroClean program)

Design

- ► TFT Touch Display

► 45 litre (net) cavity volume

- ► LED Lighting
- ▶ 3 shelf positions

- ► Child lock
- ► Triple-glazed door
- ► Residual heat indicator

Included Accessories

- ▶ 1 Universal pan
- ▶ 1 Air Fry and Grill Tray

Dimensions (HxWxD) 455 x 594 x 548mm

- ▶ 1 Wire racks

Included Accessories

- ▶ 1 Assembly screws
- ▶ 1 Welcome box
- 1 Test strip
- ► 1 Milk pipe

- ▶ 1 Milk container
- ▶ 1 Connection hose

Included Accessories

- ▶ 1 Assembly screws
- ▶ 1 Milk container
- ▶ 1 Welcome box
- 1 Test strip
- ▶ 1 Connection hose
- ► 1 Milk pipe

Dimensions (HxWxD) 455 x 594 x 385mm

Built-in Drawer Range.

Series 8

accent | line





























BID9101B1 60cm x 29cm Warming Drawer

Key Features

- ➤ 30°C 80°C temperature control
- ► Slow Cooking ▶ Keep Warm
- ► Plate Warming
- ► Cup Warming
- ► Favourites button via the Home Connect app

Home Connect BIC9101B1/BIC7101B1A 60cm x 14cm Warming Drawer

- **Key Features** ► 30°C - 80°C temperature control
- ► Slow Cooking
- ▶ Keep Warm
- ► Plate Warming
- ► Cup Warming
- ► Favourites button via the Home Connect app

Home Connect

BVE9101B1 60cm x 14cm Vacuum Drawer

Key Features

- ▶ 3 vacuuming levels in chamber
- (max 99%) ➤ 3 vacuuming levels outside chamber (max 90%)
- Drying program for vacuuming pumpSous Vide preparation
- ► Automatic connection recognition for vacuuming outside the chamber

- Design
- ► 54 litre (net) cavity volume
- ► Handleless push & pull opening mechanism ► Easy-to-clean hotplate made

Dimensions (HxWxD) 290 x 594 x 518mm

- of tempered glass ► Max espresso cups: 192
- ► Max plates: 40

► Illuminated TouchSelect Controls

Design

- ► 20 litre (net) cavity volume
- ► Handleless push & pull opening mechanism

Dimensions (HxWxD) 140 x 594 x 518mm

- ► Easy-to-clean hotplate made of tempered glass
- ► Max espresso cups: 64 ► Max plates: 12
- ► Illuminated TouchSelect Controls ► accent|line logo in drawer (BIC9101B1)

► Illuminated TouchSelect Controls

Design

- ▶ 8 litre (net) cavity volume ► Handleless push & pull opening mechanism

► stainless steel cavity

- Included Accessories
- ► 50 Big vacuuming bags ► 50 Small vacuuming bag
- ▶ 1 Adaptor for vacuuming outside the chamber
- ▶ 1 Vacuuming hose
- ▶ 1 Adaptor for bottle plugs
- ▶ 3 Plugs for vacuuming of bottles

Dimensions (HxWxD) 140 x 595 x 542mm

Built-in Oven Range.

Series 4 Series 6













































HRA574EB0A 60cm Pyrolytic Oven with HotAir Steam

Key Features

- ▶ 8 heating functions
- ► HotAir Steam ► 3D HotAir
- ► AutoPilot 10
- ► Pizza Setting

HBA574EB0A 60cm Pyrolytic Oven

Kev Features

- ▶ 7 heating functions
- ► 3D HotAir
- ► AutoPilot 10

Cleaning Support

► 5 shelf positions

► Halogen Lighting

► LED Display

► Pyrolytic Self-cleaning

► 71 litres (net) cavity volume

► Retractable control knobs

► Pizza Setting

Cleaning Support

HBT578FS2A

Key Features

► 3D HotAir

► AutoPilot 30

► Pizza Setting

► Slow Cooking

► Keep Warm ► Rapid Heat Function

► Defrost

60cm Pyrolytic Oven

► 10 heating functions

► Pyrolytic Self-cleaning

Design

- ▶ 71 litres (net) cavity volume
- ► 5 shelf positions
- ► LCD Display
- ► Retractable control knobs
- ► SoftMove door ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door ► Residual heat indicator
- ► Low door temperature during pyrolytic cleaning

Included Accessories

- ► 1 level telescopic rails
- ► Single point meat probe ▶ 1 Universal pan
- ► 2 Wire racks
- ► 1 Grill tray
- ► 1 Slimline universal pan (two half trays)

Cleaning Support ► Pyrolytic Self-cleaning

- ► 71 litres (net) cavity volume
- ► 5 shelf positions
- ► LED Display
- ► Retractable control knobs ► Halogen Lighting

- Safety ► Child lock
- ► Quadruple-glazed CoolTouch door
- Low door temperature during pyrolytic cleaning

- Included Accessories ► 1 level telescopic rails
- ▶ 1 Universal pan
- ▶ 2 Wire racks
- ▶ 1 Grill tray 1 Steam bowl

Safety ► Child lock

Design

- ► Quadruple-glazed CoolTouch door

Low door temperature during pyrolytic cleaning

- **Included Accessories**
- ▶ 1 level telescopic rails ▶ 1 Universal pan
- ▶ 2 Wire racks
- ► 1 Grill tray

Dimensions (HxWxD) 595 x 594 x 548mm

























60cm Pyrolytic Oven

Key Features

- ▶ 7 heating functions
- ► 3D HotAir ► AutoPilot 10
- ► Pizza Setting ► Rapid Heat Function

► 7 heating functions

► 3D HotAir ► AutoPilot 10

Kev Features

HBA172BB0A

► Pizza Setting ► Rapid Heat Function

60cm Pyrolytic Oven

- ► AutoPilot 10
- ► Rapid Heat Function

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ► 71 litres (net) cavity volume
- ► 5 shelf positions
- ► LED Display
- ► Retractable control knobs
- ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- Low door temperature during pyrolytic cleaning

Included Accessories

- ▶ 1 Universal pan ▶ 2 Wire racks
- ► 1 Grill tray

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ► 71 litres (net) cavity volume ► 5 shelf positions
- ► LED Touch Control display

- ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door

Dimensions (HxWxD) 595 x 594 x 548mm

Low door temperature during pyrolytic cleaning

Included Accessories

- ► 1 Grill tray

► 1 Universal pan

- ▶ 2 Wire racks

Kev Features ▶ 7 heating functions

HBA172BS0A

60cm Pyrolytic Oven

- ► 3D HotAir
- ► Pizza Setting

Cleaning Support

► Pyrolytic Self-cleaning

► 71 litres (net) cavity volume

- ► 5 shelf positions
- ► LED Touch Control display
- ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- Low door temperature during pyrolytic cleaning

Included Accessories

- ▶ 1 Universal pan ▶ 2 Wire racks
- ▶ 1 Grill tray

Series 2 Series 4








































HBA534BB0A 60cm EcoClean Direct Oven

Key Features

► 7 heating functions ► 3D HotAir

► Pizza Setting

HBA534ES0A 60cm EcoClean Direct Oven

Key Features

- ► 7 heating functions
- ► 3D HotAir
- ► Pizza Setting
- ► Rapid Heat Function

HBF133BS0A 60cm EcoClean Direct Oven

Key Features

- ► 5 heating functions
- ► 3D HotAir
- ► Rapid Heat Function

Cleaning Support

► EcoClean Direct (back panel)

- Design
 ► 71 litres (net) cavity volume
- ► 5 shelf positions ► LED Display
- ► Retractable control knobs
- ► Halogen Lighting

- Safety ► Child lock
- ► Triple-glazed door

Included Accessories

▶ 1 Universal pan

► 2 Wire racks

► 1 Grill tray

Cleaning Support

► EcoClean Direct (back panel)

- Design
 ► 71 litres (net) cavity volume
- ► 5 shelf positions
- ► LED Display
- ► Retractable control knobs
- ► Halogen Lighting

Safety

- ► Child lock
- ► Triple-glazed door

Cleaning Support

► EcoClean Direct (back panel)

- Design
 ► 66 litres (net) cavity volume
 ► 5 shelf positions
- ► LED Display
- ► Retractable control knobs
- ► Halogen Lighting

Safety

- ► Child lock
- ► Triple-glazed door

- **Included Accessories** ► 1 level telescopic rails
- ► 1 Universal pan
- 2 Wire racks
- ► 1 Grill tray

Included Accessories

- ► 1 Universal pan
- ► 1 Wire racks
- ▶ 1 Baking tray

Dimensions (HxWxD) 595 x 594 x 548mm











HBF134EB0A 60cm EcoClean Direct Oven

Key Features

- ► 5 heating functions
- ► 3D HotAir
- ► Defrost

Cleaning Support

► EcoClean Direct (back panel)

- Design
 ► 66 litres (net) cavity volume
 ► 5 shelf positions
- ► LED Display
- ► Retractable control knobs
- ► Halogen Lighting

Safety

- ► Child lock
- ► Triple-glazed door

Included Accessories

- ▶ 1 Universal pan ► 1 Wire racks
- ► 1 Baking tray

Dimensions (HxWxD) 595 x 594 x 548mm

Reference guide see pages 78-79.



32 | Bosch kitchen appliance catalogue more information www.bosch-home.com.au | 33

Microwave Range.

Series 2 Series 6







BEL554MS0A

Key Features

► AutoPilot 8

60cm Built-in Microwave



► 5 microwave power levels up to 900W

► Grill function with up to 1200W







BEL653MB3A

Key Features

► AutoPilot 8



60cm Built-in Microwave

► 5 microwave power levels up to 800W

► Grill function with up to 1000W









































Key Features

- ► 5 microwave power levels up to 800W
- ► Grill function with up to 1000W

- ► AutoPilot 8
- ► Favourite button

Cleaning Support

Cleaning Support ► Hydrolyse cleaning

Design

- ▶ 25 litre (net) capacity
- ► LED Lighting ► LED Display
- ► Retractable control knobs

Included Accessories

Dimensions (HxWxD) 382 x 594 x 388mm

► 1 raised grill rack

► 1 turntable

► Electronical door opening

► Hydrolyse cleaning

- ► 25 litre (net) capacity
- ► LED Lighting
- ► LED Display
- ► Retractable control knobs
- ► Electronical door opening

► Child lock

Included Accessories

- ► 1 raised grill rack
- ► 1 turntable

Dimensions (HxWxD) 382 x 595 x 375mm

Cleaning Support

► Hydrolyse cleaning

- ► 25 litre (net) capacity
- ► LED Lighting
- ► LED Display
- ► Retractable control knobs ► Electronical door opening

Safety

► Child lock

Included Accessories

- ► 1 raised grill rack
- ► 1 turntable

Dimensions (HxWxD) 290 x 495 x 370mm

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances.

Reference guide see page 80.

Time-saving Food Preparation.

You can grill, heat and thaw your favourite dishes with speed using a Bosch microwave.



AutoPilot 8

Every dish is a perfect success thanks to 8 pre-set automatic programs.


















Large Capacity Ovens.

Series 4 Series 6





























VBD554FS0

Key Features

▶ HotAir

90cm Catalytic Oven

▶ 8 heating functions

► Rapid Heat Function

Cleaning Support

► 5 shelf positions

► Halogen Lighting

► LED Display

Design

Safety

► Child lock

► Catalytic Liners (Sides and rear wall)

► 112 litre (net) cavity volume

► Retractable control knobs

VBD578FB0 90cm Pyrolytic Oven

Key Features

- ▶ 10 heating functions ► 1 rotisserie kit
- ▶ 3D HotAir
- ▶ Pizza Setting ► Rapid Heat Function
- ▶ Defrost
- ► Temperature Display
- ► Electronic Thermostat

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ► 112 litre (net) cavity volume
- ► 5 shelf positions
- ► LCD Display
- ► Retractable control knobs
- ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator

Included Accessories

- ► 1 level independent telescopic rails (clip-on)
- ► 1 Universal pan
- ► 2 Wire racks
- ► 1 Baking tray
- ► 1 Universal pan insert rack
- ► Rotary spit

VBD578FS0 90cm Pyrolytic Oven

Key Features

- ▶ 10 heating functions
- ► 1 rotisserie kit
- ➤ 3D HotAir
- ▶ Pizza Setting ► Rapid Heat Function
- ▶ Defrost
- ► Temperature Display ► Electronic Thermostat

Cleaning Support

► Pyrolytic Self-cleaning

- ► 112 litre (net) cavity volume
- ► 5 shelf positions
- ► LCD Display
- ► Retractable control knobs
- ► Halogen Lighting

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator

Included Accessories

- ► 1 level independent telescopic rails (clip-on)
- ▶ 1 Universal pan
- ► 2 Wire racks
- ► 1 Baking tray
- ► 1 Universal pan insert rack
- ► Rotary spit

Included Accessories

► Triple-glazed door

- ► 1 level independent telescopic rails (clip-on)
- ▶ 1 Universal pan
- ► 1 Wire rack ► 1 Baking tray
- ► Rotary spit

Dimensions (HxWxD) 594 x 896 x 570mm

Large Capacity Compact Ovens.

Series 6

Series 4





90cm Catalytic Compact Oven

► Catalytic Liners (Sides and rear wall)

▶ 85 litre (net) cavity volume

► Retractable control knobs







Key Features

▶ Pizza setting

▶ HotAir

▶ 8 heating functions

► Rapid Heat Function

Cleaning Support

► 4 shelf positions

► Halogen Lighting

► LED Display

Design



VBC578FS0 90cm Pyrolytic Compact Oven

Key Features

- ▶ 10 heating functions ▶ 3D HotAir
- ▶ Pizza setting
- Rapid Heat Function
- ► Temperature Display
- ► Electronic Thermostat

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ▶ 85 litre (net) cavity volume
- 4 shelf positions
- ► LCD Display
- ► Retractable control knobs
- ► Halogen Lighting

Safety

- ► Child lock
- ► Quadruple-glazed CoolTouch door

► Child lock

► Triple-glazed door

Safety

Included Accessories

- ► 1 level independent telescopic rails (clip-on)
- ► 1 Universal pan ► 1 Wire rack
- ► 1 Baking tray
- ► Rotary spit

Included Accessories

- ► 1 level independent telescopic rails (clip-on)
- ▶ 1 Universal pan
- ► 1 Wire rack
- ► 1 Baking tray

Dimensions (HxWxD) 475 x 896 x 572mm





Double Oven Range.

Series 6







































MBG5787S0A **Pyrolytic Oven Double Oven**

Key Features ► AutoPilot 30

Top Oven

▶ 4 heating functions

Bottom Oven

- ► 10 heating functions
- ► 3D HotAir
- ► Slow Cooking
- ► Keep Warm
- ► Defrost
- ► Automatic Rapid Heat Function

Cleaning Support

► Pyrolytic Self-cleaning

Design

- ► LCD Display
- ► Retractable control knobs
- ► SoftClose door ► Halogen Lighting
- ► Telescopic pull-out for 2 rails

Top Oven

- ▶ 34 litre (net) cavity volume
- ► 3 shelf positions

Bottom Oven

- ▶ 71 litre (net) cavity volume ► 5 shelf positions

- ► Child lock
- ► Quadruple-glazed CoolTouch door
- ► Residual heat indicator

Included Accessories

- ► 1 level independent telescopic rails (clip-on)
- ► Single point meat probe ► 1 Universal pan
- ▶ 2 Wire rack
- ► 1 Grill tray

EcoClean Direct Double Oven

Key Features

- Top Oven
- ► 3 heating functions

Bottom Oven

► EcoClean Direct (Back panel)

► Retractable control knobs

▶ 34 litre (net) cavity volume

► 71 litre (net) cavity volume

► 3D HotAir

Cleaning Support

► LED Display

Top Oven

► Halogen Lighting

► 3 shelf positions

► 5 shelf positions

► Triple-glazed door

► 7 heating functions

EcoClean Direct Double Oven

Key Features Top Oven

- ▶ 3 heating functions
- Bottom Oven
- ▶ 7 heating functions
- ► 3D HotAir

Cleaning Support

► EcoClean Direct (Back panel)

Design

► LED Display

- ► Retractable control knobs ► Halogen Lighting

Top Oven

- ▶ 34 litre (net) cavity volume
- ► 3 shelf positions

- ► 71 litre (net) cavity volume
- ► 5 shelf positions

- ► Child lock
- ► Triple-glazed door

Included Accessories

- ► 1 Universal pan
- ▶ 2 Wire rack ► 1 Grill tray

Included Accessories

- ► 1 Universal pan
- ▶ 2 Wire rack ► 1 Grill tray

Dimensions (HxWxD) 888 x 594 x 550mm

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances. Reference guide see page 82.





more information www.bosch-home.com.au | 37

38 | Bosch kitchen appliance catalogue more information www.bosch-home.com.au | 39

Induction Cooktops

PXX995KX5E

The Best Cooking needs just One Ingredient: Bosch.

Modern cooking offers so many wonderful new tastes and textures – you need a cooktop that's flexible enough to keep up.

Induction Cooktop Range.

Bosch's induction cooktops boast a wide range of modern features designed to make it easier and quicker for you to create the dishes you love. Induction cooktops can bring water to the boil much faster than a conventional cooktop and are particularly easy to clean.







FlexInduction.

Ideal for pots, pans and casserole dishes of all shapes and sizes. Thanks to the unique coil shapes, you get the ultimate flexibility and heat distribution. At the touch of a button, two induction zones become one large FlexInduction surface.

Combilnduction.

With Bosch Combilnduction, you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard cooking zones into one large CombiZone.

Induction.

Cooking with induction is safer than all other alternatives. Only the base of the pan is heated and not the entire cooktop, which remains almost completely cold.

Speed up your cooking.

Time Required to Heat 2 Litres of Water at 15°C-90°C. 12.24 0.500 9.06 7.39 0.320 0.314 4.01 0.225 Induction cooktop with Ceramic cooktop with Gas burner with 4.0kW/14.4 MJ/h 3.3kW PowerBoost 2.2kW HighSpeed 1.9kW/6.84 MJ/h

Source: BSH Hausgeräte GmbH, Germany (overseas test results).



E fo

NEW Bosch Assist Menu.

TFT colour display menu of dishes for automatic cooking.

*Available in PXX995KX5E

Always Tasty, Never Scorched.

With PerfectFry Plus, healthy cooking has never been easier. The intelligent sensor in your cooktop can be set to eleven different temperature levels depending on your meal. Once activated, it gently heats up the food on the selected cooking zone, avoiding overheated oil and potentially harmful substances. Throughout the cooking process, it constantly monitors the temperature and can prevent your food from scorching.

Selection of the Many Dishes that you can Prepare with PerfectFry Plus:

70°C / 80°C	90°C / 100°C	110°C / 120°C	140°C	160°C	180°C / 200°C	220°C
Melt chocolate butter or cheese, e.g. for fondue	Reheat dishes	Prepare sauces or stew vegetables	Frying dishes with extra virgin olive oil, margarine or better, e.g. omelets	Frying fish, meatballs or sausages	Frying steaks (medium or well-done), fresh ragout or vegetables	Frying steaks (rare), frozen French fries or popcorn



Desserts that melt your heart.

PerfectFry Plus helps you create the perfect highlight for your menu - even at low temperatures. It allows you to melt chocolate couverture at 70°C without the use of a water bath.



Fry your Veggies, not their Nutrients.

Glazed vegetables are a classic made even better by modern technology.

With PerfectFry Plus you can gently sauté your veggies at 120°C and preserve their vitamins.



Steaks Done to Perfection.

Thanks to PerfectFry Plus, you can make well-done steaks instead of mistakes.

The sensor will heat the pan to the optimum temperature of 180°C and makes sure your meat turns out tender.




End your day with a pop.

With PerfectFry Plus you can prepare delicious golden brown popcorn for your movie night. Even at 220°C, the sensor avoids scorching and serves up a truly cinematic snack. That way you can watch your movie without having to watch your popcorn.



Flex to the Max.

The new Series | 6 cooktops with **Easy Flex Zones** are equipped with several inductors that enable a separation in different-sized cooking zones – they detect your cookware and resize the cooking zones accordingly. Once you move your cookware, your cooking setting automatically moves with it.

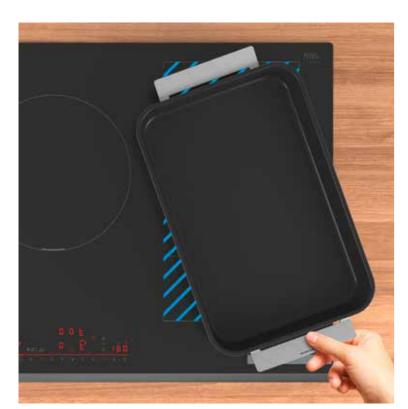

Resizes your cooking zones.



Detects your cookware.



Transfers your setting when moving the cookware.



Pro Induction Flex Pans

The coated Pro Induction Flex Plans offer exciting new ways for meal-prepping. They are available as single items as well as three and four-piece sets.

Pro Induction Flex Pan set, 3 pcs. (medium, 2x small): HEZ9FF030

Pro Induction Flex Pan set, 4 pcs. (large, medium, 2x small): HEZ9FF040

Large Flex Pan HEZ9FF010



Pro Induction Cookware

Whether you are a seasoned pro or an experimental home chef, we have just the right cookware set for your needs. They are available as four or six-piece sets.

Pro Induction Cookware set, 6 pcs.: HEZ9SE060



Grill Plate

You are red-hot for the savoury taste of grilled foods? With the large Grill Plate stretching over two cooking zones you can easily prepare meat, fish and vegetables.

Grill Plate: HEZ390522



Teppan Yaki

Our Teppan Yaki is perfect for everyone with a knack for Asian cuisine. With this 40 x 20cm large cookware you can prepare exotic sandwiches, desserts or minced meat dishes.

Pro Induction Teppan Yaki: HEZ9TY010



Cast-iron Pan

Despite its cast-iron body, it's not too hot to handle. With its 28cm diameter and extra large handle, it is perfectly safe and easy to use.

Cast-iron Pan: HEZ9FE280



Roaster and Steaming Rack

This cookware combination cooks your meat and vegetables evenly while trapping the juices underneath. Awesome sauce!

Roaster: HEZ390011



Wok

Whether you want to cook stir-fry, noodles or soup – with our Wok you have an all-in-one pot. Literally.

Wok: HEZ390090

Shop online at www.bosch-home.com.au/shop

*Release dates may vary.

2-in-1 Cooktops with Integrated Ventilation.

Series 6

70cm





Features

- ▶ 4 induction cooking zones: 2 combination zones 'CombiZone' for large pans
- ► 17 power levels
- ► PowerBoost ► CombiZone
- ► MoveMode
- ► QuickStart
- ► ReStart ► Energy Consumption Display

Cleaning

► WipeProtection pauses all settings for easy cleaning while cooking

Design

- ► DirectSelect
- ► Black ceramic glass
- ► Automatic Pot Detection ► Fully dishwasher safe and heat resistant

Safety

- ► Child lock
- ▶ 2 stage residual heat indicator

Ventilation

- ▶ 622m³/h maximum extraction capacity
- ► Noise min./max. Normal Level: 42/69 dB
- ▶ 9 power settings + 2 intensive
- ► Automatic run-on time 30 mins
- ► EcoSilence Drive brushless motor
- ► Dishwasher-safe metal grease filter
- ► Electronic filter saturation indicator
- Sleek air inlet grid, heat resistant, dishwasher safe

Dimensions (HxWxD) 223 x 710 x 522mm

Installation Dimensions (HxWxD) 223 x 560 x 490mm

80cm



with Integrated Ventilation

- 4 induction cooking zones: 2 combination zones 'CombiZone' for large pans
- ▶ 17 power levels
- ► PowerBoost
- ► CombiZone
- ▶ MoveMode
- ► QuickStart
- ► Energy Consumption Display

Cleaning

► WipeProtection pauses all settings for easy cleaning while cooking

- ► DirectSelect
- ► Black ceramic glass
- ► Frameless
- ► Automatic Pot Detection
- ▶ Fully dishwasher safe and heat resistant

- ▶ 2 stage residual heat indicator

- ► 622m³/h maximum extraction capacity ► Noise min./max. Normal Level: 42/69 dB
- ▶ 9 power settings + 2 intensive
- ► Automatic run-on time 30 mins
- ► EcoSilence Drive brushless motor
- ► Dishwasher-safe metal grease filter
- ► Electronic filter saturation indicator
- ► Sleek air inlet grid, heat resistant,

Dimensions (HxWxD)

223 x 802 x 522mm

Installation Dimensions (HxWxD) 223 x 750 x 490mm

Installation Accessories Included for Unducted Recirculation



Unducted Recirculation Kit*

4 high-performance CleanAir odour filters with optimised odour reduction performance or cooking applications with complex odour molecules (e.g. fish). Lifetime of 360 hours of cooking (non-regenerative).

- ► A telescopic slider element with a self-gluing fixation frame to easily connect the appliance's air outlet with the cut-out in backpanel of the cabinetry.
- ► A sealing gasket to ensure air tightness, which can be attached on the telescopic slider or a male flat duct.

Replenishment filters can be ordered on the Bosch Online Shop using part number: 17004805 (set of four filters).

HEZ9VDKE1 for worktop depths ≥60cm

HEZ9VDKR0 for worktop depths ≥70cm























Entertaining has never been easier.

For greater freedom and flexibility in creating your dream kitchen, Bosch offers 2-in-1 cooktops with integrated ventilation, combining

the latest technology of our **induction cooktops** and **rangehoods**

into a single appliance.

Light Up Your Day.

Combine a modern kitchen look with the ultimate cooking experience.





Induction Cooktops.

Series 8

accent | line

Series 6

90cm

FlexInduction.

Cook to Hood



Cook to Hood



Induction.



⚠ Home Connect

90cm FlexInduction Cooktop

Heating Functions

PXX995KX5E

- ► 5 induction cooking zones: 3 FlexInduction zones with Central Expanded FlexInduction zone
- ▶ 17 power levels
- ► PowerBoost for each zone
- ► Keep Warm

Key Features

▶ PerfectCook

▶ PerfectFrv

MoveMode

Bosch Assist

▶ QuickStart ▶ ReStart Cleaning

► Child lock

Safety

Cook to Hood control

► Dual time with auto switch-off

► 2-stage residual heat indicator

▶ PowerTransfer

Design

- ► TFT Touch display
- ► Carbon black side profiles

PXV975DV1E 90cm FlexInduction Cooktop

1 Home Connect

Heating Functions

- ► 5 induction cooking zones: 2 FlexInduction zones, and 1 large triple circuit
- ► 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost Function
- ► Keep Warm

- Design ► DirectSelect Premium
- ► Stainless steel side profiles

PIV931HC1E 90cm Induction Cooktop

Home Connect

Heating Functions

- ► 5 induction cooking zones: including 1 large triple ring zone
- ► 17 power levels
- ► PowerBoost for each zone

Design

- ► DirectSelect
- ► Frameless (bevelled front)

Key Features

- PerfectFry
 - ▶ MoveMode
 - ► Dish Assistant via Home Connect
 - ► Cook to Hood control
 - ► Dual timer with auto switch-off
 - ▶ QuickStart
 - ▶ ReStart

Key Features

- ▶ PerfectFrv Plus
- ► Favourites via Home Connect ► Dish Assistant via Home Connect
- ► Cook to Hood control
- Customisable timer options
- ▶ QuickStart
- ▶ ReStart

Cleaning

WipeProtection

Safety

- ► Child lock
- ► 2-stage residual heat indicator

Dimensions (HxWxD) 51 x 916 x 527mm

Installation Dimensions (HxWxD)

51 x 880 x 490-500m

Safety

- ► Child lock
- ► 2-stage residual heat indicator

Dimensions (HxWxD) 51 x 918 x 522mm

Installation Dimensions (HxWxD)

51 x 880 x 490-500m

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances. *Release dates may vary. Reference guide see pages 84-85.

Induction Cooktops.

Series 8

accent line accent | line

80cm


FlexInduction.

Cook to Hood



Cook to Hood





80cm FlexInduction Cooktop

► 4 induction cooking zones:

► PowerBoost for each zone

1 large FlexInduction zone

Home Connect

PXY898DX6E 80cm FlexInduction Cooktop

Heating Functions

- ► 4 induction cooking zones: 2 FlexInduction zones, both with expanded FlexInduction zones
- ▶ 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost Function ► Keep Warm

Design

- ► DirectSelect premium
- ZoneLight
- ► Carbon black side profiles (bevelled front & rear)
- ► Illuminated cooking zone

Kev Features

- ► PerfectCook ▶ PowerTransfer
- ▶ PerfectFrv
- ► MoveMode ► Dish Assistant via Home Connect
- ► Cook to Hood control
- ► Dual time with auto switch-off
- ▶ QuickStart
- ▶ ReStart

Cleaning

▶ WipeProtection

- ► Child lock
- ► 2-stage residual heat indicator

80cm FlexInduction Cooktop

Home Connect

Heating Functions

PXV890DV5E

- ► 5 induction cooking zones: 1 FlexInduction zone
- ► 17 power levels
- ► PowerBoost for each zone

- ► DirectSelect premium
- ▶ GlassProtect Surface
- Carbon black side profiles

Design

► DirectSelect Premium

PXE875DC1E

Heating Functions

► 17 power levels

► Stainless steel side profiles (bevelled front & rear)

Kev Features

► PerfectFry

► MoveMode

► QuickStart

▶ ReStart

Kev Features

- ► PerfectFry ► MoveMode
- ► Dish Assistant via Home Connect
- ► Cook to Hood control
- ► Dual time with auto switch-off
- ► QuickStart
- ► ReStart

Cleaning

► WipeProtection

Cleaning

► Child lock

► WipeProtection

► 2-stage residual heat indicator

Safety ► Child lock

► 2-stage residual heat indicators

► Dual timer with auto switch-off

Dimensions (HxWxD)

51 x 816 x 527mm

Installation Dimensions (HxWxD)

Dimensions (HxWxD) 51 x 816 x 527mm

Installation Dimensions (HxWxD)

Series 6

accent | line

60cm

Combilnduction.

FlexInduction.





Home Connect

60cm FlexInduction Cooktop

► 4 induction cooking zones:

2 FlexInduction zones

► PowerBoost for each zone

► Automatic zone selection

► Carbon black side profiles

(bevelled front and metal strips on the side)

PXX695HC1E

Heating Functions

► 17 power levels



Home Connect

60cm FlexInduction Cooktop

► 4 induction cooking zones:

▶ PowerBoost for each zone

► Automatic zone selection

► Frameless (bevelled front)

► Favourites via Home Connect

Customisable timer options

► Dish Assistant via Home Connect

1 FlexInduction zone

PIX631HC1E

Heating Functions

► 17 power levels

Design

▶ DirectSelect

Kev Features

► QuickStart

► ReStart

► PerfectFry Plus

► Cook to Hood control

Home Connect

PVS831HC1E 80cm Combi-Induction Cooktop

Heating Functions

- ► 4 induction cooking zones:
- 1 CombiZone and 1 28cm double circuit zone
- ► 17 power levels
- ► PowerBoost for each zone

- ► DirectSelect
- ► Frameless (bevelled front)

Design

- **Kev Features** ► PerfectFry Plus
- ► Favourites via Home Connect
- ► Dish Assistant via Home Connect

► 2-stage residual heat indicator

Dimensions (HxWxD)

51 x 802 x 522mm

Installation Dimensions (HxWxD)

- Cook to Hood control
- Customisable timer options ► QuickStart
- ► ReStart

► Child lock

► Pause Function

► PowerTransfer

Design

▶ DirectSelect

- **Kev Features** ► PerfectFry Plus
- ► Favourites via Home Connect
- ► Dish Assistant via Home Connect
- ► Cook to Hood control
- ► Customisable timer options
- QuickStart ► ReStart

- ► Child lock
- ► 2-stage residual heat indicator
- ► Pause Function

Dimensions (HxWxD) 51 x 606 x 527mm

Installation Dimensions (HxWxD)

Safety

- ► Child lock
- ► 2-stage residual heat indicator
- Pause Function

Dimensions (HxWxD) 51 x 592 x 522mm

Installation Dimensions (HxWxD) 51 x 560 x 490-500m

Induction Cooktops.

Series 6

Series 4

60cm

Combilinduction.

Induction.









Home Connect

PVS631HC1E **60cm Combilnduction Cooktop**

Heating Functions

- ► 4 induction cooking zones: 1 CombiZone
- ► 17 power levels
- ► PowerBoost for each zone

PUE611BB5E 60cm Induction Cooktop

Heating Functions

- ► 4 induction cooking zones
- ► 17 power levels ► PowerBoost for each zone

► Frameless (bevelled front)

▶ Dual time with auto switch-off

PUJ611BB5E **60cm Induction Cooktop**

Heating Functions

- ▶ 3 Induction cooking zones
- ▶ 17 power levels
- ► PowerBoost for each zone

► Frameless (bevelled front)

► Dual time with auto switch-off

Design

- ▶ DirectSelect
- ► Frameless (bevelled front)

Key Features

- ► PerfectFry Plus
- ► Favourites via Home Connect
- ► Dish Assistant via Home Connect
- ► Cook to Hood control
- Customisable timer options ▶ QuickStart
- ▶ ReStart

Safety

- ► Child lock
- ▶ 2-stage residual heat indicator

Dimensions (HxWxD)

51 x 592 x 522mm

Installation Dimensions (HxWxD)

Design

► TouchSelect

Key Features

▶ QuickStart

▶ ReStart

- ► 2-stage residual heat indicator

Safety

Design

► TouchSelect

Key Features

▶ QuickStart

▶ ReStart

- ► Child lock
- ► 2-stage residual heat indicator

Dimensions (HxWxD)

51 x 592 x 522mm

Installation Dimensions (HxWxD)

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances. Reference guide see pages 86-87.

Key Features and Functions.





Safety & Cleaning

WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

2-stage Residual Heat Indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h' - residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Child Lock

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

Automatic Safety Switch-off

Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.

Pause Function

Pause the heating process (e.g. to answer the door).

ReStart

Things happen quickly in the kitchen - spilling something on the control panel or accidentally switching off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Convenience

Bosch Assist

A menu of dishes for automatic cooking: easily find the right temperature setting for a certain dish in the touch display.

Automatic Pot Detection

Bosch Induction cooktops feature Automatic Pot Detection which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed. the control panel indicator will flash and remain inactive until the pot is detected.

Keep Warm

At the touch of a button, this is the ideal setting for keeping food warm before serving.

Dual Function Timer Including Automatic Switch-off for Each Zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (e.g. level 5.5) for up to 99 minutes ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

QuickStart

Start cooking more quickly. Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

Dish Assistant

Easily find the right temperature setting for a certain dish via the Home Connect

Energy Consumption Display

Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money (for example, placing a lid on a pot can help reduce your energy consumption).

Performance

Cook to Hood

Control your rangehood via your cooktop with cooktop-based hood control. If preferred, the rangehood can be controlled manually.

DirectSelect Premium

Taking easy-to-use, intuitive controls to the next level, DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

DirectSelect

Enjoy total convenience with DirectSelect 1.0. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/- repeatedly.

TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

17 Power Levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (e.g. 0.5, 1, 1.5, 2...9).

PowerBoost

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.

ShortBoost

Reduce the time to heat up pans this boost function heats up the pan for 30 seconds at high power before automatically reducing the heat to the correct power setting.

Pre-set 3 different power levels and move from boil to simmer in just seconds.

Cooktops | Gas

Gas Without The Guesswork.

The gas cooktops with FlameSelect are equipped with nine precisely-defined power levels which let you adjust the required heat easily and reliably. For simply perfect cooking results.

Series | 8

Our Series | 8 range of gas cooktops combines convenience and truly elegant black design with ultimate cooking control, for professional performance in the kitchen.


Series | 6

Expect excellent operation and timeless designs with our Series | 6 range of gas stainless steel cooktops. You'll get premium engineering and materials so that you can always cook something special.

Cast-iron Support.

Square design cast-iron pan supports don't just look good, but provide more stability for pots and pans. Cleverly designed to fit together, they are separate pieces, which make them easy to handle and clean.

(Flame Select

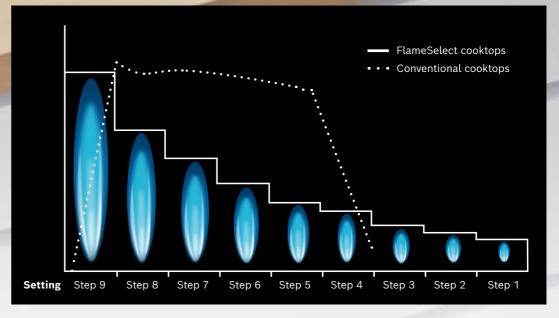

FlameSelect.

We're taking the guesswork out of using a gas cooktop. Our innovative Step Valve technology regulates the gas output precisely, so you're able to choose the size of flame. With an easy-to-use setting, all you need to do is decide which of the 9 power settings you want.

FlameSelect Gas Cooktops.

Series 8 Series 6

accent line

90cm

Stainless Steel. Black Glass.







(1) FlameSelect



(*) FlameSelect

75cm Stainless Steel

► 5 burners: 1 x 19.5 MJ/h wok burner

1 x high-speed burner

2 x standard burners

PCR7A5B90A

Gas Cooktop

Heating Functions

75cm



(1) FlameSelect

60cm Stainless Steel

4 burners: 1 x 15 MJ/h wok burner

1 x high-speed burner

1 x standard burners

PCI6A5B90A

Gas Cooktop

Heating Functions

60cm

(1) FlameSelect

PRS9A6L70A 90cm Black Ceramic Glass **Gas Cooktop**

Heating Functions

- 2 x standard burners
- 1 x economy burner

► 5 burners: 1 x 22 MJ/h wok burner 1 x high-speed burner

90cm Black Ceramic Glass

....

Heating Functions

- 5 burners:
 1 x 22 MJ/h wok burner
- 1 x high-speed burner
- 2 x standard burners

PCT9A5B90A 90cm Stainless Steel **Gas Cooktop**

Heating Functions

Key Features

► FlameSelect

- 6 burners: 2 x 19.5 MJ/h wok burner 1 x high-speed burner
- 2 x standard burners
- 1 x economy burner

► Enamelled cast-iron supports

Key Features

► FlameSelect

- Design ► Electronic display ▶ Electronic display ► Carbon black side profiles ► Dishwasher safe cast-iron supports
- ► Dishwasher safe cast-iron supports

Key Features

- ► FlameSelect
- ► One-hand ignition with sword control knobs

- Safety ► Flame failure for each burner
- ► Residual heat indicators

Suitable for NG (ex factory) and LPG (via included conversion kit)

Dimensions (HxWxD)

45 x 850 x 490-502mm

59 x 916 x 527mm Installation Dimensions (HxWxD)

- ► Flame failure for each burner
- ► Residual heat indicators

Suitable for NG (ex factory) and LPG (via included conversion kit)

► One-hand ignition with sword control knobs

Dimensions (HxWxD) 59 x 916 x 527mm

Installation Dimensions (HxWxD)

45 x 850-852 x 490-502mm

Safety

► Flame failure for each burner

► Suitable for NG (ex factory)

► One-hand ignition with sword control knobs

53 x 915 x 520m

Installation Dimensions (HxWxD) 45 x 850-852 x 490-502mm

PCR9A5B90A

90cm Stainless Steel **Gas Cooktop**

(1) FlameSelect

- **Heating Functions**
- ► 5 burners: 1 x 19.5 MJ/h wok burner
- 1 x high-speed burner

00000

- 2 x standard burners
- 1 x economy burner

Design

► Enamelled cast-iron supports

► Enamelled cast-iron supports

► Enamelled cast-iron supports

Key Features

- ► FlameSelect
- ► One-hand ignition with sword control knobs

Key Features

- ► FlameSelect
- ▶ One-hand ignition with sword control knobs

▶ FlameSelect

One-hand ignition with sword control knobs

Safety

► Flame failure for each burner

Other

Suitable for NG (ex factory) and LPG (via included conversion kit)

53 x 915 x 520mm Installation Dimensions (HxWxD)

45 x 850 x 490-502mm

Safety

► Suitable for NG (ex factory)

► Flame failure for each burner

53 x 750 x 520mm

Installation Dimensions (HxWxD)

45 x 560-562 x 480-492mm

► Flame failure for each burner

Suitable for NG (ex factory) and LPG (via included conversion kit)

53 x 582 x 520mm

Installation Dimensions (HxWxD) 45 x 560-562 x 480-492mm

Gas Cooktops.

Series 2

60cm

Stainless Steel.





PBH6B5B90A 60cm Stainless Steel **Gas Cooktop**

Heating Functions

- ► 4 burners: 1 x 15 MJ/h wok burner
- 2 x standard burners 1 x economy burner

PBH6B5B80A 60cm Stainless Steel **Gas Cooktop**

Heating Functions

- ▶ 4 burners:
- ► 1 x 13 MJ/h wok burner
- ► 2 x standard burners

► Enamelled cast-iron supports

Enamelled cast-iron supports

Key Features

► One-hand ignition with sword control knobs

Key Features

► One-hand ignition with sword control knobs

Safety

► Flame failure for each burner

► Flame failure for each burner

► Suitable for NG (ex factory)

► Suitable for NG (ex factory)

Dimensions (HxWxD) 43 x 580 x 510mm

Installation Dimensions (HxWxD) 45 x 560-562 x 480-492mm

Features and Functions for Everyday Use.







Convenience

One-hand Ignition

Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one hand, there is also no separate ignition button to clean.

Simplicity

FlameSelect

FlameSelect and its patented valve technology offer you incremental heat regulation within nine precisely-defined power levels, making your cooking with gas as easy, safe and enjoyable as possible.

Flame Failure Device

For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

Performance

High-power Wok-style Burner

Selected gas cooktop models feature a powerful wok-style burner which provides up to 19.5 MJ/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.

Flexible Burners

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of your pan.



Ceramic Cooktops.

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as practical and easy-to-clean.

Series 8

80cm

70cm

60cm



PKM875DP1A **80cm Ceramic Cooktop**

Heating Functions

- ► 4 QuickTherm cooking zones:
- 2 dual circuit zones, 1 dual circuit CombiZone
- ► 17 power levels
- ► PowerBoost for each zone

Design

► DirectSelect Premium

▶ DirectSelect Premium

PKG775DB1A

Heating Functions

► 17 power levels

2 dual circuit zones

70cm Ceramic Cooktop

▶ 4 QuickTherm cooking zones:

► Stainless steel side profiles (bevelled front)

► DirectSelect Premium

PKN675DB1A

Heating Functions

60cm Ceramic Cooktop

► 4 QuickTherm cooking zones:

► PowerBoost for each zone

1 dual circuit zone, 1 dual circuit/extended roasting zone

- ► Stainless steel side profiles (bevelled front)

Key Features

- ► Dual timer with auto switch-off
- ► Keep Warm ► ReStart
- ► Energy Consumption Display

Key Features

- ► Automatic electronic boil start
- ► Dual time with auto switch-off
- ► Keep Warm
- ► ReStart
- ► Energy Consumption Display

Key Features

- ► Automatic electronic boil start
- ► Dual time with auto switch-off
- ► Keep Warm
- ► ReStart
- ► Energy Consumption Display

Cleaning

► WipeProtection

► Child lock

Safety

► 2-stage residual heat indicators

Dimensions (HxWxD) 44 x 816 x 527mm

Installation Dimensions (HxWxD)

Cleaning

▶ WipeProtection

- Safety ► Child lock
- ► 2-stage residual heat indicators

Safety

► Child lock

Cleaning

► WipeProtection

► 2-stage residual heat indicators

Dimensions (HxWxD) 44 x 710 x 527mm

Installation Dimensions (HxWxD)

Dimensions (HxWxD) 44 x 606 x 527

Installation Dimensions (HxWxD)

Series 4

Series 2

PKE611CA2A

Heating Functions


▶ 9 power levels

▶ Frameless

60cm Ceramic Cooktop

► Side control sword knobs

► 4 QuickTherm cooking zones



PKE611BA2A **60cm Ceramic Cooktop**

Heating Functions

- ► 4 QuickTherm cooking zones
- ▶ 17 power levels

Design

- ▶ Flectronic TouchSelect
- ► Frameless

Key Features

- ▶ ReStart
- ► Quick Stop

- Safety ► Child lock
- ► 2-stage residual heat indicators

Safety

► 2-stage residual heat indicators

Dimensions (HxWxD) 45 x 592 x 522mm

Installation Dimensions (HxWxD)

Dimensions (HxWxD) 46 x 592 x 522mm

Installation Dimensions (HxWxD)

Features may vary depending on models. Please check individual product specifications. *Available on selected models only.



Convenience

DirectSelect Premium

DirectSelect Premium gives you complete cooking control with intuitive controls and unsurpassed accuracy.

QuickTherm Technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds.

PowerBoost

PowerBoost now on selected Bosch ceramic cooktops lets you heat up large volumes of water even faster than on the highest power level.

Keep Warm

At the touch of a button, this is the ideal setting for keeping food warm before serving.

ReStart

ReStart will store your last selected settings in case of a spill or accident. Those settings can be reset by simply pressing the main power switch within 4 seconds.

WipeProtection

In case of a spill or boil over, Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

2-stage Residual Heat Indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Energy Consumption Display*

Each time you finish cooking, your energy consumption display shows exactly how much power you've used.

Rangehoods

Integrated GlassVisor Rangehoods.

With our new integrated design hood you can finally gain more room beside and on the hood – and not just for spices. The hood with the T-shaped body itself serves as storage space and can hold up to 10kg on each side. Thanks to its optimised design, additional shelving can be installed in the upper cabinet to the left and right of the chimney, providing you with even more storage space - for example, for cookbooks and cooking utensils.

Series 6

90cm



60cm

90cm Integrated GlassVisor Rangehood

Performance and Features

- ► 749m³/h maximum extraction capacity*
- ▶ 3 power settings and 1 intensive setting
- with automatic revert

► 50dB at minimum level

- Automatic run-on time: 6 minutes

- Design ► TouchSelect on glass panel
- ► 3 x LED lights
- ► Seamless integration
- ► Automatic fan and light operation
- ► TouchSelect on glass panel

60cm Integrated
GlassVisor Rangehood

Performance and Features

► 50dB at minimum level

with automatic revert

► 749m³/h maximum extraction capacity*

▶ 3 power settings and 1 intensive setting

► Automatic run-on time: 6 minutes

- ► 2 x LED lights
- ▶ Seamless integration
- ► Automatic fan and light operation

- ► Dishwasher-safe metal grease filters
- ► Stainless steel filter covers

Available Accessories

- ► DWZ6IB1I4 Recirculation kit
- ► DWZ1IB6K1 Chimney extension kit (450-854mm)
- ► DWZ1IB6N1 Chimney extension kit

Product Dimensions (HxWxD) 340 x 897 x 298mm

Built-in Dimensions (HxWxD) 340 x 860 x 300mm (ducted or recirculating


- ► Dishwasher-safe metal grease filters
- Stainless steel filter covers

Available Accessories

- ► DWZ6IB1I4 Recirculation kit
- ► DWZ1IB6K1 Chimney extension kit (450-854mm)
- ► DWZ1IB6N1 Chimney extension kit

Product Dimensions (HxWxD) 340 x 597 x 298mm

Built-in Dimensions (HxWxD)



*Boost position air extraction rate according to EN 61591 Ø 15cm.





Noise is measured in numeric decibels or dB(A). It is important to note that a few decibels can make a huge difference.

EcoSilence Drive Brushless Motor.

The EcoSilence Drive brushless motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. The result: low noise levels with high power.



accent | line

GlassDraft Integrated Ventilation.

The design highlight for your kitchen island bench – with perfect extraction directly from the cooktop.





GlassDraft Ventilation.

Integrated Rangehoods.

Great performance in a tiny space. These neatly concealed rangehoods are housed underneath the kitchen unit and can only be seen if you look underneath the kitchen cabinetry.

Series 8

Series 8

Series 6

accent line

80cm

86cm

70cm

Cook to Hood







Home Connect

80cm GlassDraft - Integrated **Downdraft Ventilation**

Performance and Features

- ► 775m³/h maximum extraction capacity* ► 39dB at minimum level
- ▶ 3 power settings and 2 intensive settings
- with automatic revert
- ▶ PerfectAir sensor
- ▶ Guided Air
- ► EcoSilence Drive motor
- Cooktop-based hood control (with matching cooktop)
- ► Fully automatic rangehood
- ► Installation in an island or semi-island ► Installation in a kitchen cabinet
- ► Ducted and recirculated-air operation

DHL895DAU 86cm Integrated Rangehood

Performance and Features

- ▶ 800m³/h maximum extraction capacity with rim ventilation*
- ▶ 41dB at minimum level
- ► 3 power settings and 1 intensive setting with automatic revert
- ► Automatic run-on time: 30 minutes ► EcoSilence Drive motor

70cm Integrated Rangehood

Performance and Features

DHL785BAU

- ► 730m³/h maximum extraction capacity with rim ventilation*
- ► 53dB at minimum level
- ► 3 power settings and 1 intensive setting with automatic revert

Design

- ▶ TouchControl
- ► LED-illumination of retractable glass panel
- Ambient light colour change via Home Connect

- Push button controls
- ► 2 x LED lights

► Push button controls

Available Accessories

▶ DHZ5605 Recirculation kit

► 2 x LED lights

Cleaning

- ► Dishwasher-safe metal grease filters
- ► Flectronic filter saturation indicators
- ► Removable glass panel for easy cleaning

Cleaning

- ► Dishwasher-safe metal grease filters ► Flectronic filter saturation indicators

▶ DHZ5605 Recirculation kit

Available Accessories

Cleaning ► Dishwasher-safe metal grease filters

Available Accessories

- ► DSZ1WW1I6 Recirculation kit
- ► DSZ1WW1J1 Long life regenerative filter ► DSZ1WW1M1 Remote motor kit
- ► DSZ8WW1Y2 Seamless installation kit

Product Dimensions (HxWxD)

709 x 816 x 140mn 418 x 860 x 282mr

Built-in Dimensions (HxWxD) 418 x 836 x 264mm (ducted or recirc

418 x 700 x 282m

Built-in Dimensions (HxWxD)

418 x 676 x 264mm (ducted or recirculating

Built-in Dimensions (HxWxD)

703 x 781 x 123mm (ducted or recirculating)

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances. Reference guide see pages 92-93.

^{*}Boost position air extraction rate according to EN 61591 Ø 15cm.

Series 2

DWB96BC60A

capacity*

Design► Push button

Cleaning

► 2 x LED lights

► Dishwasher-safe

metal grease filters

Available Accessories

► DWZ1DX1I4 Recirculation kit

635-965 x 900 x 500mm

(ducted) or

635-1075 x 900 x 500

► 3 power settings

90cm Canopy Rangehood

Performance and Features

▶ 49dB at minimum level

► 619m³/h maximum extraction

Integrated Rangehoods.

Series 6 Series 4 Series 2

52cm 53cm







DHL575CAU 52cm Integrated Rangehood

Performance and Features

- ▶ 610m³/h maximum extraction capacity with rim ventilation*
- ► 50dB at minimum level
- ► 3 power settings and 1 intensive setting with automatic revert

53cm Integrated Rangehood

Performance and Features

- ► 650m³/h maximum extraction capacity*
- ► 41dB at minimum level
- ▶ 3 power settings and 1 intensive setting

DLN54AA70A 53cm Integrated Rangehood

Performance and Features

- ► 420m³/h maximum extraction capacity*
- ► 55dB at minimum level
- ► 3 power settings

- **Design**► Push button controls
- ▶ 2 x LED lights

Design

- ► Slide controls
- ▶ 2 x LED lights

- **Design**► Slide controls
- ▶ 2 x LED lights

► Dishwasher-safe metal grease filters

- **Available Accessories**
- ► DHZ5605 Recirculation kit
- Product Dimensions (HxWxD)

418 x 520 x 300n

Built-in Dimensions (HxWxD) 418 x 496 x 264mm (ducted or recirculating)

- ► Dishwasher-safe metal grease filters
- **Available Accessories** ► DHZ7305 Recirculation kit

Product Dimensions (HxWxD) 255 x 530 x 380r

Built-in Dimensions (HxWxD) 255 x 500 x 350mm (ducted or recirculating)

► Dishwasher-safe metal grease filters

Available Accessories

► DWZ0IN0T0 Recirculation kit

Product Dimensions (HxWxD) 208 x 534 x 300mn

Built-in Dimensions (HxWxD) 208 x 493 x 257mm (ducted or recirculating)

Wall-mounted Rangehoods.

Series 8

accent | line

90cm

Cook to Hood







DWK91LT65 90cm Inclined Canopy Rangehood

Performance and Features

- ► 1007m³/h maximum
- extraction capacity*
- ▶ 35dB at minimum level 3 power settings and 2 intensive settings
- with automatic revert Automatic run-on time:
- ► EcoSilence Drive motor
- ► PerfectAir sensor
- ► Cook to Hood control
- ► Customisable peformance
- profiles via Home Connect
- ▶ Favourite button ▶ PowerBoost
- ▶ Voice control via voice assistants

- Design
 ► TouchControl
- ► 2 x LED lights
- ► TemperatureLight
- SoftLight
- ► Dimming function
- ► Ambient Light

Cleaning

- ▶ Dishwasher-safe metal grease filters
- ► Electronic filter saturation indicators

Available Accessories

► DWZ1BK1I6 - 17008033 Recirculation kit

Dimensions (HxWxD)

855-1098 x 890 x 447mm (ducted) or

892-1185 x 890 x 447 (recirculating)

DWB97LM50A 90cm Canopy Rangehood 90cm Canopy Rangehood

Series 6

Performance and Features **Performance and Features**

- ▶ 965m³/h maximum
- extraction capacity* ▶ 45dB at minimum level

Home Connect

DWB91PR50A

- 3 power settings and 2 intensive settings
- with automatic revert Automatic run-on time:
- ► EcoSilence Drive motor
- ► PerfectAir sensor ► Cook to Hood control

3 power settings and 1 intensive setting with automatic revert

► 697m³/h maximum

extraction capacity*

45dB at minimum level

▶ EcoSilence Drive motor

Design
► TouchControl

► 3 x LED lights

▶ Dishwasher-safe

metal grease filters

Cleaning

► Sound installation mats

- Design ► TouchControl
- ► 3 x LED lights
- ► Sound installation mats

Cleaning

- ▶ Dishwasher-safe
- metal grease filters ► Electronic filter saturation indicators

Available Accessories

► DWZ2CB1I4 Recirculation kit

Available Accessories

► DWZ2CB1I4 Recirculation kit

614-954 x 898 x 500mm (ducted) or 614-1064 x 898 x 500 (recirculating)

(recirculating)

Series 2

Wall-mounted Rangehoods.

Series 2

90cm 60cm



DWB96BC50A 90cm Canopy Rangehood

Performance and Features

- ► 619m³/h maximum extraction capacity*
- ▶ 49dB at minimum level
- 3 power settings

DWP96BC50A 90cm Canopy Rangehood

Performance and Features

- ► 626m³/h maximum extraction capacity* capacity*
- ▶ 51dB at minimum level
- ▶ 3 power settings

DWP66BC50A 60cm Canopy Rangehood

Performance and Features

- ► 597m³/h maximum extraction
- ▶ 49dB at minimum level
- ▶ 3 power settings

DWB65BC50A 60cm Canopy Rangehood

Performance and Features

- ► 612m³/h maximum extraction capacity*
- ► 49dB at minimum level
- 3 power settings

Design

- ▶ Push button ► 2 x LED lights

Design

- ▶ Push button
- ▶ 2 x LED lights

- Push button
- ► 2 x LED lights

 Push button ► 2 x LED lights

► Dishwasher-safe metal grease filters

► Dishwasher-safe metal grease filters

 Dishwasher-safe metal grease filters

► Dishwasher-safe metal grease filters

Available Accessories

► DWZ1DX1I4 Recirculation kit

Available Accessories

► DHZ5275 Recirculation kit

Available Accessories

► DHZ5275 Recirculation kit

Available Accessories

► DHZ5377 (12025057)

Dimensions (HxWxD) 635-965 x 900 x 500mn

(ducted) or 635-1075 x 900 x 500mm (recirculating)

799-975 x 900 x 500

Dimensions (HxWxD) (ducted or recirculating)

Dimensions (HxWxD)

799-975 x 600 x 500mm (ducted or recirculating)

Dimensions (HxWxD)

550-830 x 600 x 500mm (ducted or recirculating)

*Boost position air extraction rate according to EN 61591 Ø 15cm.

Retractable Slideout Rangehoods.

To operate, the slideout section is pulled out, enlarging the extraction surface. The pelmet front can be matched to your kitchen units, making this rangehood almost invisible in your kitchen.

Series 4

90cm

60cm







DFS097A51A 90cm Slideout Rangehood

Performance and Features

- ▶ 729m³/h maximum extraction capacity
- ► 41dB at minimum level
- ► 3 power settings and 1 intensive setting with automatic revert
- Automatic run-on time: 10 minutes ► EcoSilence Drive motor

DFS067A51A 60cm Slideout Rangehood

Performance and Features

- ► 728m³/h maximum extraction capacity*
- ▶ 41dB at minimum level ▶ 3 power settings and 1 intensive setting
- with automatic revert ► Automatic run-on time: 10 minutes
- ► EcoSilence Drive motor

DFM064W54A 60cm Slideout Rangehood

Performance and Features

- ► 389m³/h maximum extraction capacity* ► 59dB at minimum level
- ► 3 power settings

Design

- Design Push buttons
- ► 3 x LED lights
- ► Automatic on/off with slide
- ► Push buttons
- ► 2 x LED lights ► Automatic on/off with slide

Design ► Rocker switches

- ► 2 x LED lights
- ► Automatic on/off with slide

Cleaning

- ► Dishwasher-safe metal grease filters
- ► Dishwasher-safe stainless steel filter covers

Available Accessories

- ► DWZ2IT1I4 Recirculation kit
- ► DSZ4920 Installation kit (90cm wide wall unit)

Product Dimensions (HxWxD) 426 x 898 x 290mn

Built-in Dimensions (HxWxD) 385 x 524 x 290mm (ducted or recirculating)

- ► Dishwasher-safe metal grease filters
- ► Dishwasher-safe stainless steel filter covers

Available Accessories ► DWZ2IT1I4 Recirculation kit

Product Dimensions (HxWxD) 426 x 598 x 290mm

Built-in Dimensions (HxWxD) 385 x 524 x 290mm (ducted or recirculating)

► Dishwasher-safe metal grease filters

Available Accessories

► DWZ1IT1I4 Recirculation kit

Product Dimensions (HxWxD)

203 x 598 x 290mm

Built-in Dimensions (HxWxD) 162 x 526 x 290mm (ducted or recirculating)

^For cabinetry match pelmet required from cabinet maker. Stainless Steel pelmet included, black and white available through spare parts. Contact Bosch spare parts team for more information. Reference guide see pages 94–95.

68 | Bosch kitchen appliance catalogue

Key Features and Functions.



Performance

Variable Power Settings

All Bosch rangehoods feature variable power settings which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting which gives an extra boost to the performance when required.

PerfectAir Sensor

PerfectAir continuously monitors the air and automatically adapts the extraction rate to the amount of odour present. At the same time, it reduces the noise level because it only activates the lowest extraction rate necessary.

LED Lighting

The LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with the dimmer function.

Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.



Convenience

Cook to Hood

Control your rangehood via your cooktop with cooktop-based hood control. If preferred, the rangehood

Electronic Filter Saturation Indicator

can be controlled manually.

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.

Electronic Control

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function; control at your fingertips.

Electronic Button Control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.

Rocker Switch Control

It doesn't get any easier: one switch with 3 power levels and one for turning the lights on and off.

Favourite Button

Directly access favourite functions with a configurable button (available with connected Home Connect account).



Cleaning

Dishwasher-safe Metal Grease Filters

For easy cleaning, all Bosch metal grease filters can be safely loaded into any Bosch dishwasher for sparkling clean results. Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.

Extraction Rates

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height. Bosch rangehoods offer powerful maximum extraction rates for when you are cooking up a storm in the kitchen, while the variable power settings allow you to navigate the extraction power you need for each meal.

Stainless steel filter


The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.

Rim ventilation filter

With its smooth uninterrupted surface and grease separation of 80–92%,* the rim ventilation filter from Bosch has a multi-patented filter sealing system and flow-optimised filter system.


No space for a rangehood? See our 2-in-1 cooktops with integrated ventilation on pages 44–45.

Installation Methods.



Ducted Extraction

Ducting out is the most effective method of extraction. Ideally, the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.




Recirculation Kit

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit will need to be purchased as a separate accessory.

What Extraction Rate Do I Need?

It is recommended that the air be exchanged or extracted in the room 6–12 times per hour to maintain optimal air quality. (Minimum 6 times per hour for simmering/low to medium cooking and maximum of 12 times per hour for frying/boiling/stir frying).

Note: For open plan kitchens 50% of the area in the adjacent room is added to the extraction rate calculation.

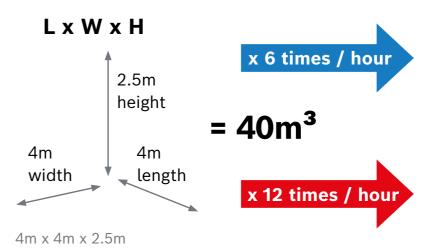

min 240m³

necessary air extraction rate at normal use (simmering on 2–3 hotplates)

max 480m³

necessary air extraction rate at intensive use (e.g. strong frying activities)

At Bosch, we adopt a stringent extraction rates testing method in accordance with the European measurement standard EN 61591.

70 | Bosch kitchen appliance catalogue

Range Overview - Built-in accent|line and Series | 8 Ovens.

Model		HNG978QB1A	HSG958DB1A	HRG978NB1A	HBG976MB1A	HMG7761B1A	HRG776MB1A	HBG776MB1A	HBG7741B1A	HBG7341B1A
		accent line	accent Line	accent line	accent line	Series 8	Series 8	Series 8	Series 8	Series 8
Туре		60cm Pyrolytic Oven		60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm EcoClean Direct Oven
		with Added Steam	Oven with Full Steam	with Added Steam	Social Pyrotytic Oten	with Microwave	with Added Steam	- Over 1 yrotytic Over	oceni i yrotytic Oven	Obeni Ecoctean Direct Oveil
Dimensions	Width (cm)	and Microwave	60	60	60	60	60	60	60	60
Dimensions	Width (cm) Appliance dimensions (HxWxD)	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm	60 595 x 594 x 548mm
	Built-in dimensions (HxWxD)		585-595 x 560-568 x 550mm			585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585–595 x 560–568 x 550mm	585-595 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	357 x 480 x 392mm	355 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 392mm	357 x 480 x 415mm			
Heating	Number of heating functions		24	22	14	20	20	14	14	14
Heating Functions	4D HotAir	●*^	● *	● *	•	•^	•*	•		
	3D HotAir								•	•
	Top and Bottom Heat	●*^	●*	•*	•	•^	•*	•	•	•
	HotAir Grill	●*^	●*	●*	•	•^	•*	•	•	•
	Full Width Grill	•^	•	•	•	•^	•	•	•	•
	Half Width Grill	•^	•	•	•	•^	•	•	•	•
	Pizza Setting	•	•	•	•	•	•	•	•	•
	Bottom Heat	•	•	•	•	•	•	•	•	•
	Intensive Heat	•	•	•						
	Slow Cooking	•	•		•	•	•	•	•	•
	Preheat Ovenware		•		•	•	•	•	•	•
	Drying (dehydrating)		•	•						
	Keep Warm	•*	•*	•*	•	•	•*	•	•	•
	HotAir Gentle	•	•	•	•	•	•	•	•	•
	Conventional Heat Gentle Air Fry Function	•	•	•	•	•	•	•	•	•
	Pure Steaming	•	•	_	•	•	•	•	•	•
	Pure Microwave	•				•				
	Microwave Boost (800W)	•				•				
	Reheating		•	•			•			
	Dough Proving	•	•	•			•			
	Defrost Setting	•	•	•	•	•	•	•	•	•
	Sous Vide		•							
Steam	Added Steam	•	•	•			•			
Functions	Steam Boost Function	•	•	•			•			
	Steam Function Plus		•							
Sensor & Automatic Functions	Automatic temperature proposal	•	•	•	•	•	•	•	•	•
Functions	Individual Browning with camera	•								
	Actual Temperature Display			•	•	•	•	•	•	•
	PerfectRoast Plus	•	•	•	•		•	•		
	PerfectBake Plus		•	•		_				
	Crisp Finish	•	•	•	_	•		_		_
			•	•	•	•	•	•	•	•
	Home Connect Oven Assistant with Voice Control	•	•	•	•	•	•	•	•	•
	Oven Assistant with Voice Control Automatic Rapid Heat Function	•	•	•	•	•	•	•	•	•
Capacity	Water tank volume (litres)	1 litre (net)	1 litre (net)	1 litre (net)	·	-	1 litre (net)	-	-	-
	Volume (usable litres)		71 litres (net)	71 litres (net)	71 litres (net)	67 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)
Design	Finish		Carbon black	Carbon black	Carbon black	Black glass				
	Drop down door		•	•	•	•	•	•	•	•
	SoftMove door	•	•	•	•	•	•	•	•	•
	Interior Light	Dual LED Illumination	LED Lighting	LED Lighting	LED Lighting	LED Lighting	LED Lighting	LED Lighting	Halogen Lighting	Halogen Lighting
	Display	TFT Touch Display Pro	TFT Touch Display Pro	TFT Touch Display Pro	TFT Touch Display Plus	TFT Touch Display Plus	TFT Touch Display Plus	TFT Touch Display Plus	TFT Touch Display	TFT Touch Display
	Electronic clock/timer with	•	•	•	•	•	•	•	•	•
	end-time programming	•	•	•			•			
	Water tank empty indicator Cavity	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel
	Controls	Digital control ring	Digital control ring	Digital control ring	Digital control ring	Digital control ring	Digital control ring	Digital control ring	Digital control ring	Digital control ring
	Full glass inner door	Dibitat Control Hills	Digital control ring	Digital control ring	• Digital Control ring	Dibitat control milk	Digital control ring	Digital Control ring	Digital control ring	Digital Control ring
	No. of shelf positions	5	5	5	5	5	5	5	5	5
Cleaning	Pyrolytic Self-cleaning	•			•	•	•	•	•	
	EcoClean Direct		• (roof, sides and back panel)							• (back panel)
	Cleaning Assistance	•	•	•	•	•	•	•	•	•
	(Hydroclean program)									
	Descaling	•	•	•			•			
	Drying of cavity	•	•	•	•	•	•			



Range Overview - Built-in accent|line and Series | 8 Ovens.

Model		HNG978QB1A	HSG958DB1A	HRG978NB1A	HBG976MB1A	HMG7761B1A	HRG776MB1A	HBG776MB1A	HBG7741B1A	HBG7341B1A
		accent line	accent line	accent line	accent line	Series 8	Series 8	Series 8	Series 8	Series 8
Туре		60cm Pyrolytic Oven with Added Steam and Microwave	60cm EcoClean Direct Oven with Full Steam	60cm Pyrolytic Oven with Added Steam	60cm Pyrolytic Oven	60cm Pyrolytic Oven with Microwave	60cm Pyrolytic Oven with Added Steam	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm EcoClean Direct Oven
Safety	Residual heat indicator	•	•	•	•	•	•	•	•	•
	Door	Quadruple-glazed CoolTouch door	Triple-glazed door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Triple-glazed door
	Automatic safety switch-off	•	•	•	•	•	•	•	•	•
	Child lock	•	•	•	•	•	•	•	•	•
	Start button	•	•	•	•	•	•	•	•	•
	Door contact switch	•	•	•	•	•	•	•	•	•
	Integrated cooling fan	•	•	•	•	•	•	•	•	•
Technical	Temperature range	30°C-300°C	30°C-250°C	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C	30°C-300°C
requirements	Length of mains cable	120cm	120cm	120cm	120cm	120cm	120cm	120cm	120cm	120cm
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW
Supplied	3-point meat probe	•	•	•	•		•	•		
accessories	Fully extendable telescopic rails	• (1-level pyrolytic proof)	• (1 set of level independent)	 (1 set of level independent pyrolytic proof) 	 (1 set of level independent pyrolytic proof) 		 (1 set of level independent pyrolytic proof) 	 (1 set of level independent pyrolytic proof) 		
	Universal pan	1	1	1	1	1	1	1	1	1
	Air Fry and Grill Tray	1	1	1	1	1	1	1	1	1
	Wire rack	2	2	2	2	2	2	2	2	2
	Steam container, perforated (2 sizes)		2 (size XL, M)							
	Steam container, unperforated (M)		1							
	Sponge		1							
Optional accessories			Refer to pa	ages 96 & 97				Refer to pages 96 & 97		

Range Overview - Built-in Compact Ovens.

Model		CSG958DB1	CMG978NB1A	CMG936AB1A	CMG7241B1A
		accent line	accent line	accent line	Series 8
Туре		45cm EcoClean Direct Compact Oven with Full Steam	45cm Pyrolytic Compact Oven with Microwave	45cm EcoClean Direct Compact Oven with Microwave	45cm Compact Oven with Microwave
Dimensions	Width (cm)	60	60	60	60
	Appliance dimensions (HxWxD)	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm
	Built-in dimensions (HxWxD)	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	235 x 480 x 415mm	237 x 480 x 392mm	237 x 480 x 392mm	237 x 480 x 392mm
Heating	Number of heating functions	24	22	20	16
Functions	4D HotAir	•*	●^	●^	
	Top and Bottom Heat	●*	●^	●^	●^
	HotAir Grill	●*	●^	•^	●^
	Full Width Grill	•	● ^	●^	● ^
	Half Width Grill	•	•^	•^	•^
	Pizza Setting	•	•	•	
	Bottom Heat	•	•	•	•
	Intensive Heat	•	•		
	Slow Cooking	•	•	•	_
	Preheat Ovenware	•	•	•	•
	Drying (dehydrating)	•	•		
	Keep Warm	•*	•	•	
	HotAir Gentle	•	•	•	•
	Conventional Heat Gentle	•	•	•	•
	Circulating Air	_	_	_	•
	Air Fry Function	•	•	•	•
	Pure Steaming	•	•	•	•
	Pure Microwave	•	•	•	•
	Reheating	•			
	Dough Proving	•	•	•	
	Defrost Setting Sous Vide	•	•	•	
Steam	Added Steam	•			
Functions	Steam Boost Function	•			
	Steam Function Plus	•			
Sensor &	Automatic temperature proposal	•	•	•	•
	Individual Browning with camera				
Functions	Actual temperature display	•	•	•	•
	PerfectRoast Plus	•	•		
	PerfectBake Plus	•	•		
	Crisp Finish		•	•	
	Bosch Assist (Fully automated cooking)	•	•	•	•
	Home Connect	•	•	•	•
	Oven Assistant with Voice Control	•	•	•	•
	Automatic Rapid Heat Function	•	•	•	
Capacity	Water tank volume (litres)	1 litre (net)			
	Volume (usable litres)	47 litres (net)	45 litres (net)	45 litres (net)	45 litres (net)
Design	Finish	Carbon black	Carbon black	Carbon black	Black glass
	Drop down door	•	•	•	•
	SoftMove door	•	•	•	•
	Interior Light	LED Lighting	LED Lighting	LED Lighting	LED Lighting
	Display	TFT Touch Display Pro	TFT Touch Display Pro	TFT Touch Display Plus	TFT Touch Display
	Electronic clock/timer with end time programming	•	•	•	•
	Water tank empty indicator	•			
	Cavity	Anthracite enamel	Anthracite enamel	Anthracite enamel	Anthracite enamel
	Controls	Digital Control Ring	Digital Control Ring	Digital Control Ring	Digital Control Ring
	Full glass inner door	•			
	No. of shelf positions	3	3	3	3
Cleaning	Pyrolytic Self-cleaning	-/	•	• //	
	EcoClean Direct	• (roof, sides and back panel)		• (back panel)	
	Cleaning Assistance (Hydroclean program)	•	•	•	•
	Descaling	•			
	Drying of cavity	•	•	•	•

Range Overview - Built-in Compact Ovens Continued.

Model		CSG958DB1	CMG978NB1A	CMG936AB1A	CMG7241B1A
		accent line	accent line	accent line	Series 8
Туре		45cm EcoClean Direct Compact Oven with Full Steam	45cm Pyrolytic Compact Oven with Microwave	45cm EcoClean Direct Compact Oven with Microwave	45cm Compact Oven with Microwave
Safety	Residual heat indicator	•	•	•	•
	Door	Triple-glazed door	Quadruple-glazed CoolTouch door	Triple-glazed door	Triple-glazed door
	Automatic safety switch-off function	•	•	•	•
	Child lock	•	•	•	•
	Start button	•	•	•	•
	Door contact switch	•	•	•	•
	Integrated cooling fan	•	•	•	•
	Temperature range	30°C-250°C	30°C-300°C	30°C-300°C	30°C-230°C
requirements	Length of mains cable	150cm	150cm	150cm	150cm
	Power requirements	220-240 V / 50-60Hz	220-240 V / 50-60Hz	220-240 V / 50-60Hz	220-240 V / 50-60Hz
	Total connected load	3.3 KW	3.6 KW	3.6 KW	3.6 KW
Supplied	Fully extendable telescopic rails	• (1 set of level independent)	• (1-level pyrolytic proof)	● (1-level)	
accessories	Universal pan	1	1	1	1
	Air Fry and Grill Tray		1	1	1
	Wire rack	1	1	1	1
	Baking tray	1			
	Steam containers, perforated (2 sizes)	2 (size XL,M)			
	Steam container, unperforated (size M)	1			
	Sponge	1			
Optional accessories			Refer to pa	ages 96 & 97	

^{*}Compatible with steam option. ^Compatible with microwave option.



Discover the Bosch dishwasher range, available in freestanding, built under and integrated designs.



*Source Euromonitor International Limited; volume sales 2022



Range Overview - Built-in Coffee Machines.

Model		CTL9181B0	CTL7181B0
		accent line	Series 8
Туре		45cm Fully Automatic Coffee Machine	45cm Fully Automatic Coffee Machine
Dimensions	Width (cm)	60	60
	Appliance dimensions (HxWxD)	455 x 594 x 385mm	455 x 594 x 385mm
	Built-in dimensions (HxWxD)	449 x 558 x 376mm	449 x 558 x 376mm
Flavour	CoffeeWorld specialities (including Home Connect)	29	29
	Warm milk, milk froth & hot water function	•	•
	AromaSelect	•	•
	Adjustable milk ratio	•	•
	Intelligent strength adjustment	•	•
	AromaDoubleShot	•	•
Design	Finish	Carbon black trims	Stainless steel trims
	Display	TFT Touch Display Pro	TFT Touch Display Pro
	Water tank capacity (litres)	2.4 litres (net)	2.4 litres (net)
	Illuminated coffee outlet, stage and interior	•	•
Convenience	Favourites - save up to 30 beverages	•	•
	Automatic milk amount detection	•	
	Coffee pot function	•	
	Height adjustable beverage outlet	•	•
	OneTouch DoubleCup	•	•
	Removable water tank	•	•
	Home Connect	•	•
	Adjustable grinding degree (multi-level)	•	•
Performance	SilentCeram Drive	•	•
	Water pump with 19 bar pressure	•	•
Hygiene	AutoMilk Clean	•	•
	Calc'n'Clean	•	•
	Removable brewing unit	•	•
	Dishwasher-proof	•	•
	Automatic reminder for cleaning	•	•
Safety	Child lock	•	•
Extras	Integrated milk container	0.7 litre	0.7 litre
	500g bean container with aroma protection lid	•	•
Technical	Length of mains cable	170cm	170cm
Details	Power requirements	220-240 V / 50-60Hz	220-240 V / 50-60Hz
	Electrical Connection Rating	1500W	1500W
Supplied	Assembly screws	1	1
Accessories	Milk container	1	1
	Test strip	1	1
	Connection hose for milk frother	1	1
	Milk pipe	1	1
	welcome-Box	1	1

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances.

Range Overview - Built-in Warming Drawers.

Model		BID9101B1	BIC9101B1	BIC7101B1A
		accent line	accent line	Series 8
Туре		29cm Built-in warming drawer	14cm Built-in warming drawer	14cm Built-in warming drawer
Dimensions	Width (cm)	60	60	60
	Appliance dimensions (HxWxD)	290 x 594 x 518mm	140 x 594 x 518mm	140 x 594 x 518mm
	Built-in dimensions (HxWxD)	290 x 560 x 550mm	140 x 560 x 550mm	140 x 560 x 550mm
	Installation dimensions (HxWxD)	290 x 560-568 x 550mm	140 x 560-568 x 550mm	140 x 560-568 x 550mm
Heating	Temperature control with 4 levels	•	•	•
Functions	Temperature range (glass surface temperature)	30°C-80°C	30°C-80°C	30°C-80°C
Suitable for	Slow Cooking	•	•	•
	Keep Warm	•	•	•
	Plate Warming	•	•	•
	Cup Warming	•	•	•
Design	accent line logo	•	•	
	Volume (usable litres)	54 litres (net)	20 litres (net)	20 litres (net)
	Heating plate made of toughened glass	•	•	•
	Home Connect	•	•	•
	Favourites Button	•	•	•
	Touch key operation	•	•	•
	Touch Control illumination	•	•	•
	Handleless push-pull mechanism	•	•	•
	Max weight	25kg	25kg	25kg
	Max loading espresso cups	192pc	64pc	64pc
	Max loading plates	40pc	12pc	12pc
Cleaning	Easy to clean hot plate	•	•	•
Technical	Length of mains cable	175cm	175cm	175cm
Details	Power requirements	220-240 V / 50-60Hz	220-240 V / 50-60Hz	220-240 V / 50-60Hz
	Total connected load	0.82 KW	0.82 KW	0.82 KW

Range Overview - Built-in Vacuum Drawer.

Model		BVE9101B1
		accent line
Туре		14cm Built-in vacuum drawer
Dimensions	Width (cm)	60
	Appliance dimensions (HxWxD)	140 x 595 x 542mm
Type Dimensions Vacuuming Functions Suitable for Design	Built-in dimensions (HxWxD)	Refer to installation guide
	Installation dimensions (HxWxD)	140 x 560-568 x 550mm
Vacuuming	Vacuuming levels in the chamber	3 (max 99%)
Functions	Vacuuming levels outside the chamber	3 (max 90%)
	Heat sealing durations	3
	Drying program	•
Suitable for	Sous-vide preparation	•
	Nutrient preservation	•
Design	Design	Stainless Steel Cavity
	Volume (usable litres)	8
	Illuminated touch controls	•
	Handleless Push&Pull Mechanism	•
Technical	Length of mains cable	150cm
Details	Power requirements	220-240 V / 50-60Hz
	Total connected load	0.32 KW
Supplied	Adaptor for vacuuming outside the chamber	1
Accessories	Adaptor for bottle plugs	1
	Plugs for vacuuming of bottles	3
	Big vacuuming bags	50
	Small vacuuming bags	50
	Vacuuming hose	1

Range Overview - Built-in Series | 6, 4 and 2 Ovens.

Model		HBT578FS2A	HRA574EB0A	HBA574EB0A	HBA574BS0A	HBA172BB0A	HBA172BS0A	HBA534BB0A	HBA534ES0A	HBF133BS0A	HBF134EB0A
		Series 6	Series 4	Series 4	Series 4	Series 4	Series 4	Series 4	Series 4	Series 2	Series 2
Туре		60cm Pyrolytic Oven	60cm Pyrolytic Oven with HotAir Steam	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm Pyrolytic Oven	60cm EcoClean Direct Oven	60cm EcoClean Direct Oven	60cm EcoClean Direct Oven	60cm EcoClean Direct Oven
imensions	Width (cm)	60	60	60	60	60	60	60	60	60	60
	Appliance dimensions (HxWxD)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm
	Built-in dimensions (HxWxD)	585-595 x 560-568 x 550mm	n 585-595 x 560-568 x 550m	m 585-595 x 560-568 x 550mr	n 585–595 x 560–568 x 550mm	585-595 x 560-568 x 550mr	m 585-595 x 560-568 x 550mr	m 585-595 x 560-568 x 550mi	m 585-595 x 560-568 x 550mr	n 575-597 x 560-568 x 550mr	n 575-597 x 560-568 x 550
	Cavity dimensions (HxWxD)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	329 x 479 x 420mm	329 x 479 x 420mm
eating	Number of heating functions	10	8	7	7	7	7	7	7	5	5
	4D HotAir										
	3D HotAir	•	•	•	•	•	•	•	•	•	•
	HotAir + Steam	_	•			_	_		_		
	HotAir Eco/Gentle	•	•	•	•	•	•	•	•	•	•
	Top and Bottom Heat	•	•	•	•	•	•	•	•	•	
	Bottom Heat	•	•	•	•	•	•	•	•		
	Intensive Heat	•	•	•	•	•	•	•	•	•	•
	HotAir Grill Full Width Grill	•	•	•	•	•	•	•	•	•	•
	Half Width Grill	•	•	•	•	•	•	-	•	•	_
	Pizza Setting	•	•	•	•	•	•	•	•		
	Slow Cooking	•	•	•	•	_	_	_	•		
	Keep Warm	•									
	Preheat Ovenware	-									
	Drying (dehydrating)										
	Defrost	•									•
	Rapid Heat Function	•			•	•	•		•	•	
	Automatic temperature proposal	•				•	•				
	Temperature display	•			•	•	•				
ensor &	Bosch Assist (Fully automated cooking)										
utomatic unctions	PerfectBake Plus										
inctions	PerfectRoast Plus										
	Single point meat probe	•									
	AutoPilot (Automatic programs)	● (30)	● (10)	● (10)	• (10)	● (10)	● (10)				
apacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	66 litres (net)	66 litres (net)
	Water tank		250ml (water bowl)								
esign	Finish	Stainless steel with metal bar handle	Black glass	Black glass	Stainless steel with metal bar handle	Black glass	Stainless steel with metal bar handle	Black glass	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Black glass
	Cavity	Grey enamel	Grey enamel	Grey enamel	Grey enamel	Grey enamel	Grey enamel	Grey enamel	Grey enamel	Grey enamel	Grey enamel
	Display	LCD-display control (white)	•	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)
	Electronic clock/timer	display control (write)	display control (red)	display control (red)	display control (red)	display control (red)	display control (red)	display control (red)	display control (red)	display control (red)	display control (red)
	with end-time programming	•	•	•	•			•	•	•	•
	Controls	Retractable rotary	Retractable rotary	Retractable rotary	Retractable rotary	LED Touch Control display	LED Touch Control display	Retractable rotary	Retractable rotary	Retractable rotary	Retractable rotary
		control knobs	control knobs	control knobs	control knobs			control knobs	control knobs	control knobs	control knobs
	SoftMove door	•									
	Interior light	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting	Halogen Lighting
	No. of shelf positions	5	5	5	5	5	5 •	5 •	5	5 •	5
	Full glass inner door Removable door	•	•	•	•	•	•	•	•	•	•
leaning	Pyrolytic Self-cleaning	•	•	•	•	•	•	•	•	•	•
	EcoClean Direct	•	V	•	•	•	<u> </u>	• (back panel)	• (back panel)	• (back panel)	• (back panel)
afety	Door	Quadruple-glazed	Quadruple-glazed	Quadruple-glazed	Quadruple-glazed	Quadruple-glazed	Quadruple-glazed	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door
anct)		CoolTouch door	CoolTouch door	CoolTouch door	CoolTouch door	CoolTouch door	CoolTouch door	p.c Bazea acoi	pro pareco dooi		
	Residual heat indicator	•									
	Automatic safety switch-off	•	•	•	•	•	•	•			
	Child lock	•	•	•	•	•	•	•	•	•	•
	Cooling fan	•			•		•		•	•	
chnical	Maximum temperature	30-275°C	275°C	275°C	50-275°C	30-275°C	30-275°C	275°C	50-275°C	50-275°C	270°C
	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.4kW	3.4kW	3.3kW	2.3kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50Hz
ıpplied	Fully extendable telescopic rails		• (1-level)	● (1-level)							
	Partially extendable telescopic rails	● (1-level)							• (1-level)		
		2	2	2	2	1	1	2	2	1	1
	Wire rack										
	Split grill tray	1	1	1	1	1	1	1	1		
ccessories	Split grill tray Universal pan		1	1	1	1 1	1	1	1	1	1
	Split grill tray			1		1	1	1	1	1	1

80 | Bosch kitchen appliance catalogue more information www.bosch-home.com.au | 81

Range Overview - Built-in and Freestanding Microwaves.

Model		BEL554MS0A	BEL653MB3A	FEL053MS2A		
		Series 6	Series 2	Series 2		
Туре		60cm Built-in Microwave	60cm Built-in Microwave	49cm Freestanding Microwave		
Dimensions	Width (cm)	60	60	49		
	Appliance dimensions (HxWxD)	382 x 594 x 388mm	382 x 595 x 375mm	290 x 495 x 370mm		
	Built-in dimensions (HxWxD)	382 x 560 x 550mm	380-382 x 560-568 x 550mm			
	Cavity dimensions (HxWxD)	208 x 328 x 369mm	205 x 310 x 334mm	205 x 310 x 334mm		
Heating	Full Width Grill	• (1200W)	• (1000W)	• (1000W)		
Functions	Pure Microwave	● (5 power levels – 90, 180, 360, 600, 900W)	● (5 power levels - 90, 180, 360, 600, 800W)	● (5 power levels – 90, 180, 360, 600, 800W)		
Sensor & Automatic Functions	AutoPilot (Automatic programs)	• (8)	• (8)	• (8)		
Capacity	Volume (usable litres)	25 litres (net)	25 litres (net)	25 litres (net)		
Design	Finish	Black glass, stainless steel trims	Black glass	Black glass, stainless steel trims		
	Cavity	Stainless steel	Stainless steel			
	Display	LED-display control (white)	LED-display control (red)	LED-display control (red)		
	Electronic clock/timer with end-time programming	•	•	•		
	Controls	Retractable rotary control knobs	Rotary control knobs	Rotary control knobs		
	SoftMove door					
	Interior light	LED Lighting	LED Lighting	LED Lighting		
Safety	Door	Single-glazed door	Single-glazed door	Single-glazed door		
	Residual heat indicator					
	Automatic safety switch-off	•	•	•		
	Child lock		•	•		
Technical	Total connected load	1.45kW	1.27kW	1.27kW		
requirements	Power requirements	220-230V / 50Hz	220-230V / 50Hz	220-230V / 50Hz		
Supplied	Grill rack	1 high	1 high	1 high		
accessories	Turntable	•	•	•		
Optional accessories			Refer to pages 96 & 97			

Range Overview - Built-in 90cm Ovens and Compact Ovens.

Model		VBD578FB0	VBD578FS0	VBD554FS0	VBC578FS0	VBC5540S0
		Series 6	Series 6	Series 4	Series 6	Series 4
Туре		90cm Pyrolytic Oven	90cm Pyrolytic Oven	90cm Catalytic Oven	90cm Pyrolytic Compact Oven	90cm Catalytic Compact Oven
Dimensions	Width (cm)	90	90	90	90	90
	Appliance dimensions (HxWxD)	594 x 896 x 570mm	594 x 896 x 570mm	594 x 896 x 570mm	475 x 896 x 572mm	475 x 896 x 572mm
	Built-in dimensions (HxWxD)	600-604 x 860-864 x 560mm	600-604 x 860-864 x 560mm	600-604 x 860-864 x 560mm	477-480 x 860-864 x 560mm	477-480 x 860-864 x 560mm
	Cavity dimensions (HxWxD)	371 x 724 x 417mm	371 x 724 x 417mm	371 x 724 x 417mm	282 x 724 x 417mm	282 x 724 x 417mm
Heating	Number of heating functions	10	10	8	10	8
Functions	3D HotAir	•*	•*		●*	
	HotAir			•		•
	Top and Bottom Heat	•*	●*	•	●*	•
	Top and Bottom Heat Eco	•	•	•	•	•
	Fan Assisted Top and Bottom Heating	•*	•*		●*	
	Bottom Heat	•	•	•	•	•
	HotAir Grill	•	•	•	•	•
	Full Width Grill	•	•	•	•	•
	Pizza Setting	•*	●*	•	●*	•
	Rotisserie	•	•	•	•	
	Defrost	•	•		•	
	Rapid Heat Function	● (manual)	• (manual)	• (manual)	• (manual)	• (manual)
	Temperature display	•	•		•	
	Electronic thermostat	•	•		•	
Capacity	Volume (usable litres)	112 litres (net)	112 litres (net)	112 litres (net)	85 litres (net)	85 litres (net)
Design	Finish	Black Glass with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LCD-display control (white)	LCD-display control (white)	LED-display control (red)	LCD-display control (white)	LED-display control (red)
	Electronic clock/timer with end-time programming	•	•	•	•	•
	Controls	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	Interior light	2 Halogen	2 Halogen	2 Halogen	2 Halogen	2 Halogen
	No. of shelf positions	5	5	5	4	4
	Full glass inner door	•	•	•	•	•
	Removable door	•	•	•	•	•
Cleaning	Pyrolytic Self-cleaning	•	•		•	
	Catalytic cleaning system			• (sides and rear wall)		• (sides and rear wall)
Safety	Door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Triple-glazed door	Quadruple-glazed CoolTouch door	Triple-glazed door
	Residual heat indicator	•	•		•	
	Automatic safety switch-off	•	•	•	•	•
	Child lock	•	•	•	•	•
	Cooling fan	•	•	•	•	•
	Maximum temperature	50-280°C	50-280°C	50-250°C	50-280°C	50-250°C
	Total connected load	4.2kW	4.2kW	3.3kW	3.3kW	3.1kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied	ClipRail telescopic rails	1	1	1	1	1
accessories	Wire racks	2	2	1	1	1
	Universal pan insert rack	1	1			
	Universal pans	1	1	1	1	1
	Baking trays	1	1	1	1	1
	Rotary spit	1	1	1	1	
Optional accessories				Refer to pages 96 & 97		

Range Overview - Built-in Double Ovens.

Model		MBG5787S0A	MBA534BB0A	MBA534BS0A
		Series 6	Series 4	Series 4
Туре		60cm Pyrolytic Double Oven	60cm EcoClean Direct Double Oven	60cm EcoClean Direct Double Oven
Dimensions	Width (cm)	60	60	60
	Appliance dimensions (HxWxD)	888 x 594 x 550mm	888 x 594 x 550mm	888 x 594 x 550mm
	Built-in dimensions (HxWxD)	875-888 x 560-568 x 550mm	875-888 x 560-568 x 550mm	875-888 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)
Heating Functions	Number of heating functions	4 (top) and 10 (bottom)	3 (top) and 7 (bottom)	3 (top) and 7 (bottom)
	3D HotAir	●* (bottom)	●* (bottom)	●* (bottom)
	HotAir Eco/Gentle	• (bottom)	• (bottom)	• (bottom)
	Top and Bottom Heat	●* (top and bottom)	●* (top and bottom)	●* (top and bottom)
	Bottom Heat	• (top and bottom)	• (bottom)	• (bottom)
	Hot air grilling	• (bottom)	• (bottom)	• (bottom)
	Full Width Grill	• (top and bottom)	• (top and bottom)	• (top and bottom)
	Grill – small area	● (top)	● (top)	● (top)
	Pizza Setting	• (bottom)	• (bottom)	• (bottom)
	Slow Cooking	• (bottom)		
	Keep Warm	• (bottom)		
	Defrost	• (bottom)		
	Automatic Rapid Heat Function	•		
	Automatic temperature proposal	•		
	Temperature display	•		
	Electronic thermostat	•		
Sensor & Automatic Functions	AutoPilot (Automatic programs)	• (30)		
Capacity	Volume (usable litres)	34 litres (net) top 71 litres (net) bottom	34 litres (net) top 71 litres (net) bottom	34 litres (net) top 71 litres (net) bottom
Design	Finish	Stainless steel with metal bar handle	Black glass with metal bar handle	Stainless steel with metal bar handle
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LCD-display control (white)	LED-display control (red)	LED-display control (red)
	Electronic clock/timer with end-time programming	•	•	•
	Controls	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	SoftClose door	•		
	Interior light	Halogen 1 (top) and 1 (bottom)	Halogen 1 (top) and 1 (bottom)	Halogen 1 (top) and 1 (bottom)
	No. of shelf positions	3 (top) and 5 (bottom)	3 (top) and 5 (bottom)	3 (top) and 5 (bottom)
	Full glass inner door	•	•	•
	Removable door	•	•	•
Cleaning	Pyrolytic Self-cleaning	•		
Safety	EcoClean Direct Door	Quadruple-glazed CoolTouch door (top and bottom)	(back panel) (bottom) Triple-glazed door (top and bottom)	(back panel) (bottom) Triple-glazed door (top and bottom)
	Child lock	(top and bottom)	(top and bottom)	(top and bottom)
	Cooling fan	•	•	•
Technical requirements	Maximum temperature	30-275°C	50-275°C	50-275°C
recinicat requirements	Total connected load	6.3kW	5.9kW	5.9kW
	Power requirements	220-240V / 50-60Hz	220–240V / 50Hz	220-240V / 50-60Hz
Supplied accessories	ClipRail telescopic rails	1		2.0., 00 30112
- Supplied decessories	Single point meat probe	•		
	Partially extendable telescopic rails	• (1-level – bottom)		
	Wire racks	2	2	2
	Split grill trays	1	1	1
	Universal pans	1	1	1
Optional accessories			Refer to pages 96 & 97	

Descriptions are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances. *Compatible with Rapid Heat.

Range Overview - 2-in-1 Cooktops with Integrated Ventilation.

Model		PVQ731F15E	PVQ811F15E
		Series 6	Series 6
Туре		70cm Induction cooktop	80cm Induction cooktop
		with integrated ventilation	with integrated ventilation
	Width (cm)	70	80
	Appliance dimensions (WxD)	223 x 710 x 522mm	223 x 802 x 522mm
	Built-in dimensions (WxD)	223 x 560 x 490mm	223 x 750 x 490mm
Design		(installation dimensions)	(installation dimensions)
Design		Black ceramic glass Bevelled front	Black ceramic glass Frameless
4 Burners /	Front left	CombiZone 2.2kW	CombiZone 2.2kW
Zone Output (Size)	Rear left	CombiZone 2.2kW	CombiZone 2.2kW
	Front right	2.2kW	2.2kW
	Rear right	2.2kW	2.2kW
Performance	17-stage power setting	•	•
	PowerBoost	•	•
	CombiZone	•	•
	MoveMode	2 Auto Power Levels	2 Auto Power Levels
Convenience	WipeProtection	•	•
	QuickStart	•	•
	ReStart	•	•
	Energy Consumption Display	•	•
	Timer with automatic switch-off	•	•
	Automatic Pot Detection	•	•
Safety	Child lock	•	•
	2-stage residual heat indicators	•	•
	Automatic safety shut-off	•	•
Electronic touch-controls	DirectSelect 1.0	•	•
Extraction rate according to	Maximum normal use	500m³/h	500m³/h
EN 61591 (ducted)	Intensive	622m³/h	622m³/h
Extraction rate according to	Maximum normal use	500m³/h	500m³/h
EN 61591 (recirculated)	Intensive	615m³/h	615m³/h
Ventilation performance	Suitable for ducted or recirculated extraction (accessory may be required)	•	•
	Starter kit for Ducted extraction	HEZ9VDKE1	HEZ9VDKE1
	Partly ducted recirculation kit	HEZ9VDKR0	HEZ9VDKR0
	Power level	9 + 2 intensive	9 + 2 intensive
	Intensive setting with automatic switch back to previous setting	•	•
	Automatic residual shutdown	•	•
	AutoOn	•	•
	EcoSilence Drive brushless motor	•	•
Noise* level (ducted)	Noise levels (min/max)	42/69dB	42/69dB
	Intensive	74dB	74dB
Noise* level (recirculated)	Noise levels (min/max)	41/68dB	41/68dB
	Intensive	72dB	72dB
Cleaning	Saturation indicator	•	•
	Ventilation module cassette	•	•
	- heat resistant, dishwasher safe	_	_
	Dishwasher safe 12 layer stainless steel grease filters	•	•
	200ml dishwasher safe liquid collector unit	•	•
	700ml dishwasher safe liquid reservoir	7.4 (//)	7.4 KW
Technical requirements	Total connected load	7.4 KW	7.4 KW
	Power requirements	220-240V / 380-415V / 50-60Hz	220-240V / 380-415V / 50-60Hz
Outional accounts	Minimum worktop thickness	16mm	16mm
Optional accessories	Griddle plate HEZ390522	•	•
	Pro Induction Teppan Yaki: HEZ9TY010	•	•
	Stainless steel roasting pan with lid HEZ390011	•	
	Stainless steel wok HEZ390090	•	•
	Set of 2 pots and 1 pan HEZ9SE030	•	•

Range Overview - 90cm and 80cm Induction Cooktops.

Model		PXX995KX5E	PXV975DV1E	PIV931HC1E	PXY898DX6E	PXV890DV5E	PXE875DC1E	PVS831HC1E
		accent line	Series 8	Series 6	accent line	accent line	Series 8	Series 6
Туре		90cm FlexInduction Cooktop	90cm FlexInduction Cooktop	90cm Induction Cooktop	80cm FlexInduction Cooktop	80cm FlexInduction Cooktop	80cm FlexInduction Cooktop	80cm Combi-Induction Cooktop
Dimensions	Width (cm)	90	90	90	80	80	80	80
	Appliance dimensions (HxWxD)	51 x 916 x 527mm	51 x 916 x 527mm	51 x 918 x 522mm	51 x 816 x 527mm	51 x 816 x 527mm	51 x 816 x 527mm	51 x 802 x 522mm
	Installation dimensions (HxWxD)	51 x 880 x 490-500mm	51 x 880 x 490-500mm	51 x 880 x 490-500mm	51 x 750-780 x 490-500mm	51 x 750-780 x 490-500mm	51 x 750-780 x 490-500mm	51 x 750 x 490-500mm
Design		Carbon black ceramic glass, bevelled front with carbon black strips on the side.	Black ceramic glass, stainless steel slimline side profile, bevelled front and rear		Black ceramic glass, bevelled front with carbon black strips on the side.	Carbon black ceramic glass, bevelled front with carbon black strips on the side.	Black ceramic glass, stainless steel slimline side profile, bevelled front and rear	
Burner / Zone Output		5 zones including:	5 zones including:	5 zones including:	4 zones including:	5 zones including:	4 zones including:	4 zones including:
	Front left	FlexZone: 2.2kW / 3.7kW Boost (200, 240mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard Zone: 2kW / 3.1kW Boost (180mm)	FlexZone: 2.2kW / 3.7kW Boost (200, 230mm)	Standard Zone: 1.8kW / 3.1kW Boost (180mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	CombiZone: 2.5kW / 3.7kW Boost (190, 210mm)
	Back left	FlexZone: 2.2kW / 3.7kW Boost (200, 240mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard Zone: 2kW / 3.1kW Boost (180mm)	FlexZone: 2.2kW / 3.7kW Boost (200, 230mm)	Standard Zone: 1.4kW / 2.2kW Boost (145mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	CombiZone: 2.5kW / 3.7kW Boost (190, 210mm)
	Front centre	FlexZone: 2.6kW / 3.7kW Boost (240, 300mm)	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 3.7kW Boost (210 / 260 / 320mm)	Triple circuit zone: 2.2kW / 3.7kW Boost (210 / 260 / 320mm)		Standard Zone: 2.2kW / 3.7kW Boost (240mm)		
	Rear centre							Double circuit zone: 3kW/ 3.7kW Boost (280mm)
	Front right	FlexZone: 2.2kW / 3.7kW Boost (200, 240mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard Zone: 2.5kW / 3.7kW Boost (210mm)	FlexZone: 2.2kW / 3.7kW Boost (200, 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200, 210mm)	Standard Zone: 1.4kW / 2.2kW (145mm)	Standard Zone: 1.6kW / 2.2kW (145mm)
	Back right	FlexZone: 2.2kW / 3.7kW Boost (200, 240mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard Zone: 1.6kW / 2.2kW Boost (145mm)	FlexZone: 2.2kW / 3.7kW Boost (200, 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200, 210mm)	Standard Zone: 2.6kW / 3.7kW (280mm)	
			*Total FlexZone: 3.3kW / 3.7kW Boost (400 x 230mm)		*Total FlexZone: 2.3kW / 3.7kW Boost (400 x 230mm)		*Total FlexZone: 3.3kW / 3.6kW Boost (400 x 240mm)	
Performance	17 power levels	•	•	•	•	•	(400 x 24011111)	•
	PerfectFry Plus			•				•
	PerfectFry	•	•		•	•	•	
	PerfectCook	•			•			
	PowerBoost	•	•	•	•	•	•	•
	ShortBoost		•		•		•	
	PowerTransfer	•			•			
	FlexZone	•	•		•	•		
	Expanded FlexZone	•	24.5		•	_	0.4.1.0	
	MoveMode	•	3 Auto Power Levels	•	•	•	3 Auto Power Levels	_
Convenience	Favourite Button Bosch Assist	•		•				•
	Dish Assistant		•	•	•	•		•
	Switch-off timer	•	•	•	•	•	•	•
	Count-down timer	•	•	•	•	•	•	•
	Count-up timer	•	•	•	•	•	•	•
	Alarm	•	•	•	•	•	•	•
	Cook to Hood	•	•	•	•	•		•
	WipeProtection	•	•		•	•	•	
	Keep Warm		•		•		•	
	ZoneLight				•			
	Pause Function			•				•
	Illuminated cooking zone				•			•
	QuickStart	•	•	•	•	•	•	•
	ReStart Dual function timer with automatic switch-off	_	•	•	•	•	•	
	Single timer (customisable with Home Connect) Automatic Pot Detection	•	•	•	•	•	•	•
	Adaptable Sound Volume	•	-	•	-	•	•	•
	Energy Consumption Display	•	•	-	•	•	•	-
	Home Connect	•	•	•	•	•		•
Safaty	Child lock	•	•	•	•	•	•	•
Safety	2-stage residual heat indicators	•	•	•	•	•	•	•
	1-stage residual heat indicator	-			-			
	Automatic safety switch-off	•	•	•	•	•	•	•
Electronic Touch-controls	DirectSelect Premium		•		•	•	•	
	DirectSelect			•				•
	TFT Touch Display	•						
	TouchSelect							
Technical Requirements	Total connected load	11.1kW	11.1kW	11.1kW	7.4kW	7.4kW	7.4kW	7.4kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Minimum worktop thickness	16mm	16mm	16mm	16mm	16mm	16mm	16mm
Optional Cookware		Refer to pa	age 43			Refer to	o page 43	

86 | Bosch kitchen appliance catalogue more information www.bosch-home.com.au | 87

Range Overview - 60cm Induction Cooktops.

Model		PXX695HC1E	PIX631HC1E	PVS631HC1E	PUE611BB5E	PUJ611BB5E
		accent line	Series 6	Series 6	Series 4	Series 4
Туре		60cm FlexInduction Cooktop	60cm FlexInduction cooktop	60cm Combilinduction Cooktop	60cm Induction Cooktop	60cm Induction Cooktop
Dimensions	Width (cm)	60	60	60	60	60
	Appliance dimensions (HxWxD)	51 x 606 x 527mm	51 x 592 x 522mm	51 x 592 x 522mm	51 x 592 x 522mm	51 x 592 x 522mm
	Installation dimensions (HxWxD)	51 x 560 x 490-500mm	51 x 560-560 x 490-500mm	51 x 560 x 490–500mm	51 x 560 x 490-500mm	51 x 560 x 490-500mm
Design		Black ceramic glass, bevelled front with metal strips on the side.	Black ceramic glass, bevelled front	Black ceramic glass, bevelled front	Black ceramic frameless glass	Black ceramic frameless glass
Burner / Zone Output		4 zones including:	5 zones including:	4 zones including:	4 zones including:	3 zones including:
(Size)	Front left	FlexZone: 2.2kW / 3.7kW Boost (190, 230mm)	FlexZone: 2.2kW / 3.7kW Boost (190, 230mm)	CombiZone: 2.5kW / 3.7kW Boost (190, 210mm)	Standard zone: 1.8kW / 3.1kW (180mm)	
	Back left	FlexZone: 2.2kW / 3.7kW Boost (190, 230mm)	FlexZone: 2.2kW / 3.7kW Boost (190, 230mm)	CombiZone: 2.5kW / 3.7kW Boost (190, 210mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.6kW / 3.7kW (280mm)
	Front centre					
	Rear centre					
	Front right	FlexZone: 2.2kW / 3.7kW Boost (190, 230mm)	Standard Zone: 2.5kW / 3.7kW (210mm)	Standard Zone: 2kW / 3.1kW Boost (180mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 2.2kW / 3.7kW (210mm)
	Back right	FlexZone: 2.2kW / 3.7kW Boost (190, 230mm)	Standard Zone: 1.6kW / 2.2kW (145mm)	Standard Zone: 1.6kW / 2.2kW Boost (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)
Performance	17 power levels	•	•	•	•	•
T el loi mance	PerfectFry Plus	•	•	•	-	-
	PowerBoost	•	•	•	•	•
	PowerTransfer	•	•	•		_
	FlexZone	•	•			
	CombiZone			•		
	MoveMode					
Convenience	Favourite Button	•	•	•		
C	Dish Assistant	•	•	•		
	Switch-off timer	•	•	•		
	Count-down timer	•	•	•		
	Count-up timer					
	Alarm	•	•	•		
	Cook to Hood	•	•	•		
	WipeProtection					
	Keep Warm					
	Pause Function	•	•	•		
	Illuminated cooking zone					
	QuickStart	•	•	•	•	•
	ReStart	•	•	•	•	•
	Dual function timer with automatic switch-off				•	•
	Single timer (customisable with Home Connect)	•	•	•		
	Automatic zone selection	•	•			_
	Automatic Pot Detection	•	•	•	•	•
	Adaptable Sound Volume	•	•	•		
	Energy Consumption Display					
	Home Connect	•	•	•		
Safety	Child lock	•	•	•	•	•
	2-stage residual heat indicators	•	•	•	•	•
	1-stage residual heat indicator					
	Automatic safety switch-off	•	•	•	•	•
Electronic Touch-controls						
	DirectSelect	•	•	•		
	TFT Touch Display					
	TouchSelect				•	•
Technical Requirements	Total connected load	7.4kW	7.4kW	6.9kW	4.6kW	4.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Minimum worktop thickness	16mm	16mm	16mm	16mm	16mm
Optional Cookware			Refer to page 43		Refer t	o page 43

Range Overview - Gas Cooktops.

Model		PRS9A6L70A	PRS9A6D70A	PCT9A5B90A	PCR9A5B90A	PCR7A5B90A	PCI6A5B90A	PBH6B5B90A	PBH6B5B80A
		accent line	Series 8	Series 6	Series 6	Series 6	Series 6	Series 2	Series 2
Туре		90cm FlameSelect Gas Cooktop	90cm FlameSelect Gas Cooktop	90cm FlameSelect Gas Cooktop	90cm FlameSelect Gas Cooktop	75cm FlameSelect Gas Cooktop	60cm FlameSelect Gas Cooktop	60cm Gas Cooktop	60cm Gas Cooktop
Dimensions	Width (cm)	90	90	90	90	75	60	60	60
	Appliance dimensions (HxWxD)	59 x 916 x 527mm	59 x 916 x 527mm	53 x 915 x 520mm	53 x 915 x 520mm	53 x 750 x 520mm	53 x 582 x 520mm	56 x 580 x 510mm	56 x 580 x 510mm
	Cut-out dimensions (HxWxD)	45 x 850-852 x 490-502	45 x 850-852 x 490-502mm	45 x 850-852 x 490-502mm	45 x 850-852 x 490-502mm	45 x 560-562 x 480-492mm	45 x 560-562 x 480-492mm	45 x 560-562 x 480-492mm	45 x 560-562 x 480-492mm
Design	Finish	Black ceramic frameless glass	Black ceramic frameless glass	Stainless Steel	Stainless Steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Burner / Zone Output		5 burners including:	5 burners including:	6 burners including:	5 burners including:	5 burners including:	4 burners including:	4 burners including:	4 burners including:
	Front left			Dual flame wok burner 19.5 MJ/h*	Economy burner 4 MJ/h*	Economy burner 4 MJ/h*		Wok burner 15 MJ/h*	Wok burner 13 MJ/h*
	Centre left	Wok burner 22 MJ/h*	Wok burner 22 MJ/h*				Wok burner 15 MJ/h*		
	Rear left			Standard burner 6.85 MJ/h*	Standard burner 6.85 MJ/h*	Standard burner 6.85 MJ/h*		Standard burner 6.5 MJ/h*	Standard burner 6.5 MJ/h*
	Front centre	Standard burner 8.1 MJ/h*	Standard burner 8.1 MJ/h*	Economy burner 4 MJ/h*			Economy burner 4 MJ/h*		
	Middle centre				Dual flame wok burner 19.5 MJ/h*	Dual flame wok burner 19.5 MJ/h*			
	Rear centre	Economy burner 4.8 MJ/h*	Economy burner 4.8 MJ/h*	Standard burner 6.85 MJ/h*			Standard burner 6.85 MJ/h*		
	Front right	Standard burner 8.1 MJ/h*	Standard burner 8.1 MJ/h*	Dual flame wok burner 19.5 MJ/h*	Standard burner 6.85 MJ/h*	Standard burner 6.85 MJ/h*		Economy burner 4 MJ/h*	Economy burner 4 MJ/h*
	Centre right						High-speed burner 11 MJ/h*		
	Rear right	High-speed burner 11.6 MJ/h*	High-speed burner 11.6 MJ/h*	High-speed burner 11 MJ/h*	High-speed burner 11 MJ/h*	High-speed burner 11 MJ/h*		Standard burner 6.5 MJ/h*	Standard burner 6.5 MJ/h*
Convenience	FlameSelect (precise control in 9 steps)	•	•	•	•	•	•		
	Individual cast-iron trivets with rubber feet	•							
	3 piece cast-iron trivets with rubber feet		•	•	•	•			
	2 piece cast-iron trivets with rubber feet						•	•	
	Steel trivets with cast-iron finish and rubber feet								•
	Steel trivets with rubber feet								
	Enamelled cast-iron burner caps	•	•	•	•	•	•	•	
Safety	Flame failure fitted to each burner	•	•	•	•	•	•	•	•
	Residual heat indicators	•	•						
Controls	Sword knob controls	•	•	•	•	•	•	•	•
Technical requirements	Total connected load	54.6 MJ/h	54.6 MJ/h	67.7 MJ/h	48.2 MJ/h	48.2 MJ/h	36.85 MJ/h	32 MJ/h	32 MJ/h
	Power requirements	220-240V / 50-60Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz
	Minimum worktop thickness	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm
Supplied accessories	Wok ring support	•	•	•	•	•	•	•	•
	Espresso cross support	•	•	•	•	•	•		
	LPG conversion kit	•	•	•	•	•	•	•	•
Other	Suitable for NG or LPG	•	•	•	•	•	•	•	•

^{*}Depending on gas type.

Range Overview - Ceramic Cooktops.

Model		PKM875DP1A	PKG775DB1A	PKN675DB1A	PKE611BA2A	PKE611CA2A
		Series 8	Series 8	Series 8	Series 4	Series 2
Туре		80cm Ceramic Cooktop	70cm Ceramic Cooktop	60cm Ceramic Cooktop	60cm Ceramic Cooktop	60cm Ceramic Cooktop
Dimensions	Width (cm)	80	70	60	60	60
	Appliance dimensions (WxD)	816 x 527mm	710 x 527mm	606 x 527mm	592 x 522mm	583 x 513mm
	Cut-out dimensions (WxD)	780 x 500mm	560-640 x 490-500mm (fits cut-out for 60cm)	560 x 500mm	560 x 490-500mm	560 x 490-500mm
Design		Black ceramic glass, stainless steel slimline side profile, bevelled front and rear	Black ceramic glass, stainless steel slimline side profile, bevelled front and rear	Black ceramic glass, stainless steel slimline side profile, bevelled front and rear	Black ceramic frameless glass	Black ceramic frameless glass
Burner /		4 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
Zone Output (Size)	Front left	Dual circuit zone: 1.2kW / 2.1kW (145 / 210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 2kW (180mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
	Rear left	Standard zone: 1.2kW (145mm)	Dual circuit zone: 0.8kW / 2.0kW (120 / 180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170 / 265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
	Rear centre	Dual circuit zone: 1.7kW / 2.4kW (180 / 230mm)				
	Front right	Dual circuit/roaster zone: 1kW / 2kW / 3.4kW / 4.6kW (120 / 180 / 270 / 370mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Dual circuit zone: 1kW / 2.2kW (145 / 210mm)	Standard zone: 2.2kW (210mm)	Standard zone: 2.0kW (180mm)
	Rear right		Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
Performance	17-stage power setting	•	•	•	•	
	9-stage power setting					•
	PerfectFry Sensor					
	PowerBoost	•				
Convenience	WipeProtection	•	•	•		
	Keep Warm	•	•	•		
	ReStart	•	•	•	•	
	Energy Consumption Display	•	•	•		
	Dual function timer with automatic switch-off	•	•	•		
	Automatic Pot Detection					
	Automatic Boil Start		•	•		
	Home Connect					
Safety	Child lock	•	•	•	•	
	2-stage residual heat indicators	•	•	•	•	
	Residual heat indicator					•
	Automatic safety switch-off	•	•	•	•	
Electronic touch-controls	DirectSelect Premium	•	•	•		
	TouchSelect Sword control knobs				•	•
Technical requirements	Total connected load	11.2kW	6.6kW	7.5kW	6.6kW	6.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Minimum worktop thickness	20mm (see space requirements for oven)	20mm (see space requirements for oven)	20mm (see space requirements for oven)	20mm (see space requirements for oven)	20mm (see space requirements for oven)
	The state of the s	(222 2 part 1 oquillonio 101 0 toli)	(. (((222 2222 22441 01101101 101 01011)

Range Overview - Integrated Rangehoods.

Model		DDW88MM66	DBB97AM60A	DBB67AM60A	DHL895DAU	DHL785BAU	DHL575CAU	DHL555BAU	DLN54AA70A
		accent line	Series 6	Series 6	Series 8	Series 6	Series 6	Series 4	Series 2
Туре		80cm GlassDraft integrated downdraft ventilation	90cm Integrated GlassVisor Rangehood	60cm Integrated GlassVisor Rangehood	86cm Integrated Rangehood	70cm Integrated Rangehood	52cm Integrated Rangehood	53cm Integrated Rangehood	53cm Integrated Rangehood
Dimensions	Width (cm)	80	90	60	86	70	52	53	53
	Appliance dimensions (HxWxD)	709 x 816 x 140mm	340 x 897 x 298mm	340 x 597 x 298mm	418 x 860 x 282mm	418 x 700 x 282mm	418 x 520 x 300mm	255 x 530 x 380mm	208 x 534 x 300mm
	Built-in Dimensions (HxWxD)	703 x 781 x 123mm	340 x 860 x 300mm	340 x 560 x 300mm	418 x 836 x 264mm	418 x 676 x 264mm	418 x 496 x 264mm	255 x 500 x 350mm	208 x 493 x 257mm
Design		Black glass with glass panel	Lacquered black finish	Lacquered black finish	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish	Stainless Steel
	TouchControls	•	•	•					
	Decorative LED-illumination	•							
	Ambient light	•							
	LED-display	•	•	•					
	On/Off main switch control	•	•	•	•	•	•		
	Electronic controls for power and light	•	•	•		•	•		
	Push button controls for power and light				•				
	Slide controls for power and light							•	•
	Concealed power and light controls		•	•					
	Lighting	Glass Edge Lighting	3 x 2W LED Lights	2 x 2W LED Lights	2 x 1W LED Lights with dimmer function	2 x 1W LED Lights	2 x 1W LED Lights	2 x 2W LED Lights	2 x 3W LED Lights
Power	Maximum extraction rate	775m³/h	749m³/h	749m³/h	800m³/h	730m³/h	610m³/h	650m³/h	420m³/h
functions	3 power levels plus 2 intensive settings	•							
	3 power levels plus 1 intensive setting		•	•	•	•	•	•	
	3 power levels								•
	Intensive setting with automatic switch back to previous setting 6 min		•	•	•	•	•		
	Residual shutdown with automatic run-on time 1–10 min	● (10 mins)			● (30 mins)				•
	Rim ventilation system				•	•	•		
	EcoSilence Drive brushless motor	•			•				
	Powerful single motor with twin fan		•	•		•	•		
	Powerful twin motor							•	
	Powerful single motor								•
	Guided Air	•							
Noise*	Noise min. / max.	39dB / 62dB	50dB / 63dB	50dB / 63dB	41dB / 64dB	53dB / 66dB	50dB / 67dB	41dB / 59dB	55dB / 67dB
	Noise max. (intensive setting)	70dB	73dB	73dB	70dB	69dB	70dB	69dB	
Convenience	PerfectAir sensor	•							
	Cooktop-based hood control	•							
	Dual layer metal grease filters				•	•	•	•	
	Dishwasher-safe metal grease filter	● (2)	● (2)	● (2)	● (2)	• (2)	● (2)	• (2)	● (1)
	Saturation indicator for filters	•			•				
	Back-pressure flap (one-way)								•
	Home Connect	•							
Technical	Total connected load	300W	259W	259W	172W	315W	252W	240W	121W
requirements	Power requirements	220-240 / 50/60Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
	Ducting connection diameter	150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120mm
Optional accessory	Recirculation kit	DSZ1WW1I6	DWZ6IB1I4	DWZ6IB1I4	DHZ5605	DHZ5605	DHZ5605		DWZ0IN0T0
accessory	Required recirculation accessory	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)
	Charcoal filter for recirculation		DW711D6V1 (450, 054)	DW711DCV1 (AEO. 9EAmm)				DHZ7305	
	Chimney extension kits		DWZ1IB6K1 (450-854mm) DWZ1IB6N1 (187-360mm)	DWZ1IB6K1 (450-854mm) DWZ1IB6N1 (187-360mm)					
	Long life regenerative filter	DSZ1WW1J1							
	Remote motor kit	DSZ1WW1M1							
Othor	Seamless installation kit	DSZ8WW1Y2			•	•	•	•	•
Other	Ducted and recirculated air operation	•			•	•	•	•	•

Range Overview - Wall-mounted Rangehoods.

Model		DWK91LT65	DWB91PR50A	DWB97LM50A	DWB96BC60A	DWB96BC50A	DWP96BC50A	DWP66BC50A	DWB65BC50A
		accent line	Series 8	Series 6	Series 2	Series 2	Series 2	Series 2	Series 2
Туре		90cm Inclined Canopy Rangehood	90cm Canopy Rangehood	90cm Canopy Rangehood	90cm Canopy Rangehood	90cm Canopy Rangehood	90cm Canopy Rangehood	60cm Canopy Rangehood	60cm Canopy Rangehood
Dimensions	Width (cm)	90	90	90	90	90	90	60	60
	Appliance dimensions (HxWxD)	855-1098 x 890 x 447mm (ducted) or 892-1185 x 890 x 447 (recirculating)	614–954 x 898 x 500mm (ducted) or 614–1064 x 898 x 500mm (recirculating)	614–954 x 898 x 500mm (ducted) or 614–1064 x 898 x 500mm (recirculating)	635–965 x 900 x 500mm (ducted) or 635–1075 x 900 x 500mm (recirculating)	635–965 x 900 x 500mm (ducted) or 635–1075 x 900 x 500mm (recirculating)	799–975 x 900 x 500mm (ducted or recirculating)	799–975 x 600 x 500mm (ducted or recirculating)	450-830 x 598 x 500mm (ducted) or 550-830 x 598 x 500mm (recirculating)
Design		Black	Stainless steel	Stainless steel	Black	Stainless steel	Stainless steel	Stainless steel	Stainless steel
	TouchControls	•	•	•					
	Lightline		•						
	LED-display			•					
	On/Off main switch control	•	•	•	•	•	•	•	•
	Electronic controls for power and light	•	•	•					
	Push button controls for power and light Slide controls				•	•	•	•	•
	for power and light Rocker switches								
	for power and light Concealed power								
	and light controls								
	Lighting	2 x LED SoftLights with dimmer function	3 x 1.5W LED SoftLights with dimmer function	3 x 1.5W LED Lights	2 x 1.5W LED Lights	2 x 1.5W LED Lights	2 x 1.5W LED Lights	2 x 1.5W LED Lights	2 x 3W LED Lights
Power	Maximum extraction rate	1007m³/h	965m³/h	697m³/h	619m³/h	619m³/h	626m³/h	597m³/h	580m³/h
functions	3 power levels plus 2 intensive settings	•	•						
	3 power levels plus 1 intensive setting			•					
	3 power levels				•	•	•	•	•
	Intensive setting with automatic switch back to previous setting 6 min	•	•	•					
	Residual shutdown with automatic run-on time 1–10 min	•	•						
	EcoSilence Drive brushless motor	•	•	•					
	Powerful single motor with twin fan				•	•	•	•	•
	Powerful single motor								
Noise*	Noise min. / max.	35dB / 59dB	45dB / 64dB	45dB / 55dB	49dB / 70dB	49dB / 70dB	51dB / 69dB	49dB / 69dB	48dB / 69dB
	Noise max. (intensive setting)	78dB	73dB	66dB					
	Sound insulation mats		•	•					
Convenience	PerfectAir sensor	•	•						
	Cooktop-based hood control Dual layer metal	•	•	•					
	grease filters Dishwasher-safe metal	• (3)	• (3)	• (3)	• (3)	• (3)	• (3)	• (2)	• (2)
	grease filter Saturation indicator	•	•	• (5)	• (5)	• (5)	• (5)	• (2)	• (2)
	for filters Back-pressure flap		•	•	•	•	•	•	•
	(one-way) Home Connect	•	•						
	Favourite button	•							
Technical	Total connected load	250W	265W	145W	220W	220W	220W	220W	216W
requirements	Power requirements	220-240V / 50-60Hz		220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	
	Ducting connection diameter	150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm
Required accessory									
Optional accessory	Recirculation kit	DWZ1BK1I6 - 17008033	DWZ2CB1I4	DWZ2CB1I4	DWZ1DX1I4	DWZ1DX1I4	DHZ5275	DHZ5275	DHZ5377
Oth	Installation kit for 90cm cupboard								
Other	Ducted and recirculated air operation	•	•	•	•	•	•	•	•

Range Overview - Retractable Slideout Rangehoods.

Model		DFS097A51A Series 4	DFS067A51A Series 4	DFM064W54A Series 2
Туре		90cm Slideout Rangehood	60cm Slideout Rangehood	960cm Slideout Rangehood
Dimensions	Width (cm)	90	60	60
	Appliance dimensions (HxWxD)	426 x 898 x 290mm	426 x 598 x 290mm	203 x 598 x 290mr
	Built-in Dimensions (HxWxD)	385 x 524 x 290mm	385 x 524 x 290mm	162 x 526 x 290mr
Design		Silver metallic	Silver metallic	Silver metallic
	TouchControls			
	Lightline			
	LED-display	•	•	
	On/Off main switch control	•	•	
	Electronic controls for power and light			
	Push button controls for power and light	•	•	
	Slide controls for power and light			
	Rocker switches for power and light			•
	Concealed power and light controls	•	•	•
	Lighting	3 x 1.5W LED Lights	2 x 1.5W LED Lights	2 x 1.5W LED Ligh
Power	Maximum extraction rate	729m³/h	728m³/h	389m³/h
	3 power levels plus 2 intensive settings			
	3 power levels plus 1 intensive setting	•	•	
	3 power levels			•
	Intensive setting with automatic switch back to previous setting 6 min	•	•	
	Residual shutdown with automatic run-on time 1–10 min	● (10 mins)	● (10 mins)	
	EcoSilence Drive brushless motor	•	•	
	Powerful single motor with twin fan			
	Powerful single motor			•
Noise*	Noise min. / max.	41dB / 53dB	41dB / 53dB	59dB / 67dB
	Noise max. (intensive setting) Sound insulation mats	69dB	68dB	
Convenience	PerfectAir sensor			
Convenience	Cooktop-based hood control			
	Dual layer metal			
	grease filters Dishwasher-safe metal	● (3)	• (2)	● (2)
	grease filter Saturation indicator for filters			
	Back-pressure flap (one-way)			
	Home Connect			
	Favourite			
Technical	Total connected load	146W	144W	108W
	Power requirements	220-240V / 50/60Hz	220-240V / 50/60Hz	220-240V / 50Hz
	Ducting connection diameter	120 and 150mm	120 and 150mm	120 and 150mm
Required accessory		CleanAir Module (recirculation mode)	CleanAir Module (recirculation mode)	
Optional accessory	Recirculation kit	DWZ2IT1I4	DWZ2IT1I4	DWZ1IT1I4
	Installation kit for 90cm cupboard	DSZ4920		
Other	Ducted and recirculated	•	•	•

Accessories.

Shop Bosch accessories and cleaning products online at www.bosch-home.com.au/shop.

Oven and Cooker Accessories			l		
	Air Fry and Grill tray To suit all Bosch Series 8 60cm ovens and compact ovens.	HEZ629070		Wire rack (standard) To suit Bosch 60cm ovens, 45cm compact ovens and double ovens. Excludes: HSG958DB1A, CSG958DB1, HBF133BS0A and HBF134EB0A.	HEZ634000
	Pizza stone Pizza baking stone with wooden bread paddle. Baking stone is pyrolytic proof. To suit all Bosch 60cm and double ovens ovens except HSG958DB1A.	HEZ327000		Clip rail full extension - for pyrolytic ovens To suit Bosch ovens: HRG978NB1A, HBG976MB1A, HBG7741B1A, HRG776MB1A and HBG776MB1A.	HEZ638070
	To suit Bosch compact ovens CMG978NB1A, CMG936AB1A and CMG7241B1A. Enamelled baking tray – pyrolytic proof	HEZ631070	H	ClipRail telescopic rails To suit Bosch oven HBG7341B1A and Series 6 and 4 60cm and double ovens.	HEZ538000
	To suit all Bosch Series 8 60cm and 45cm ovens.			Clip rail full extension - for non-pyrolytic and non-steam ovens	HEZ638000
	Universal pan with ceramic non-stick coating To suit Bosch 60cm ovens, 45cm compact ovens and double ovens. Excludes:	HEZ532010		To suit Bosch ovens: HBG7341B1A, HBT578FS2A, HRA574EB0A, HBA574EB0A, HBA574BS0A, HBA534BB0A and HBA534ES0A.	
	HBF133BSOA and HBF134EBOA. Baking tray with ceramic non-stick coating To suit Bosch 60cm and 45cm ovens. Excludes: HBF133BSOA and HBF134EBOA.	HEZ531010		2-level extension rails To suit Bosch Series 2 ovens.	HEZ438201
	Half trays (slimline universal pan) Slim-sized trays are perfect when cooking smaller quantities of food. Consists of 2 parts and fits perfectly in Bosch dishwashers and Bosch	HEZ530000		Clip rail full extension - for steam ovens To suit Bosch ovens HSG958DB1A and CSG958DB1.	HEZ638D00
	integrated fridges. To suit Bosch 60cm ovens, 45cm compact ovens and double ovens. Excludes: HNG978QB1A, CMG978NB1A, CMG936AB1A, HBT578FS2A, HBF133BSOA, HBF134EB0A,				

90cm ovens and MBG5787S0A



This much is for sure: you can trust our service.

Reliable, experienced, fast. The customer service of Bosch – before and after purchase.

Quality service straight from the manufacturer. Original Bosch.

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly-trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

Reliability guaranteed. No compromises.

All Bosch home appliances are produced with maximum care using high-quality

We promise it in our two year manufacturer's warranty on all appliances.

Original accessories. Effective care products.

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the @BoschHomeAU right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

Extensive customer service network. Just a call away.

Customer Care

Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

Service & Repairs

Our team is there to provide the right advice on faults, arrange a visit of a service engineer and order the right accessories or spare parts.

Customer care, service and repairs: 1300 369 744

24 hour phone support Monday to Friday.*

*Phone lines open 7am Monday until midnight on Friday.









BSH Home Appliances Pty Ltd

1555 Centre Road Clayton VIC 3168

Postal Address

Locked Bag 66, Clayton South VIC 3169

Customer Line

Phone: 1300 369 744 www.bosch-home.com.au

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Bosch retailer for the latest information.

Whilst every care has been taken in the preparation of this publication, BSH does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KRD 11/2023 - BH 6124 B





