


Invented for life

BOSCH

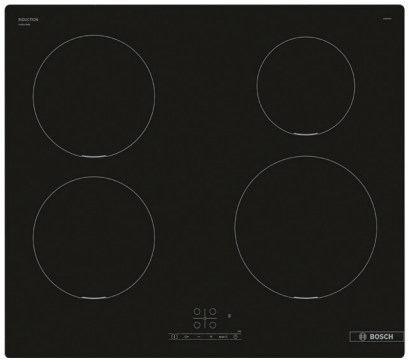



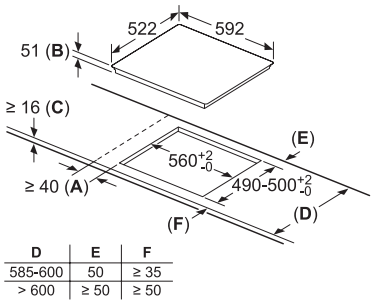


D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50


A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

Induction hob over a drawer



Induction hob over an oven



① Ventilation gap must be present

PUE611BB5E — $13,800

60cm Induction Hob

Performance	• 4 induction cooking zones • 17 stages of power setting • Touch Select: simple selection
Functions	• QuickStart • ReStart
Features	• PowerBoost: Up to 50% more power for faster heating • Count-down timer for each zone • Kitchen timer
Design	• Ceramic glass
Safety functions	• Digital 2-stage residual heat indicator for each zone • Main switch • Safety switch-off • Cookware detection • Childproof lock
Technical information	• Cooking zone output

Zone	Output (kW)	Output without booster (kW)	Dimensions (mm)
Front left	3.1	1.8	180
Rear left	3.1	1.8	180
Front right	3.7	2.2	210
Rear right	2.2	1.4	145

• Total connected load: 4.6kW (220V/20A single phase)
• Dimensions:
- Appliance (H x W x D): 51* x 592 x 522 mm *excl. glass thickness
- Cut out (W x D): 560 x 490-500 mm

Optional accessories	• Connection strip (HEZ394301) • Griddle Plate (HEZ390522) • Teppan Yaki (HEZ9TY010) • Induction roaster (HEZ390011)
Country of origin	• Spain

Measurements in mm

BSH Home Appliances Limited
Customer Contact Hotline: 2626 9655 (Hong Kong) / 0800 863 (Macau local call only)
www.bosch-home.com.hk

• Specifications and technical information are subject to change.
• Right of technical modification reserved, colours may vary slightly from illustrations.
©2024 by BSH Home Appliances Limited. Reproduction, complete or in part, only with the express permission of BSH.