



accent|line

# Ultimate Simplicity Cutting-edge Design

**Best of the best global award**

# Ultimate Simplicity

## Cutting-edge Design

Simple design merged with distinctive aesthetics and modern functionality, the Bosch accent | line Carbon Black series represents the fusion between the kitchen and living space.

### **Seamless aesthetics**

The accent | line Carbon Black series exhibits a design pared down to the bare minimum, with a formal consistency that extends down to the last nuance. All appliances enhance the kitchen space with their understated presence and a silhouette distinguished by an intriguing interplay of light and shade.



accent|line

## Master Craftsmanship

Robert Sachon, Bosch Chief Designer, redefines Bosch accent line carbon black with a sense of visual purism throughout, including the Digital Control Ring, frame details, displays and handles made of high-quality, black stainless steel.

*“ A reduction to the essentials  
leaves room for awareness of the  
exceptional.”*



**Robert Sachon**

Chief-Designer  
Robert Bosch Hausgeräte GmbH





## Designed for all of the senses

No matter whether you prefer steaming, baking or roasting, the accent line of the new Series 8 oven range from Bosch has got all kitchen skills covered. With 60cm or 45cm ovens, built-in coffee machines and vacuum drawers – all in the same stunning seamless design. The elegant panel with the Digital Control Ring engraved in the glass, dark glass front and the carbon black colour handle with an embossed Bosch logo were made to perfectly integrate into the kitchen environment, making cooking a delight on all levels.



Discover more






## Pure art

Discover a seamless design that integrates perfectly into the kitchen environment. With an elegant dark-glass front, a carbon black handle and the Digital Control Ring – a design element found in the entire Series 8 oven range. For full cooking ease, the range also comes with a brilliant TFT Touch Display with clear text and images that provide easy navigation for the various settings.



### Thin Handle.

A thin carbon-black handle with an embossed Bosch logo highlights the elegant design.

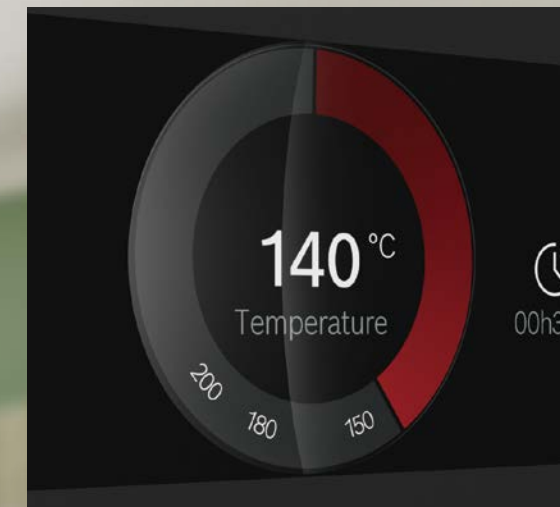

### Digital Control Ring.

With the Digital Control Ring, you can adjust your oven settings intuitively. Just move your finger across the ring engraved in the glass on the control panel and confirm the desired setting.




### TFT Touch Display.

Additionally, you are supported by a high-resolution TFT Touch Display: clear, vivid images and info texts take you through each step as you navigate the program options. Thus, you enjoy a complete overview and full control over your appliance's functions. For those who love an extra good overview, we have designed the enlarged TFT Touch Display Plus and the 6.8-inch full-surface TFT Touch Display Pro.







60cm oven combined with a 45cm compact oven and a 14cm vacuum drawer

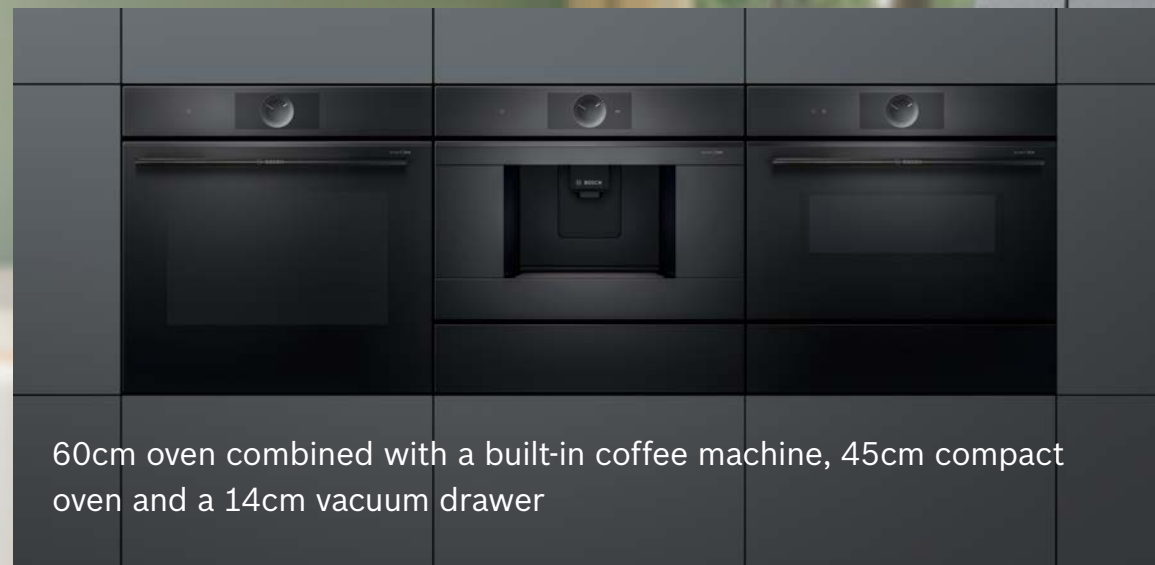

60cm oven combined with a built-in coffee machine, 45cm compact oven and a 14cm vacuum drawer

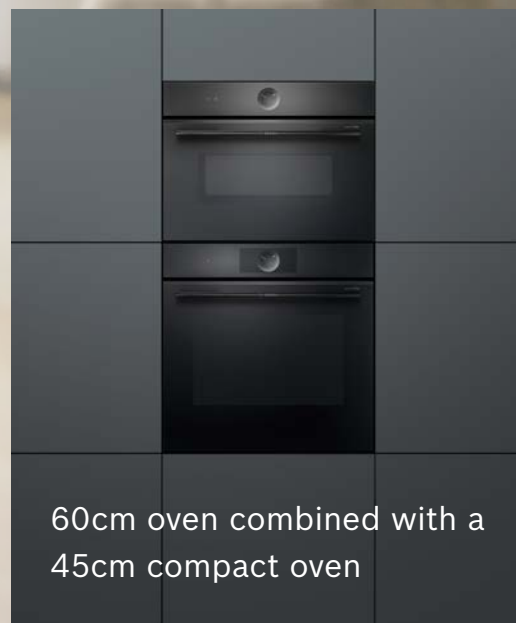

60cm oven combined with a 45cm compact oven

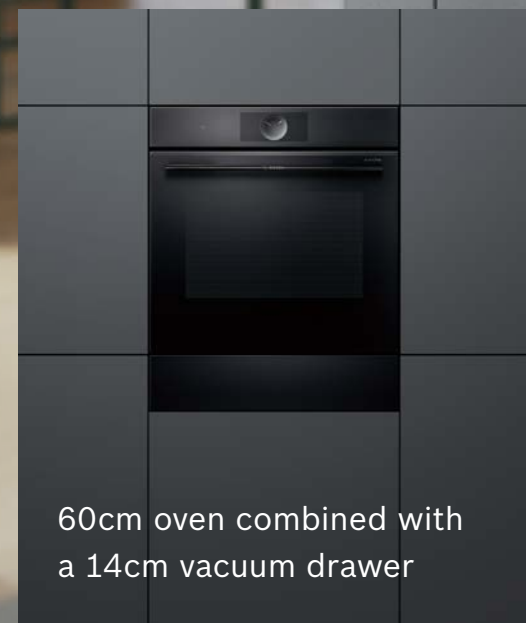

60cm oven combined with a 14cm vacuum drawer




## Seamless elegance

Experience true sophistication with the new Series 8 accent line. Discreet elements in carbon black highlight the elegant nuances in the elegant seamless design. A superior look coupled with an equally superior cooking experience, thanks to an intuitive TFT Touch Display with Digital Control Ring engraved in the glass, Artificial Intelligence and a wide range of settings and programs. The perfect design match for perfect cooking and in any product combination.







accent|line

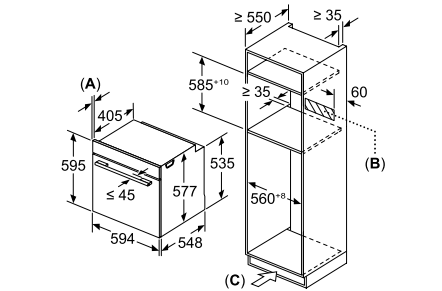

**A:** 19.5 mm  
**B:** Space for appliance connection 320 x 115 mm  
**C:** Ventilation space in the base min. 200 cm²

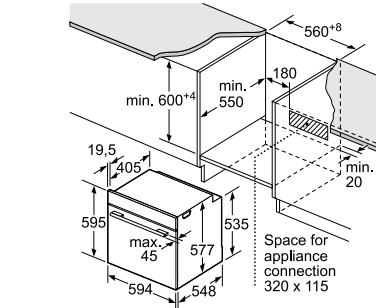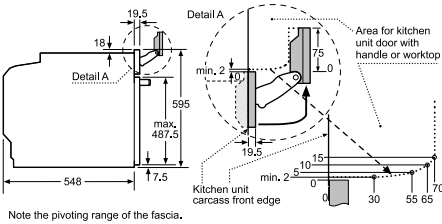

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

## HNG978QB1

60cm built-in oven with added steam and microwave function

\$56,900



### Programmes

- 16 cooking methods:
  - 4D HotAir
  - Air Fry
  - Hotair Gentle
  - Top and Bottom Heating
  - Top and Bottom Heating Gentle
  - Bottom Heat
  - Hotair Grill
  - Full-width Grill
  - Half-width Grill
  - Pizza Setting (Intensive Hotair)
  - Keep Warm
  - Plate Warming
  - Intensive Heat
  - Slow Cook
  - Defrost
  - Desiccation
- Microwave output:
  - 5 power levels: 800W, 600W, 360W, 180W, 90W
- 2 steam cooking methods:
  - Reheat
  - Dough Proving
- 4 combination added steam and oven functions:
  - 4D HotAir
  - Top and Bottom Heating
  - Hotair Grill
  - Keep Warm
- 5 combination microwave and oven functions:
  - 4D HotAir
  - Top and Bottom Heating
  - Hotair Grill
  - Full-width Grill
  - Half-width Grill

### Functions and Features

- Individual Browning
- PerfectBake Plus
- PerfectRoast Plus
- Pyrolytic cleaning function
- Pyrolytic proof rails
- Steam Boost Function
- Assist function - automatic cooking programmes
- Automatic temperature proposal with actual temperature display
- Drying function
- Rapid heat function
- Descaling function

### Design

- 6.8" TFT color and graphics display
- Digital ring touch control
- Camera in the oven
- dualLED light at cavity
- 5 shelf levels with 1 level full extension telescopic rail
- Enamel oven interior

### Safety functions

- Door contact switch
- Residual heat indicator
- Quadruple glass cool touch door (30°C door temperature)^
- SoftOpen and SoftClose door
- Integral cooling fan
- Childproof lock
- Water tank empty indicator

### Technical information

- Capacity: 67L
- Water tank capacity: 1L
- Heating temperature: 30°C - 300°C
- Total connected load: 3.6kW (20A single-phase connection)
- Grill output: 2.8kW (max.)
- Dimensions (H x W x D):
  - Appliance: 595 x 594 x 548 mm
  - Cavity: 357 x 480 x 392 mm

### Supplied Accessories




- 1 enamel baking tray
- 1 universal pan
- 1 combination grid
- 1 air fry & grill tray

### Country of origin

^Measured at the middle of the window at 180°C oven temperature, after 1 hour on top and bottom heat.



accent|line

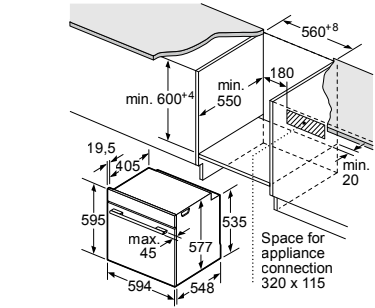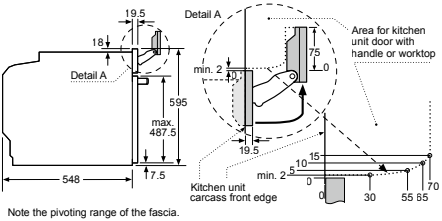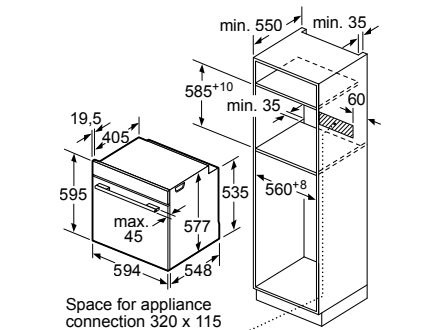

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

## HSG958DB1

60cm built-in combination steam oven

\$52,900



### Programmes

- 15 cooking methods:
  - 4D HotAir
  - Air Fry
  - Hotair Gentle
  - Top and Bottom Heating
  - Top and Bottom Heating Gentle
  - Bottom Heat
  - Hotair Grill
  - Full-width Grill
  - Half-width Grill
  - Pizza Setting (Intensive Hotair)
  - Keep Warm
  - Plate Warming
  - Intensive Heat
  - Slow Cook
  - Desiccation
- 5 steam cooking methods:
  - Sous-vide Cooking
  - Steam Function Plus (up to 120°C steam)
  - Defrost
  - Reheat
  - Dough Proving
- 4 combination steam and oven functions:
  - 4D HotAir
  - Top and Bottom Heating
  - Hotair Grill
  - Keep Warm

### Functions and Features

- PerfectBake Plus
- PerfectRoast Plus
- Eco Clean Direct panel at ceiling, back and side walls
- Cleaning Assistance
- Steam Boost Function
- Assist function - automatic cooking programmes
- Automatic temperature proposal with actual temperature display
- Drying function
- Rapid heat function
- Descaling function

### Design

- 6.8" TFT color and graphics display
- Digital ring touch control
- LED light at cavity ceiling
- 5 shelf levels
- 1 full extension clip rail
- Enamel oven interior

### Safety functions

- Door contact switch
- Residual heat indicator
- Triple glass cool touch door (40°C door temperature)^
- SoftOpen and SoftClose door
- Integral cooling fan
- Childproof lock
- Water tank empty indicator

### Technical information

- Capacity: 71L
- Water tank capacity: 1L
- Heating temperature: 30°C - 250°C
- Heating temperature: Steam 30°C - 120°C
- Total connected load: 3.6kW (20A single-phase connection)
- Grill output: 2.8kW (max.)
- Dimensions (H x W x D):
  - Appliance: 595 x 594 x 548 mm
  - Cavity: 355 x 480 x 415 mm

### Supplied Accessories

- 1 small steam cooking container (solid)
- 1 small steam cooking container (perforated)
- 1 large steam cooking container (perforated)
- 1 enamel baking tray
- 1 universal pan
- 1 grid
- 1 sponge
- 1 air fry & grill tray




### Country of origin

^Measured at the middle of the window at 180°C oven temperature, after 1 hour on top and bottom heat.





accent|line

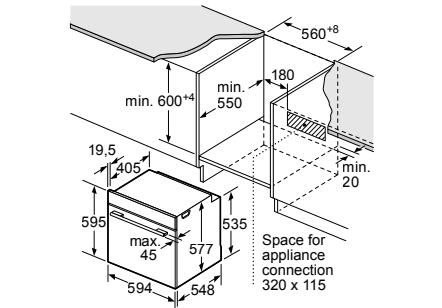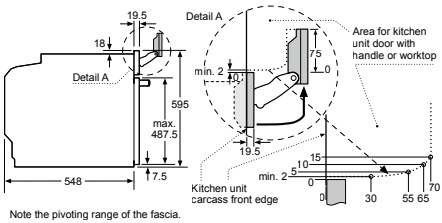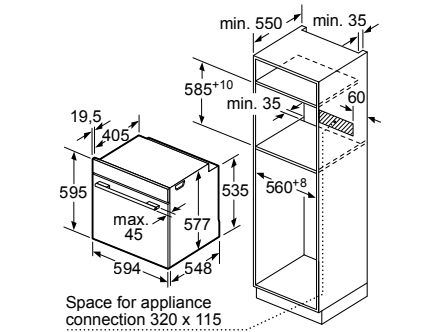

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

HRG978NB1  
60cm built-in oven with added steam

\$38,900



Programmes

- 16 cooking methods:
  - 4D HotAir
  - Air Fry
  - Hotair Gentle
  - Top and Bottom Heating
  - Top and Bottom Heating Gentle
  - Bottom Heat
  - Hotair Grill
  - Full-width Grill
  - Half-width Grill
  - Pizza Setting (Intensive Hotair)
  - Keep Warm
  - Plate Warming
  - Intensive Heat
  - Slow Cook
  - Defrost
  - Desiccation
- 2 steam cooking methods:
  - Reheat
  - Dough Proving
- 4 combination added steam and oven functions:
  - 4D HotAir
  - Top and Bottom Heating
  - Hotair Grill
  - Keep Warm

Functions and Features

- PerfectBake Plus
- PerfectRoast Plus
- Pyrolytic cleaning function
- Pyrolytic proof rails
- Steam Boost Function
- Assist function - automatic cooking programmes
- Automatic temperature proposal with actual temperature display
- Drying function
- Rapid heat function
- Descaling function

Design

- 6.8" TFT color and graphics display
- Digital ring touch control
- LED light at cavity ceiling
- 5 shelf levels
- 1 full extension clip rail
- Enamel oven interior

Safety functions

- Door contact switch
- Residual heat indicator
- Quadruple glass cool touch door (30°C door temperature)^
- SoftOpen and SoftClose door
- Integral cooling fan
- Childproof lock
- Water tank empty indicator

Technical information

- Capacity: 71L
- Water tank capacity: 1L
- Heating temperature: 30°C - 300°C
- Total connected load: 3.6kW (20A single-phase connection)
- Grill output: 2.8kW (max.)
- Dimensions (H x W x D):
  - Appliance: 595 x 594 x 548 mm
  - Cavity: 357 x 480 x 415 mm

Supplied Accessories

- 1 enamel baking tray
- 1 universal pan
- 1 combination grid
- 1 air fry & grill tray



Country of origin

- Germany



^Measured at the middle of the window at 180°C oven temperature, after 1 hour on top and bottom heat.



accent|line

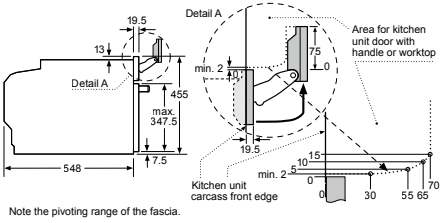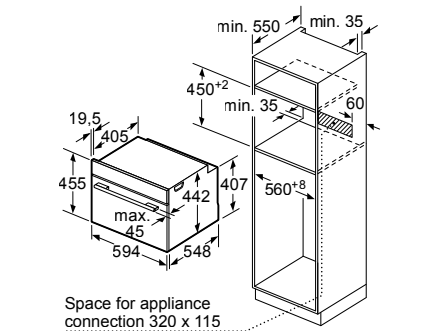

Installation with a hob.



If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

CSG936DB1  
45cm built-in combination steam oven

\$47,900



Programmes

- 13 cooking methods:
  - 4D HotAir
  - Air Fry
  - Hotair Gentle
  - Top and Bottom Heating
  - Top and Bottom Heating Gentle
  - Bottom Heat
  - Hotair Grill
  - Full-width Grill
  - Half-width Grill
  - Pizza Setting (Intensive Hotair)
  - Keep Warm
  - Plate Warming
  - Slow Cook
- 5 steam cooking methods:
  - Sous-vide Cooking
  - Steam Function Plus (up to 120°C steam)
  - Defrost
  - Reheat
  - Dough Proving
- 4 combination steam and oven functions:
  - 4D HotAir
  - Top and Bottom Heating
  - Hotair Grill
  - Keep Warm

Functions and Features

- PerfectBake Plus
- PerfectRoast Plus
- Eco Clean Direct panel at back wall
- Cleaning Assistance
- Steam Boost Function
- Assist function - automatic cooking programmes
- Automatic temperature proposal with actual temperature display
- Drying function
- Rapid heat function
- Descaling function

Design

- 3.8" TFT color and graphics display
- Digital ring touch control
- LED light at cavity ceiling
- 3 shelf levels
- 1 full extension clip rail
- Enamel oven interior

Safety functions

- Door contact switch
- Residual heat indicator
- Triple glass cool touch door (40°C door temperature)^
- SoftOpen and SoftClose door
- Integral cooling fan
- Childproof lock
- Water tank empty indicator

Technical information

- Capacity: 47L
- Water tank capacity: 1L
- Heating temperature: 30°C - 250°C
- Heating temperature: Steam 30°C - 120°C
- Total connected load: 3.3kW (20A single-phase connection)
- Grill output: 2.8kW (max.)
- Dimensions (H x W x D):
  - Appliance: 455 x 594 x 548 mm
  - Cavity: 235 x 480 x 415 mm

Supplied Accessories

- 1 small steam cooking container (solid)
- 1 small steam cooking container (perforated)
- 1 large steam cooking container (perforated)
- 1 universal pan
- 1 grid
- 1 sponge

Country of origin


- Germany

^Measured at the middle of the window at 180°C oven temperature, after 1 hour on top and bottom heat.







accent|line






Space for appliance connection 320 x 115

Installation with a hob.





If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

	<b>CDG914XB1W</b> 45cm built-in steam oven		<b>\$30,900</b>
	  		
<b>Programmes</b>	<ul style="list-style-type: none"><li>• 5 cooking methods:<ul style="list-style-type: none"><li>- Sous-vide Cooking</li><li>- Steam</li><li>- Defrost</li><li>- Reheat</li><li>- Dough Proving</li></ul></li></ul>		
<b>Functions and Features</b>	<ul style="list-style-type: none"><li>• Assist function - automatic cooking programmes</li><li>• Descaling function</li><li>• Automatic temperature proposal with actual temperature display</li></ul>		
<b>Design</b>	<ul style="list-style-type: none"><li>• 2.5" TFT color and graphics display</li><li>• Digital ring touch control</li><li>• LED light at cavity ceiling</li><li>• 3 shelf levels</li><li>• Stainless steel interior</li></ul>		
<b>Safety functions</b>	<ul style="list-style-type: none"><li>• Door contact switch</li><li>• Double glass cool touch door (40°C door temperature)</li><li>• SoftOpen and SoftClose door</li><li>• Integral cooling fan</li><li>• Childproof lock</li><li>• Water tank empty indicator</li></ul>		
<b>Technical information</b>	<ul style="list-style-type: none"><li>• Capacity: 38L</li><li>• Water tank capacity: 1.3L</li><li>• Heating temperature: 30°C - 100°C</li><li>• Total connected load: 1.75kW (13A)</li><li>• Dimensions (H x W x D):<ul style="list-style-type: none"><li>- Appliance: 455 x 594 x 548 mm</li><li>- Cavity: 265 x 325 x 439 mm</li></ul></li></ul>		
<b>Supplied Accessories</b>	<ul style="list-style-type: none"><li>• 1 large steam cooking container (solid)</li><li>• 1 large steam cooking container (perforated)</li><li>• 1 sponge</li></ul>		
<b>Country of origin</b>	• France		



accent|line





	<b>BVE9101B1</b> 14cm built-in vacuum drawer		<b>\$36,900</b>
<b>Programmes</b>	<ul style="list-style-type: none"><li>• Vacuum settings: 3 levels</li><li>• Heat sealing duration settings: 3 levels</li></ul>		
<b>Function</b>	<ul style="list-style-type: none"><li>• Drying function</li></ul>		
<b>Design</b>	<ul style="list-style-type: none"><li>• Stainless steel chamber</li><li>• Glass lid</li><li>• Touch control</li><li>• Push and pull opening mechanism</li><li>• Bag clip</li></ul>		
<b>Safety functions</b>	<ul style="list-style-type: none"><li>• Door contact switch</li><li>• Locking stop function</li></ul>		
<b>Technical information</b>	<ul style="list-style-type: none"><li>• Capacity: 8L</li><li>• Max. size of vacuuming bag: 240 x 350mm</li><li>• Total connected load: 0.32kW (13A)</li><li>• Dimensions (H x W x D):<ul style="list-style-type: none"><li>- Appliance: 140 x 595 x 542 mm</li><li>- Cavity: 95 x 350 x 285 mm</li></ul></li></ul>		
<b>Supplied Accessories</b>	<ul style="list-style-type: none"><li>• 1 adaptor for vacuuming outside the chamber</li><li>• 1 vacuuming hose</li><li>• 50 large vacuuming bags</li><li>• 50 small vacuuming bags</li><li>• 3 plugs for vacuuming of bottles</li><li>• 1 adapter for bottle plugs</li></ul>		
<b>Country of origin</b>	• Slovakia		







accent|line




Bean and water containers are removed from the front  
Recommended installation height  
950–1450 mm



Bean and water containers are removed from the front  
Recommended installation height  
950–1450 mm




A: 7.5 mm



If using the 92° hinge limiter, the min. distance to the wall is only 100 mm


	CTL9181D0 Built-In Fully Automatic Coffee Machine		\$52,900
Flavour	<ul style="list-style-type: none"><li>• up to 33 beverages</li><li>• warm milk, milk froth and hot water function</li><li>• AromaSelect – 3 different aroma profiles (mild-balanced-distinctive)</li><li>• adjustable milk ratio for classic milk-mix beverages</li><li>• intelligent strength adjustment – adaptive based on strength and size</li><li>• AromaDouble Shot – less bitterness</li></ul>		
Performance	<ul style="list-style-type: none"><li>• SilentCeram Drive – high-quality ceramic grinder</li><li>• water pump with 19 bar pressure</li></ul>		
Convenience	<ul style="list-style-type: none"><li>• TFT-Touch display Pro - 6.8” color display with touch and slide function</li><li>• Fresh water connection with aqua stop for refilling water tank</li><li>• Favorites: save up to 30 personalised beverages</li><li>• automatic milk amount detection</li><li>• coffee pot function</li><li>• height adjustable bevarage outlet (up to 15cm high glass)</li><li>• OneTouch DoubleCup</li><li>• 2.4L removable water tank</li></ul>		
Hygiene	<ul style="list-style-type: none"><li>• AutoMilk Clean</li><li>• Calc’nClean</li><li>• removable brewing unit</li><li>• dishwasher-proof: beverage outlet, drip tray and drip pans</li><li>• automatic reminder for cleaning, descaling or water filter change</li></ul>		
Home Connect	<ul style="list-style-type: none"><li>• remote control</li><li>• CoffeePlaylist – select drinks in the app in your chosen order</li><li>• additional coffee know-how</li></ul>		
Technical information	<ul style="list-style-type: none"><li>• Dimensions (H x W x D): 455 x 594 x 385 mm</li><li>• Min. required niche size for installation (H x W x D):<ul style="list-style-type: none"><li>- 449 x 558 x 376 mm</li></ul></li><li>• Total Connection load: 1.5kW (10A)</li><li>• Voltage: 220-240V</li><li>• integrated 0.7L milk container</li><li>• 500g bean container with aroma protection lid</li><li>• 1.7L tube on water connection</li><li>• illuminated coffee outlet, stage and interior</li><li>• adjustable grinding degree (multi-level)</li><li>• child lock</li></ul>		
Included Accessories	<ul style="list-style-type: none"><li>• 1 assembly screws</li><li>• 1 milk container</li><li>• 1 test strip</li><li>• 1 connection hose for milk frother</li><li>• 1 milk pipe</li><li>• 1 welcome-Box</li><li>• 1 Microfiber cloth Bosch</li></ul>		
Optional Accessories	<ul style="list-style-type: none"><li>• TCZ7003 : Accessories small appliances</li><li>• TCZ7033 : Water filter</li><li>• TCZ8001A : Cleaning tablets</li><li>• TCZ8002A : Descaling tablets</li><li>• TCZ8004A : Care set espresso</li></ul>		
Country of origin	Slovenia		

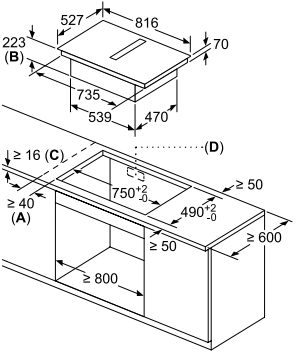

A: Minimum distance from the hob cut-out to the wall  
B: Recessing depth  
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.  
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.


Ducted recirculation planning:

Front view




A: Connected directly at the rear

With cooktop  
>= 60cm



\* Accessory HEZ9VDKR1 required.

With cooktop  
>= 70cm



\* Accessory HEZ9VDKR0 required.



Discover more:

	PXX875D67E 80cm Induction Hob with Integrated Ventilation Module		\$48,800																												
	<div><div>Home Connect</div><div>PerfectCook</div><div>PerfectFry</div><div>PerfectAir</div><div>EcoSilence Drive</div><div>MoveMode</div><div>PanBoost</div><div>Setting transfer</div><div>80 cm</div><div>ProfileTrim</div><div>QuickStart</div><div>ReStart</div><div>Hh hH</div><div> kWh Energy Consumption</div><div>DirectSelect</div></div>																														
Performance	<ul style="list-style-type: none"><li>• 4 induction cooking zones</li><li>• 17 stages of power setting</li><li>• 17+2 stages of ventilation power</li></ul>																														
Function	<ul style="list-style-type: none"><li>• combines best induction with best ventilation technology for perfect results</li></ul>																														
Features	<b>Induction:</b> <ul style="list-style-type: none"><li>• PerfectCook: Precise temperature control prevents boiling over</li><li>• PerfectFry: Ensure perfect browning of roasted foods</li><li>• DirectSelect Premium: Direct and simple selection</li><li>• Automatic setting transfer</li><li>• MoveMode with 3 power levels</li><li>• PowerBoost: Up to 50% more power for faster heating</li><li>• PanBoost for added quickness</li><li>• 3-in-1 timer: count-up, count-down, kitchen timer</li></ul> <b>Ventilation:</b> <ul style="list-style-type: none"><li>• PerfectAir: fully automatic ventilation thanks to sensor technology.</li><li>• EcoSilence Drive™: powerful, efficient and quiet BLDC motor technology</li></ul>																														
Design	<ul style="list-style-type: none"><li>• SCHOTT CERAN® ceramic glass</li><li>• ComfortProfil: Bevelled front and rear with side profiles</li><li>• Can be combined with all hobs in comfort design</li></ul>																														
Safety functions	<ul style="list-style-type: none"><li>• Digital 2-stage residual heat indicator for each zone</li><li>• Small cookware detection</li><li>• Main switch</li><li>• Anti-overflow protection</li><li>• Safety switch off</li><li>• Wipe protection</li><li>• Childproof lock</li></ul>																														
Technical information	<ul style="list-style-type: none"><li>• Cooking zone output</li></ul> <table><thead><tr><th>Zone</th><th>Output (kW)</th><th>Output without booster (kW)</th><th>Dimensions (mm)</th></tr></thead><tbody><tr><td>Left FlexZone</td><td>3.7</td><td>3.3</td><td>400 x 240</td></tr><tr><td>Right FlexZone</td><td>3.7</td><td>3.3</td><td>400 x 240</td></tr><tr><td>Front left</td><td>3.7</td><td>2.2</td><td>200 x 240</td></tr><tr><td>Front right</td><td>3.7</td><td>2.2</td><td>200 x 240</td></tr><tr><td>Rear left</td><td>3.7</td><td>2.2</td><td>200 x 240</td></tr><tr><td>Rear right</td><td>3.7</td><td>2.2</td><td>200 x 240</td></tr></tbody></table> <ul style="list-style-type: none"><li>• Extraction / Recirculation capacity: 622/615 m³/h (EN61591)</li><li>• Total connected load: 7.4kW (220V/40A single phase or 380V/20A two-phase connection)</li><li>• Dimensions:<ul style="list-style-type: none"><li>- Appliance (H x W x D): 223* x 816 x 527 mm</li><li>- Cut out (W x D): 750 x 490 mm</li></ul></li></ul> <p>*excl. glass thickness, please reserve extra 100mm beneath appliance for overflow container</p>			Zone	Output (kW)	Output without booster (kW)	Dimensions (mm)	Left FlexZone	3.7	3.3	400 x 240	Right FlexZone	3.7	3.3	400 x 240	Front left	3.7	2.2	200 x 240	Front right	3.7	2.2	200 x 240	Rear left	3.7	2.2	200 x 240	Rear right	3.7	2.2	200 x 240
Zone	Output (kW)	Output without booster (kW)	Dimensions (mm)																												
Left FlexZone	3.7	3.3	400 x 240																												
Right FlexZone	3.7	3.3	400 x 240																												
Front left	3.7	2.2	200 x 240																												
Front right	3.7	2.2	200 x 240																												
Rear left	3.7	2.2	200 x 240																												
Rear right	3.7	2.2	200 x 240																												
Supplied accessory	<ul style="list-style-type: none"><li>• Unducted recirculation kit (4 charcoal filters with 1 slider)</li></ul>																														
Optional accessories	<ul style="list-style-type: none"><li>• Recirculating kit (HEZ9VDKR1)</li><li>• Recirculation kit (HEZ9VDKR0)</li><li>• Exhaust kit (HEZ9VDKE1)</li><li>• PerfectCook wireless sensor (set) (HEZ39050)</li><li>• Griddle Plate (HEZ390522)</li><li>• Teppan Yaki (HEZ9TY010)</li></ul>																														
Country of origin	Spain																														

\* Indent Order





## Open Door Assist

### Open your fridge with a gentle push


The bottom of the machine is equipped with an intelligent overload magnetic rebounder device.

When the reaction area receives a gravity signal (pressing-pressure sensor), the ultra-thin micro BLDC motor will slowly push out the push rod to open the door.


If the door is opened, the BLDC motor will reverse to retract the push rod. If the door is not opened for 5 seconds (accidental touch, door opening angle  $<20^\circ$ ), the push rod will be magnetically attracted to the cabinet door and slowly close it.





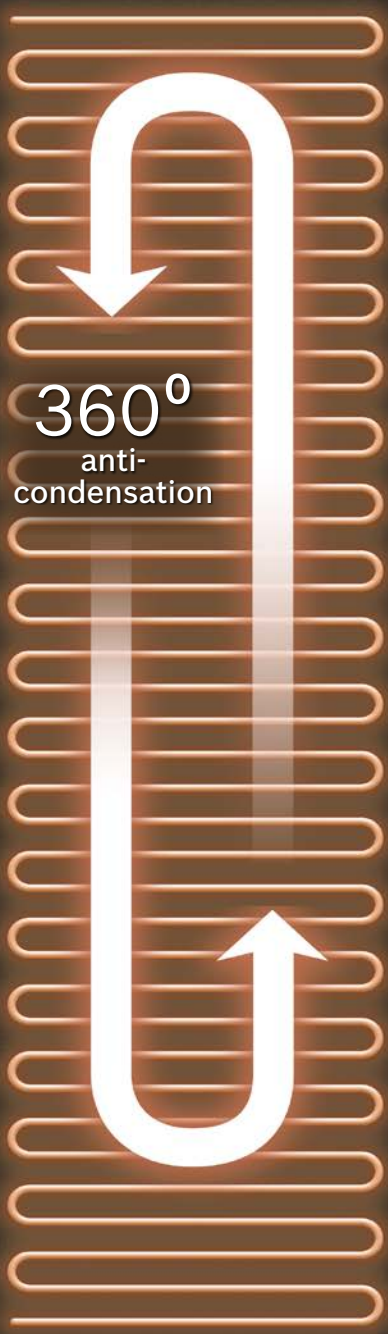

360°  
anti-  
condensation

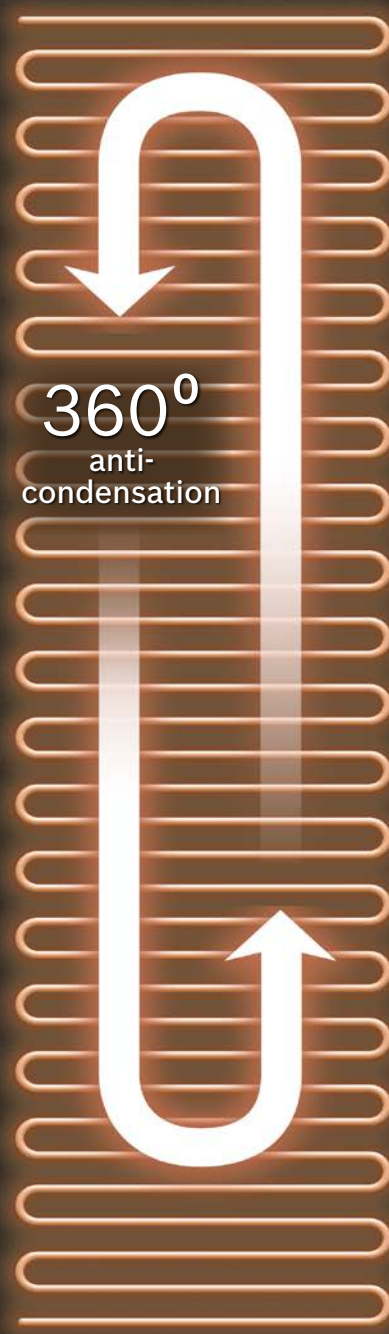














360°  
anti-  
condensation

## Tailored for Hong Kong Trusted partner for exquisite cabinets












Bosch's 360° Anti-Condensation AI technology prevents cabinet damage in Hong Kong's humid climate. Tested at 75% relative humidity, it ensures dryness. The system uses intelligent humidity sensors and heating wires for constant adjustment, solving condensation issues. This eco-friendly design saves energy, offering superior performance while promoting sustainability and environmental care in high-end appliances.












	<b>KIF81HD36C</b> Built-in 1-door fridge (Touch open)	<b>\$48,900</b>
	<div><div></div><div></div></div>	
Performance	<ul style="list-style-type: none"><li>• Total net capacity: 289 liters</li><li>• Noise level: 37dB</li><li>• Total connected load: 65W</li><li>• Intelligent Inverter Compressor</li></ul>	
Key features	<ul style="list-style-type: none"><li>• Touch open</li><li>• 360° anti-condensation system</li><li>• LED interior light</li></ul>	
Additional features	<ul style="list-style-type: none"><li>• 7 safety glass shelves of which 6 are adjustable, including 1 Easy Access shelf</li><li>• 2 VitaFresh Premium 0°C chill drawer for fish and meat</li><li>• 1 VitaFresh Premium humidity controlled fresh drawer</li><li>• 4 door bins, including 1 extra deep</li><li>• 1 dairy storage compartment</li></ul>	
Functions	<ul style="list-style-type: none"><li>• SuperCooling function with automatic deactivation</li><li>• Special function: Eco mode</li><li>• Door opening warning: Optical and acoustic</li><li>• Malfunction warning: Optical and acoustic</li></ul>	
Design	<ul style="list-style-type: none"><li>• Soft-closing</li><li>• Flush folding hinge</li><li>• LED interior light</li><li>• LED display and touch control</li><li>• EasyAccess shelf</li><li>• Telescopic rail drawers</li><li>• Door right hinged, reversible</li><li>• Dimensions (H x W x D): 1,772 x 558 x 545 mm</li></ul> <p>Max. panel weight =&lt;22kg. Order Heavy-duty hinge support KS0BZS00 for more panel weight tolerance.add: Max. panel weight =&lt;22kg. Order Heavy-duty hinge support KS0BZS00 for panel weight tolerance up to 27kkg.</p>	
Country of origin	• Germany	



	<b>GIN81HD36C</b> Built-in 1-door freezer	<b>\$50,900</b>
	<div><div></div><div></div></div>	
Performance	<ul style="list-style-type: none"><li>• Annual energy consumption: 339 kWh per year</li><li>• Total net capacity: 212 litres</li><li>• Freezing capacity in 24 hours: 14.8 kg</li><li>• Noise level: 40dB</li><li>• Intelligent Inverter Compressor</li></ul>	
Key features	<ul style="list-style-type: none"><li>• Touch open</li><li>• Frost free freezer</li></ul>	
Additional features	<ul style="list-style-type: none"><li>• 5 pull out drawers including 2 BigBox</li><li>• 2 freezer compartments with flap</li><li>• 2 ice packs</li><li>• Freezing calendar</li></ul>	
Functions	<ul style="list-style-type: none"><li>• SuperFreezing functions with automatic deactivation</li><li>• Door open warning signal: acoustic</li><li>• Malfunction warning signal: acoustic</li></ul>	
Design	<ul style="list-style-type: none"><li>• LED display and touch control</li><li>• Soft closing door</li><li>• Door left hinged, reversible</li><li>• Dimensions (H x W x D): 1,772* x 556 x 545 mm</li></ul> <p>* Excluded the height of the base compressor: 110mm Max. panel weight =&lt;22kg. Order Heavy-duty hinge support KS0BZS00 for panel weight tolerance up to 27kg.</p>	
Country of origin	• Germany	

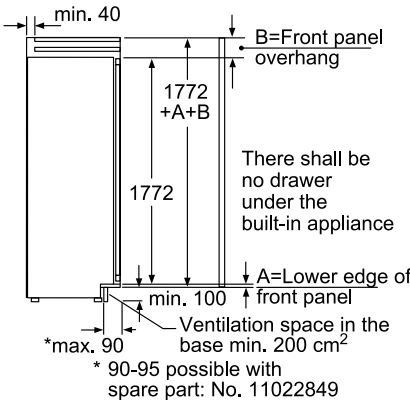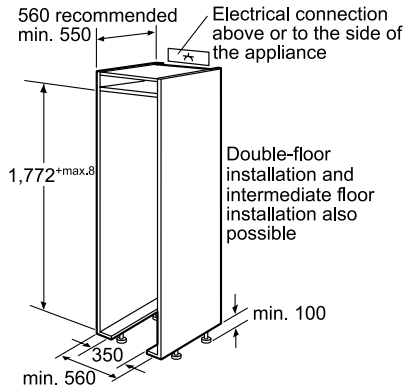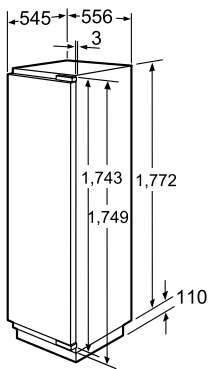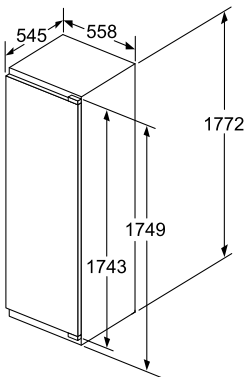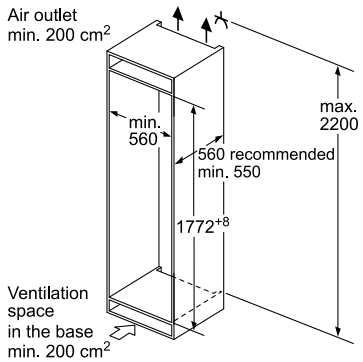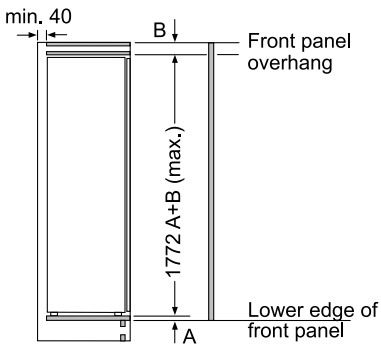

Maximal permissible weight of the unit fronts



Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door	undamped hinge, Door in kg:	damped hinge, Door in kg:
Hinges in mm:	1500-1750	22



# All our built-in appliances at a glance.

The accent line range of built-in appliances.

60cm Height	Oven with added steam and microwave function	HNG978QB1	P.12
	Combination steam oven	HSG958DB1	P.13
45cm Height	Oven with added steam	HRG978NB1	P.14
	Combination steam oven	CSG936DB1	P.15
	Steam oven	CDG914XB1W	P.16
14cm Height	Vacuum drawer	BVE9101B1	P.17
45cm Height	Built-in coffee machine	CTL9181D0	P.18
80cm Width	Induction Hob with Integrated Ventilation Module	PXX875D67E	P.19
177cm Height	Cooling 1-door fridge	KIF81HD36C	P.24
	Cooling 1-door freezer	GIN81HD36C	P.25



### **Bosch Galleria**

1/F, HDH Centre, 8 Pennington Street, Causeway Bay, Hong Kong  
Telephone: 2191 3388


### **Customer Contact Center**

Unit 07, 23/F, CDW Building, 388 Castle Peak Road  
Tsuen Wan, New Territories, Hong Kong  
Customer Contact Hotline: 2626 9655 (Hong Kong)/ 0800 863 (Macau local call only)

[www.bosch-home.com.hk](http://www.bosch-home.com.hk)

 [www.facebook.com/boschhomeHK](https://www.facebook.com/boschhomeHK)

 [www.youtube.com/boschhomeHK](https://www.youtube.com/boschhomeHK)

 [www.instagram.com/boschhomehongkong/](https://www.instagram.com/boschhomehongkong/)



Official Site



Our Facebook page:  
@boschhomehk



Our YouTube channel:  
Bosch Home HK



Our Instagram:  
boschhomehongkong

The product images used in the catalogue are for reference only; the models are subject to availability.

Models numbers and specifications are for reference only and are subject to change without prior notice. Bosch is continuously seeking to improve specification, design and production of its appliances and alterations may take place regularly. All descriptions and installation diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction manual supplied with the appliance. Electrical and gas connections should only be made in accordance with the regulations of the national authorities.

Rights of technical modification reserved, delivery subject to availability, colors of actual products may vary from illustrations.

**Your dealer will be able to provide you with reliable information.**

© 2025 BSH Home Appliances Limited. All rights reserved. All contents and information contained in this Catalogue are proprietary to BSH Home Appliances Limited and are subjected to copyright protection. Reproduction, republication, redistribution or unauthorized use of any content or information contained in this Catalogue is expressly prohibited without the prior written consent of BSH Home Appliances Limited.  
Printed in Hong Kong [06.2025]

