

Invented for life



BOSCH

Perfection has never been so beautiful.




accent | line

Oven Series 8 with Microwave with Steam Shot



accent|line



Built-in Oven with Microwave Function, Steam Shot and Pyrolysis

Serie | 8 **HNG978QB1** carbon black, with **camera** and Dual LED

- Home Connect
- **Camera with browning sensor**
- **28 heating modes** incl. Air Fry and Regeneration
- **3 steam levels: high, medium, low**
- **Manual steam injection**
- Max. Power: 800 W; 5 microwave power levels
- Temperature control from 30 °C – 300 °C
- **Oven assistant with voice control**
- **Self-cleaning technology (pyrolysis)**
- Cleaning support (program)
- **TFT Touchdisplay Pro** – Digital operation
- **Remaining time display – Crisp finish**
- Drop-down door with SoftClose and SoftOpen
- Bosch Assist
- Water tank empty indicator
- **PerfectRoast Plus**
- **PerfectBake Plus**
- **Dual LED lighting**
- **1-level telescopic rail** with stop function

Accessories

1 x Enamel baking tray, 1 x Combination grid,
1 x Universal pan, **1 x Air Fry & Grill tray**

Oven Series 8 with Pyrolysis



accent|line



Built-in Oven

Serie | 8 **HBG978NB1** carbon black

- Home Connect
- **14 heating modes** incl. Air Fry (optional accessory)
- Temperature control from 30 °C – 300 °C
- **Self-cleaning technology (Pyrolysis)**
- Cleaning support (program)
- **Oven assistant with voice control**
- **TFT-Touchdisplay Pro** – digital operation
- **Remaining time prediction**
- Bosch Assist
- Drop-down door with SoftClose and SoftOpen
- **Crisp Finish**
- **PerfectRoast Plus**
- **PerfectBake Plus**
- **LED-interior lighting**
- **1-level telescopic rail**, independent of shelf level, with stop function

Accessories

1 x Enamel baking tray, 1 x Combination grid,
1 x Universal pan

Optional Accessories

HEZ629070 Air Fry & Grill tray

Oven Series 6 with Pyrolysis



accent|line



Built-in Oven with Roasting Thermometer

Serie | 6 **HBG4795B7** carbon black

- Home Connect
- **14 heating modes**, incl. Air Fry
- Temperature control from 30 °C – 275 °C
- **Self-cleaning technology (Pyrolysis)**
- Cleaning support
- Rotary and retractable control knobs
- **TFT-Touchdisplay**
- Visual preheat indicator, temperature suggestion, actual temperature control
- Electronic clock
- **Roasting thermometer**
- **AutoPilot 40 programs**
- Drop-down door with SoftClose and SoftOpen
- Halogen interior lighting
- **1-level telescopic rail**, shelf-independent, with stop function

Accessories

1 x Enamel baking tray, 1 x Combination grid,
1 x Universal pan, **1 x Air Fry & Grill tray**

Oven Series 4 with Steam Support



accent|line



Built-in Oven with Steam Support

Serie | 4 **HQA4720B3** Carbon black

- **8 heating modes** incl. Air Fry
- **Steam support: Water tray with 250 ml capacity**
- Temperature control from 30 °C – 275 °C
- **Self-cleaning technology (Pyrolysis)**
- Cleaning support: light soiling removal with steam and detergent
- LED Touch Control (red/white)
- Electronic clock
- Visual preheat indicator, temperature suggestion
- **AutoPilot 10 programs**
- **1-level telescopic rail**, independent of shelf height, with stop function

Accessories

1 x Combination grid, 1 x Universal pan,
1 x Air Fry & Grill tray

Compact Oven Series 8 with Microwave

BEST OF BEST



accent|line



Built-in Compact Oven with Microwave Function

Serie | 8 **CMG978NB1** carbon black

- **Home Connect**
- **22 heating modes** incl. Air Fry (optional accessory)
- Max. power: 900 W;
- 5 microwave power levels
- **Self-cleaning technology (Pyrolysis)**
- Cleaning support (program)
- Temperature control from 30 °C – 300 °C
- **Oven assistant with voice control**
- **TFT Touchdisplay Pro** – digital control
- **Remaining time prediction**
- Drop-down door with SoftClose and SoftOpen
- **PerfectRoast Plus**
- **PerfectBake Plus**

- **Crisp Finish**
- Bosch Assist
- **LED interior lighting**
- **1-level telescopic rail** with stop function

Accessories

1 x Universal pan, 1 x Enamel baking tray, 1 x Combination grid

Optional Accessory

HEZ629070 Air Fry & Grill tray

Compact Steam Oven Series 8 with Steam Function Plus

BEST OF BEST



accent|line



Built-in Compact Steam Oven

Serie | 8 **CSG958DB1** carbon black

- **Home Connect**
- **24 heating modes**, incl. Air Fry (optional accessory) and regeneration
- **Sous-vide cooking – Steam Function Plus**
- **Manual steam injection**
- **3 steam levels: high, medium, low**
- **EcoClean DirectPlus: ceiling, back panel, side walls**
- Cleaning support (program)
- Electronic temperature control from 30 °C – 250 °C
- **Oven assistant with voice control**
- **TFT-Touchdisplay Pro** – digital operation
- **Remaining time prediction**

- Drop-down door with SoftClose and SoftOpen
- **PerfectRoast Plus** – **PerfectBake Plus**
- **LED interior lighting**
- Bosch Assist – Water tank empty indicator
- **1-level telescopic rail**, shelf-independent, with stop function

Accessories

1 x Enamel baking tray, 1 x Perforated steam container M, 1 x Perforated steam container XL, 1 x Non-perforated steam container M, 1 x Wire rack, 1 x Sponge, 1 x Universal pan.

Optional Accessory

HEZ629070 Air Fry & Grill tray

Coffee Machine 45 cm



accent|line



Built-in Fully Automatic Coffee Machine

Serie | 8 **CTL9181B0** carbon black

- **Home Connect**
- CoffeePlaylist – Add multiple drinks in the app; they will be prepared in the order you choose
- Additional coffee Know-how
- Up to 33 different coffee specialities (in the machine and in the Home Connect app)
- Dispensing of warm milk, milk foam and hot water
- AromaSelect – 3 different aroma profiles
- Intelligent aroma adjustment – Coffee management based on strength and drink size
- **TFT-Touchdisplay Pro**

- Favorites – Save up to 30 personalized drinks


– **Milk quantity recognition – usable with: the included milk container, 1-liter milk cartons, or any other container**

- Jug function
- OneTouch DoubleCup – Prepare two cups at once with a single touch
- Removable water tank (2.4 L)

Accessories

1 x BRITA Intenza water filter, 1 x glass milk container, Water hardness test strip

Warming Drawer



accent|line



Warming Drawer

Serie | 8 **BIC9101B1** carbon black


- **Home Connect function**
- Multifunctional warming drawer with heating types: gentle cooking, keeping food warm, warming plates, warming cups
- Temperature control in 4 levels: approx. 30 °C – 80 °C (glass surface temperature)
- **Touch control with illumination**
- Easy operation concept
- Glass heating plate
- Usable volume: 20 L
- Load capacity: up to 25 kg

- Max. load of espresso cups: 64 pieces or max. load of plates (26 cm): 12 pieces
- Handle-free (push & pull)
- Operation via sensor buttons


Dimensions

Appliance dimensions (H x W x D): 140 x 594 x 548 mm
Installation below the countertop is possible with accessory 9001698838

Induction hob with integrated hood

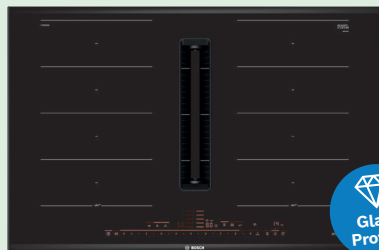

accent|line
carbon black

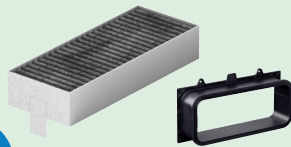


Induction Hob with Integrated Hood

Serie | 8 **PXX890D51E** ComfortProfile

- 4 induction zones with pan recognition
- **2 FlexInduction zones** – **Direct Select Premium**
- **PerfectFry** frying sensor with 5 temperature levels
- **PerfectAir** air quality sensor
- **MoveMode (3 levels)**
- ReStart, QuickStart
- Home Connect function (Wi-Fi enabled)
- **Glass Protect for increased scratch resistance**
- Timer with auto switch-off for each cooking zone
- Choice of fully automatic or manual fan speed control
- Ventilation system with 17 electronically controlled fan speeds and 2 intensive levels (fully automatic mode available)

Base version includes CleanAir Plus odor filter.
Slider usable for guided recirculation or extraction mode.
Minimum worktop depth: ≥ 60 cm

FlexInduction

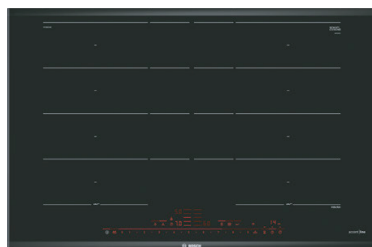

accent|line




Induction hob with 2 FlexInduction zones + extension

Serie | 8 **PXY895DV1E** carbon black, ComfortProfile

- **Home Connect function (Wi-Fi enabled)**
- **Extended FlexInduction zone**
- PowerBoost function for all cooking zones
- **PanBoost:**
- PowerBoost function for frying pans
- **Direct Select Premium**
- Keep-warm function
- Switch Off Timer
- Countdown-Timer
- CountUp Timer
- **MoveMode (3 levels)**
- QuickStart
- ReStart
- **PerfectFry frying sensor** with 5 temperature levels
- Cooking assistant
- 2-stage residual heat indicator per cooking zone
- Child lock
- Wipe protection function
- Energy consumption display: shows the electricity usage of the last cooking session

FlexInduction with PerfectCook/PerfectFry

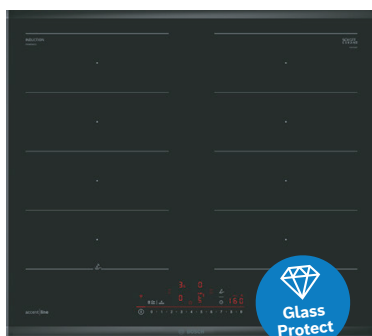

accent|line



Induction hob with 2 FlexInduction zones + PerfectFry Plus

Serie | 6 **PXX690HC1E** carbon black, ComfortProfile

- **Home Connect function (Wi-Fi enabled)**
- **4 induction cooking zones** with pan recognition
- **2 FlexInduction zones**
- **Cooktop-based hood control** (with compatible extractor hood)
- **PerfectFry Plus frying sensor with 11 temperature levels**
- Cooking assistant via Home Connect app
- Favoriten Button
- Easy Flex Zones
- **Direct Select control**
- PowerBoost-function for all cooking zones
- QuickStart
- ReStart
- Switch Off Timer
- 2-stage residual heat indicator per cooking zone
- Main switch
- Pause Button
- Automatic safety shut-off
- Child lock
- **Glass Protect surface increases scratch resistance**

Integrated Glass Downdraft Hood



accent|line
carbon black



Integrated Glass Downdraft Hood

Serie | 8 DDW88MM66 carbon black, ComfortProfile

- The perfect solution for installation in a cooking island or semi-island
- Choice of extraction or recirculation operation
- For recirculation, a CleanAir Plus Recirculation Set (optional accessory) is required
- ComfortProfile, enables seamless installation with the cooktop as a single unit
- Retractable glass panel, illuminated
- The appliance, with its exceptional glass design, features red illuminated edges. Via the Home Connect app, any color can be set
- Direct Select controls
- 3 power levels + 2 intensive levels
- Intensive levels with automatic reset
- Fan run-on for 10 minutes
- **With Guided Air activation: guarantees perfect vapor capture regardless of pot height or position**
- Decorative LED lighting
- Metal grease filters, dishwasher-safe
- Saturation indicators for grease and odor filters
- Filter cleaning position raises filter cassette for easy removal
- Glass panel is easy to remove and clean
- Home Connect functionality integrates with various partner voice assistants
- Voice control possible via common voice assistants
- Exhaust performance: Standard mode 501 m³/h, intensive mode 775 m³/h
- Noise level min./max. in standard mode: 39/62 dB
- Suitable for installation in a 90 cm base cabinet
- Lift height: 250 mm
- Not compatible with gas cooktops
- Appliance dimensions: 709 × 816 × 140 mm
- Installation dimensions: 703 × 781 × 123 mm
- Total connected load: 300 W

Optional Accessories

DSZ8WW1Y2 Mounting set for seamless installation

DSZ1WW1I6 CleanAir Plus recirculation set

DSZ1WW1J1 Long Life recirculation set

DSZ1WW1B6 CleanAir Plus odor filter (replacement)

DZZ1XX1X1 Aluflex duct, round, 150 mm

Integrated design hood



accent|line



Integrated Design Hood

Serie | 6 DBB97DP60 90 cm, Black

- Choice of extraction or recirculation mode
- **Noise level min./max. (normal level): 50/63 dB**
- Airflow performance
Normal: 459 m³/h, Intensive: 749 m³/h
- Flush installation for seamless integration into wall cabinets
- Space-saving, compact design allows additional storage next to the hood (up to 10 kg per side)
- **Glass panel with touch control for easy operation and improved steam capture**
- Electronic control via Direct Select with LED display
- 3 power levels + 1 intensive level
- Intensive level with automatic revert
- SoftLight – 3 × 2 W LED
Color temperature: 3500K – Brightness: 571 lux
- Appliance (H × W × D): 340 × 897 × 298 mm
- Installation (H × W × D): 340 × 860 × 300 mm

Optional Accessories

DWZ6IB1I4: CleanAir recirculation set

DWZ1IB6K1: Chimney extension 450–854 mm


DWZ1IB6N1: Chimney extension 187–360 mm

DWZ6IB1B4: CleanAir odor filter

Installation drawings



Premium ovens, 60 cm

Measurements in mm

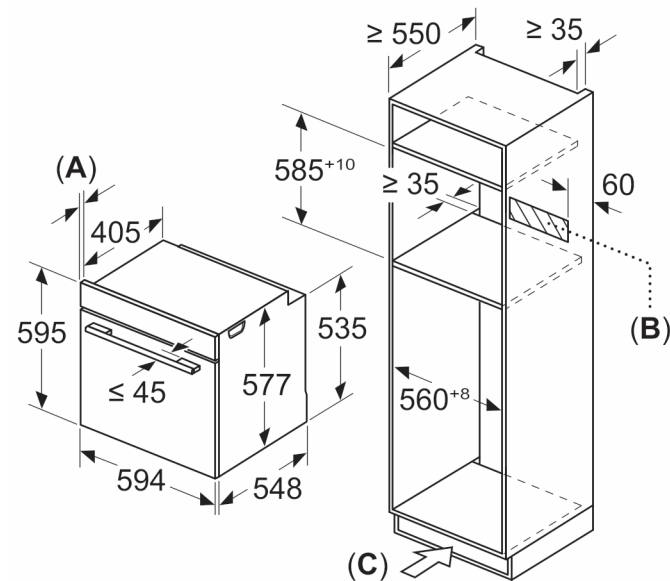

- A:** 19.5 mm
- B:** Space for appliance connection
320 x 115 mm
- C:** Ventilation space in the base $\geq 200 \text{ cm}^2$


Installing two appliances on top of each other
Air exchange

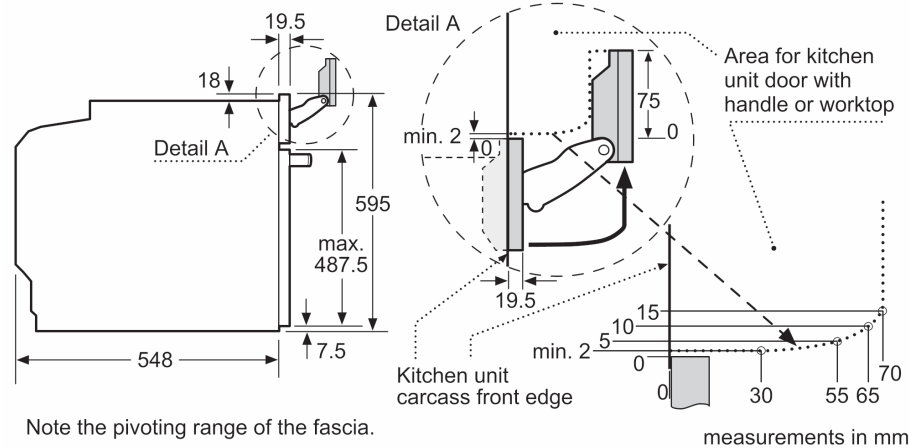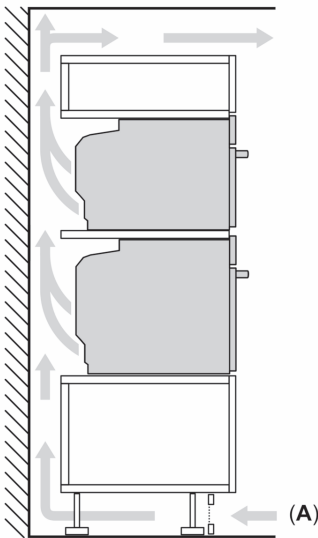

Note the pivoting range of the fascia.

measurements in mm

A: Air inlet $\geq 200 \text{ cm}^2$

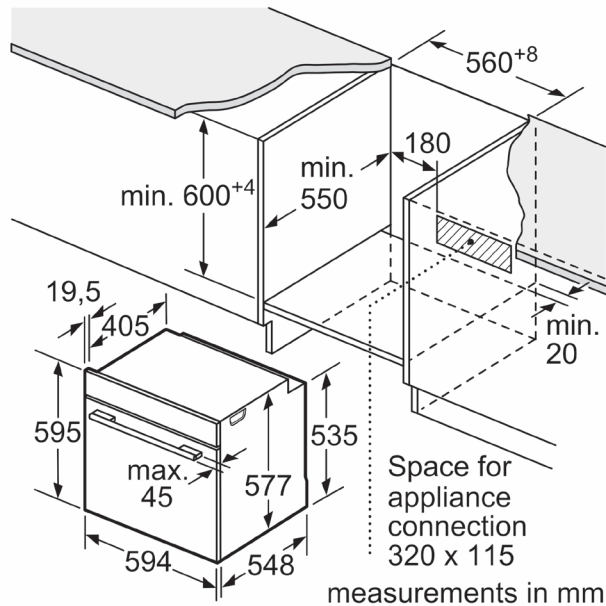

measurements in mm


If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

Installation drawings

Series 4 and Series 6 ovens


Measurements in mm

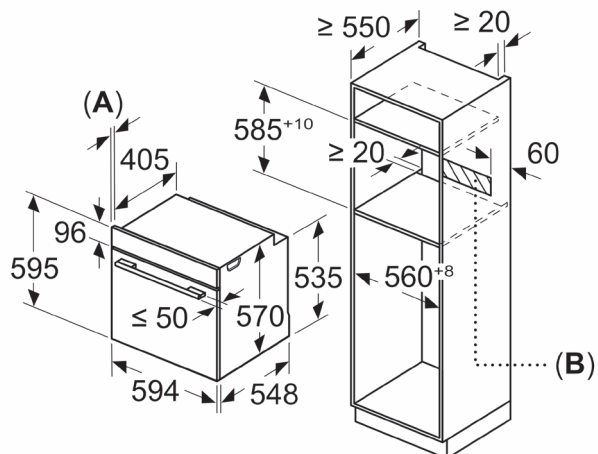


A: 19.5 mm

B: Space for appliance connection 320 x 115 mm


Installation with a hob.

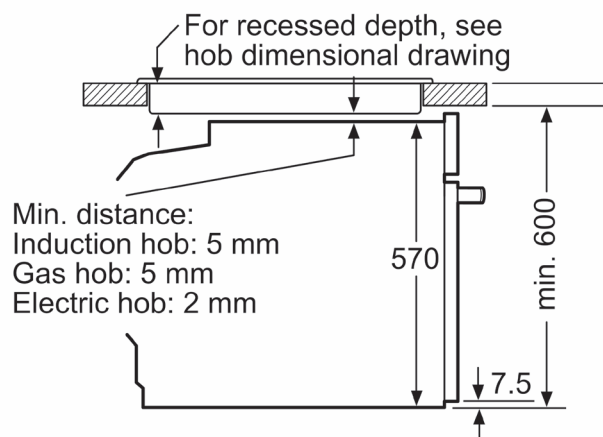

measurements in mm

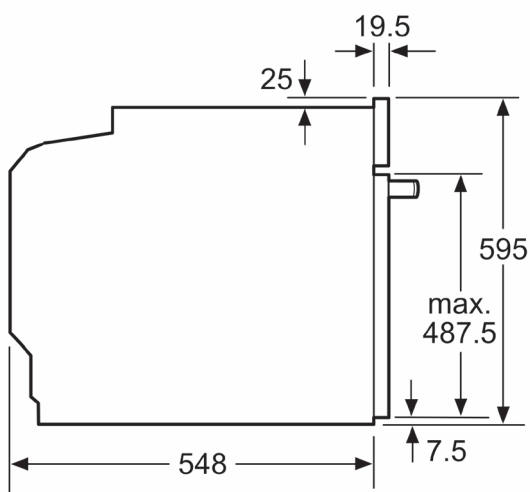




measurements in mm

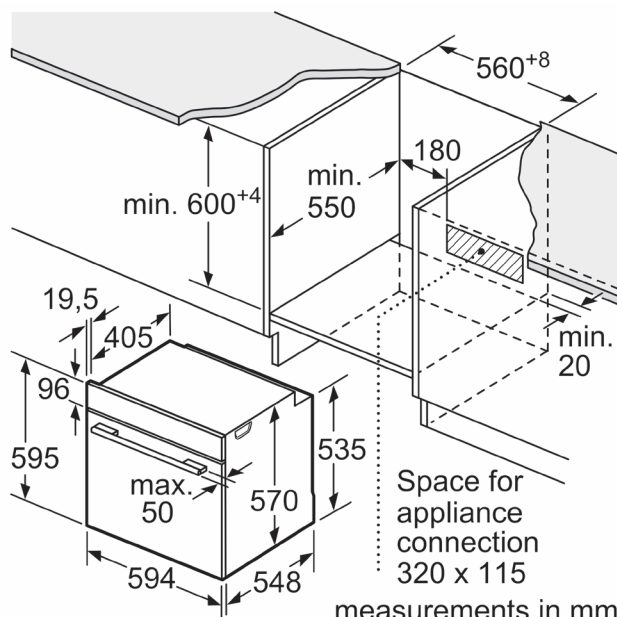


measurements in mm

Installation drawings

Ovens, 45 cm

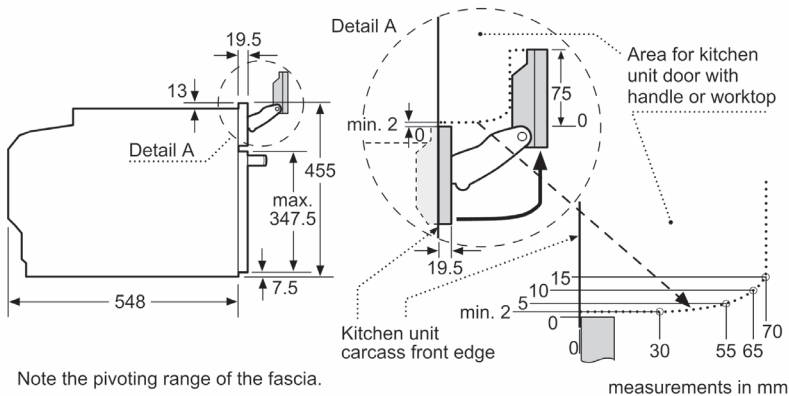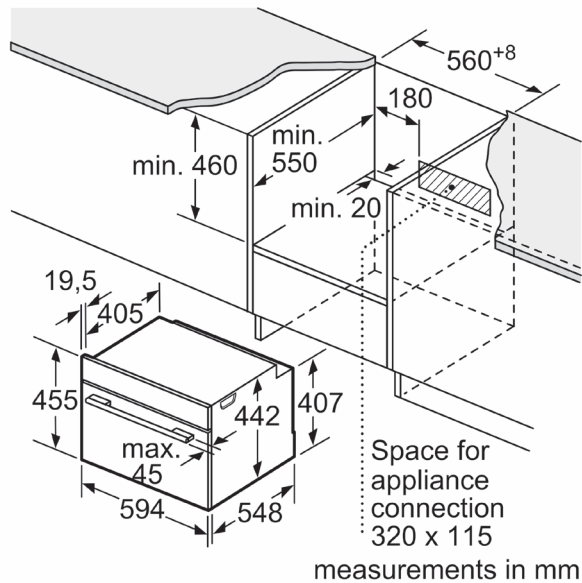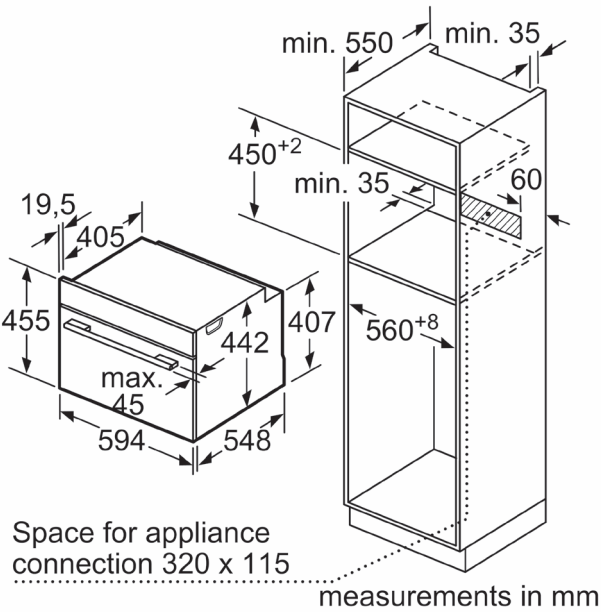


Installing two appliances on top of each other
Air exchange

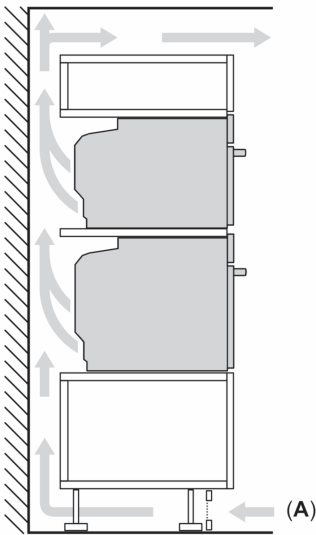

A: Air inlet $\geq 200 \text{ cm}^2$

Installation with a hob.

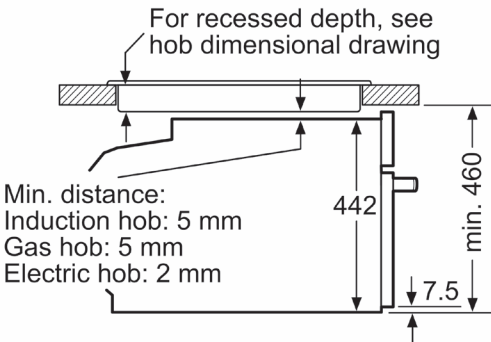

measurements in mm


If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

Installation drawings


Coffee Machines and Microwave, 45 cm

Measurements in mm

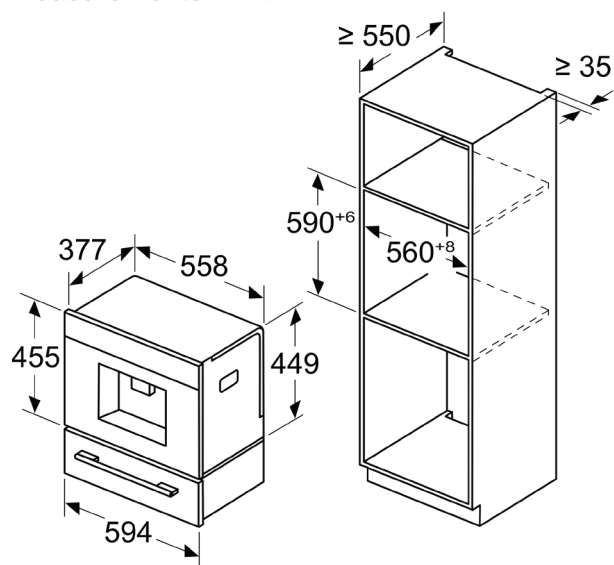


Measurements in mm

Left corner installation

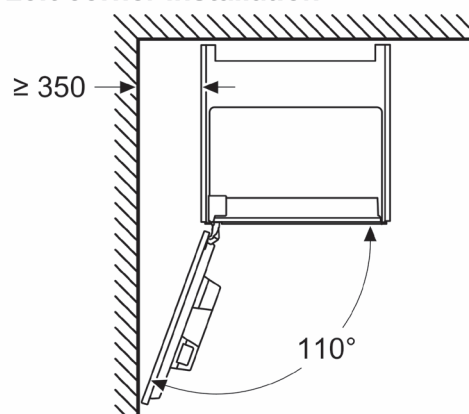


If using the 92° hinge limiter, the min. distance to the wall is only 100 mm

Measurements in mm

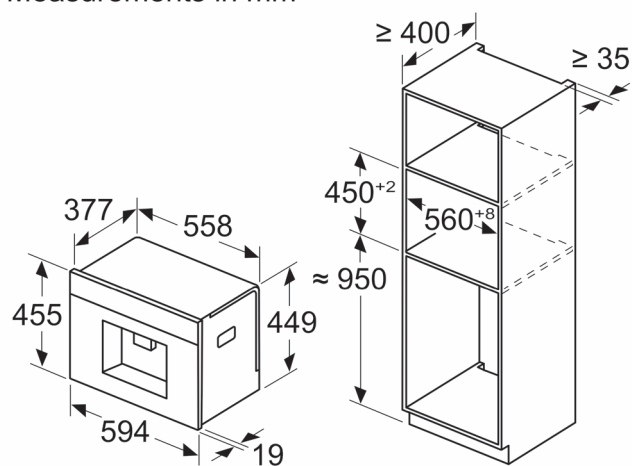

Bean and water containers are removed from the front
Recommended installation height
950–1450 mm

Measurements in mm

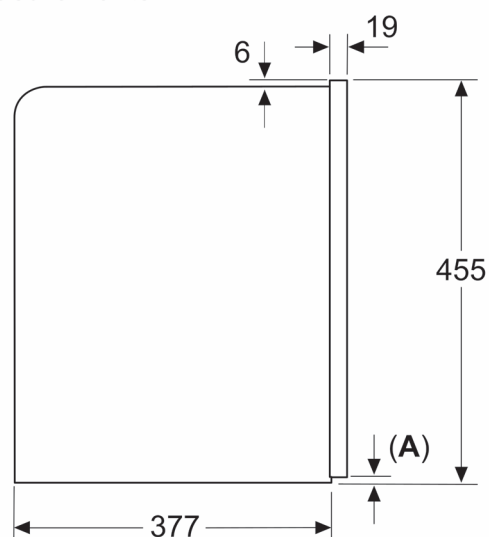


A: 7.5 mm

Installation drawings


Warming Drawer

Measurements in mm

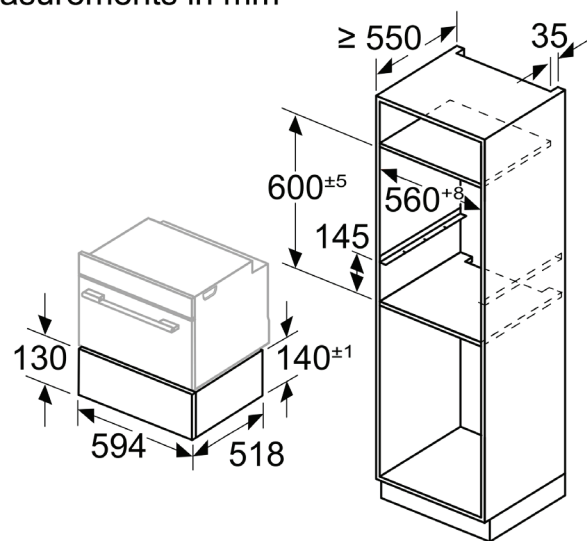


For the combined installation of some electrical appliances, support frames are required

Measurements in mm

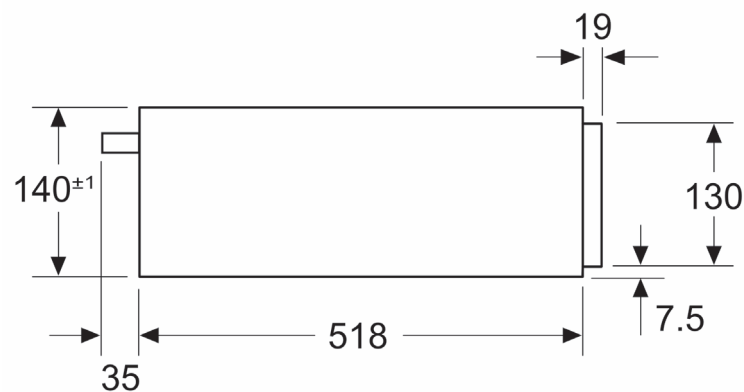


Installation drawings

Induction hob with 2 FlexInduction zones + PerfectFry Plus

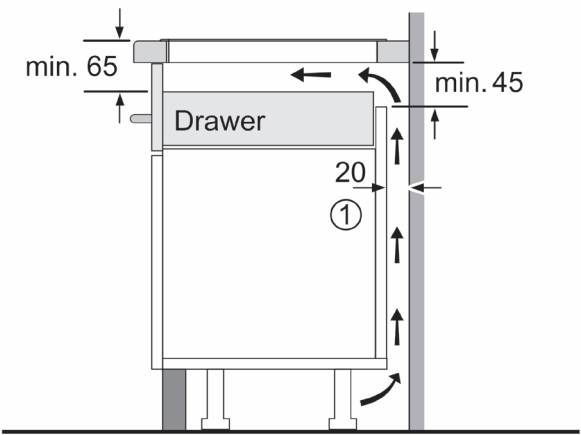


①
Ventilation gap must be present.

Measurements in mm

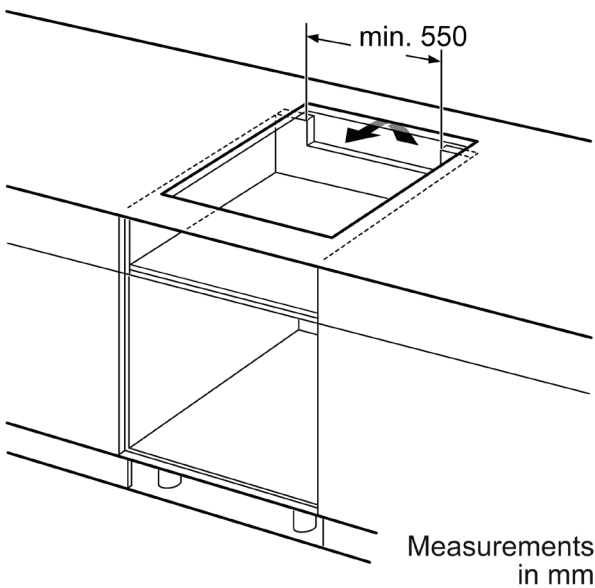


Measurements in mm

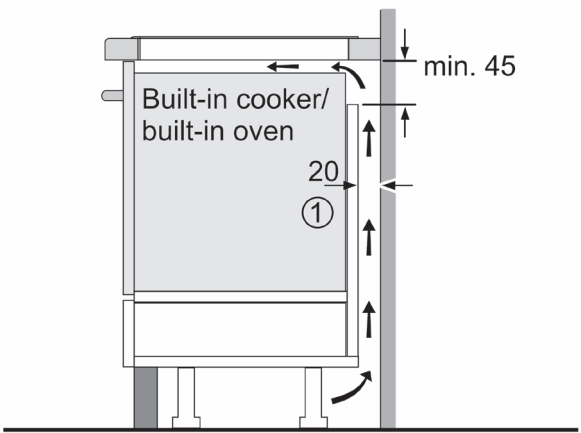


①
Ventilation gap must be present

All measurements in mm

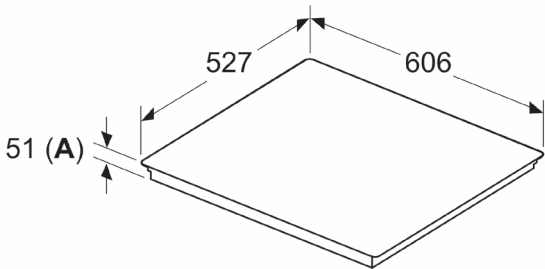

A: Recessed depth

Measurements in mm

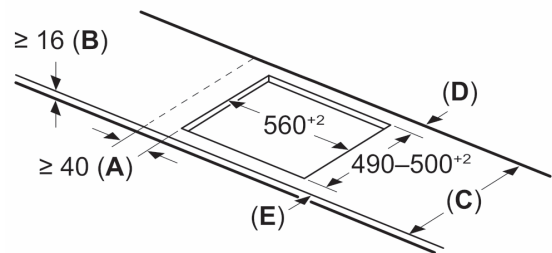

- A: Min. distance from the hob cut-out to the wall
- B: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm


See space requirements for the oven

C	D	E
585–600	50	≥ 35
> 600	≥ 50	≥ 50

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required


Installation drawings

Induction hob with 2 FlexInduction zones + PerfectFry Plus

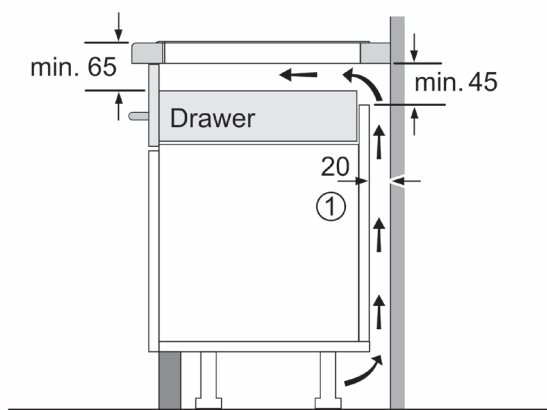

①
Ventilation gap must
be present.


Measurements in mm

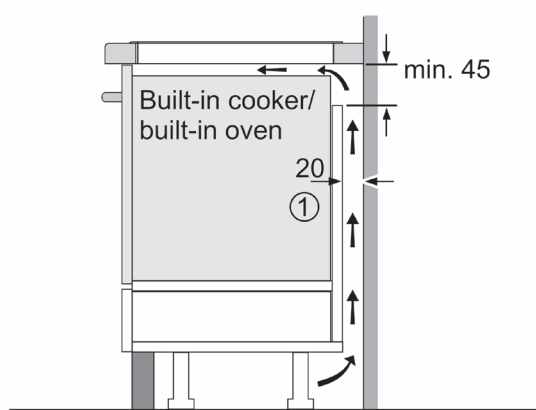


①
Ventilation gap must
be present

All measurements in mm

Measurements in mm

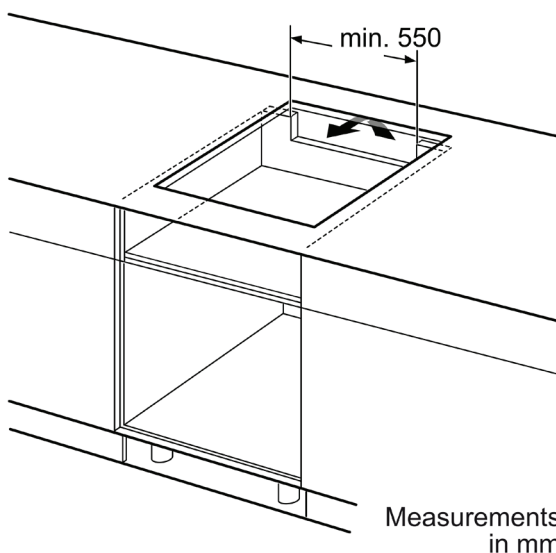


Measurements
in mm

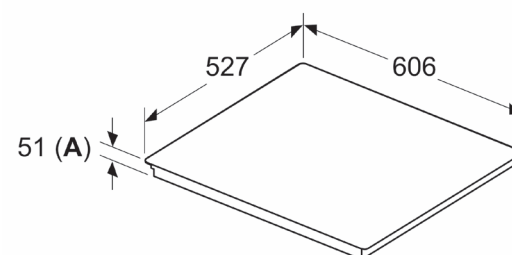

A: Recessed depth

Measurements in mm

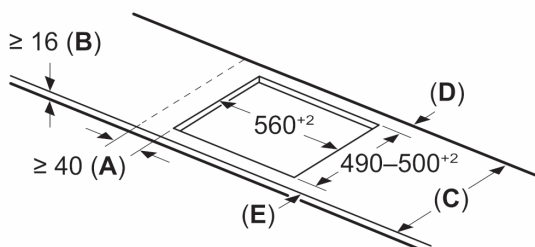

A: Min. distance from the hob cut-out to
the wall

B: The clearance between the surface of
the worktop and the top of the front of
the oven must be 30 mm



See space requirements for the oven

C	D	E
585–600	50	≥ 35
> 600	≥ 50	≥ 50

The worktop into which the hob is installed
must withstand loads of approx. 60 kg;
suitable substructures must be used if
required


Installation drawings

Induction hob with 2 FlexInduction zones + extension

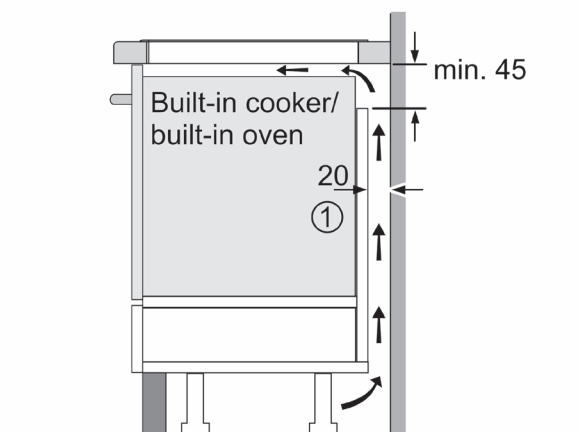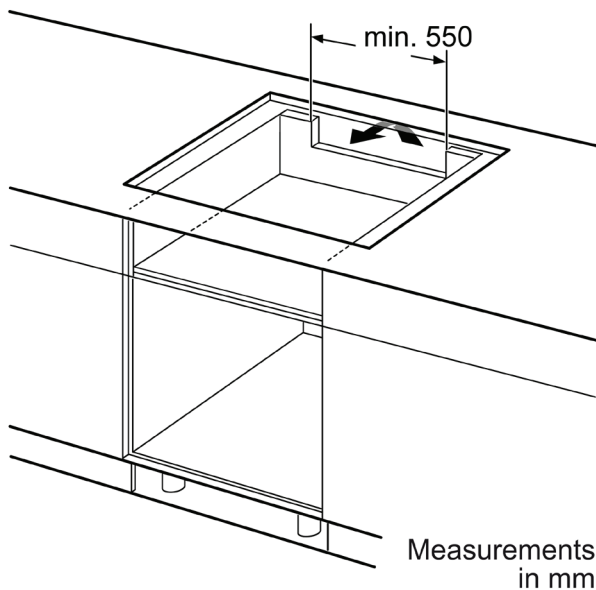


①
Ventilation gap must
be present

All measurements in mm

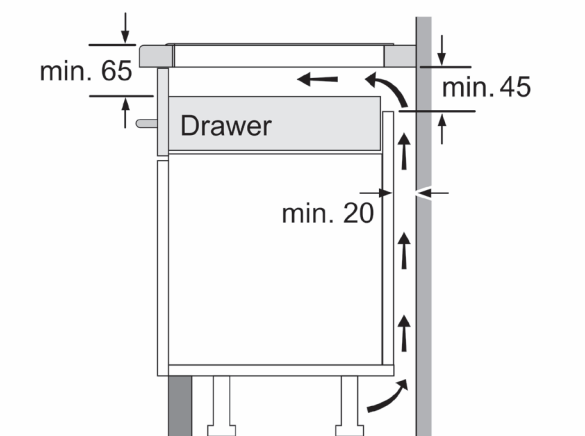

Measurements in mm

measurements in mm

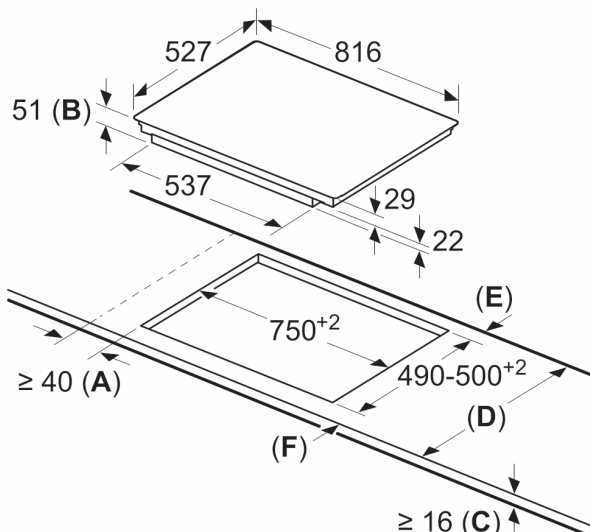

A: Minimum distance from the hob cut-out to the wall.

B: Recessed depth

C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.


The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50


Installation drawings

Induction hob with integrated hood


measurements in mm

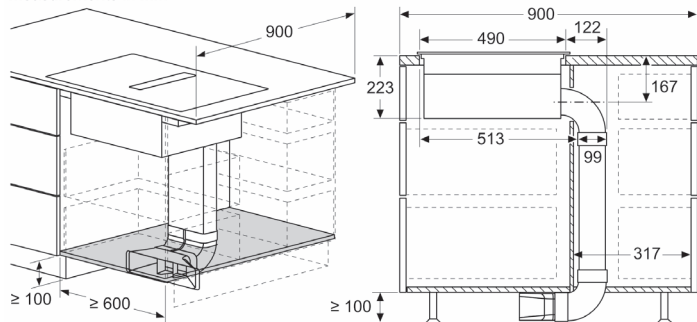


measurements in mm

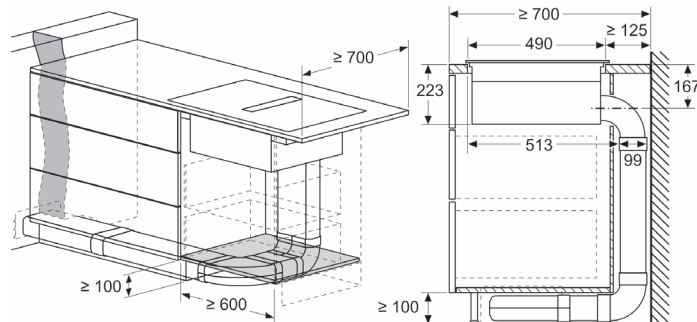


measurements in mm

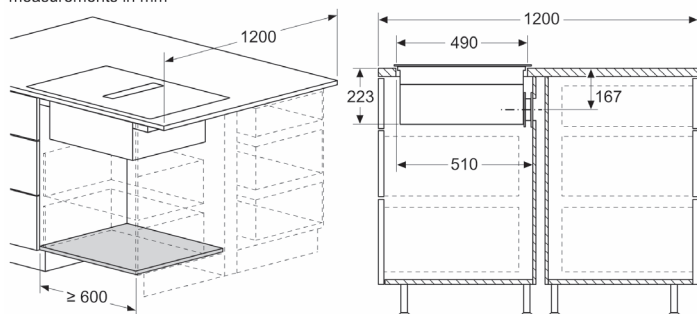


measurements in mm

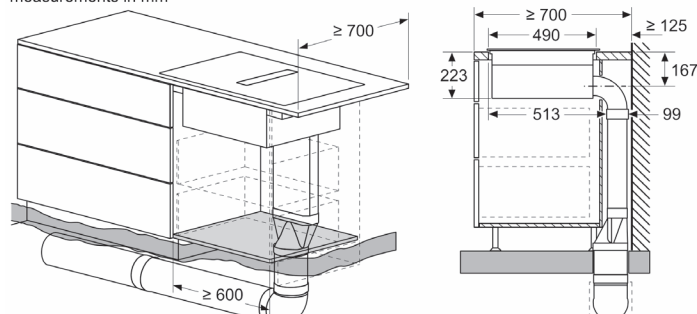

measurements in mm

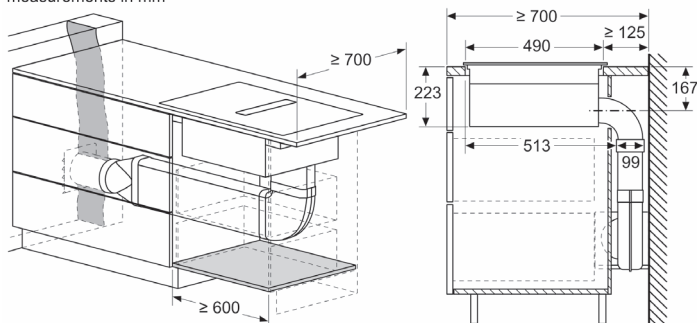


measurements in mm

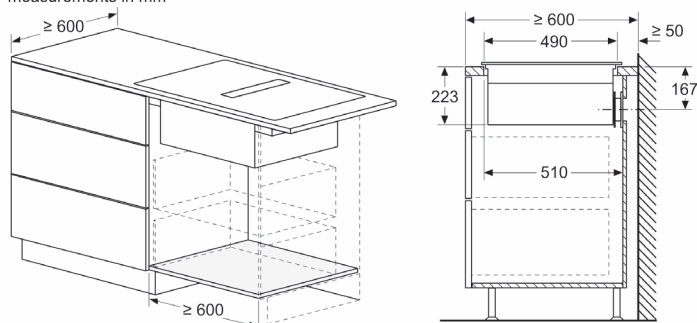

measurements in mm

Side view

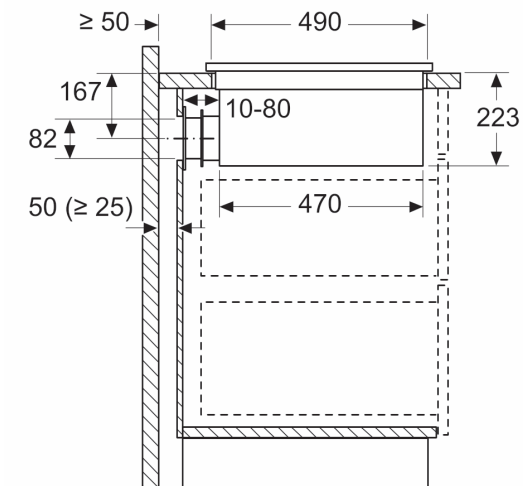


When installing directly at outer walls that are non-insulated ($\mu \geq 0.5 \text{ W/m}^2 \text{ } ^\circ\text{C}$), we recommend to use partially or fully ducted recirculation configurations.

Installation drawings


Induction hob with integrated hood

Measurements in mm

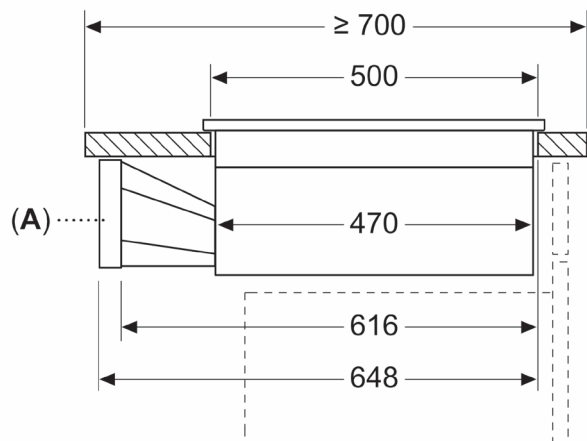


A: Adapter round-flat


measurements in mm
Front view – unit cut-out
for unducted recirculation

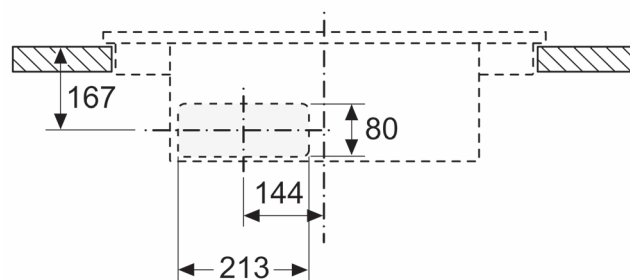

measurements in mm
Front view

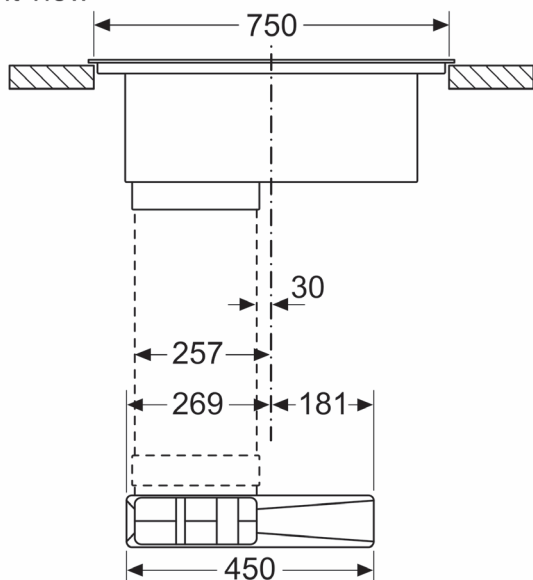


measurements in mm
Front view

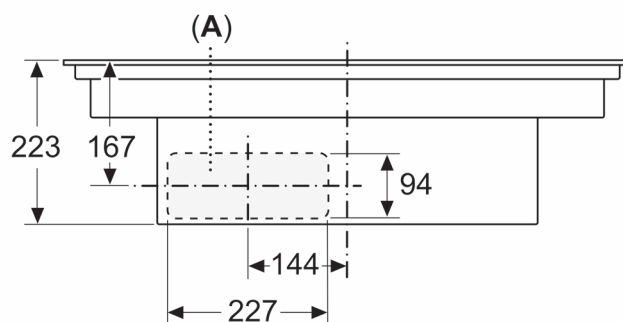


A: Connected directly at the rear

Induction hob with integrated hood

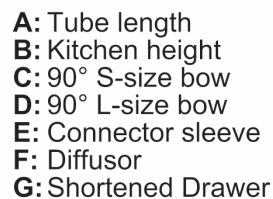

The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 990
1000	> 990

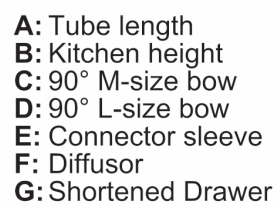


The installer has to select the tube length and if necessary cut it according to the kitchen height

A	B
500	≤ 940
1000	> 940

Installation drawings

Induction hob with integrated hood


Measurements in mm

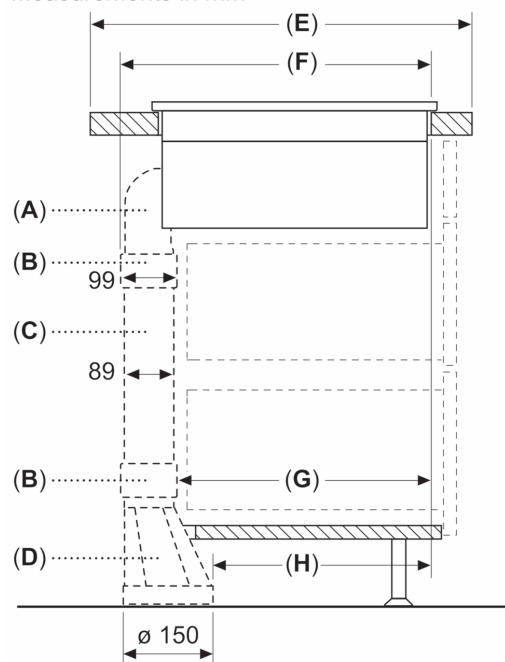

A	E	F	G	H
S-size	≥ 600	547	451	389
M-size	≥ 650	574	475	413
L-size	≥ 700	612	515	453


A: 90° Bow
B: Connector sleeve
C: Straight tube
D: Straight adapter round-flat

measurements in mm

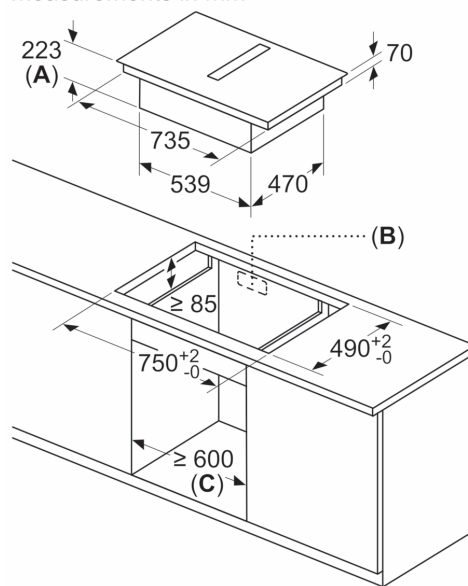

A: Recessing depth
B: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
C: All 80cm width class models can be installed in 60cm wide furniture by adjusting the side panels.

measurements in mm

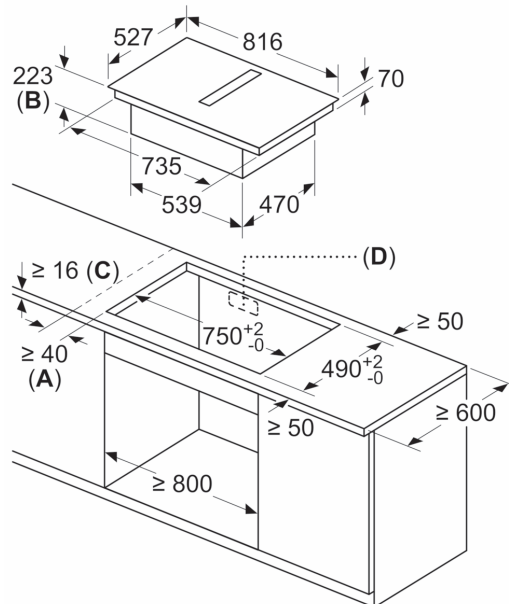

A: Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

Integrated Glass Downdraft Hood


Technical drawing of a table with dimensions and safety requirements. The drawing shows a table with a rectangular top and four legs. The dimensions are as follows:

- Overall width: 780
- Overall depth: 643
- Top thickness: 40
- Inner width (clearance): ≥ 500
- Inner depth (clearance): ≥ 500
- Leg height: ≥ 750
- Base width: ≥ 900

The drawing is labeled (A) in the top right corner.

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm


- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm



B: 5.5 mm

Figure 1 consists of two schematic diagrams. Diagram (A) is a top-down view showing a subject seated at a table, looking at a video screen. On the screen, a target (T) is indicated by a vertical line, and a starting position (S) is marked with a dot. A horizontal bar is positioned above the screen. Diagram (B) is a side view showing the subject's arm reaching for the target. A vertical scale is visible on the right, and a horizontal bar is positioned above the screen.

Standard installation: Partially laid around the toe kick



Installation with fully laid pipework to the toe kick for poorly insulated exterior walls or above cold floors

Technical drawing of a rectangular container with the following dimensions and labels:

- Overall width: ≥ 750
- Top flange width: 40
- Top flange height: 16-45
- Internal width: 643
- Internal height: 367
- Internal width from side wall to centerline: 123
- Internal width from centerline to opposite side wall: 133
- Internal height from base to top of side wall: 336
- Internal width from side wall to base: 150
- Base diameter: $\phi 150$
- Base diameter: $\phi 180$
- Labels: (A) points to the top flange, (B) points to the side wall, (C) points to the base, and (D) points to the internal space.

D: Motor unit must always be accessible

Technical drawing of a three-story building section showing structural details and dimensions. The drawing includes a cross-section of the building with three floors, labeled (D) for the floors and (B) for the basement. The total height is indicated as ≥ 900 . Key dimensions include: floor-to-floor heights of 367, 336, and 16-45; room widths of 123, 133, and 150; and overall widths of 643, 300, and 560. The drawing also shows a section of the building with a width of ≥ 900 and a height of 16-45. The drawing is labeled (A) and (C) at the top and bottom respectively.

Motor unit must always be accessible

Standard: with worktop divider between
downdraft and hob

Motor unit must always be accessible


[illegible]

Installation drawings


Integrated design hood

measurements in mm

Front view

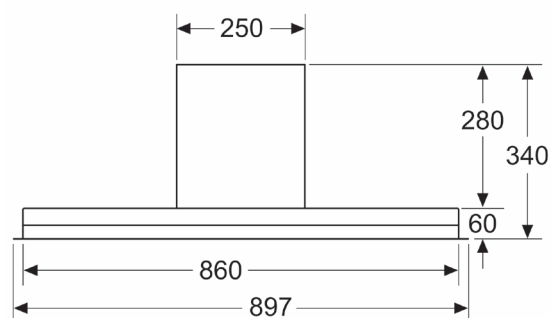

measurements in mm

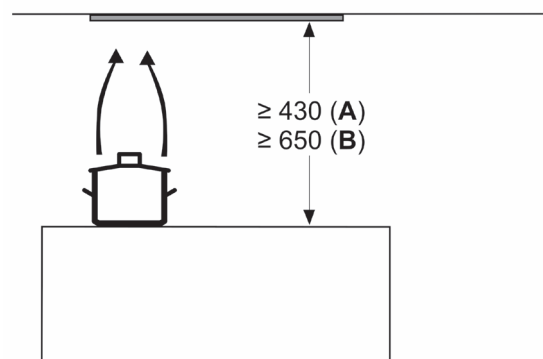


from upper edge of pan support

A: min. 430 electric

B: min. 650 gas


measurements in mm

Installation example

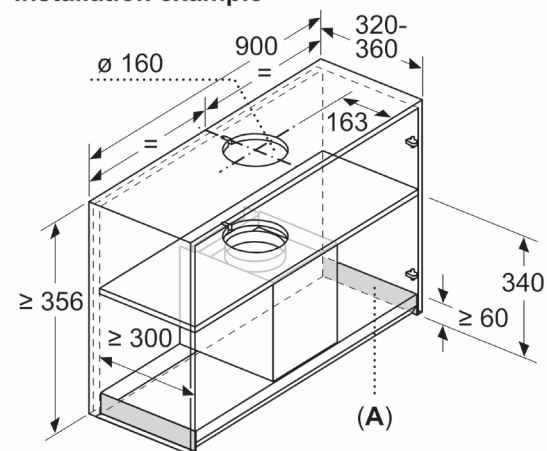

A: Area without hinges

measurements in mm

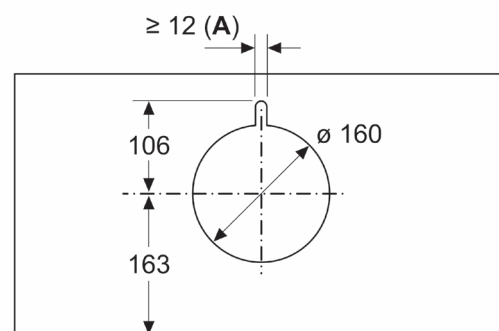

A: Cable bushing



Bosch Website:
BSH Home Appliances (Vietnam) Co.Ltd
<https://www.bosch-home.com.vn/>



Bosch Facebook:
<https://www.facebook.com/BoschHomeVietnamOfficial/>



Bosch Youtube:
<https://www.youtube.com/@BoschHomeVNOfficial>



15 years of
spare parts
availability⁶

15 years of spare parts availability

Developed to be ready for the future:

In line with our commitment to durability and sustainability,
we have extended the availability of our high-quality spare parts for large appliances to up to 15 years.

Invented for life



BOSCH

Sự hoàn hảo chưa bao giờ đẹp đến thế




accent | line

Lò nướng Series 8 kết hợp lò vi sóng và bơm hơi nước



accent|line




Lò nướng âm tủ với chức năng vi sóng, bơm hơi nước và tự làm sạch bằng nhiệt phân

Serie | 8 **HNG978QB1** Màu đen carbon, có camera và đèn LED kép

- Kết nối Home Connect (qua Wi-Fi)
 - Camera với cảm biến độ vàng giòn
 - 28 chế độ nướng
 - bao gồm Chiên Không Dầu và Chế độ hâm nóng
 - 3 mức hơi nước: cao, trung bình, thấp
 - Bơm hơi nước thủ công
 - Công suất tối đa: 800 W; 5 mức công suất vi sóng
 - Điều chỉnh nhiệt độ từ 30 °C – 300 °C
 - Trợ lý lò nướng với điều khiển giọng nói
 - Công nghệ tự làm sạch (nhiệt phân – Pyrolysis)
 - Chương trình hỗ trợ làm sạch
 - TFT Touchdisplay Pro – Điều khiển kỹ thuật số
 - Hiển thị thời gian còn lại
 - Chế độ làm giòn (Crisp Finish)
 - Cửa lò mở xuống với SoftClose và SoftOpen
 - Trợ lý nấu ăn Bosch Assist
 - Bảo hiệu hết nước trong bình chứa
 - Cảm biến PerfectBake Plus
 - Cảm biến PerfectRoast Plus
 - Đèn LED kép
 - Ray trượt 1 tầng có chặn an toàn
- Phụ kiện đi kèm**
1 x Khay nướng tráng men,
1 x Vi nướng kết hợp, 1 x Khay đa năng,
1 x Khay nướng và chiên không dầu

Lò nướng Series 8 với chức năng tự làm sạch bằng nhiệt phân

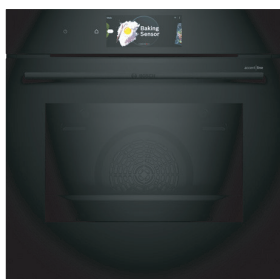

accent|line




Lò nướng âm tủ

Serie | 8 **HBG978NB1** Màu đen carbon

- Kết nối Home Connect (qua Wi-Fi)
 - 14 chế độ nướng (bao gồm Chiên Không Dầu, phụ kiện tùy chọn)
 - Điều chỉnh nhiệt độ từ 30 °C – 300 °C
 - Công nghệ tự làm sạch (nhiệt phân – Pyrolysis)
 - Chương trình hỗ trợ làm sạch
 - Trợ lý lò nướng với điều khiển giọng nói
 - TFT Touchdisplay Pro – Điều khiển kỹ thuật số
 - Hiển thị thời gian còn lại
 - Trợ lý nấu ăn Bosch Assist
 - Cửa lò mở xuống với SoftClose và SoftOpen
 - Chế độ làm giòn (Crisp Finish)
 - Cảm biến PerfectBake Plus
 - Cảm biến PerfectRoast Plus
 - Đèn LED chiếu sáng bên trong lò
 - Ray trượt 1 tầng có chặn an toàn, độc lập với vị trí khay
- Phụ kiện đi kèm**
1 x Khay nướng tráng men, 1 x Vi nướng kết hợp, 1 x Khay đa năng
- Phụ kiện tùy chọn**
HEZ629070 Khay nướng và chiên không dầu

Lò nướng Series 6 với chức năng tự làm sạch bằng nhiệt phân

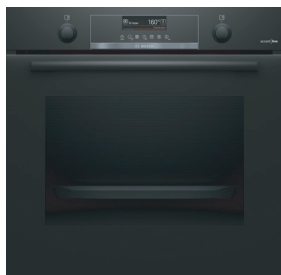

accent|line



Lò nướng âm tủ với nhiệt kế nướng

Serie | 6 **HBG4795B7** Màu đen carbon

- Kết nối Home Connect (qua Wi-Fi)
 - 14 chế độ nướng (bao gồm Chiên Không Dầu)
 - Điều chỉnh nhiệt độ từ 30 °C – 275 °C
 - Công nghệ tự làm sạch (nhiệt phân – Pyrolysis)
 - Chương trình hỗ trợ làm sạch
 - Nút vận điều khiển xoay và thu gọn
 - TFT-Touchdisplay
 - Hiển thị báo hiệu làm nóng trước, gợi ý nhiệt độ, kiểm soát nhiệt độ thực tế
 - Đồng hồ điện tử
 - Nhiệt kế nướng (Roasting thermometer)
 - AutoPilot 40 chương trình nấu tự động
 - Cửa lò mở xuống với SoftClose và SoftOpen
 - Đèn Halogen chiếu sáng bên trong lò
 - Ray trượt 1 tầng có chặn an toàn, độc lập với vị trí khay
- Phụ kiện đi kèm**
1 x Khay nướng tráng men,
1 x Vi nướng kết hợp, 1 x Khay đa năng,
1 x Khay nướng và chiên không dầu

Lò nướng Series 4 với chức năng hỗ trợ hơi nước



accent|line



Lò nướng âm tủ có hỗ trợ hơi nước

Serie | 4 **HQA4720B3** Màu đen carbon

- 8 chế độ nướng (bao gồm Chiên Không Dầu)
 - Hỗ trợ hơi nước: khay nước dung tích 250 ml
 - Điều chỉnh nhiệt độ từ 30 °C – 275 °C
 - Công nghệ tự làm sạch (nhiệt phân – Pyrolysis)
 - Hỗ trợ làm sạch: loại bỏ vết bẩn nhẹ bằng hơi nước và chất tẩy rửa
 - Điều khiển cảm ứng LED (đỏ/trắng)
 - Đồng hồ điện tử
 - Hiển thị báo hiệu làm nóng trước, gợi ý nhiệt độ
 - AutoPilot 10 chương trình nấu tự động
 - Ray trượt 1 tầng có chặn an toàn, độc lập với vị trí khay
- Phụ kiện đi kèm**
1 x Vi nướng kết hợp, 1 x Khay đa năng,
1 x Khay nướng và chiên không dầu

Lò nướng nhỏ gọn Series 8 kết hợp lò vi sóng

BEST OF BEST



accent|line



Lò nướng âm tủ nhỏ gọn với chức năng vi sóng

Serie | 8 CMG978NB1 Màu đen carbon

- Kết nối Home Connect (qua Wi-Fi)
- 22 chế độ nướng (bao gồm Chiên Không Dầu, phụ kiện tùy chọn)
- Công suất tối đa: 900 W; 5 mức công suất vi sóng
- Công nghệ tự làm sạch (nhiệt phân – Pyrolysis)
- Chương trình hỗ trợ làm sạch
- Điều chỉnh nhiệt độ từ 30 °C – 300 °C
- Trợ lý lò nướng với điều khiển giọng nói
- TFT Touchdisplay Pro – điều khiển kỹ thuật số
- Dự đoán thời gian còn lại
- Cửa lò mở xuống với SoftClose và SoftOpen
- Cảm biến PerfectRoast Plus
- Cảm biến PerfectBake Plus

- Chế độ làm giòn (Crisp Finish)
- Trợ lý nấu ăn Bosch Assist
- Đèn LED chiếu sáng bên trong lò
- Ray trượt 1 tầng có chặn an toàn

Phụ kiện đi kèm

1 x Khay nướng tráng men, 1 x Vi nướng kết hợp, 1 x Khay đa năng

Phụ kiện tùy chọn

HEZ629070 Khay nướng và chiên không dầu

Lò nướng hơi nước nhỏ gọn Series 8

BEST OF BEST



accent|line



Lò nướng hơi nước âm tủ nhỏ gọn

Serie | 8 CSG958DB1 Màu đen carbon

- Kết nối Home Connect (qua Wi-Fi)
- 24 chế độ nướng, bao gồm Chiên Không Dầu (phụ kiện tùy chọn) và hâm nóng
- Nấu chậm chân không (Sous-vide)
- Steam Function Plus
- Bơm hơi nước thủ công
- 3 mức hơi nước: cao, trung bình, thấp
- Chương trình hỗ trợ làm sạch
- Điều chỉnh nhiệt độ điện tử từ 30 °C – 250 °C
- Trợ lý lò nướng với điều khiển giọng nói
- TFT-Touchdisplay Pro – điều khiển kỹ thuật số
- EcoClean DirectPlus: tự làm sạch bằng lớp phủ gốm – trần, lưng và vách hông lò
- Dự đoán thời gian còn lại

- Cửa lò mở xuống với SoftClose và SoftOpen
- Cảm biến PerfectRoast Plus
- Cảm biến PerfectBake Plus
- Đèn LED chiếu sáng bên trong lò
- Trợ lý nấu ăn Bosch Assist
- Báo hiệu hết nước trong bình chứa
- Ray trượt 1 tầng có chặn an toàn, độc lập với vị trí khay

Phụ kiện đi kèm

1 x Khay nướng tráng men, 1 x Hộp hấp có lỗ cỡ M, 1 x Hộp hấp có lỗ cỡ XL, 1 x hộp hấp không lỗ cỡ M, 1 x Giá dây, 1 x miếng bọt biển, 1 x khay đa năng

Phụ kiện tùy chọn

HEZ629070 Khay nướng và chiên không dầu

Máy pha cà phê 45 cm



accent|line



Máy pha cà phê âm tủ tự động hoàn toàn

Serie | 8 CTL9181B0 Màu đen carbon


- Kết nối Home Connect (qua Wi-Fi)
- CoffeePlaylist – thêm nhiều loại đồ uống trong ứng dụng, máy sẽ pha theo thứ tự bạn chọn
- Kiến thức cà phê bổ sung trong ứng dụng
- Lên đến 33 loại đồ uống cà phê khác nhau (trên máy và trong ứng dụng Home Connect)
- Rót sữa nóng, bọt sữa và nước nóng tự động
- AromaSelect – 3 hồ sơ hương vị khác nhau
- Điều chỉnh hương vị thông minh – quản lý cà phê dựa trên độ đậm và kích thước cốc
- TFT-Touchdisplay Pro
- Favorites – lưu đến 30 loại đồ uống cá nhân hóa

- Nhận diện dung tích sữa – sử dụng với: hộp sữa đi kèm, hộp sữa 1 lít hoặc các loại bình chứa khác
- Jug Function: máy có thể pha một lượng lớn cà phê trực tiếp vào một bình (jug)
- OneTouch DoubleCup – pha hai tách cùng lúc chỉ với một chạm
- Bình chứa nước có thể tháo rời (2.4 L)

Phụ kiện đi kèm

1 x Bộ lọc nước BRITA Intenza, 1 x bình sữa thủy tinh, Dải đo độ cạn khoáng trong nước

Ngăn hâm nóng



accent|line



Ngăn hâm nóng

Serie | 8 BIC9101B1 Màu đen carbon

- Kết nối Home Connect (qua Wi-Fi)
- Ngăn hâm nóng đa năng với nhiều chế độ: nấu nhẹ, giữ ấm thức ăn, hâm nóng đĩa, hâm nóng tách
- 4 mức điều chỉnh nhiệt độ: khoảng 30 °C – 80 °C (nhiệt độ bề mặt kính)
- Điều khiển cảm ứng có đèn chiếu sáng
- Dễ dàng thao tác
- Dung tích sử dụng: 20 lít
- Tải trọng tối đa: 25 kg

- Chứa được tối đa 64 tách espresso hoặc 12 đĩa đường kính 26 cm
- Thiết kế không tay cầm (đẩy để mở/đóng)
- Vận hành bằng nút cảm ứng



Kích thước

Kích thước thiết bị (C x R x S):

140 x 594 x 548 mm

Có thể lắp đặt bên dưới mặt bếp với phụ kiện: 9001698838

Bếp từ kết hợp hút mùi

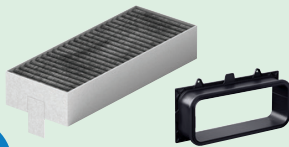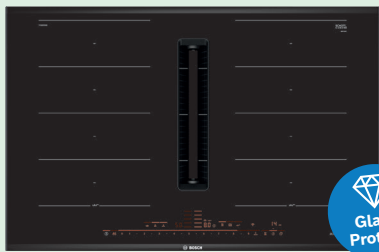

accent|line
carbon black




Bếp từ kết hợp hút mùi

Serie | 8 PXX890D51E ComfortProfile

- 4 vùng nấu từ với tính năng nhận diện nồi/chảo
- **2 vùng FlexInduction – Điều khiển Direct Select Premium**
- **Cảm biến chiên PerfectFry với 5 mức nhiệt độ**
- **Cảm biến chất lượng không khí PerfectAir**
- **Chế độ MoveMode (3 mức)**
- Khởi động nhanh (QuickStart), khởi động lại (ReStart)
- Kết nối Home Connect (qua Wi-Fi)
- **Glass Protect – chống trầy xước tăng cường**
- Hẹn giờ tắt tự động cho từng vùng nấu
- Lựa chọn tự động hoặc thủ công cho tốc độ quạt hút
- Hệ thống hút mùi với 17 mức tốc độ điều khiển điện tử và 2 mức cường độ mạnh (có chế độ tự động hoàn toàn)

Phiên bản tiêu chuẩn bao gồm bộ lọc mùi CleanAir Plus. Thanh trượt điều khiển có thể dùng cho chế độ tuần hoàn hoặc hút xả. Độ sâu mặt bếp tối thiểu: ≥ 60 cm

Bếp từ FlexInduction

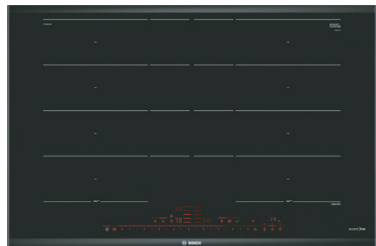

accent|line



Bếp từ với 2 vùng FlexInduction + vùng mở rộng

Serie | 8 PXY895DV1E carbon black, ComfortProfile

- **Kết nối Home Connect (qua Wi-Fi)**
- **Vùng FlexInduction mở rộng**
- Chức năng PowerBoost cho tất cả các vùng nấu
- **PanBoost:**
 - PowerBoost dành riêng cho chảo rán
- **Điều khiển Direct Select Premium**
- Chức năng giữ ấm
- Hẹn giờ tắt cho từng vùng nấu
- Hẹn giờ đếm ngược (Countdown-Timer)
- Hẹn giờ đếm xuôi (CountUp-Timer)
- **Chế độ MoveMode (3 mức)**
- Khởi động nhanh (QuickStart)
- Khởi động lại (ReStart)
- **Cảm biến chiên PerfectFry với 5 mức nhiệt độ**
- Trợ lý nấu ăn (Cooking Assistant)
- Cảnh báo nhiệt dư 2 cấp độ cho từng vùng nấu
- Khóa an toàn trẻ em
- Chế độ lau chùi an toàn (Wipe Protection)
- Hiển thị mức tiêu thụ năng lượng – cho biết lượng điện đã dùng ở lần nấu gần nhất

Bếp từ FlexInduction với PerfectCook/PerfectFry



accent|line



Bếp từ với 2 vùng FlexInduction + cảm biến chiên PerfectFry Plus


Serie | 6 PXX690HC1E Màu đen carbon, ComfortProfile

- **Kết nối Home Connect (qua Wi-Fi)**
- **4 vùng nấu từ** với tính năng nhận diện nồi/chảo
- **2 vùng FlexInduction**
- **Điều khiển hút mùi trực tiếp từ bếp** (khi kết nối với máy hút mùi tương thích)
- **Cảm biến chiên PerfectFry Plus với 11 mức nhiệt độ**
- Trợ lý nấu ăn qua ứng dụng Home Connect
- Nút yêu thích (Favoriten Button)
- Nhận diện vùng nấu Easy Flex Zones
- **Điều khiển Direct Select**
- Chức năng PowerBoost cho tất cả các vùng nấu
- Khởi động nhanh (QuickStart)
- Khởi động lại (ReStart)
- Hẹn giờ tắt cho từng vùng nấu
- Hiển thị nhiệt dư 2 cấp độ cho từng vùng nấu
- Công tắc nguồn chính
- Nút tạm dừng (Pause Button)
- Ngắt an toàn tự động
- Khóa an toàn trẻ em
- **Bề mặt Glass Protect – tăng cường chống trầy xước**

Máy hút mùi âm bàn kính



accent|line
carbon black

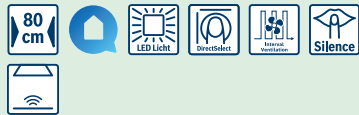

Máy hút mùi âm bàn kính

Serie | 8 **DDW88MM66** Màu đen carbon, ComfortProfile

- Giải pháp lý tưởng cho đảo bếp hoặc bán đảo
- Lựa chọn chế độ hút xả trực tiếp hoặc tuần hoàn
- Với chế độ tuần hoàn, cần phụ kiện Bộ lọc tuần hoàn CleanAir Plus Recirculation Set (tùy chọn)
- Thiết kế ComfortProfile – lắp đặt liền mạch với bếp từ thành một khối thống nhất
- Tầm kính trượt lên/xuống
- Thiết kế kính cao cấp với viền chiếu sáng đồ, có thể đổi màu qua ứng dụng Home Connect
- Điều khiển Direct Select
- 3 mức công suất + 2 mức tăng cường (Intensive)
- Mức tăng cường tự động đặt lại sau thời gian sử dụng
- Quạt chạy thêm 10 phút sau khi tắt bếp
- **Công nghệ Guided Air: đảm bảo hút khói hiệu quả, bất kể chiều cao hay vị trí nổi nấu**
- Đèn LED trang trí
- Bộ lọc mỡ kim loại – an toàn với máy rửa chén
- Đèn báo bảo hòa cho bộ lọc mỡ và bộ lọc mùi
- Chức năng làm sạch bộ lọc dễ dàng (cassette tháo lắp nhanh)
- Tầm kính dễ tháo rời và vệ sinh
- **Kết nối Home Connect (qua Wi-Fi)**, tương thích với nhiều trợ lý giọng nói
- Hỗ trợ điều khiển bằng giọng nói qua các trợ lý ảo phổ biến
- **Hiệu suất hút:** Standard mode 501 m³/h, intensive mode 775 m³/h
- Độ ồn (min./max. chế độ thường): 39/62 dB
- Lắp đặt trong tủ bếp rộng 90 cm
- Chiều cao nâng kính: 250 mm
- Không tương thích với bếp gas
- Kích thước thiết bị: 709 × 816 × 140 mm
- Kích thước lắp đặt: 703 × 781 × 123 mm
- Công suất kết nối: 300 W

Phụ kiện tùy chọn

DSZ8WW1Y2 Bộ khung lắp đặt liền mạch
DSZ1WW1I6 Bộ lọc tuần hoàn CleanAir Plus
DSZ1WW1J1 Bộ tuần hoàn Long Life
DSZ1WW1B6 Bộ lọc mùi CleanAir Plus (thay thế)
DZZ1XX1X1 Ống dẫn khí tròn, 150 mm

Máy hút mùi thiết kế âm tủ



accent|line



Máy hút mùi thiết kế âm tủ

Serie | 6 **DBB97DP60** 90 cm, màu đen

- Lựa chọn chế độ hút xả trực tiếp hoặc tuần hoàn
- **Độ ồn (min./max. chế độ thường): 50/63 dB**
- Hiệu suất hút:
 - Chế độ thường: 459 m³/h
 - Chế độ tăng cường: 749 m³/h
- Lắp đặt âm tủ, tích hợp liền mạch với tủ bếp
- Thiết kế nhỏ gọn, tiết kiệm diện tích, cho phép tận dụng thêm không gian chứa đồ cạnh máy (tải trọng đến 10 kg mỗi bên)
- **Bảng điều khiển cảm ứng bằng kính – thao tác dễ dàng, tăng cường khả năng hút hơi nước**
- Điều khiển điện tử Direct Select với màn hình LED
- 3 mức công suất + 1 mức tăng cường
- Chế độ tăng cường tự động đặt lại
- Đèn SoftLight – 3 bóng LED 2 W
 - Nhiệt độ màu: 3500K
 - Độ sáng: 571 lux
- Kích thước thiết bị (C x R x S): 340 × 897 × 298 mm
- Kích thước lắp đặt (C x R x S): 340 × 860 × 300 mm

Phụ kiện tùy chọn

DWZ6IB1I4: Bộ lọc tuần hoàn CleanAir
DWZ1IB6K1: Ống khói kéo dài 450–854 mm
DWZ1IB6N1: Ống khói kéo dài 187–360 mm
DWZ6IB1B4: Bộ lọc mùi CleanAir

Lò nướng cao cấp, 60 cm

(A)

594

548

535

577

405

≤ 45

585 $\pm$ 10

≥ 550

≥ 35

≥ 35

60

560 $\pm$ 8

(B)

(C)

C: Ventilation space in the base $\geq 200 \text{ cm}^2$

19.5

18

Detail A

595

max. 487.5

7.5

548

Detail A

min. 2

19.5

75

0

Area for kitchen unit door with handle or worktop

min. 2

5

10

15

30

55

65

70

Kitchen unit carcass front edge

0

measurements in mm

Note the pivoting range of the fascia.

Technical drawing of a built-in oven showing dimensions in mm. The drawing includes a side view and a front view. Key dimensions are:

- Top width: 560^{+8}
- Side height: $\text{min. } 600^{+4}$
- Side depth: $\text{min. } 550$
- Top depth: 180
- Front width: 594
- Front height: 595
- Front depth: 548
- Front width (inner): 405
- Front height (inner): 535
- Front depth (inner): 577
- Front width (handle): $\text{max. } 45$
- Top depth (handle): $19,5$
- Space for appliance connection: 320×115
- Minimum gap: $\text{min. } 20$


measurements in mm

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

Bản vẽ lắp đặt


Lò nướng Series 4 và Series 6

Measurements in mm

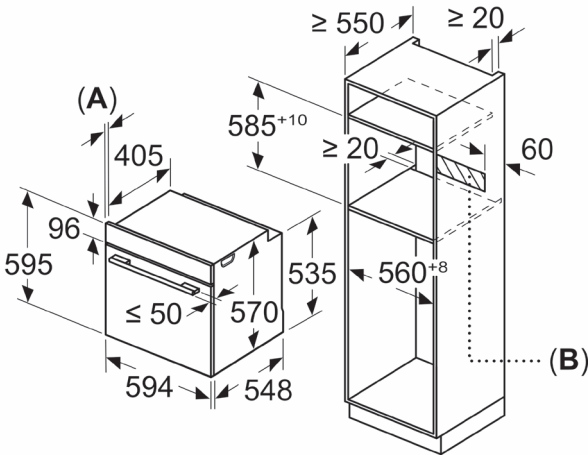


- A: 19.5 mm
- B: Space for appliance connection 320 x 115 mm

Installation with a hob.

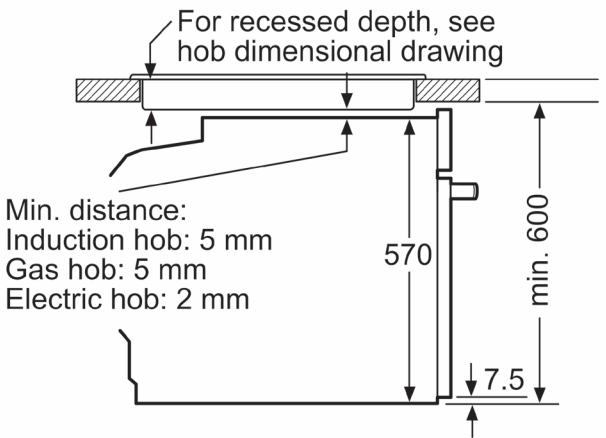


Min. distance:
 Induction hob: 5 mm
 Gas hob: 5 mm
 Electric hob: 2 mm

measurements in mm

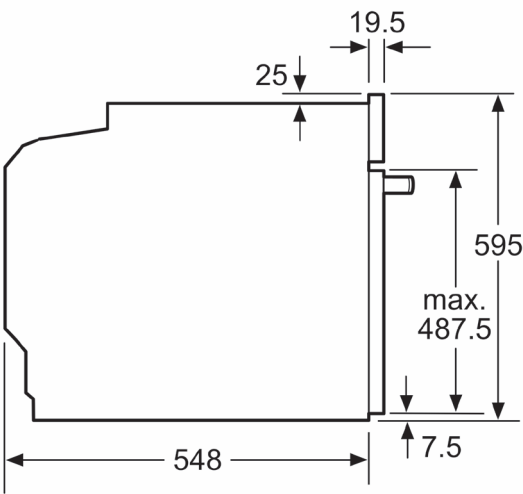


measurements in mm

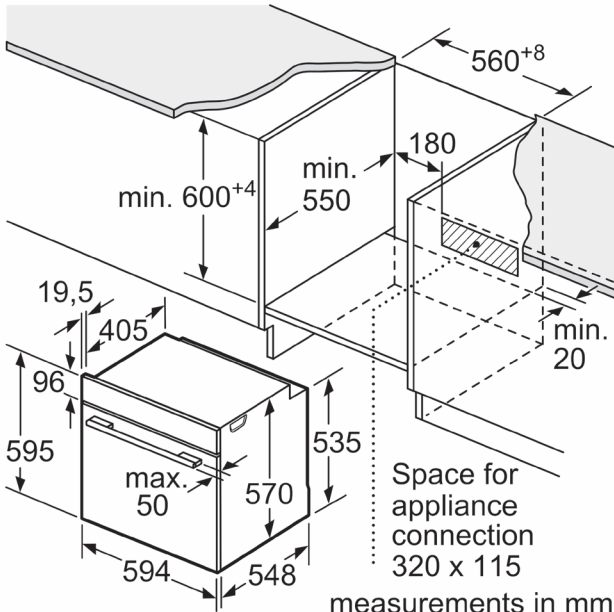


measurements in mm

Bản vẽ lắp đặt

Lò nướng, 45 cm


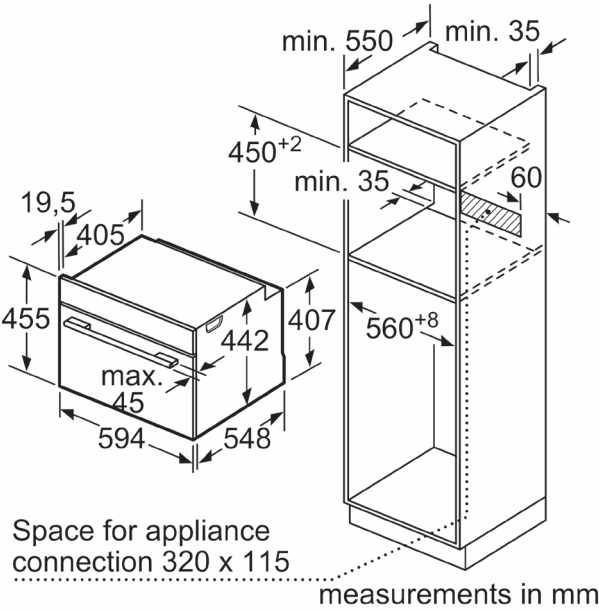


Installing two appliances on top of each other
Air exchange

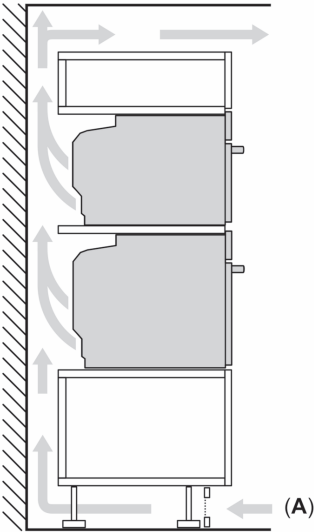

A: Air inlet $\geq 200 \text{ cm}^2$


Installation with a hob.

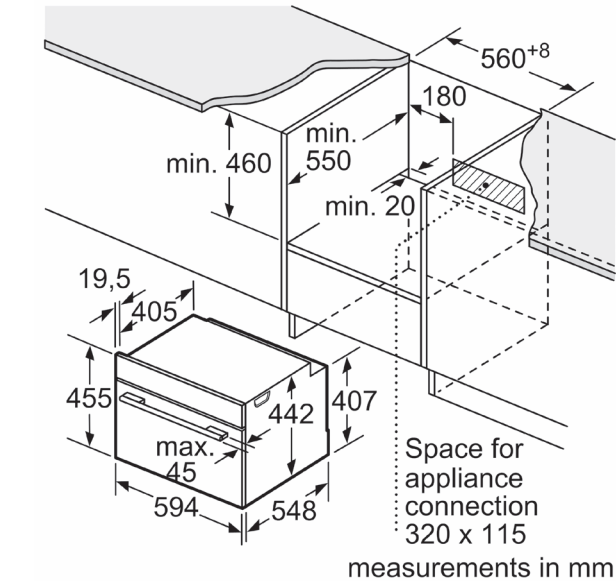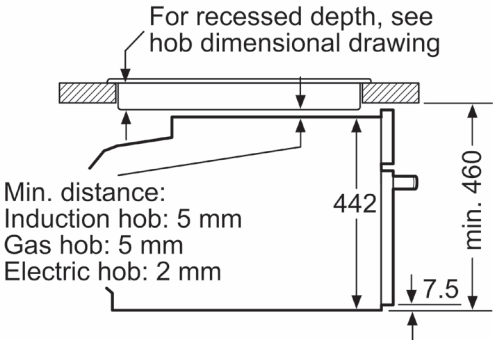

measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

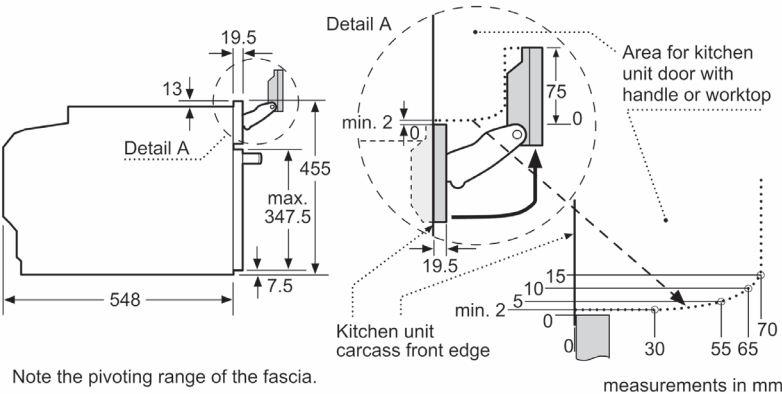

Bản vẽ lắp đặt


Máy pha cà phê & Lò vi sóng, 45 cm

Measurements in mm

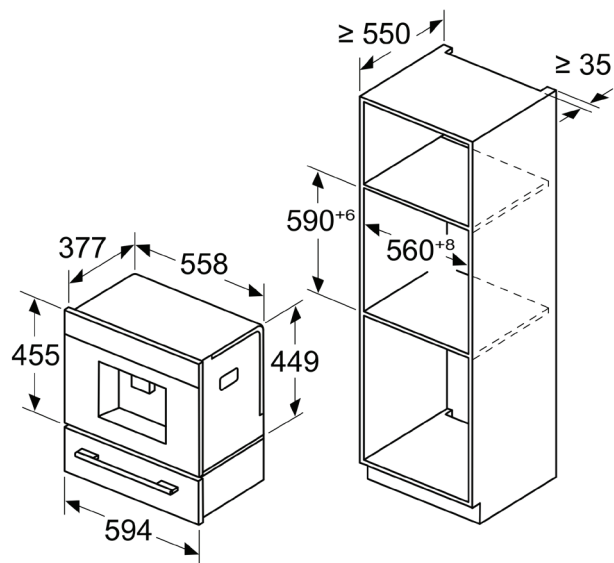


Measurements in mm

Left corner installation

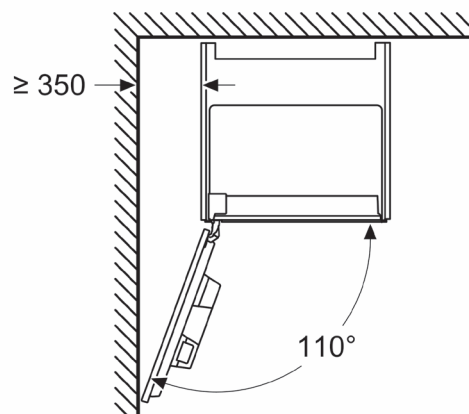


If using the 92° hinge limiter, the min. distance to the wall is only 100 mm

Measurements in mm

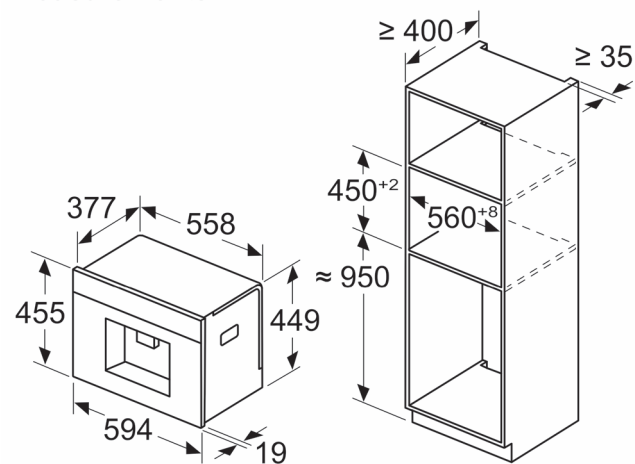


Bean and water containers are removed from the front
Recommended installation height
950–1450 mm

Measurements in mm

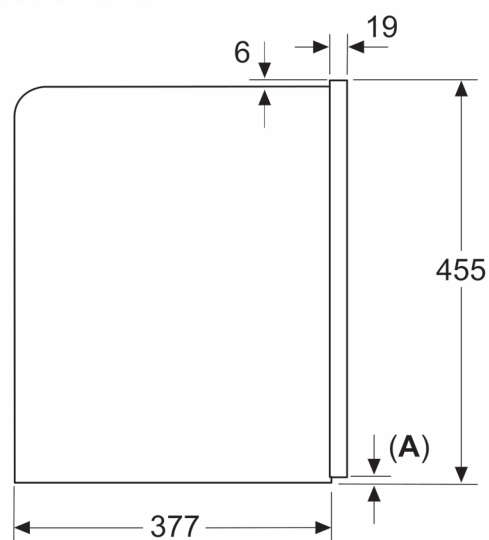


A: 7.5 mm

Measurements in mm

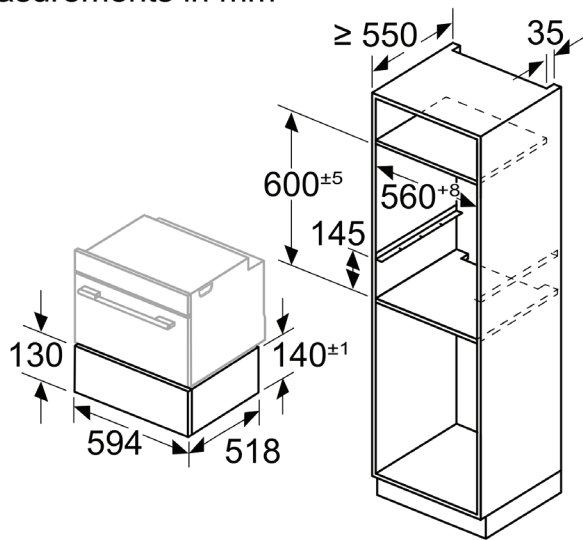


For the combined installation of some electrical appliances, support frames are required

Measurements in mm

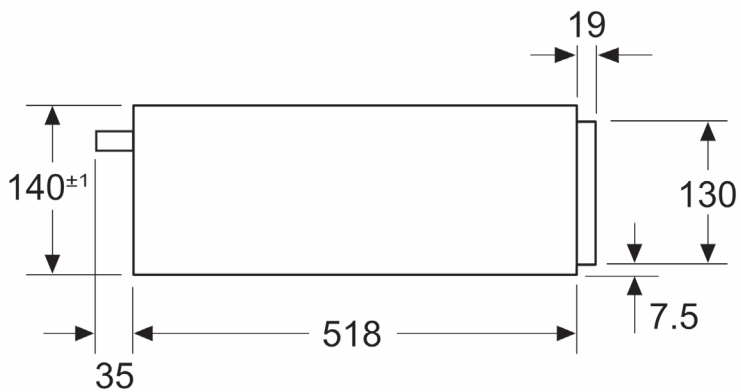


Bản vẽ lắp đặt

Bếp từ với 2 vùng FlexInduction + PerfectFry Plus

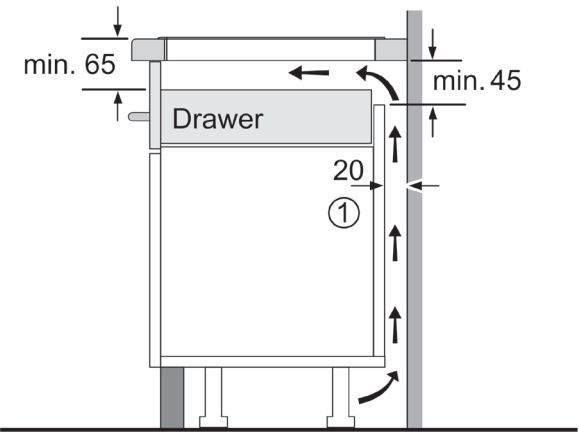


①
Ventilation gap must be present.

Measurements in mm

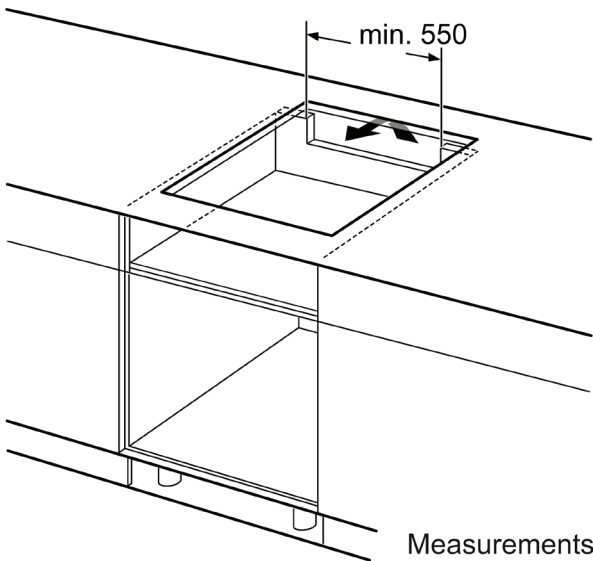


Measurements in mm

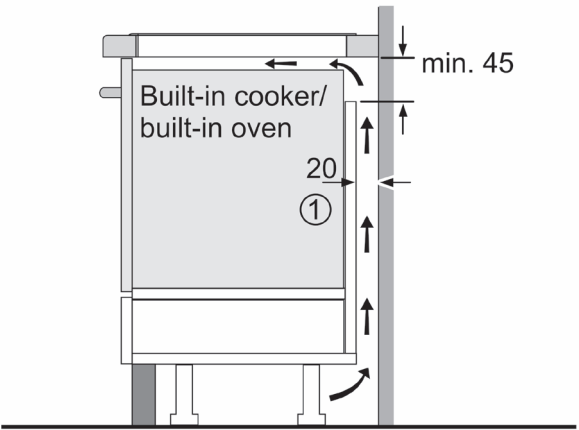


①
Ventilation gap must be present

All measurements in mm

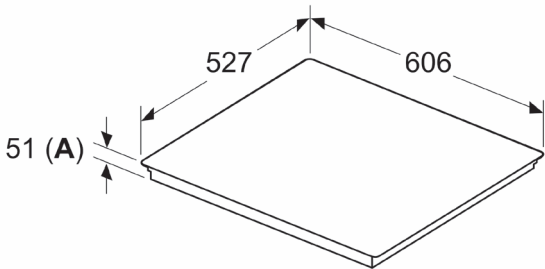

A: Recessed depth

Measurements in mm

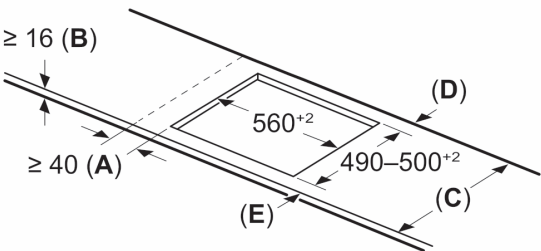

- A: Min. distance from the hob cut-out to the wall
- B: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm


See space requirements for the oven

C	D	E
585–600	50	≥ 35
> 600	≥ 50	≥ 50

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required


Bản vẽ lắp đặt

Bếp từ với 2 vùng FlexInduction + PerfectFry Plus

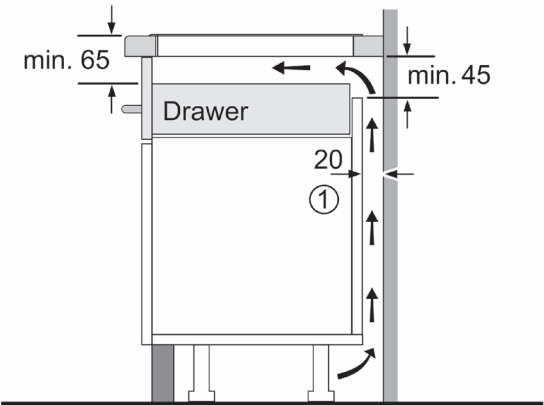

① Ventilation gap must be present.


Measurements in mm

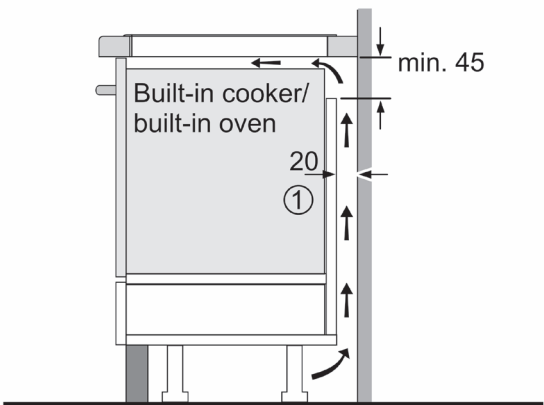


① Ventilation gap must be present

All measurements in mm

Measurements in mm

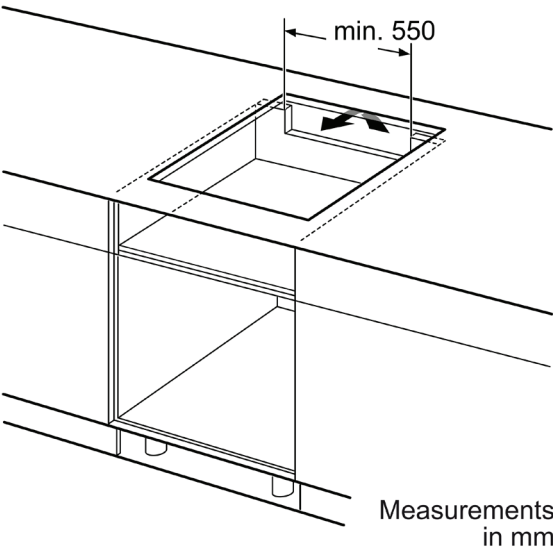


Measurements in mm

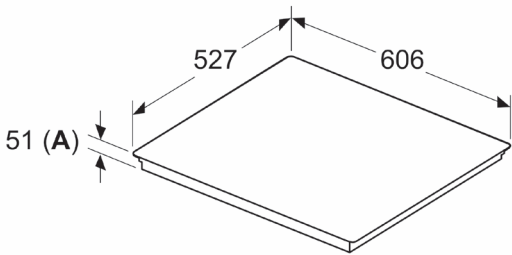

A: Recessed depth

Measurements in mm

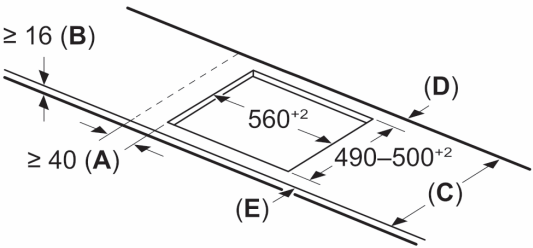

A: Min. distance from the hob cut-out to the wall

B: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm



See space requirements for the oven

C	D	E
585–600	50	≥ 35
> 600	≥ 50	≥ 50

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required


Bản vẽ lắp đặt

Bếp từ với 2 vùng FlexInduction + vùng mở rộng

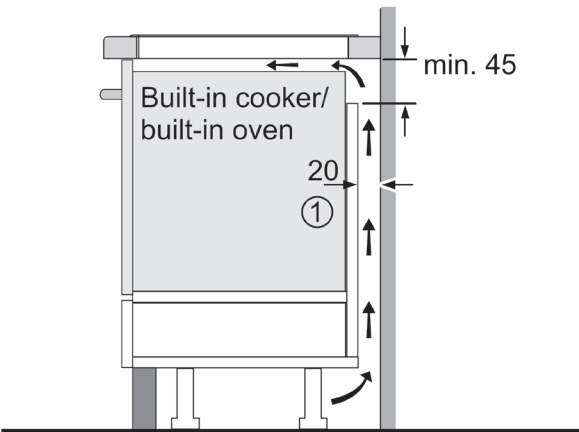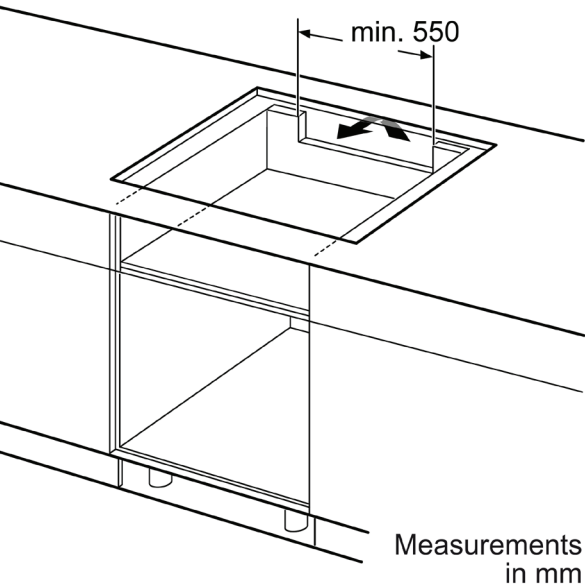


①
Ventilation gap must be present

All measurements in mm

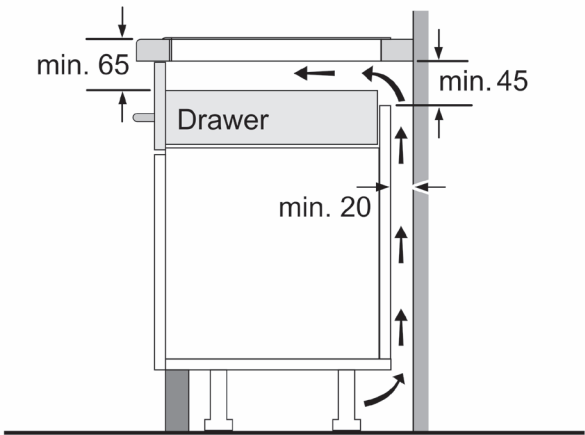

Measurements in mm

measurements in mm

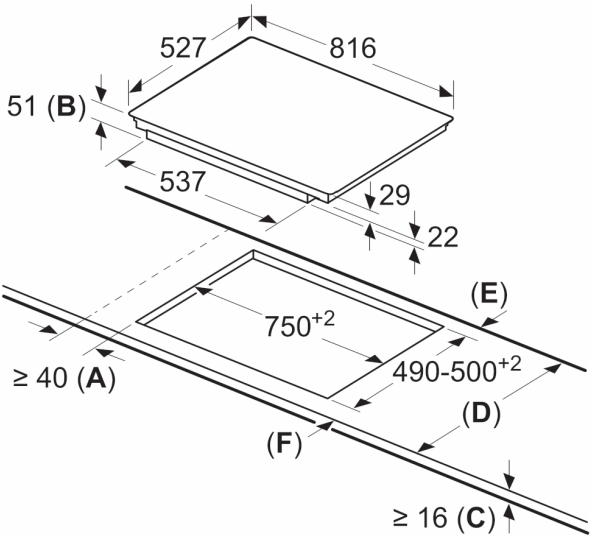

- A: Minimum distance from the hob cut-out to the wall.
- B: Recessed depth
- C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.


The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50


Bản vẽ lắp đặt

Bếp từ kết hợp hút mùi


measurements in mm

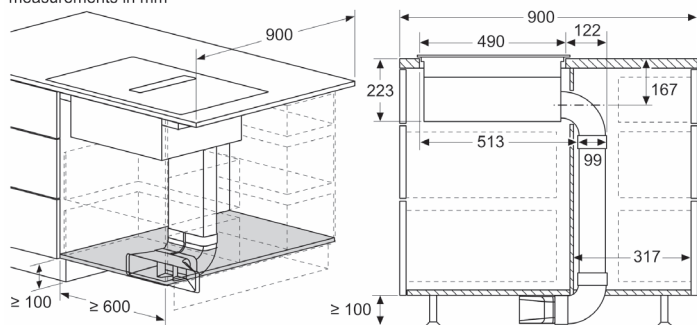


measurements in mm

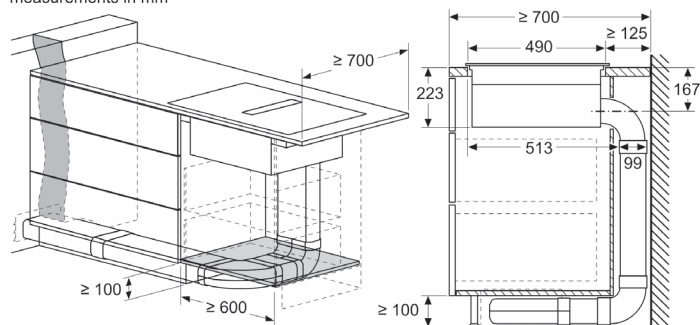


measurements in mm

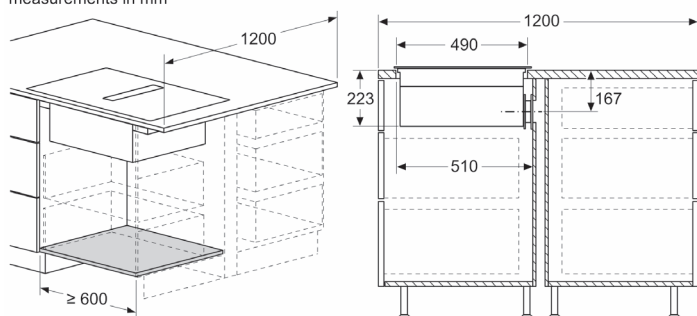


measurements in mm

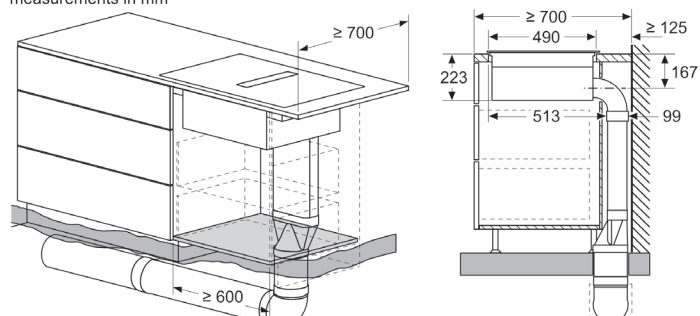

measurements in mm

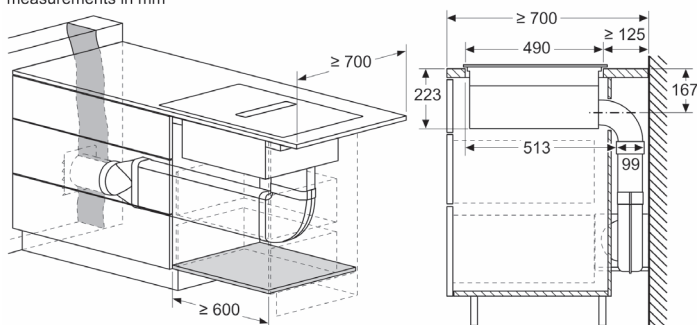


measurements in mm

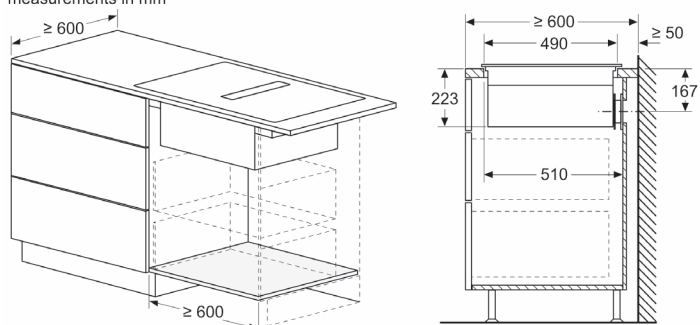

measurements in mm

Side view

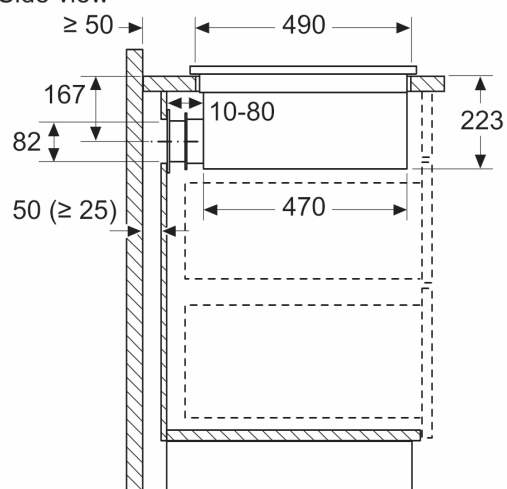


When installing directly at outer walls that are non-insulated ($\mu \geq 0.5 \text{ W/m}^2 \text{ } ^\circ\text{C}$), we recommend to use partially or fully ducted recirculation configurations.

Bản vẽ lắp đặt

Bếp từ kết hợp hút mùi


Measurements in mm

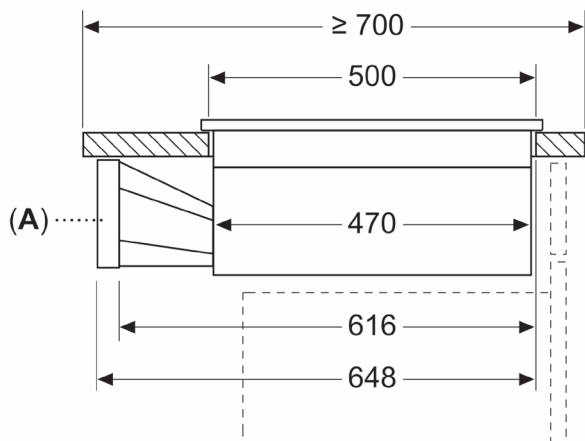

A: Adapter round-flat


measurements in mm

Front view – unit cut-out
for unducted recirculation

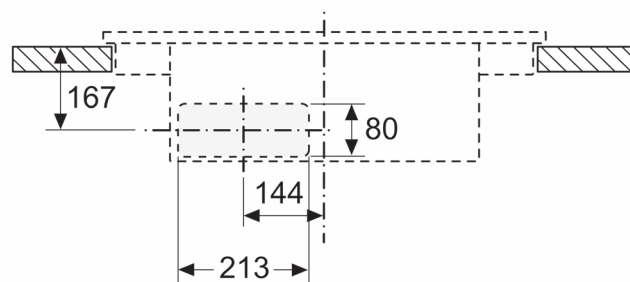


measurements in mm

Front view

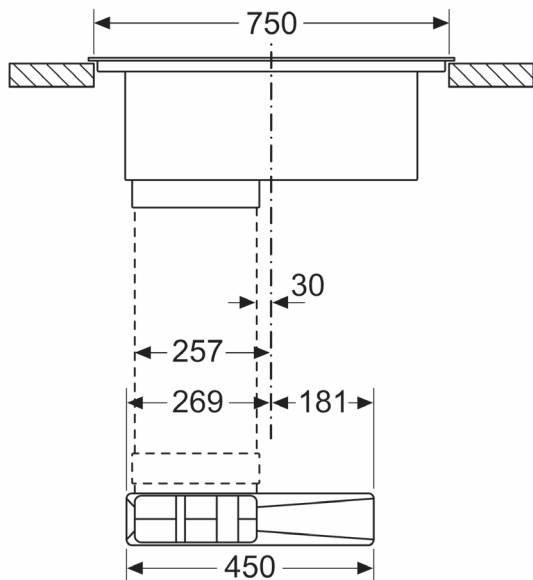



measurements in mm

Front view

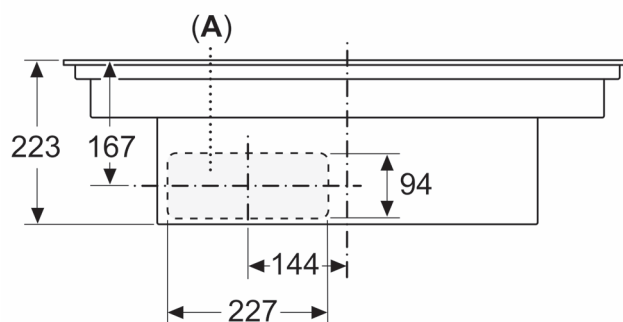


A: Connected directly at the rear

Bếp từ kết hợp hút mùi




Bản vẽ lắp đặt

Bếp từ kết hợp hút mùi

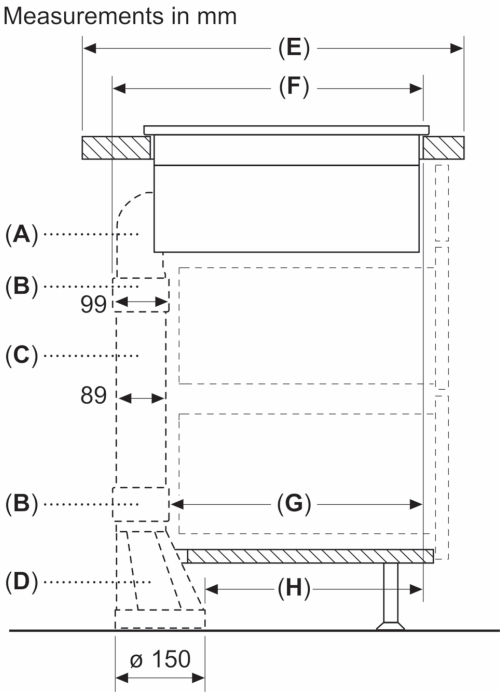


A	E	F	G	H
S-size	≥ 600	547	451	389
M-size	≥ 650	574	475	413
L-size	≥ 700	612	515	453

- A: 90° Bow
B: Connector sleeve
C: Straight tube
D: Straight adapter round-flat

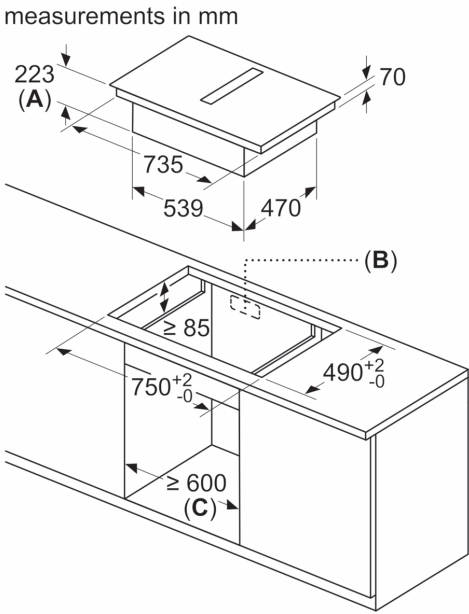

- A: Recessing depth
B: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.
C: All 80cm width class models can be installed in 60cm wide furniture by adjusting the side panels.

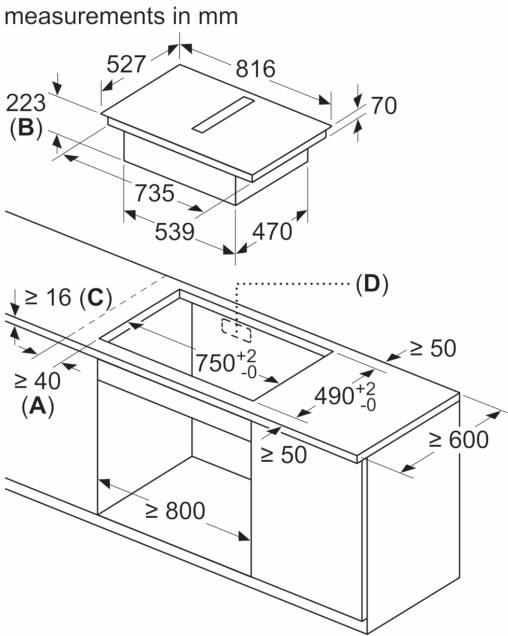


- A: Minimum distance from the hob cut-out to the wall
B: Recessing depth
C: The worktop into which the hob is installed must withstand loads of approx. 60kg; suitable substructures must be used if required.
D: Cut-out in back panel required for pipework. Exact size and position can be taken from specific drawing.

Bản vẽ lắp đặt


Máy hút mùi âm bàn kính

Measurements in mm
Combination with electric hob
Seamless, top-mounted installation

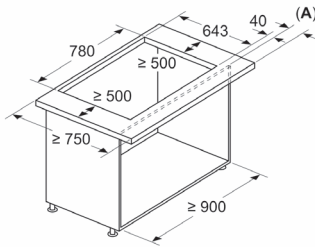



- A:** Worktop overlap to kitchen cabinet
Combination with gas hob is not possible
To prevent power loss, observe the following:
- Do not install upper cabinets or open shelf elements above the appliance
 - Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
 - Distance between appliance frame and wall min. 50 mm

Measurements in mm
Combination with electric hob
Standard, top-mounted installation

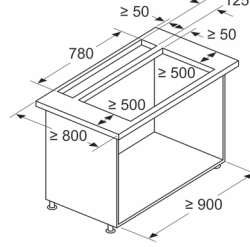

- Standard: with worktop divider between downdraft and hob
Combination with gas hob is not possible
To prevent power loss, observe the following:
- Do not install upper cabinets or open shelf elements above the appliance
 - Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
 - Distance between appliance frame and wall min. 50 mm

Measurements in mm

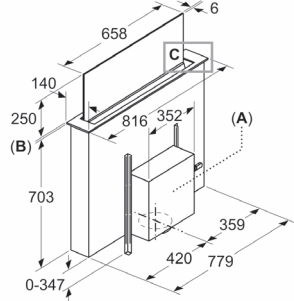


- A:** Installation of motor unit on front/rear or offset laterally with max. 3 m clearance (special accessory required)

Motor unit must always be accessible


B: 5.5 mm

Planning recommendation, air recirculation



A: Exterior wall – U-value ≤ 0.5 W/(m²K)


Standard installation: Partially laid around the toe kick



B: Exterior wall – U-value > 0.5 W/(m²K)


Installation with fully laid pipework to the toe kick for poorly insulated exterior walls or above cold floors

Measurements in mm
Seamless, top-mounted installation
(Special accessory required)

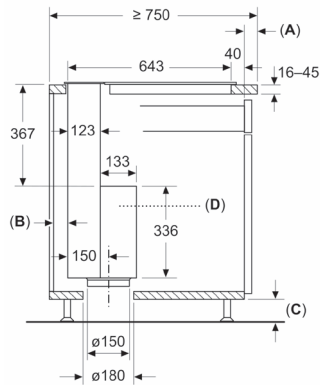


- A:** Worktop overlap to kitchen cabinet
B: ≥ 20 mm between the Guided Air suction area and a cabinet wall
C: ≥ 60 mm for air recirculation
≥ 100 mm for air extraction with ducting in the plinth
D: Motor unit must always be accessible

Measurements in mm
Seamless, top-mounted installation
(Special accessory required)

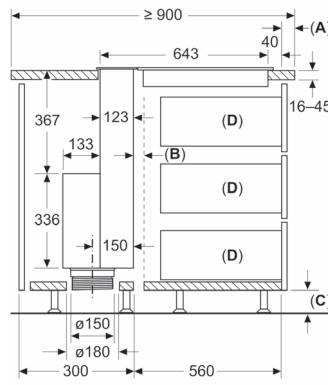

- A:** Worktop overlap to kitchen cabinet
B: Ventilation gap for hob
C: ≥ 60 mm for air recirculation
≥ 100 mm for air extraction with ducting in the plinth
D: Max. pull-out depth
Motor unit must always be accessible


Measurements in mm
Standard, top-mounted installation

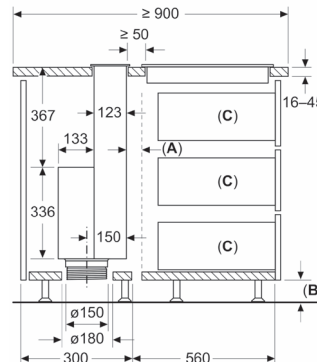

Standard: with worktop divider between downdraft and hob

- A:** Ventilation gap for hob
B: ≥ 60 mm for air recirculation
≥ 100 mm for air extraction with ducting in the plinth
C: Max. pull-out depth
Motor unit must always be accessible

Measurements in mm
Standard, top-mounted installation

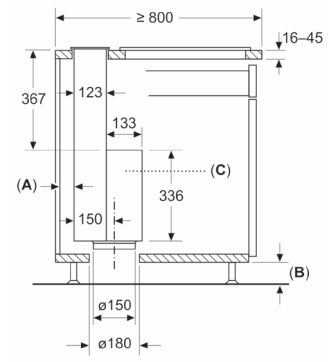

Standard: with worktop divider between downdraft and hob


- A:** ≥ 20 mm between the Guided Air suction area and a cabinet wall
B: ≥ 60 mm for air recirculation
≥ 100 mm for air extraction with ducting in the plinth
C: Motor unit must always be accessible

Bản vẽ lắp đặt


Máy hút mùi thiết kế âm tủ

measurements in mm

Front view

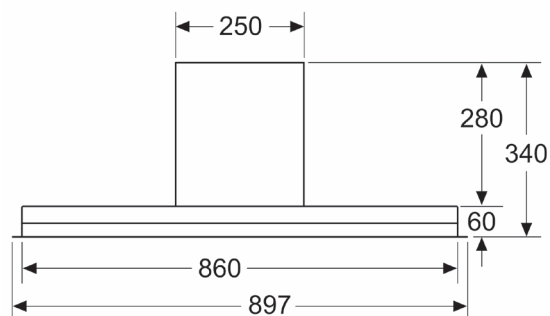

measurements in mm

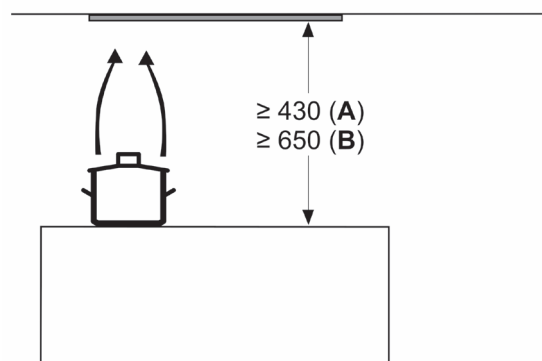


from upper edge of pan support

A: min. 430 electric

B: min. 650 gas


measurements in mm

Installation example

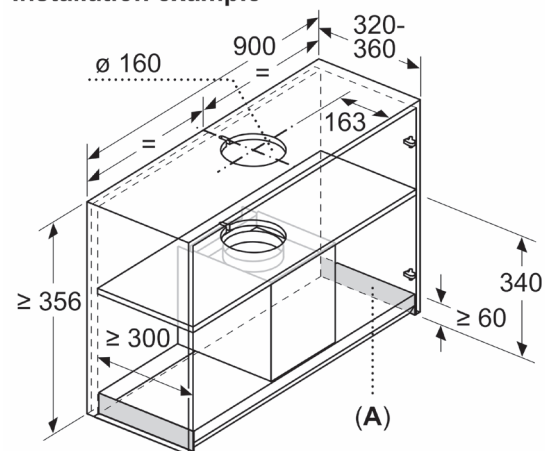

A: Area without hinges

measurements in mm

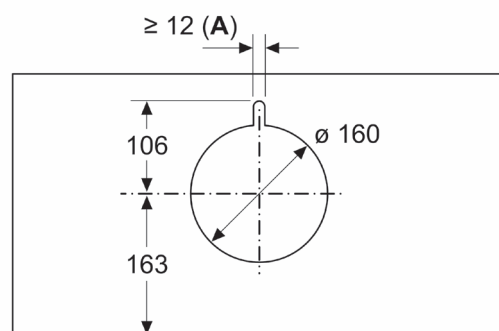

A: Cable bushing



Bosch Website:
Công ty TNHH Đồ Gia Dụng BSH (Việt Nam)
<https://www.bosch-home.com.vn/>



Bosch Facebook:
<https://www.facebook.com/BoschHomeVietnamOfficial/>



Bosch Youtube:
<https://www.youtube.com/@BoschHomeVNOOfficial>



15 năm đảm bảo cung cấp linh kiện thay thế

Được phát triển để sẵn sàng cho tương lai:
Theo đúng cam kết về độ bền và tính bền vững của chúng tôi,
chúng tôi đã mở rộng thời gian cung cấp linh kiện chất lượng cao cho các thiết bị gia dụng lớn lên đến 15 năm.