

Invented for life



BOSCH

Perfection has never been so beautiful.



accent | line

Induction cooktop with integrated range hood.

Smart Combination. Perfect Integration.

The perfect combination of a cooktop and range hood, seamlessly integrated into a single device. It extracts steam and odors right where they originate, allowing you to fully concentrate on cooking.



Information

Induction cooktops offer numerous advantages over gas or infrared alternatives.

+ Speed

Induction cooktops cook faster by transferring heat directly to the base of the pot. Since heat is generated precisely where it's needed, food cooks quickly and evenly.

+ Controllability

Adjust temperatures instantly to prevent boil-overs without needing to remove the pot from the stove.

+ Easy to Clean

Because the surface doesn't get hot, spilled food won't burn or stick, making it easy to wipe away.

+ Safety

The stovetop surface remains relatively cool, significantly reducing the risk of burns.

+ Performance

Direct energy transfer saves up to 30% more electricity compared to infrared stoves.



PerfectAir

The PerfectAir sensor continuously monitors airflow during cooking. In automatic mode, the hob precisely adjusts suction power based on the level of fumes and odors, effectively minimizing noise.

Induction hob with integrated hood



accent|line
carbon black



CONNECTED BY
Home Connect

Induction Hob with Integrated Hood

Serie I 8 PXX895D66E ComfortProfile


- 4 induction zones with pan recognition
- 2 FlexInduction zones
- Direct Select Premium interface
- PerfectFry sensor with 5 temperature levels
- PerfectAir air quality sensor
- MoveMode (3 levels)
- ReStart and QuickStart functions
- Home Connect functionality (Wi-Fi enabled)
- Timer with automatic switch-off for each cooking zone
- Choice of fully automatic or manual fan speed control
- Ventilation system with 17 electronically controlled fan speeds and 2 intensive levels (fully automatic mode available)
- Wireless temperature cooking sensor

Base version includes a CleanAir Plus odor filter.


Slider usable for guided recirculation or extraction mode.

Minimum worktop depth: ≥60 cm

Induction hob with integrated hood

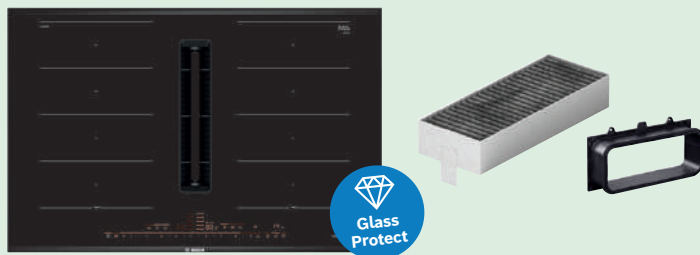

accent|line
carbon black

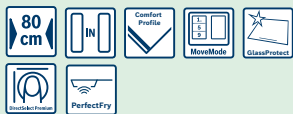

CONNECTED BY
Home Connect

Induction Hob with Integrated Hood

Serie I 8 PXX890D51E ComfortProfile

- 4 induction zones with pan recognition
- 2 FlexInduction zones
- Direct Select Premium interface
- PerfectFry sensor with 5 temperature levels
- PerfectAir air quality sensor
- MoveMode (3 levels)
- ReStart and QuickStart functions
- Home Connect functionality (Wi-Fi enabled)
- Timer with automatic switch-off for each cooking zone
- Choice of fully automatic or manual fan speed control
- Ventilation system with 17 electronically controlled fan speeds and 2 intensive levels (fully automatic mode available)

Base version includes a CleanAir Plus odor filter.

Slider usable for guided recirculation or extraction mode.

Minimum worktop depth: ≥60 cm

Integrated glass hood

The beauty of a fresh, clean space.

The award-winning integrated glass range hood is the ideal ventilation solution: powerful, energy-efficient, and compatible with up to five cooking zones.

Information

When switched off, the glass panel will automatically press down onto the cooktop

Directed Airflow & CleanAir Plus filter

Light effects



Guided air

To ensure that steam rising from all cooking zones – especially the front zones – is effectively drawn in, a V-shaped airflow is created behind the glass panel. This enhances extraction efficiency and ensures quieter operation.

CleanAir Plus filter

Ideal for allergy sufferers. This high-performance filter removes up to 90% of odors and filters up to 99% of airborne particulate matter.



Light effects

The LED lighting system enhances the kitchen space. With the Home Connect app, you can choose from the entire RGB color spectrum.

FlexInduction



accent|line



CONNECTED BY
Home Connect

Induction Hob with 2 Flex Induction Zones + Extension

Serie I 8 **PXY895DV1E** Carbon Black, ComfortProfile

- Home Connect function (Wi-Fi enabled)
- Extended FlexInduction zone
- PowerBoost function for all cooking zones
- PanBoost: PowerBoost function for frying pans
- DirectSelect Premium
- Keep-warm function
- Switch-Off Timer
- Countdown Timer and CountUp Timer
- MoveMode (3 levels)
- QuickStart
- ReStart
- PerfectFry frying sensor with 5 temperature levels
- Cooking assistant
- 2-stage residual heat indicator per cooking zone
- Child lock
- Wipe protection function
- Energy consumption display: shows the electricity usage of the last cooking session

Integrated Glass Downdraft Hood



accent|line

carbon black



CONNECTED BY
Home Connect

Integrated Glass Downdraft Hood

Serie I 8 **DDW88MM66** Carbon Black, ComfortProfile

- The perfect solution for installation in a cooking island or semi-island
- Choice of extraction or recirculation operation
- For recirculation, a CleanAir Plus recirculation set (optional accessory) is required
- ComfortProfile enables seamless installation with the cooktop as a single unit
- Retractable glass panel, illuminated
- The appliance features a premium glass design with red illuminated edges; colors can be customized via the Home Connect app
- DirectSelect controls
- 3 power levels + 2 intensive levels
- Intensive levels with automatic reset
- Fan run-on for 10 minutes
- Guided Air activation guarantees perfect vapor capture regardless of pot height or position
- Decorative LED lighting
- Metal grease filters, dishwasher-safe
- Saturation indicators for grease and odor filters
- Filter cleaning position raises the filter cassette for easy removal
- Glass panel is easy to remove and clean
- Home Connect functionality integrates with various partner voice assistants
- Voice control possible via common voice assistants
- Exhaust performance: Standard mode 501 m3/h, Intensive mode 775 m3/h
- Noise level min./max. in standard mode: 39/62 dB
- Suitable for installation in a 90 cm base cabinet
- Lift height: 250 mm.
- Not compatible with gas cooktops
- Appliance dimensions: 709 x 816 x 140 mm.
- Installation dimensions: 703 x 781 x 123 mm.
- Total connected load: 300 W.

Steam oven

Regardless of the model, the **accent | line** steam ovens allow for the gentle preparation of delicious, nutritious meals, supporting a healthy lifestyle.

The oven has extra steam

- Ideal for toasting bread
- A specialized heating system creates the perfect steam environment.
- Water tray (250 ml)

Oven with steam assist

- Ideal for baking, roasting, grilling, and steam reheating.
- The 1-liter water tank is located behind the control panel.
- Steam support with 3 intensity levels
- Function: Perfect Steam sensor, adds steam on demand.

The oven has a steam assist and a steaming function.

- Ideal for steaming, as well as baking, roasting, grilling, and steam reheating.
- Water tank (1 l) is located behind the control panel.
- Steam support with 3 intensity levels
- Functions: Perfect Steam sensor adds steam on demand, steams up to 120°C.

Perfect Steam steam sensor

Plus steaming function



Air Fry: Healthy frying with less oil

Frying with circulating hot air makes food crispier and tastier while reducing the amount of oil and grease compared to traditional frying methods. This method supports a healthy lifestyle. In addition, the kitchen stays cleaner with no lingering smell of frying oil.



TFT-Touchdisplay Pro touchscreen with digital control ring

Thanks to the intuitive interface, the baking process is easier than ever. All baking settings can be easily adjusted with just a light turn of the large digital control ring. The high-resolution 6.8-inch TFT-Touchdisplay shows detailed images and instructions, guiding you step-by-step through each program selection.



PerfectRoast Plus baking thermometer

Cooking a perfectly roasted dish no longer requires years of experience—that's why you need the PerfectRoast Plus. This device measures the core temperature of the meat at three different points, ensuring your roast is perfectly cooked. Thanks to artificial intelligence, you will know exactly how many minutes are left until done.

Oven Series 8 with Microwave and Steam Function



accent|line



CONNECTED BY
Home Connect

Built-in Oven with Microwave and Steam Function, with Pyrolysis

Serie | 8 **HNG978QB1** Carbon Black, with Camera and Dual LED

- Home Connect
- Camera with browning sensor
- 28 heating modes, including Air Fry and Regeneration
- 3 steam levels: high, medium, and low
- Manual steam injection
- Max. Power: 800 W; 5 microwave power levels
- Temperature control from 30°C – 300°C
- Oven Assistant with voice control
- Self-cleaning technology (pyrolysis)
- Cleaning support (program)
- TFT Touchdisplay Pro – digital operation
- Remaining time display – Crisp finish
- Drop-down door with SoftClose and SoftOpen
- Bosch Assist
- Water tank empty indicator
- PerfectRoast Plus
- PerfectBake Plus
- 1-level telescopic rail with stop function

Compact Steam Oven Series 8 with Steam Function Plus



accent|line



CONNECTED BY
Home Connect

Built-in Compact Steam Oven


Serie | 8 **CSG958DB1** Carbon Black

- Home Connect
- 24 heating modes, including Air Fry (optional accessory) and Regeneration
- Sous-vide cooking – Steam Function Plus
- Manual steam injection
- 3 steam levels: high, medium, and low
- EcoClean DirectPlus: ceiling, back panel, and side walls
- Cleaning support (program)
- Electronic temperature control from 30°C – 250°C
- Oven Assistant with voice control
- TFT Touchdisplay Pro – digital operation
- Remaining time prediction
- Drop-down door with Soft
- Close and SoftOpen
- LED interior lighting
- PerfectRoast Plus
- PerfectBake Plus
- Bosch Assist - Water tank empty indicator
- 1-level telescopic rail, shelf-independent, with stop function


Installation drawing

Induction hob with integrated hood


Measurements in mm

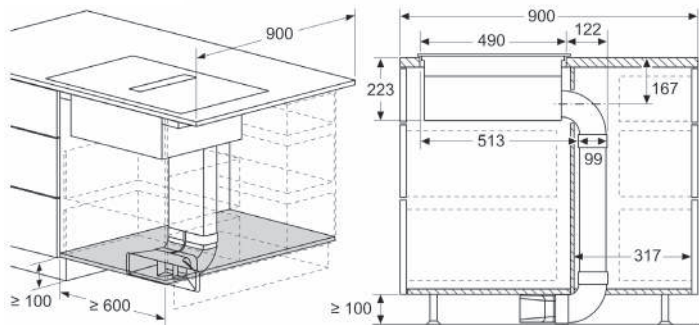


Measurements in mm

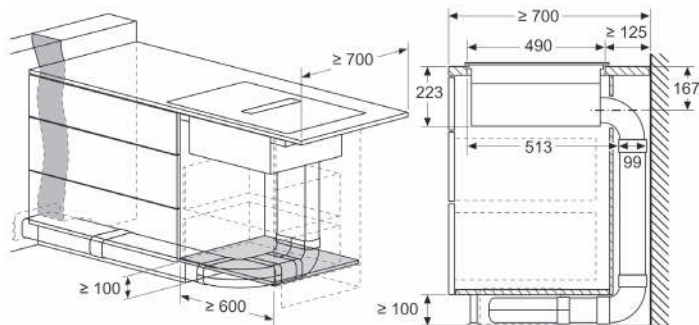


Measurements in mm

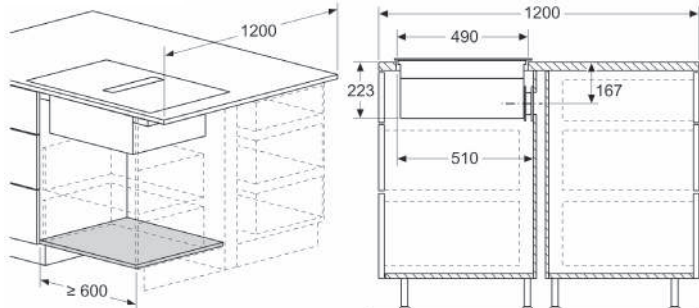


Measurements in mm

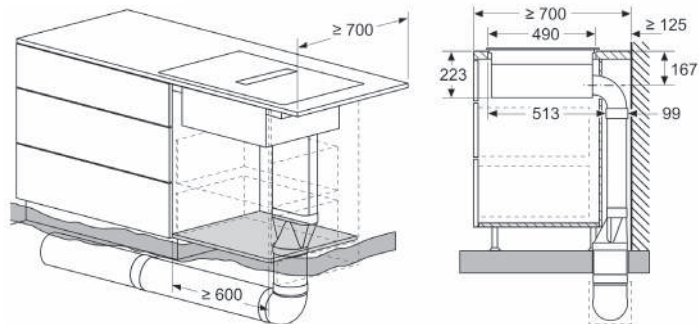

Measurements in mm

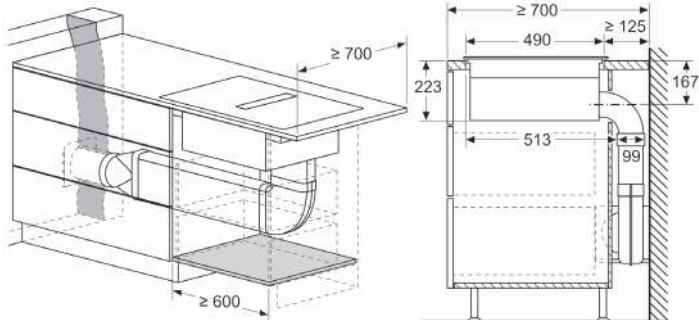


Measurements in mm

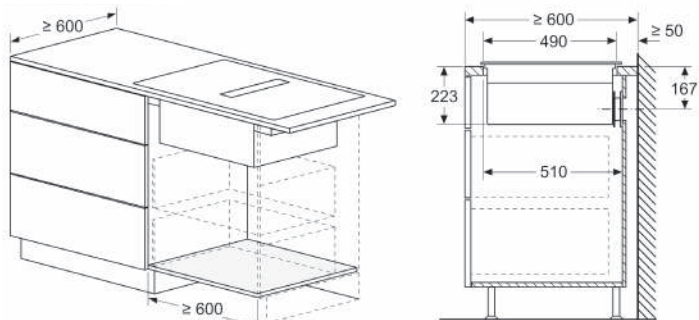

Measurements in mm

Side view

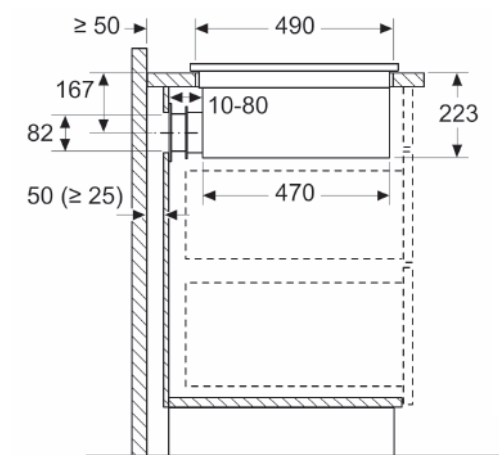


When installing directly at outer walls that are non-insulated ($u \geq 0.5 \text{ W/m}^2 \text{ } ^\circ\text{C}$), we recommend to use partially or fully ducted recirculation configurations.

Installation drawing

Induction hob with integrated hood


Measurements in mm

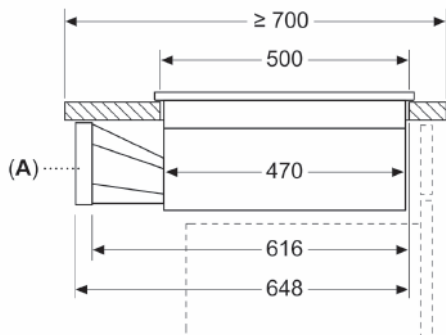

A: Adapter round-flat


Measurements in mm

Front view - unit cut-out
for unducted recirculation

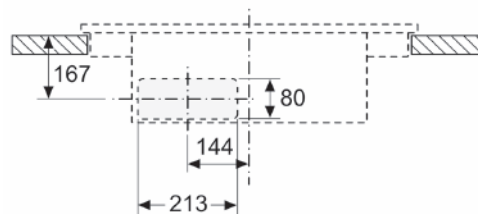


Measurements in mm

Front view

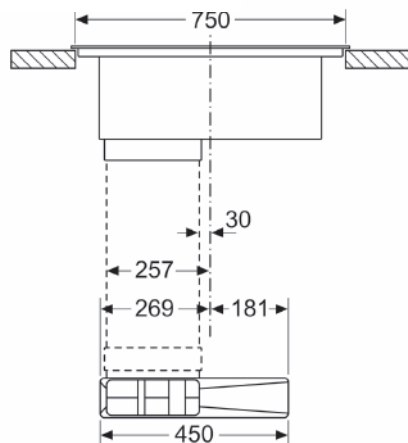



Measurements in mm

Front view

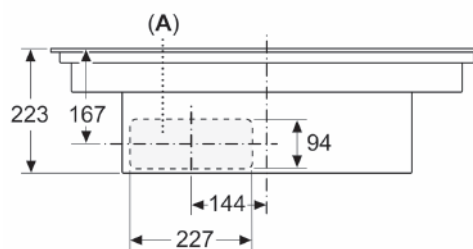


A: Connected directly at the rear

Induction hob with 2 FlexInduction zones + extension

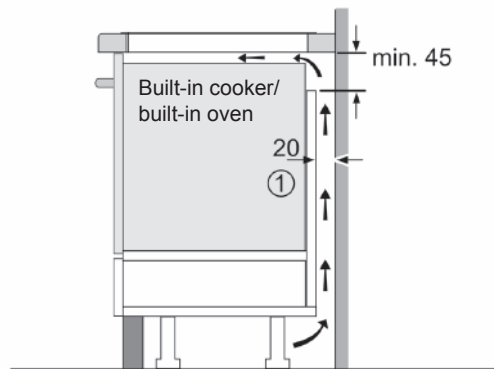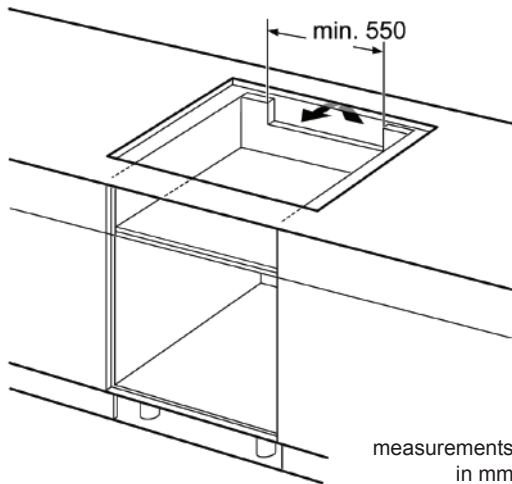


① Ventilation gap must be present

All measurements in mm

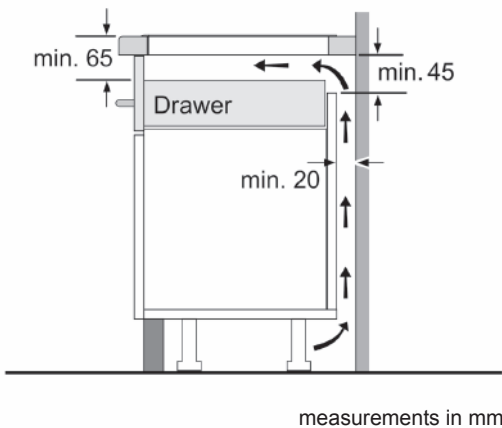

measurements in mm

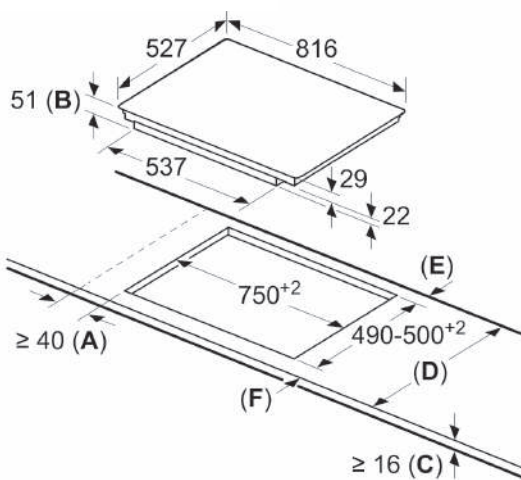

- A:** Minimum distance from the hob cut-out to the wall.
- B:** Recessed depth
- C:** The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.


The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

Installation drawing

Integrated Glass Downdraft Hood

Measurements in mm
Combination with electric hob
Seamless, top-mounted installation

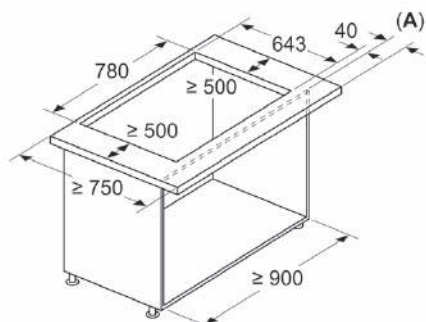



A: Worktop overlap to kitchen cabinet

Combination with gas hob is not possible

To prevent power loss, observe the following:

- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm

Measurements in mm

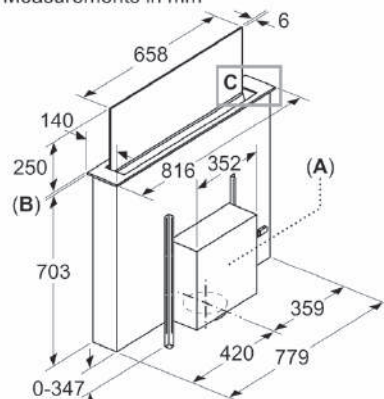


A: Installation of motor unit on front/rear or offset laterally with max. 3 m clearance (special accessory required)

Motor unit must always be accessible

B: 5.5 mm

Measurements in mm
Combination with electric hob
Standard, top-mounted installation

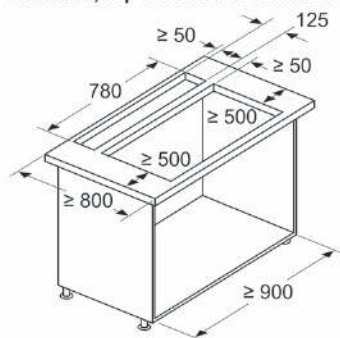


Standard: with worktop divider between downdraft and hob

Combination with gas hob is not possible

To prevent power loss, observe the following:


- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm

Planning recommendation, air recirculation

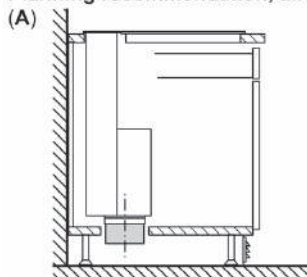

A: Exterior wall – U-value $\leq 0.5 \text{ W/(m}^2\text{K)}$

Standard installation: Partially laid around the toe kick

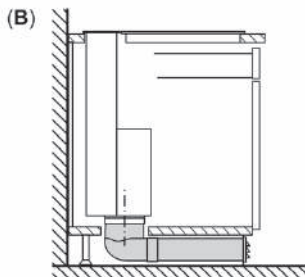

B: Exterior wall – U-value $> 0.5 \text{ W/(m}^2\text{K)}$


Installation with fully laid pipework to the toe kick for poorly insulated exterior walls or above cold floors

Installation drawing

Glass table hood

Measurements in mm
Seamless, top-mounted installation


(Special accessory required)

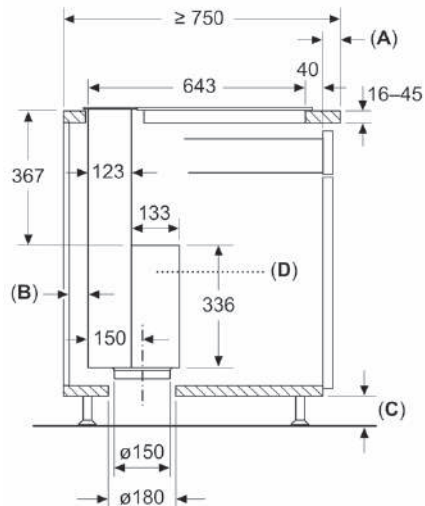

- A:** Worktop overlap to kitchen cabinet
- B:** ≥ 20 mm between the Guided Air suction area and a cabinet wall
- C:** ≥ 60 mm for air recirculation
 ≥ 100 mm for air extraction with ducting in the plinth
- D:** Motor unit must always be accessible


Measurements in mm
Seamless, top-mounted installation

(Special accessory required)

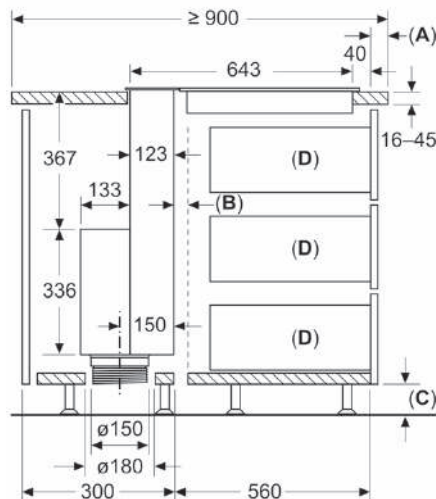

- A:** Worktop overlap to kitchen cabinet
 - B:** Ventilation gap for hob
 - C:** ≥ 60 mm for air recirculation
 ≥ 100 mm for air extraction with ducting in the plinth
 - D:** Max. pull-out depth
- Motor unit must always be accessible


Measurements in mm
Standard, top-mounted installation

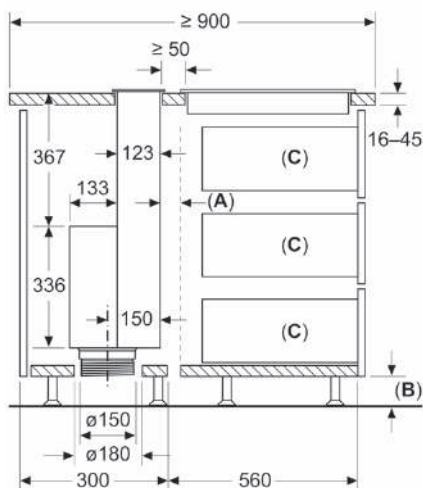

Standard: with worktop divider between downdraft and hob

- A:** Ventilation gap for hob
 - B:** ≥ 60 mm for air recirculation
 ≥ 100 mm for air extraction with ducting in the plinth
 - C:** Max. pull-out depth
- Motor unit must always be accessible

Measurements in mm
Standard, top-mounted installation

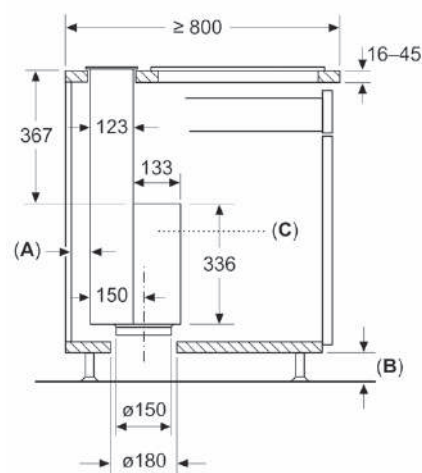


Standard: with worktop divider between downdraft and hob

- A:** ≥ 20 mm between the Guided Air suction area and a cabinet wall
- B:** ≥ 60 mm for air recirculation
 ≥ 100 mm for air extraction with ducting in the plinth
- C:** Motor unit must always be accessible

Installation drawings

Premium ovens, 60 cm


Measurements in mm

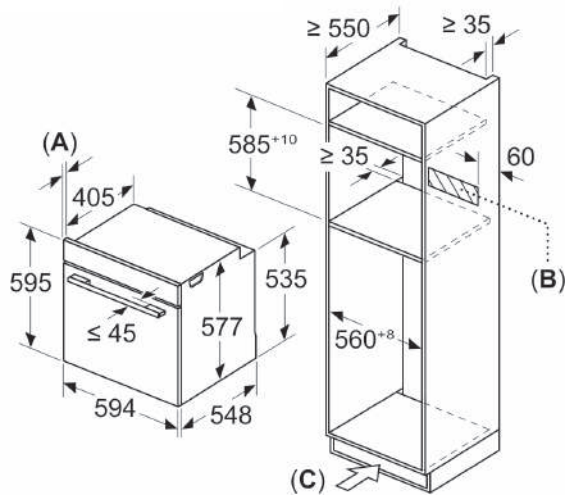

A: 19.5 mm

B: Space for appliance connection
320 x 115 mm


C: Ventilation space in the base $\geq 200 \text{ cm}^2$

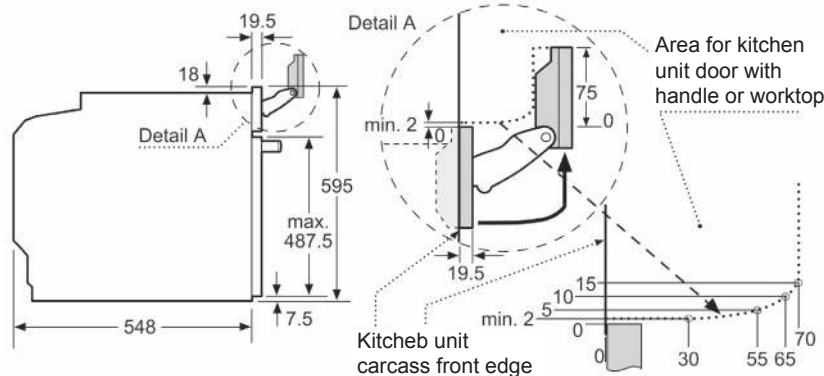


Note the pivoting range of the fascia.

Measurements in mm

Installing two appliances on top of each other
Air exchange

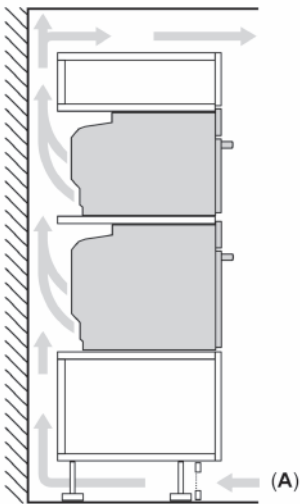

A: Air inter $\geq 200 \text{ cm}^2$

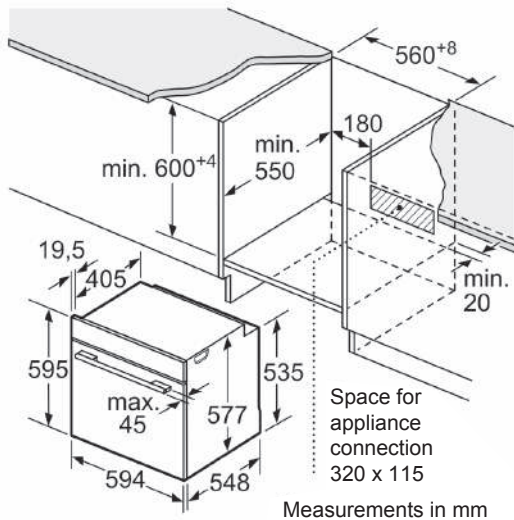


Measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.


Hob type	min. worktop thickness	
	fitted	flush
Induction hob	37 mm	38 mm
Full surface Induction hob	47 mm	48 mm
Gas hob	30 mm	38 mm
Electric hob	27 mm	30 mm

Installation drawings


Ovens, 45 cm

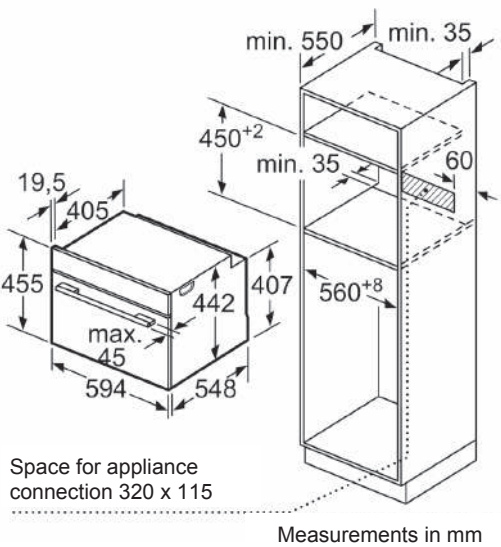



Installing two appliances on top of each other
Air exchange

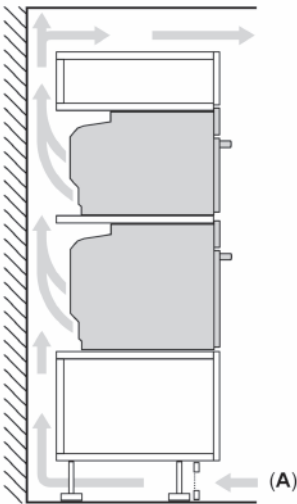

A: Air inter $\geq 200 \text{ cm}^2$

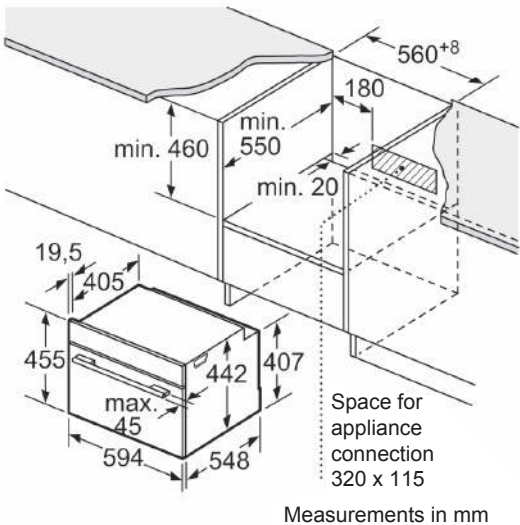

Installation with a hob.

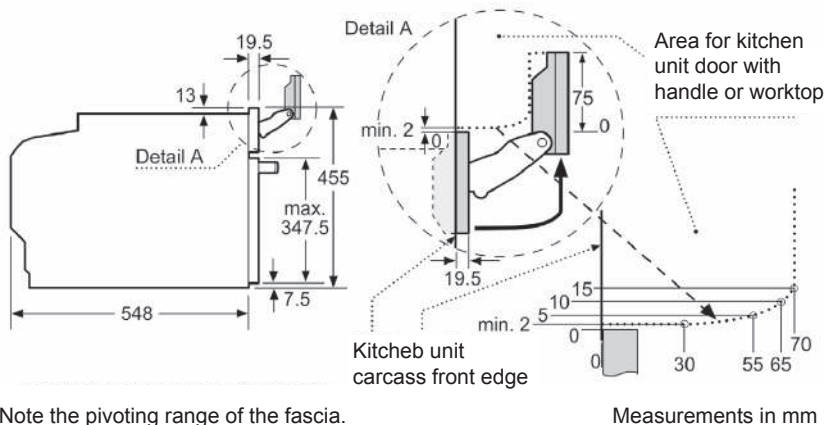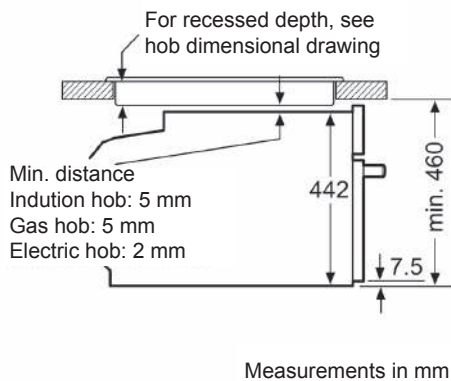

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm



BSH Home Appliances Ltd.

Ital Thai Tower, 2034/31-39, 2nd Floor, New Phetchburi Road,
Bangkapi, Huay Kwang, Bangkok 10310, Thailand

Email: bosch-th-info@bshg.com

Call-Center : +662 495 2424

www.bosch-home.in.th

 Like us on
FACEBOOK | [www.facebook.com/
BoschHomeThailand](https://www.facebook.com/BoschHomeThailand)

 Instagram | [BoschHomeThailand](https://www.instagram.com/BoschHomeThailand)

 Youtube | [Bosch Home Singapore, Thailand, Indonesia](#)

All images are for illustration purposes only.

Please approach out in-store sales personnel

further information more details, visit www.bosch-home.in.th

©Copyright 2021 by BSH HomeAppliances Ltd. (Thailand)

Printed in Thailand.