Your new dryer

Congratulations – You have opted for a modern, high-quality domestic appliance of the Bosch brand. The condenser dryer is distinguished by its economical energy consumption.

Each dryer which leaves our factory is inspected thoroughly to ensure that it functions properly and is in perfect condition.

If you have any questions, please do not hesitate to contact our customer service.

Environmental disposal

Dispose of packaging in an environmentally friendly manner.

This appliance has been identified in accordance with the European directive 2002/96/EG on Waste Electrical and Electronic Equipment – WEEE.

The directive specifies the framework for an EU-wide valid return and recycling of old appliances.



Preparation Intended Use

Check A Never use a damaged dryer! Notify customer service! the dryer

.. and adjust

Super 40' Sportswear 99 Energy B 20 min

Programme selector

Cupboard Dry .

End of programme in 1*–24 hours (Press button several times if required) **h: min** $^{\prime}$ (*depending on the selected programme, e.g. duration 1:54h \rightarrow 2h. Can always be selected to the next full hour.)

€ Uctions

Cupboard Dr

Button for programme duration Set drying time for **Woollens Drying Basket** programme **Wool** (see separate instructions for "Woollens basket"). Drying Bask

Reduced temperature for sensitive textiles ©, e.g. polyacrylic, Low Heat

only in the household:

washed with water.

near the dryer!

only for drying textiles which have been

- Do not leave children unattended

Keep pets away from the dryer!

Status/service

polyamide, elastane, acetate, for longer drying time Select On/Off for acoustic signal at end of programme ■ 4) Buzzer For installation see page 8



Selecting + setting programme

Select drying programme .

All buttons are sensitive. a gentle tap is adequate!

Select ① Start button

 $\underline{\mathbb{M}} \supseteq \underline{\mathbb{H}} \Rightarrow \underline{\mathbb{M}}$ drying, iron dry, cupboard dry, fluff/finished. Empty condensation container. Clean fluff filter and/or air cooler.

Drying

Cooling grille

Drying

Condensation container

Door handle

Drum

Maintenance flap

Control panel

Draining the condensation

Empty container **after** each drying operation!

- L. Pull out the container and keep in a horizontal position.
- Pour out the condensation.


3. Insert the container until it locks into position.

Cleaning the fluff filter

- 1. Open door, pull out filter and open.
- 2. Remove fluff (run hand over filter). 3. Close filter, re-insert and close door.
- Rinse extremely soiled or blocked filters with warm water and dry thoroughly.

Switching off the dryer

Set programme selector to **0** (Off). Do not leave damp washing in the dryer!



Removing washing

The automatic anti-crease function causes the drum to move at specific intervals, the washing remains loose and fluffy for an hour (two hours if the 🔁 (Reduced Ironing) function is also selected – depending



Topping up or removing washing

- Open door, the drying process is terminated.
- Top up or remove washing and close door.
- 3. If required, reselect programme and additional functions.
- 4. Select ① (Start/Stop) button.




Drum and door may be hot.

About the washing ...



Identifying textiles

Follow care information of the manufacturer!



Dry at low temperature -> also select ((Low Heat).



Do not dry by machine.



Do not dry the following textiles in the dryer:

- Airtight textiles (e.g. rubberised).
 - Delicate fabrics (silk, synthetic curtains) -> anti-creasing!
- Dripping wet washing -> high energy consumption!
- Oil-contaminated washing.

Drying tips

- For uniform drying result, sort the washing according to fabric type and drying
- Close zips, hooks and eyelets, button up guilt covers, tie fabric belts, apron
- Do not overdry the washing -> risk of creasing! Leave the washing to air.
- Do not iron the washing immediately after drying, fold up the washing for a while -> residual moisture will then be distributed evenly.
- Knitted textiles (e.g. T shirts, knitted underwear) often shrink when dried for the first time -> Do not use the **!: Very Dry** programme.
- The drying of starched washing should be limited -> Starch leaves a coating which impairs drying.
- Use the time programme for a small load.

Protection of the environment/Conservation of energy

- Before drying, thoroughly spin the washing in the washing machine -> Higher spin speeds reduce the drying time and lower the energy consumption;
- also spin easy-care washing.
- Use the maximum recommended load, but do not exceed -> Page 7. "Overview of programmes".
- Ensure that the room is well ventilated during the drying process.
- Clean the fluff filter after each drying process -> Page 4.
- Keep the air cooler clean -> Page 6 "Servicing and cleaning".
- Ensure that the cooling air flow is not obstructed -> Do not block or seal the cooling grille.

Servicing and cleaning



Dryer housing, control panel, cooling grille

- Rub with a soft, damp cloth.
- Do not use any caustic cleaning agents/solvents. Immediately remove washing and cleaning agent residue.
- During drying, water may occasionally collect between the window and the seal. This does not adversely affect the function of your dryer in any way!


3-4 times a year or if ((a) (Filter) flashes continuously after the fluff filter has been cleaned




Air cooler

- Leave the dryer to cool down.
 - Residual water may escape, place an absorbent cloth under the maintenance flap.
- 1. Unlock the maintenance flap.
- 2. Completely open maintenance flap.

Appliance must be







6. Clean the seals.

4. Pull out the air cooler.

- 7. Re-insert the air cooler, handle at the bottom! 8. Unscrew both locking levers.
 - 9. Close the maintenance flap until it locks into position.

3. Screw both locking levers towards each other.





Moisture sensor

The dryer is equipped with moisture sensors made of stainless steel. The moisture level of the washing is measured with the moisture sensors. After a longer operating time, a fine layer of limescale may form on the moisture sensors


- 1. Open the door.
- 2. Clean the moisture sensor using a damp sponge with a rough surface (scouring pad).



Do not use steel wool or abrasive materials!











		Terry towels Tea towels hand towels		7	7	7					For textiles with membrane coating, water-repellent textiles, working clothes, fleece textiles (dry jackets/trousers with removable lining separately).			For washing which is to be dried quickly, e.g. made of synthetic fabrics, cotton or blended fabrics. Actual values may differ from the values given, depending on fabric type, mixture of items to be dried, residual moisture in the fabric and load size.	For predried, multi-ply, delicate textiles made of acrylic fibres or for individual small items. Also for subsequent drying.	WTE86304BY 0809 en 9000 454473
		Table linen		7						7	hes, fle			cotton c nic type	dual sm	> 07
		Bed linen		7	7	7	'n.			7	ig clot	jt".		orics, on fab	indivi	
		Socks			7	7	For non-iron washing made of synthetic and blended fabrics, cotton.				workin	Use with separate basket only. See description of "Woollens basket".		netic fal ending e ze.	s or for	= _
	3>	Underwear		7	7	7	l fabric	7			extiles,).	/oollen:	kets. J.	of syntl n, depe Ioad sii	ic fibre	äte Gmbl tschland
		Towelling bathrobe	linen.			7	plendea				ellent t parately	n of "W	nd blanı r drying	made c ss giver ic and	of acryll	Robert Bosch Hausgeräte GmbH Carl-Wery Str. 34 81739 München / Deutschland
		Anorak	ton or				and b			7	ter-rep ng sep	criptior	ows an	/, e.g. I e value he fabr	made c	RobertBoschHau Carl-Wery Str. 34 81739 München.
		Work clothes	of cot	7			ınthetic	7			ng, wa ible lini	ee des	gs, pill _i st 1 pie	' quickl) from th ıre in tl	extiles i	Rober Carl-V 81739
		Sportswear	s made				de of sy	7	7		e coati remova	only. S	ner fillin add ju	e dried differ 1 moistu	licate te g.	
See also page 5		Skirts/dresses	For cottons and coloureds made of cotton or linen.	7			ng mac	7			For textiles with membrane coating, water-repellent te (dry jackets/trousers with removable lining separately)	basket	Garments with down feather fillings, pillows and blankets. By non quilt loads-please add just 1 piece per drying.	For washing which is to be dried quickly, e.g. made of synthet fabrics. Actual values may differ from the values given, depencitems to be dried, residual moisture in the fabric and load size.	For predried, multi-ply, delie Also for subsequent drying	n our
e also I		Trousers	and co	7			washi	7			vith me rouser	oarate I	ith dow Ioads-	which al value dried, r	, multi- sequer	und or
		Shirts	ottons				on-iron	7	7		xtiles v ckets/t	vith sep	ents w in quilt	ashing s. Actu to be o	redried or sub	l be fo
Ď	5	hin2-T	For co	7			Forn				For te (dry ja	Use v	Garm By nc	For w fabric items	For pi Also f	ots car de
programmes		б	max. 7 kg		M	R	max. 3.5 kg		R	B	max. 1.5 kg	max. 1.5 kg	max. 2 kg	max. 2 kg	max. 3 kg	selection of our produc .bosch-hausgeraete.
Overview of p		After drying: ≥ iron the washing ≥ lightly iron the washing ≥ do not iron the washing ○ mangle the washing	Cottons	≥ Iron Dry	⊞. Cupboard Dry	⊞: Very Dry	♣ Synthetics	□ Iron Dry		⊞: Very Dry	₱ Sportswear	8 Wool drying basket	♣ Down	🔊 Super 40'	© Timed progr. 20 min	Further information and a selection of our products can be found on our Internet page: http://www.bosch-hausgeraete.de

Installation

Included in standard delivery: dryer, operating and installation instructions.

Mains plug not inserted!

Check dryer for damage which may have been caused in transit!

Drver is heavy. Do not lift it by yourself!

Beware of sharp edges!

Do not install in a room where there is a risk of frost! Freezing water may result in damage!

- If in doubt, have a technician connect the appliance!

- Do not lift the dryer by projecting components (e.g. door) – risk of breakage!

Installing the dryer

Take all accessories out of the drum.

Drum must be empty!

Mains plug must be accessible at all times!


Do not obstruct cooling grille at the front of the dryer.

 Keep the area around the dryer clean. - Align the dry with the height-adjustable feet.

Place the dryer on a clean, level and firm surface!

Use a spirit level.

- Never remove the height-adjustable feet!



Clean and level

Do not obstruct


cooling grille

Mains connection see Safety instructions, page 11.

- Connect correctly to an a.c. earthed socket. If in doubt, have the socket checked by an

- Mains voltage must correspond with the voltage specifications on the appliance rating plate (see page 9)

Wattage and required fuse are indicated on the appliance rating plate.

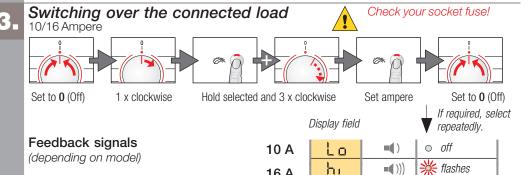

Frost protection/ transportation

Preparation

Empty condensation container, see page 4.

2. Set programme selector to any programme. 3. Select ① (Start/Stop) button -> condensation is pumped into the container.

4. Wait 5 min., empty condensation container again.

5. Set programme selector to **0** (Off).

Technical specifications

Dimensions (D x W x H) 60 x 60 x 85 cm (height-adjustable) Weight (net) approx. 45 kg 7 kg Max. capacity

Condensation container Supply voltage

Connected load

Product number (E-Nr.)

See appliance rating plate

Spin speed Drying time in Energy

Production number (FD) he appliance rating plate is situated on the rear of the dryer.

Consumption values Specifications are approximate values determined under normal conditions. Fluctuations up to 10% are possible.

		esidual humidity)	min. wit	h 8 min. g time**	consumption in kWh**		
			10 A	16 A	10 A	16 A	
	1400	(approx. 50%)	112	89	3.36	3.36	
	1000	(approx. 60%)	131	104	3.92	3.92	
	800	(approx. 70%)	150	120	4.48	4.48	
a Iron Dry*	1400	(approx. 50%)	93	69	2.42	2.42	
	1000	(approx. 60%)	111	82	3.06	3.06	
	800	(approx. 70%)	130	94	3.70	3.70	
☆ Synthetics 3.5	kg						
	800	(approx. 40%)	48	42	1.35	1.35	
	600	(approx. 50%)	60	51	1.65	1.65	
* Test programmes acc	cording to DI	VEN 61 121 and IEC	361 121	1	I	1	

Fest programmes according to DIN EN 61 121 and IEC 61 121

Actual values may differ from the values given, depending on fabric type, mixture of items to be dried, residual moisture in the fabric and load size.

Drum light (depending on model) (Bulb E14, 15 W)

The drum is lit when the door is opened and closed or when the programme starts; it goes out automatically.

Optional accessories

Connection fittings for condensation outlet The condensation is conveved directly via a hose.

Connection set for washing-drying column o save space, the dryer can be placed on a suitable washing machine which has the **same**

depth and width. his connection set must always be used to secure the dryer to the washing machine.

Same as WTZ 11310 but with removable worktop.

Installation underneath the worktop

Risk of electric shock! nstead of the appliance covering plate, you must have a metal cover fitted by an expert.

Platform

Facilitates loading and unloading the appliance.

he basket contained in the drawer can be used to carry the laundry.

What to do if ...

Repairs may be carried out by customer service or authorised technicians only!

Before you call customer service, please check whether you can correct the fault yourself. A technician will charge you for advice, even during the warranty period. Please give customer service the product number (E-Nr.) and the production number (FD) of the appliance (see inside

(Start/Stop) indicator light Is the mains plug inserted? oes not come on. Programme selected? Check fuse in the house.

Empty condensation container. (Container) and (Start/Stop) indicator lights If featured, check hose for condensation outlet.

are flashing.

③ (Filter) and ① (Start/Stop) Clean air cooler, page 6 "Servicing and cleaning". indicator lights are flashing. Clean fluff filter, page 4.

Dryer does not start. ① (Start/Stop) button selected? Door closed?

Programme set? Ambient temperature higher than 5°C?

ater is running out. Align dryer horizontally Clean air cooler seal.

Press door until it "clicks" into position. oor is opening by itself.

Degree of dryness was not Clean fluff filter/air cooler, page 4/6. ached or drying time too Empty condensation container.

Check water outlet (if featured). Ambient temperature above 30 $^{\circ}$ C -> adequate ventilation.

Cooling grille may be blocked -> unblock. Unsuitable programme set? Page 7. Dryer installation too restricted? Provide air circulation.

Power failure -> restart dryer. Fine layer of limescale on the moisture sensors -> clean the moisture sensors, page 6.

Vashing damp. Use next higher drying programme or also the time programme,

Warm washing feels damper than it actually is!

Humidity in the room Ventilate room adequately. increasing significantly. Cooling grille blocked? -> Unblock

Ensure that the air cooler has been inserted.

One or more indicator lights Clean filter and air cooler, page 4/6. programme status are Check installation conditions, page 8. Switch off, leave to cool down, switch on again,

restart programme. Does the interior light Pull out the mains plug. Open cover inside the appliance above (depending on model) work? the door(with a Torx 20 screwdriver) and change the bulb.

Close the cover flap.

If you cannot correct a fault yourself or if a repair is required: Set programme selector to 0 (Off).

Pull out the mains plug.

Safety instructions

Use dryer ONLY ... NEVER ..

- in the house.

for drying textiles.

- Immediately pull out mains plug or interrupt fuse.

 use dryer for other purposes than those described above. modify the technology or properties of the dryer.

Children and uninstructed persons must not use the dryer. Do not leave children unattended near the dryer. Keep pets away from the dryer.

Take all objects out of the pockets. Look out for cigarette lighters -> risk of explosion!

Do not lean or sit on the door -> risk of dryer tipping over!

 Open the door carefully. Hot steam may escape. - Frost damage possible below 0 °C.

connection

Attach loose cables or hoses, otherwise risk of tripping. Connect the dryer correctly to an a.c. earthed socket, otherwise safety

cannot be ensured. Cable cross-section must be adequate.

Use residual-current-operated circuit-breaker with this symbol only: Mains plug and socket must match.

 Do not use multiple plug/couplings and/or extension leads. - Do not take hold of the mains plug with damp hands.

Never pull the mains plug out of the socket by tugging the cable.

Do not damage the power cord.

- Load the drum with washing only. Check the contents before switching on

 Do not use the dryer if the washing has come into contact with solvent, oil, wax, grease or ink (e.g. setting lotion, nail varnish remover, stain remover, solvent naphtha, etc.) -> risk of fire/explosion!

Dust hazard (e.g. coal dust, flour): do not use the dryer -> risk of explosion! Do not use the dryer if the washing contains foam/rubber -> elastic material may be destroyed and the dryer may be damaged by possible deformation

- When cleaning the fluff filter, make sure that no foreign material (down, filling material) gets into the air duct opening. If necessary, clean the drum beforehand with a vacuum cleaner. If foreign material should still get into the air duct -> call the after-sales service. There is a risk of a fire.

Switch off the dryer when the programme ends. Do not drink the condensation!

 Do not use the dryer if it is defective or considered to be defective; repairs by customer service only.

 Do not use the dryer if the power cord is defective. To prevent hazards. have a defective power cord replaced by customer service only.

Before changing the interior light bulb, always pull the mains plug out of the

For reasons of safety use original spare parts and accessories only.

- Dryer: pull out the mains plug, then sever the power cord on the appliance. Dispose of at a public waste disposal centre.

Packaging: do not allow children to play with packaging parts -> risk of suffocation!

- All materials are environmentally friendly and recyclable. Dispose of in an environmentally friendly manner.







Read these instructions before switching on the dryer!







Follow instructions on page 11!

Your new dryer

Congratulations - You have opted for a modern, high-quality domestic appliance of the Bosch brand. The condenser dryer is distinguished by its economical energy consumption.


Each dryer which leaves our factory is inspected thoroughly to ensure that it functions properly and is in perfect condition.

If you have any questions, please do not hesitate to contact our customer service.

Environmental disposal

Dispose of packaging in an environmentally friendly manner.

This appliance has been identified in accordance with the European directive 2002/96/EG on Waste Electrical and Electronic Equipment - WEEE.



Intended Use

- only in the household:
- only for drying textiles which have been washed with water.



- Do not leave children unattended near the drver!
- Keep pets away from the dryer!

Preparation

Never use a damaged dryer!



With dry hands only! Take hold of the plug with dry hands only!



Sort and put in the

Take all objects Look out fo The drum must be empty


For install



Selecting + setting pr

Select drying p



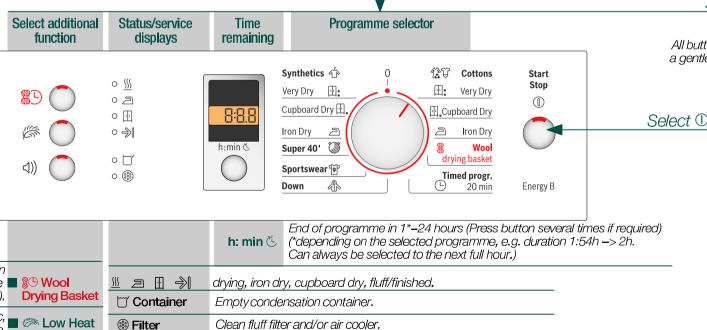



1

ation see page 8

Check the dryer

Insert the ains plug



e washing

out of the pockets. r cigarette lighters! before it is loaded!

ogramme

rogramme ...

.. and adjust

ons are sensitive, e tap is adequate!

Start button

3

Drying



Drying


Draining the condensation




- Empty container **after** each drying operation!

 1. Pull out the container and keep in a horizontal position.
- 2. Pour out the condensation.
- 3. Insert the container until it locks into position.

Cleaning the fluff filter






Rinse extremely soiled or blocked filters with warm water and dry thoroughly.




Switching off the dryer



Do not leave damp washing in the drver!



Removing washing







Topping up or removing washing

- Open door, the drying process is terminated.
- Top up or remove washing and close door.
- If required, reselect programme and additional functions.
- Select ① (Start/Stop) button.



Drum and door may be hot.

About the washing ...



Identifying textiles

Follow care information of the manufacturer!



Dry at normal temperature.



Dry at low temperature -> also select ((Low Heat).



Do not dry by machine.



Do not dry the following textiles in the dryer:

- Airtight textiles (e.g. rubberised).
- Delicate fabrics (silk, synthetic curtains) -> anti-creasing!
- Dripping wet washing -> high energy consumption!
- Oil-contaminated washing.

Drying tips

- For uniform drying result, sort the washing according to fabric type and drying programme.
- Close zips, hooks and eyelets, button up quilt covers, tie fabric belts, apron strings, etc.
- Do not overdry the washing -> risk of creasing! Leave the washing to air.
- Do not iron the washing immediately after drying, fold up the washing for a while -> residual moisture will then be distributed evenly.
- Knitted textiles (e.g. T shirts, knitted underwear) often shrink when dried for the first time -> Do not use the **□: Very Dry** programme.
- The drying of starched washing should be limited -> Starch leaves a coating which impairs drying.
- Use the time programme for a small load.

Protection of the environment/Conservation of energy

- Before drying, thoroughly spin the washing in the washing machine -> Higher spin speeds reduce the drying time and lower the energy consumption; also spin easy-care washing.
- Use the maximum recommended load, but do not exceed -> Page 7, "Overview of programmes".
- Ensure that the room is well ventilated during the drying process.
- Clean the fluff filter after each drying process -> Page 4.
- Keep the air cooler clean -> Page 6 "Servicing and cleaning".
- Ensure that the cooling air flow is not obstructed -> Do not block or seal the cooling grille.

Servicing and cleaning





Dryer housing, control panel, cooling grille


- Rub with a soft, damp cloth.
- Do not use any caustic cleaning agents/solvents.
- Immediately remove washing and cleaning agent residue.
- During drying, water may occasionally collect between the window and the seal. This does not adversely affect the function of your dryer in any way!

3–4 times a year or if (8) (Filter) flashes continuously after the fluff filter has been cleaned.



Air cooler

- Leave the dryer to cool down.
- Residual water may escape, place an absorbent cloth under the maintenance flap.



2. Completely open maintenance flap.




0 17

*****®

- 3. Screw both locking levers towards each other.
- 4. Pull out the air cooler.



Do not damage the air cooler! Clean with warm water only; do not use hard/sharp-edged objects!



- 6. Clean the seals.
- 7. Re-insert the air cooler, handle at the bottom!
- 8. Unscrew both locking levers.
- 9. Close the maintenance flap until it locks into position.





Moisture sensor

The dryer is equipped with moisture sensors made of stainless steel. The moisture level of the washing is measured with the moisture sensors. After a longer operating time, a fine layer of limescale may form on the moisture sensors.

- 1. Open the door.
- 2. Clean the moisture sensor using a damp sponge with a rough surface (scouring pad).





Do not use steel wool or abrasive materials!

6

See also page 5 Overview of programmes

nand towels e.g. made of synthetic fabrics, cotton or blended values given, depending on fabric type, mixture of lea towels/ textiles for individual small items. l emy towels nənii əlds i clothes, Bed linen 7 cotton. working description of "Woollens basket" **200KS** delicate textiles made of acrylic fibres or fabrics, **Underwear** and blended (dry jackets/trousers with removable lining separately), pathrobe guillawo I items to be dried, residual moisture in the fabric **ANORAK** of cotton synthetic **Work clothes** By non quilt loads-please add just Sportswear made of SKILLS/QLGSSGS 7 multi-ply, non-iron washing For washing which is fabrics, Actual values Garments with down Use with separate SJÐSNOJ J and For predried, r Also for subse cottons Shirts F0, T-Shirt For 1.5 kg .5 kg 2 kg <u>\$</u> 3 kg 3.5 N max. max. max. max. max. N M M M M M M M do not iron the washing lightly iron the washing mangle the washing Wool drying basket iron the washing Timed progr. ■ Cupboard Dry **Cupboard Dry** Sportswear ♣ Synthetics **∰** ⇔ Cottons Super 40' VeryDry ≥ Iron Dry ≥ Iron Dry Down ⊕ 20 min ⊞ ∺ R O (

Installation

739 München / Deutschland

can be found on our

- Included in standard delivery: dryer, operating and installation instructions.
- Mains plug not inserted!
- Check dryer for damage which may have been caused in transit!
- Dryer is heavy. Do not lift it by yourself!
- Beware of sharp edges!
- Do not install in a room where there is a risk of frost! Freezing water may result in damage!
- If in doubt, have a technician connect the appliance!
- Do not lift the dryer by projecting components (e.g. door) risk of breakage!

Installing the dryer




Take all accessories out of the drum. Drum must be empty!

- Mains plug must be accessible at all times!
- Place the dryer on a clean, level and firm surface!
- Do not obstruct cooling grille at the front of the dryer.
- Keep the area around the dryer clean.
- Alian the dry with the height-adjustable feet. Use a spirit level.
- Never remove the height-adjustable feet!




Mains connection see Safety instructions, page 11.

- Connect correctly to an a.c. earthed socket. If in doubt, have the socket checked by an electrician!
- Mains voltage must correspond with the voltage specifications on the appliance rating plate (see page 9)!
- Wattage and required fuse are indicated on the appliance rating plate.






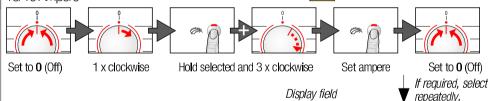

Feedback signals (depending on model)

10 A 16 A



off 0 **#** flashes

Frost protection/ transportation



Do not operate the drve if there is a risk of frost!



7

Preparation

- 1. Empty condensation container, see page 4.
- Set programme selector to any programme.
- Select \odot (Start/Stop) button \rightarrow condensation is pumped into the container.
- Wait 5 min., empty condensation container again.
- Set programme selector to 0 (Off).

Technical specifications

- Dimensions (D x W x H)

- Weight (net)

- Max. capacity

- Condensation container

- Supply voltage

- Connected load

FuseProductnumber (E-Nr.)

- Production number (FD)

 $60 \times 60 \times 85$ cm (height-adjustable)

approx. 45 kg

7 kg 4.2 l

See appliance rating plate

The appliance rating plate is situated on the rear of the dryer.

Consumption values Specifications are approximate values determined under normal conditions. Fluctuations up to 10% are possible.

		pin speed esidual humidity)	Drying min. wit cooling	h8min.	Energy consumption in kWh**		
			10 A	16 A	10 A	16 A	
■. Cupboard Dry*	1400	(approx. 50%)	112	89	3.36	3.36	
	1000	(approx. 60%)	131	104	3.92	3.92	
	800	(approx. 70%)	150	120	4.48	4.48	
alron Dry*	1400	(approx. 50%)	93	69	2.42	2.42	
	1000	(approx. 60%)	111	82	3.06	3.06	
	800	(approx. 70%)	130	94	3.70	3.70	
	ф						
■. Cupboard Dry*	800	(approx. 40%)	48	42	1.35	1.35	
	600	(approx. 50%)	60	51	1.65	1.65	
I I DELEVISION DECONICION							

^{*}Test programmes according to DIN EN 61 121 and IEC 61 121

Drum light (depending on model) (Bulb E14, 15 W)

The drum is lit when the door is opened and closed or when the programme starts; it goes out automatically.

Optional accessories

<u>Order no.</u>

Connection fittings for condensation outlet

The condensation is conveyed directly via a hose.

Connection set for washing-drying column

To save space, the dryer can be placed on a suitable washing machine which has the **same** depth and width.

This connection set must always be used to secure the dryer to the washing machine.

Same as WTZ 11310 but with removable worktop.

Installation underneath the worktop Risk of electric shock!

Instead of the appliance covering plate, you must have a metal cover fitted by an expert.

WMZ Platform

Facilitates loading and unloading the appliance.

The basket contained in the drawer can be used to carry the laundry.

What to do if ...



Repairs may be carried out by customer service or authorised technicians only!

Before you call customer service, please check whether you can correct the fault yourself. A technician will charge you for advice, even during the warranty period. Please give customer service the product number (E-Nr.) and the production number (FD) of the appliance (see inside of door).

① (Start/Stop) indicator light	Is the mains plug inserted?					
does not come on.	Programme selected?					
	Check fuse in the house.					
1						

☐ (Container) and Empty condensation container.

① (Start/Stop) indicator lights If featured, check hose for cond

① (Start/Stop) indicator lights If featured, check hose for condensation outlet. are flashing.

(Filter) and ① (Start/Stop)
Clean air cooler, page 6 "Servicing and cleaning".
Indicator lights are flashing.
Clean fluff filter, page 4.

Dryer does not start. ① (Start/Stop) button selected?

Door closed? Programme set?

Ambient temperature higher than 5 °C?

Water is running out.

Align dryer horizontally.

Clean air cooler seal.

Door is opening by itself. Press door until it "clicks" into position.

Degree of dryness was not reached or drying time too long.

Clean fluff filter/air cooler, page 4/6.

Empty condensation container.

Check water outlet (if featured).

Ambient temperature above 30 °C -> adequate ventilation.

Cooling grille may be blocked -> unblock. Unsuitable programme set? Page 7.

Driver installation too restricted? Provide air circulation.

Power failure -> restart dryer.

Fine layer of limescale on the moisture sensors ->

clean the moisture sensors, page 6.

Washing damp. Use next higher drying programme or also the time programme,

page 7.

Warm washing feels damper than it actually is!

Humidity in the room Ventilate room adequately. is increasing significantly.

Cooling grille blocked? -> Unblock.

Ensure that the air cooler has been inserted.

One or more indicator lights for programme status are flashing.

Clean filter and air cooler, page 4/6. Check installation conditions, page 8.

Switch off, leave to cool down, switch on again,

restart programme.

Does the interior light Pull out the mains plug. Open cover inside the appliance above (depending on model) work? Pull out the mains plug. Open cover inside the appliance above the door(with a Torx 20 screwdriver) and change the bulb.

Close the cover flap.

If you cannot correct a fault yourself or if a repair is required:
- Set programme selector to **0** (Off).

- Pull out the mains plug.

^{**} Actual values may differ from the values given, depending on fabric type, mixture of items to be dried, residual moisture in the fabric and load size.

Safety instructions



Emergency Use dryer ONLY ...

NEVER ...

- Immediately pull out mains plug or interrupt fuse.
- in the house.
- for drying textiles.
- use dryer for other purposes than those described above.
- modify the technology or properties of the dryer.
 Children and uninstructed persons must not use the dryer.
 - Do not leave children unattended near the dryer.
 - Keep pets away from the dryer.
 - Take all objects out of the pockets. Look out for cigarette lighters
 risk of explosion!
 - Do not lean or sit on the door -> risk of dryer tipping over!
 - Open the door carefully. Hot steam may escape.

Installation

- Frost damage possible below 0°C.
- Attach loose cables or hoses, otherwise risk of tripping.

Mains connection

- Connect the dryer correctly to an a.c. earthed socket, otherwise safety cannot be ensured.
- Cable cross-section must be adequate.
- Use residual-current-operated circuit-breaker with this symbol only: 🖂
- Mains plug and socket must match.
- Do not use multiple plug/couplings and/or extension leads.
- Do not take hold of the mains plug with damp hands.
- Never pull the mains plug out of the socket by tugging the cable.
- Do not damage the power cord.

Operation

- Load the drum with washing only. Check the contents before switching on the dryer.
- Do not use the dryer if the washing has come into contact with solvent, oil, wax, grease or ink (e.g. setting lotion, nail varnish remover, stain remover, solvent naphtha, etc.) -> risk of fire/explosion!
- Dust hazard (e.g. coal dust, flour): do not use the dryer -> risk of explosion!
- Do not use the dryer if the washing contains foam/rubber -> elastic material may be destroyed and the dryer may be damaged by possible deformation of the foam.
- When cleaning the fluff filter, make sure that no foreign material (down, filling material) gets into the air duct opening. If necessary, clean the drum beforehand with a vacuum cleaner. If foreign material should still get into the air duct -> call the after-sales service. There is a risk of a fire.
- Switch off the dryer when the programme ends.
- Do not drink the condensation!

Defect

- Do not use the dryer if it is defective or considered to be defective; repairs by customer service only.
- Do not use the dryer if the power cord is defective. To prevent hazards, have a defective power cord replaced by customer service only.
- Before changing the interior light bulb, always pull the mains plug out of the socket.

Spare parts Disposal

- For reasons of safety use original spare parts and accessories only.
- Dryer: pull out the mains plug, then sever the power cord on the appliance. Dispose of at a public waste disposal centre.
- Packaging: do not allow children to play with packaging parts
- -> risk of suffocation!
- All materials are environmentally friendly and recyclable.
 Dispose of in an environmentally friendly manner.





Read these instructions before switching on the dryer!



Follow instructions on page 11!