



Wine cooler

KWK36..

[en] Information for Use



You can find additional information and explanations online. Scan the QR code on the title page.



Table of contents

1 Safety 3 1.1 General information 3 1.2 Intended use 3	7.3 Switching off the appliance 7.4 Setting the temperature 7.5 Keylock	12
1.3 Restriction on user group 3 1.4 Safe transport 3 1.5 Safe installation 3 1.6 Safe use 5 1.7 Damaged appliance 6	8 Additional functions	12 12 12 12
2 Preventing material damage 7	9.1 Door alarm9.2 Temperature alarm	
3 Environmental protection and saving energy	10 Wine storage compartment 10.1 Arranging the maximum number of standard bottles 10.2 Tips for storing wine	13 13 13
4.1 Scope of delivery	11 Defrosting	14
 4.3 Installing the appliance	12 Cleaning and servicing	14 14
5 Familiarising yourself with your appliance	channel and drainage hole 12.4 Removing the fittings	
5.2 Control panel 10	13 Troubleshooting	16
6 Features 10 6.1 Extendable bottle shelf 10 6.2 Bottle shelf 11 6.3 Presentation shelf 11 6.4 Door lock 11 7 Basic operation 11 7.1 Switching on the appliance 11 7.2 Operating tips 11	 14 Storage and disposal	17 18 18 18



1 Safety

Observe the following safety instructions.

1.1 General information

- Read this instruction manual carefully.
- Keep the instruction manual and the product information safe for future reference or for the next owner.
- Do not connect the appliance if it has been damaged in transit.

1.2 Intended use

Only use this appliance:

- For storing wine.
- in private households and in enclosed spaces in a domestic environment.
- Up to an altitude of 1200 m above sea level.

1.3 Restriction on user group

This appliance may be used by children aged 8 or over and by people who have reduced physical, sensory or mental abilities or inadequate experience and/or knowledge, provided that they are supervised or have been instructed on how to use the appliance safely and have understood the resulting dangers.

Do not let children play with the appliance.

Cleaning and user maintenance must not be performed by children unless they are being supervised.

1.4 Safe transport

The heavy weight of the appliance may result in injury when lifted.

▶ Do not lift the appliance on your own.

1.5 Safe installation

⚠ WARNING – Risk of electric shock!

Incorrect installation is dangerous.

► Connect and operate the appliance only in accordance with the specifications on the rating plate.

en Safety

- ► Connect the appliance to a power supply with alternating current only via a properly installed socket with earthing.
- ► The protective conductor system of the domestic electrical installation must be properly installed.
- ► Never equip the appliance with an external switching device, e.g. a timer or remote control.
- ▶ When the appliance is installed, the mains plug of the power cord must be freely accessible. If free access is not possible, an isolating switch must be integrated into the permanent electrical installation according to the installation regulations.
- ► When installing the appliance, check that the power cable is not trapped or damaged.

If the insulation of the power cord is damaged, this is dangerous.

▶ Never let the power cord come into contact with heat sources.

⚠ WARNING – Risk of explosion!

If the appliance's ventilation openings are closed off, a leak in the refrigeration circuit may result in a flammable mixture of gas and air.

► Keep ventilation openings in the appliance casing or in the integrated casing clear of obstruction.

It is dangerous to use an extended power cord and non-approved adapters.

- ▶ Do not use extension cables or multiple socket strips.
- Only use adapters and power cords approved by the manufacturer.
- ▶ If the power cord is too short and a longer one is not available, please contact an electrician to have the domestic installation adapted.

Portable multiple socket strips or portable power supply units may overheat and cause a fire.

► Do not place portable multiple socket strips or power supply units on the back of the appliance.

1.6 Safe use

⚠ WARNING – Risk of electric shock!

An ingress of moisture can cause an electric shock.

- ► Only use the appliance in enclosed spaces.
- ► Never expose the appliance to intense heat or humidity.
- ► Do not use steam- or high-pressure cleaners to clean the appliance.

Children may put packaging material over their heads or wrap themselves up in it and suffocate.

- ► Keep packaging material away from children.
- ► Do not let children play with packaging material.

Children may breathe in or swallow small parts, causing them to suffocate.

- ► Keep small parts away from children.
- ► Do not let children play with small parts.

⚠ WARNING – Risk of explosion!

If the cooling circuit is damaged, flammable refrigerant may escape and explode.

► To accelerate the defrosting process, do not use any other mechanical devices or means other than those recommended by the manufacturer.

Products which contain flammable propellants and explosive substances may explode, e.g. spray cans.

► Do not store products which contain flammable propellants (e.g. spray cans) or explosive substances in the appliance.

Electrical devices within the appliance may cause a fire, e.g. heaters or electric ice makers.

► Do not operate electrical devices within the appliance.

Injury to the eyes caused by escaping flammable refrigerant and hazardous gases.

▶ Do not damage the tubes of the refrigerant circuit or the insulation.

The appliance may tip.

▶ Do not stand or support yourself on the base, runners or doors.

Individual parts on the back of the appliance become hot during operation.

► Never touch these hot parts.

1.7 Damaged appliance

If the appliance or the power cord is damaged, this is dangerous.

- ► Never operate a damaged appliance.
- ► Never pull on the power cord to unplug the appliance. Always unplug the appliance at the mains.
- ▶ If the appliance or the power cord is damaged, immediately unplug the power cord or switch off the fuse in the fuse box.
- ► Call customer service. → Page 18 Improper repairs are dangerous.
- ► Repairs to the appliance should only be carried out by trained specialist staff.
- ▶ Only use genuine spare parts when repairing the appliance.
- If the power cord of this appliance is damaged, it must be replaced by the manufacturer, the manufacturer's Customer Service or a similarly qualified person in order to prevent any risk.



If the tubes are damaged, flammable refrigerant and harmful gases may escape and ignite.

- Keep naked flames and ignition sources away from the appliance.
- ► Ventilate the room.
- ► Switch off the appliance. → Page 12
- ► Unplug the mains plug from the mains or switch off the circuit breaker in the fuse box.
- ► Call customer service. → Page 18

2 Preventing material damage

ATTENTION

If not rolling freely, the appliance's castors may damage the floor when the appliance is moved.

- Transport the appliance using a sack truck.
- Use floor protection when moving the appliance, and do not move it in a zigzag fashion.

Using the appliance, base, runners or doors as a seat or climbing surface may damage the appliance.

► Do not stand or lean on the appliance, base, runners or doors.

Contamination with oil or fat may cause plastic parts and door seals to become porous.

Keep plastic parts and door seals free of oil and grease.

If you clean fittings and accessories in the dishwasher, this may cause them to become deformed or discolour.

 Never clean fittings and accessory in the dishwasher.

3 Environmental protection and saving energy

3.1 Disposing of packaging

The packaging materials are environmentally compatible and can be recycled.

 Sort the individual components by type and dispose of them separately.

3.2 Saving energy

If you follow these instructions, your appliance will use less power.

Selecting the installation location

- Keep the appliance out of direct sunlight.
- Install the appliance as far away as possible from heating elements, cookers and other heat sources:
 - Maintain a 30 mm clearance to electric or gas cookers.
 - Maintain a 300 mm clearance to oil or solid-fuel cookers.
- Never cover or block the exterior ventilation grilles.

Saving energy during use

Note: The arrangement of the fittings does not affect the energy consumption of the appliance.

- Open the appliance only briefly and then close it carefully.
- Never cover or block the interior ventilation openings or the exterior ventilation grilles.

4 Installation and connection

4.1 Scope of delivery

After unpacking all parts, check for any transport damage and for completeness of delivery.

If you have any complaints, contact your dealer or our after-sales service → Page 18.

The delivery consists of the following:

- Free-standing appliance
- Equipment and accessories ¹
- Installation material
- Installation instructions

¹ Depending on the appliance specifications

- User manual
- Customer service directory
- Warranty enclosure ¹
- Energy label
- Information on energy consumption and noises

4.2 Criteria for the installation location

If the appliance is in a space that is too small, a leak in the refrigeration circuit may result in a flammable mixture of gas and air.

► Only install the appliance in a space with a volume of at least 1 m³ per 8 g refrigerant. The volume of refrigerant is indicated on the rating plate.

→ "Appliance", Fig. 1 / 6
Page 10

The weight of the appliance ex works may be up to 80 kg depending on the model.

The subfloor must be sufficiently stable to bear the weight of the appliance.

The surface must be level.

This refrigerator is intended for use at ambient temperatures of 10 $^{\circ}$ C to 38 $^{\circ}$ C.

The appliance is fully functional within the permitted room temperature. If the appliance is operated at colder room temperatures, the appliance will not be damaged up to a room temperature of 5 $^{\circ}$ C.

Over-and-under and side-by-side installation

If you want to install 2 refrigerating appliances one over the other or side

by side, you must maintain a clearance of at least 150 mm between the appliances. Selected appliances can be installed without a minimum clearance. Ask your dealer or kitchen planner about this.

4.3 Installing the appliance

Install the appliance in accordance with the enclosed installation instructions.

4.4 Preparing the appliance for the first time

- 1. Remove the informative material.
- Remove the protective foil and transit bolts, e.g. remove the adhesive strips and carton.
- 3. Clean the appliance for the first time. → Page 15

4.5 Connecting the appliance to the electricity supply

 Insert the mains plug of the appliance's power cable in a socket nearby.

The connection data of the appliance can be found on the rating plate.


- → "Appliance", Fig. 1 / 6
 Page 10
- 2. Check the mains plug is inserted properly.
- ✓ The appliance is now ready for use.

Not in all countries

5 Familiarising yourself with your appliance

5.1 Appliance

You can find an overview of the parts of your appliance here.

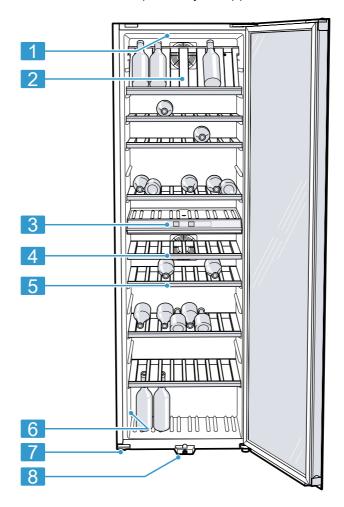



Deviations between your appliance and the diagrams may differ with regard to their features and size.


- Interior lighting
- Presentation shelf → Page 11
- Control panel → Page 10
- Extendable bottle shelf → Page 10
- Bottle shelf → Page 11

6 Rating plate → Page 18

- 7 Screw foot
- 8 Door lock → Page 11

5.2 Control panel

You can use the control panel to configure all functions of your appliance and to obtain information about the operating status.

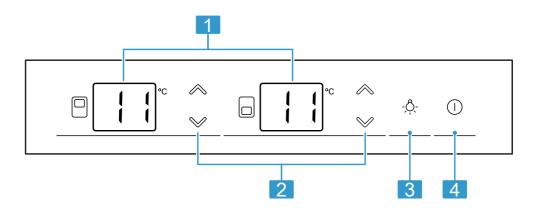

- 2
- Displays the set temperature of the wine-storage compartment °C.
- 2 \square
- switches the interior lighting on or off.
- ① switches the appliance on or off.


6 Features

The features of your appliance depend on the model.

6.1 Extendable bottle shelf

In order to achieve an improved overview and to remove bottles more

quickly, pull out the extendable bottle shelf.



6.2 Bottle shelf

Store bottles securely on the bottle shelf.

ATTENTION

If you exceed the maximum loadbearing capacity, this may damage the bottle shelves and holders.

 Do not exceed the maximum weight of 125 kg per bottle shelf.


To store the maximum number of bottles, you can remove the bottle travs.

→ "Removing the bottle shelf", Page 15

6.3 Presentation shelf

Display special wines on the presentation shelf.

In order to use the presentation shelf, remove the top bottle shelf and insert the presentation shelf at an angle.



△ CAUTION Risk of injury!

Bottles may fall and break.

 Make sure that the presentation shelf is inserted correctly before you put the bottles back.

6.4 Door lock

⚠ WARNING

Risk of suffocation!

Children can lock themselves in the appliance, thereby putting their lives at risk.

Keep the key out of the reach of children.

To lock the appliance, push and hold the key in the door lock and turn it clockwise

7 Basic operation

7.1 Switching on the appliance

1. Electrically connect the appliance. → Page 8

Note: If the appliance has been previously switched off using the control panel, press ①.

- ✓ The appliance begins to cool.
- 2. Set the required temperature. → Page 12

7.2 Operating tips

- Once you have switched on the appliance, the set temperature is only reached after several hours.
- When closing the door, make sure that the door is not blocked by stored items.
- When you close the door, a vacuum may be created. The door is then difficult to open again. Wait a moment until the vacuum is offset.
- The temperature in the appliance varies due to the following conditions:
 - How often the appliance is opened
 - Load capacity
 - Ambient temperature
 - Direct sunlight

7.3 Switching off the appliance

► Press ①.

7.4 Setting the temperature

Setting the temperature of the wine storage compartment

Note: If you press and hold %/ for a longer time, the temperature value changes continuously.

7.5 Keylock

The keylock prevents the appliance from being operated accidentally or incorrectly while running.

Switching on the keylock

- ► Press and hold \bigvee (□) + \bigwedge (□) at the same time for three seconds.
- ▼ The temperature displays show "CL" and "On" for 3 seconds, then the temperature that was previously set is displayed again.

Note: If you press a touch field while the keylock is switched on, the temperature display shows "CL" for 3 seconds.

Switching off the keylock

- The temperature displays show "CL" and "OF" for 3 seconds, then the temperature that was previously set is displayed again.

8 Additional functions

Find out which additional functions can be used for your appliance.

8.1 Interior lighting

The interior lighting switches on automatically when you open the appliance.

Tip: If the interior lighting is switched on when the door is closed too, you can switch on the presentation mode.

Switching on the interior lighting

► Press ...

Switching off the interior lighting

- ► Press ...
- The interior lighting is permanently switched off.

8.2 Presentation mode

In presentation mode, the interior lighting is permanently switched on.

Switching on the presentation mode

- ► Press and hold ❖ for three seconds.
- The interior lighting remains switched on, even if the appliance door is closed.

Switching off the presentation mode

► Press and hold for three seconds.

9 Alarm

9.1 Door alarm

If the appliance door is open for a while, the door alarm switches on.

Switching off the door alarm

- ► Close the appliance door.
- ✓ The warning tone is switched off.

9.2 Temperature alarm

If the wine storage compartment is too warm or too cold for an extended period, the temperature alarm switches on.

If the temperature in a wine storage compartment is more than 2 °C below the set temperature for an extended period, a warning tone sounds and "LO" flashes in the corresponding temperature display.

If the temperature in a wine storage compartment is more than 5 °C above the set temperature for an extended period, a warning tone sounds and "HI " flashes in the corresponding temperature display.

Switching off the temperature alarm

- Press any touch field.
- ✓ The warning tone is switched off.

Note: "LO" or "HI" flashes until the set temperature is reached again.

10 Wine storage compartment


In the wine storage compartment, vou store wine at a constant temperature.

You can set the temperature in the wine storage compartment from 7 °C to 19 °C.


10.1 Arranging the maximum number of standard bottles

► To place the maximum number of bottles in the appliance, place wine bottles into the appliance laving

down with the neck of the bottle facing forwards.



Standard bottle



Storage example with 133 standard bottles and 199 standard bottles

Note: If you remove the bottle shelves, instead of 133 standard bottles, you can place a total of 199 standard bottles in the appliance.

10.2 Tips for storing wine

Note the following tips for storing wine.

- Do not store the wine bottles in crates or boxes in the appliance. The open bottle shelves allow for continuous air circulation. As a result, excess humidity is quickly removed.
- Before you enjoy your wine, you should slowly warm it to room temperature. Take rosé out of the appliance 2 to 5 hours before consuming, and take red wine out of

en Defrosting

the appliance 4 to 5 hours before consuming. Serve white wine immediately after taking it out of the appliance. Sparkling wine and champagne should be chilled in the refrigerator for a short while before drinking.

 Always store wine a little cooler than its ideal serving temperature, as the wine warms up as soon as it is poured into the glass.

10.3 Drinking temperatures

The correct serving temperature is crucial for the taste of the wine.

Type of wine	Drinking tem- perature
Full-bodied red Bordeaux	18 °C
Côtes du Rhône red, Barolo	17 °C
Full-bodied red Burgundy, red Bordeaux	16 °C
Port	15 °C
Young red Burgundy	14 °C
Young red wines	12 °C
Young Beaujolais, all white wines with little residual sugar	11 °C
Old white wines, full-bodied Chardonnay	10 °C
Sherry	9 °C
Young white wines, from late vintage onward	8 °C
Loire, Entre-deux- Mers white wines	7 °C

11 Defrosting

11.1 Defrosting in the wine storage compartment

When the appliance is operating, condensation droplets or frost form on the rear panel of the wine storage compartment due to functional reasons. The back panel in the wine storage compartment defrosts automatically.

The condensation drains into the drainage hole via the condensation channel.

To ensure that the condensation can drain and odours do not form, observe the following information: .

→ "Cleaning the condensation channel and drainage hole", Page 15

12 Cleaning and servicing

Customer Service must clean inaccessible points. Cleaning by customer service can give rise to costs.

12.1 Preparing the appliance for cleaning

- **1.** Switch off the appliance.
 - → Page 12
- 2. Disconnect the appliance from the power supply.
 - Unplug the appliance from the mains or switch off the circuit breaker in the fuse box.
- **3.** Take out all bottles and store them in a cool place.
- **4.** Remove all fittings and accessories from the appliance.
 - → Page 15

12.2 Cleaning the appliance

⚠ WARNING

Risk of electric shock!

An ingress of moisture can cause an electric shock.

► Do not use steam- or high-pressure cleaners to clean the appliance.

Liquid in the lighting or in the controls can be dangerous.

► The rinsing water must not drip into the lighting or controls.

ATTENTION

Unsuitable cleaning products may damage the surfaces of the appliance.

- ▶ Do not use hard scouring pads or cleaning sponges.
- ▶ Do not use harsh or abrasive deteraents.
- ► Do not use cleaning products with a high alcohol content.

If liquid gets into the drainage hole, the evaporation pan may overflow.

► The rinsing water must not get into the drainage hole.


If you clean fittings and accessories in the dishwasher, this may cause them to become deformed or discolour.

- Never clean fittings and accessory in the dishwasher.
- 1. Prepare the appliance for cleaning. → Page 14
- 2. Clean the appliance, the fittings, the accessories and the door seals with a dish cloth, lukewarm water and a little pH-neutral washing-up liquid.
- 3. Dry thoroughly with a soft, dry cloth.
- **4.** Insert the fittings.
- 5. Electrically connect the appliance. → Page 8

12.3 Cleaning the condensation channel and drainage hole

Regularly clean the condensation channel and drainage hole to ensure that the condensation can drain.

 Carefully clean the condensation channel and the drainage hole, e.g. using a cotton bud.






12.4 Removing the fittings

If you want to clean the fittings thoroughly, remove these from your appliance.

Removing the bottle shelf

► Slightly lift the rear of the bottle shelf 1) and remove it 2.



13 Troubleshooting

You can rectify minor faults on your appliance yourself. Read the troubleshooting information before contacting after-sales service. This will avoid unnecessary costs.

⚠ WARNING

Risk of electric shock!

Improper repairs are dangerous.

- ► Repairs to the appliance should only be carried out by trained specialist staff.
- ► Only use genuine spare parts when repairing the appliance.
- ► If the power cord of this appliance is damaged, it must be replaced by the manufacturer, the manufacturer's Customer Service or a similarly qualified person in order to prevent any risk.

Fault	Cause and troubleshooting
The appliance is not cooling, the displays and lighting are lit.	Showroom mode is switched on. 1. Press and hold ○ (□) + ○ (□) +
The LED lighting does not work.	Different causes are possible. ► Call customer service. The customer service number can be found in the enclosed customer service directory.
The refrigeration unit is switching on more frequently and for longer.	The appliance has been opened frequently. Do not open appliance door unnecessarily.
	The exterior ventilation grilles are blocked. ► Remove any obstructions from in front of the exterior ventilation grilles.
"CL" appears on the temperature display.	The keylock is switched on. ► Switch off the keylock. → Page 12
A warning tone sounds and "HI" flashes in the temperature display.	It was too warm in the wine storage compartment for an extended period. • Press any touch field.
	Note: "HI" flashes until the set temperature is reached again.
	 The exterior ventilation grilles are blocked. Remove any obstructions from in front of the exterior ventilation grilles.

	3 to to 3 g t am a map a com = 11
Fault	Cause and troubleshooting
A warning tone sounds and "LO" flashes in the temperature display.	It was too cold in the wine storage compartment for an extended period. ► Press any touch field. Note: "LO" flashes until the set temperature is reached again.
The temperature differs greatly from the setting.	 Different causes are possible. 1. Switch off the appliance. → Page 12 2. Switch the appliance back on after five minutes. → Page 11 ► If the temperature is too warm, check the temperature again after a couple of hours. ► If the temperature is too cold, check the temperature again on the following day.
The base of the wine storage compartment is wet.	 The condensation channel or drainage hole are blocked. Clean the condensation channel and the drainage hole. → Page 15
The appliance hums, bubbles, buzzes, gargles or clicks.	Not a fault. A motor is running, e.g. refrigerating unit, fan. Refrigerant flows through the pipes. The motor, switches or solenoid valves are switching on or off. No action required.
The appliance makes noises.	 The appliance is not level. ► Align the appliance using a spirit level and the screw feet. The appliance is not free-standing. ► Observe the minimum clearances for the appliance.
	Fittings wobble or stick.

14 Storage and disposal

place these.

14.1 Taking the appliance out of operation

- 1. Switch off the appliance.
 - → Page 12

2. Disconnect the appliance from the power supply. Unplug the appliance from the mains or switch off the circuit

breaker in the fuse box.

► Check the removable fittings and, if required, re-

- **3.** Clean the appliance. \rightarrow *Page 15*
- **4.** To guarantee the ventilation inside the appliance, leave the appliance open.

14.2 Disposing of old appliance

Valuable raw materials can be reused by recycling.

Children can lock themselves in the appliance, thereby putting their lives at risk.

- Leave shelves and containers inside the appliance to prevent children from climbing in.
- Keep children away from the redundant appliance.

⚠ WARNING Risk of fire!

If the tubes are damaged, flammable refrigerant and harmful gases may escape and ignite.

- ► Do not damage the tubes of the refrigerant circuit or the insulation.
- Unplug the appliance from the mains.
- 2. Cut through the power cord.
- Dispose of the appliance in an environmentally friendly manner.
 Information about current disposal methods are available from your specialist dealer or local authority.



This appliance is labelled in accordance with European Directive 2012/19/EU concerning used electrical and electronic appliances (waste electrical and electronic equipment - WEEE). The guideline determines the framework for the re-

turn and recycling of used appliances as applicable throughout the EU.

15 Customer Service

Detailed information about the warranty period and the warranty conditions in your country is available via the QR code on the enclosed document on service contacts and warranty conditions, from our customer service or on our website.

If you contact Customer Service, you will require the product number (E-Nr.) and the production number (FD) of your appliance.

You can find the contact details for our customer service via the QR code on the enclosed document on service contacts and warranty conditions or on our website.

15.1 Product number (E-Nr.) and production number (FD)

You can find the product number (E-Nr.) and the production number (FD) on the appliance's rating plate.

→ "Appliance", Fig. 1 6 Page 10 Make a note of your appliance's details and the Customer Service telephone number to find them again quickly.

16 Technical data

Refrigerant, cubic capacity and further technical specifications can be found on the rating plate.

→ "Appliance", Fig. 1 / 6 Page 10





Thank you for buying a Bosch Home Appliance!

Register your new device on MyBosch now and profit directly from:

- · Expert tips & tricks for your appliance
- · Warranty extension options
- · Discounts for accessories & spare-parts
- · Digital manual and all appliance data at hand
- Easy access to Bosch Home Appliances Service

Free and easy registration – also on mobile phones: **www.bosch-home.com/welcome**



Looking for help? You'll find it here.

Expert advice for your Bosch home appliances, help with problems or a repair from Bosch experts.

Find out everything about the many ways Bosch can support you:

www.bosch-home.com/service

Contact data of all countries are listed in the attached service directory.

BSH Hausgeräte GmbH

Carl-Wery-Straße 34 81739 München, GERMANY www.bosch-home.com

A Bosch Company



9001833594 (050626)