





Hobs that deliver perfect results - intuitively.

When it comes to cooking on the hob, it doesn't take much for things to go



✓ PerfectCook

May your pasta never boil over again. Our hobs are designed with a sensor so you'll be able to control your cooking by the temperature in the pan rather than the power level. So whether you're defrosting, warming up, cooking or deep fat frying, you're in control with our smart **CookingSensor**. Because precise temperature control guarantees perfect cooking results.



У PerfectFrv

Enjoy perfectly cooked steak, however you like it. Our clever **FryingSensor** measures the temperature in the pan for perfect results. So when you're reducing a sauce, the heat will be low and gentle, and when you want a high heat for frying a steak, you'll have precisely the right temperature. Say goodbye to overcooking and undercooking your favourite meals. This feature requires the purchase of a **FryingSensor** frying pan to operate. Available from www.bosch-home.co.uk/store.

More control at your fingertips.

You'll have a complete overview and full control over your hob at all times.

With a high-resolution clear-text display, it will give helpful prompts to guide you through each step.

Select your ideal temperature and what you're cooking simply at the touch of a

Express cooking.

Induction cooking with a turbo boost. The **Boost function** allows you to increase the power of the cooking zone - perfect for large pots and pans or when you're in a hurry.

Easy to clean.

Automatic pan recognition only

heats up the base of the pan and not the rest of the zone, which doesn't waste energy and leaves the rest of the hob cool to touch. Keeping the hob cooler makes it safer and also prevents spillages from burning on so it's easy to clean.

Even more flexibility.

Available on selected Serie 8 FlexInduction hobs, the **Extended** FlexInduction zone offers optimum flexibility. The amount of usable surface on the hob is maximised to accommodate even the largest of cookware. With **CombiZone**, two cooking zones can be linked, making the switch from small to large pans effortless. Plus, the MoveMode **function** automatically switches from boil to simmer with a simple slide of the saucepan



Flexible.

FlexInduction is great for roaster pans and poaching as well as large grill pans



Introducing the Bosch induction hob range.

The perfect combination.

For the first time we are combining the best of our technologies from our induction hobs and powerful cooker hoods in a single appliance. The PerfectAir venting hob removes odours at source, leading to fewer cooking smells in the kitchen. It can be easily installed into the work surface to suit any kitchen design and has the added convenience of being easy to clean. Thanks to the PerfectFry sensor and PerfectCook sensor on the hob, you can achieve perfect results whether you're frying or boiling.

Venting hobs

Serie 8













Specifications

2 FlexInduction zones

DirectSelect Premium

PerfectFry sensor

PerfectCook sensor ready

MoveMode

Automatic setting transfer

PerfectAir sensor

EcoSilence Drive™ motor

17 power levels

2-stage residual heat indicators (H/h)


Boost setting for all zones

Automatic pan recognition

Timer for all zones

Count up timer



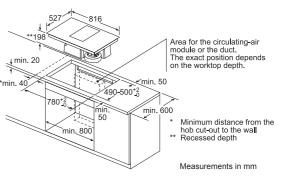

Serie 6



PVS851F21E







Specifications

4 Induction zones

2 Combi Zones

DirectSelect Control

2-stage move mode

EcoSilence Drive™ motor

Auto-on extraction


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones

Automatic pan recognition

Timer for all zones

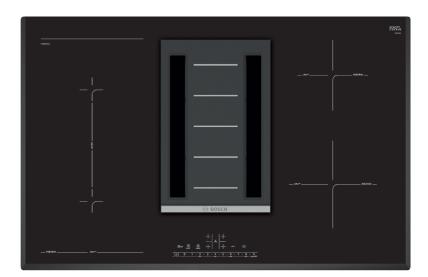


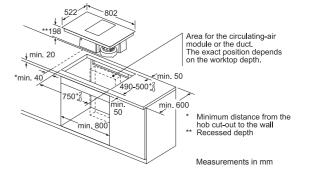




FlexInduction hobs




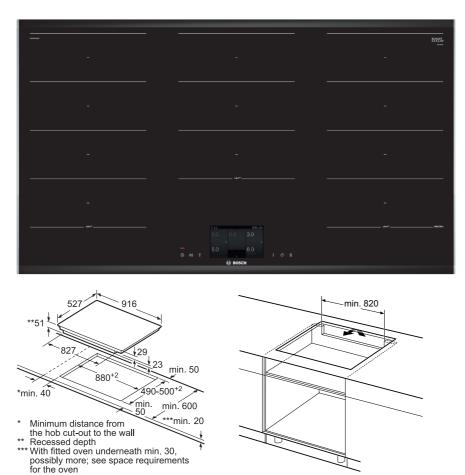

FlexInduction hobs



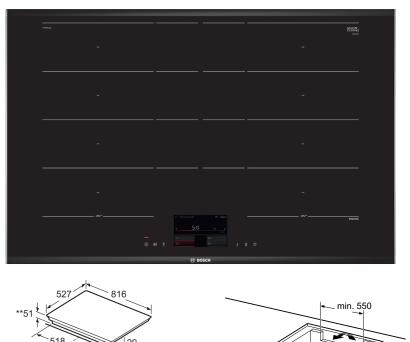

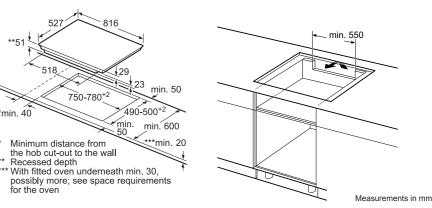

Whichever model you choose from our Serie ranges, you'll find lots of reasons to love your Bosch electric hob.

Twice as fast as gas.

Measurements in mm

Induction hobs can heat food and boil water nearly twice as fast as gas and three times faster than ceramic hobs*. And as they're also more energy efficient, you'll save money as well as time.

Cooking that's designed around you.

Ultimate flexibility with FlexInduction. One, two or three pots, or even a large casserole: the Bosch FlexInduction hob leaves it up to you. At the flick of a switch, you can combine two induction zones into a large induction surface on which you can cook the way you want.





FlexInduction hobs

Serie 4

PXE875BB1E







Specifications

Touch control


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones

Automatic pan recognition


Timer for all zones

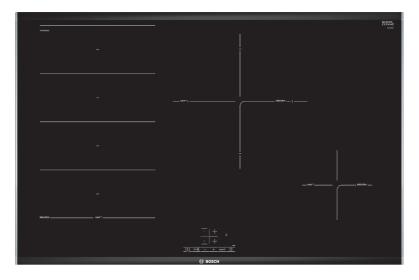

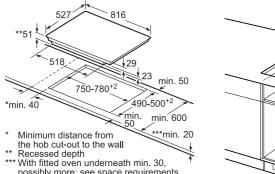

** Recessed depth

*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven



Induction hobs

Serie 4

PIE845BB1E



Specifications

Touch control


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones


Automatic pan recognition

Timer for all zones

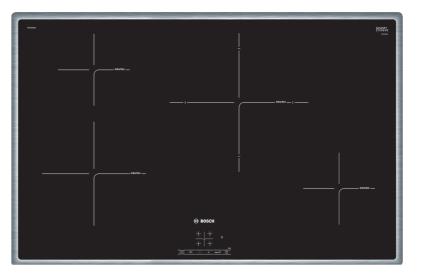



* Minimum distance from the hob cut-out to the wall
** Recessed depth
*** With fitted oven underneath min. 30, possibly more; see space requirements for the oven



Serie 4

PXE675BB1E









Specifications

Touch control


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones

Automatic pan recognition

Timer for all zones

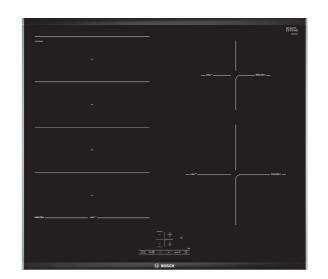

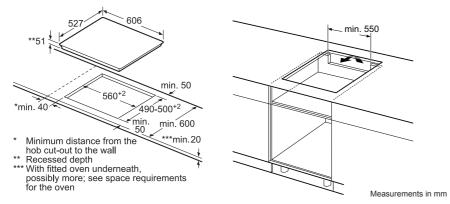

Serie 4





Specifications

EasyTouch control


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones

Automatic pan recognition

Timer for all zones

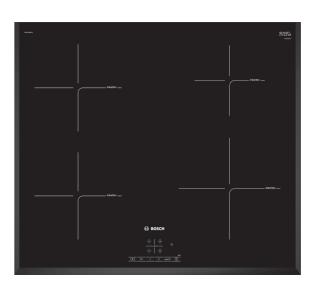

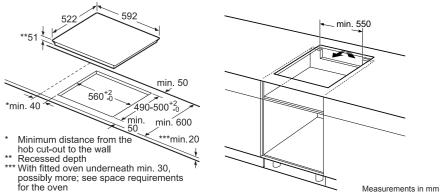

Induction hobs

Serie 4

PWP631BB1E



Specifications

EasyTouch control

CombiZone


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones

Automatic pan recognition


Timer for all zones

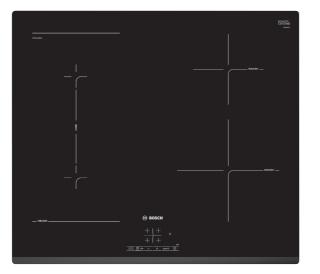



hob cut-out to the wall

** Recessed depth *** With fitted oven underneath min. 30, possible more; see space requirements



Measurements in mm

Induction hobs

Serie 4







Specifications EasyTouch control

CombiZone

13Amp Plug'n'Play


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones


Automatic pan recognition

Timer for all zones

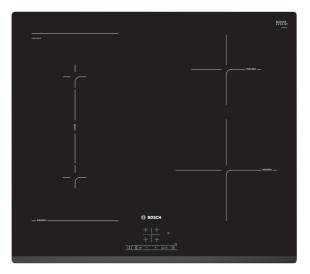



hob cut-out to the wall Recessed depth *** With fitted oven underneath min. 30, possibly more; see space requirements for the oven



Measurements in mm

Serie 4

PUE611BB1E



Specifications

EasyTouch control


17 power levels


2-stage residual heat indicators (H/h)

Boost setting for all zones


Automatic pan recognition

Timer for all zones

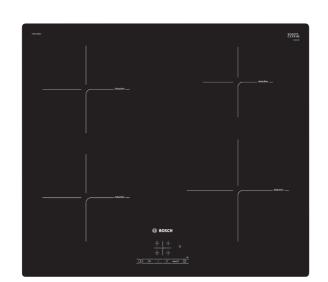









Serie 4

PUE611BF1B



| Specifications |
|--|
| EasyTouch control |
| 13Amp Plug'n'Play |
| 17 power levels |
| 2-stage residual heat indicators (H/h) |
| Boost setting for all zones |
| Automatic pan recognition |
| Timer for all zones |

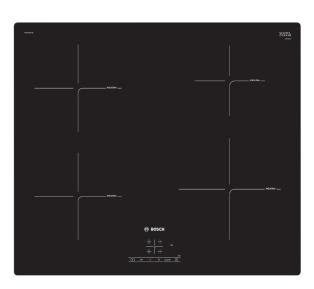



Measurements in mm

FlexInduction hob specifications

| HOB TYPE | FLEXINDUCTION VENTING HOBS | | | | |
|---|--|----------------------------------|--------------------------------------|----------------------------|--|
| DESIGN FAMILY | SEF | RIE 8 | SERIE 6 | | |
| MODEL | PXX87 | 75D34E | PVS851F21E | | |
| Width (mm) | | 16 | | 316 | |
| Control position Control type | | ont et Promium | Front DirectSelect | | |
| Style | DirectSelect Premium Comfort Profile | | | rt Profile | |
| KEY FEATURES | | | | | |
| Integrated downdraft extractor | | | | • | |
| Fully automatic extraction via air quality sensor Wireless temperature sensor ready | HEZ39050 required | | | - | |
| Wireless sensor settings for hob | 5 set | tings | | - | |
| PerfectFry sensor settings for hob Number of FlexInduction zones | | tings 2 | 4 se | ettings - | |
| Number of Combi Induction zones | | | | 2 | |
| Digital display HOB FEATURES | | | | • | |
| Number of individual zones | | 4 | | 4 | |
| Power levels | | 7 | | 17 | |
| powerBoost/panBoost MoveMode | | / ● ages | | / ● tages | |
| Automatic setting transfer | | ages • | 23 | - | |
| Energy consumption display Timer with automatic switch off for each zone | | | • | | |
| Count up timer | | | | | |
| QuickStart/ReStart Keep warm function | • | /• | • | -/- | |
| Wipe protection function | | | | • | |
| Can be combined with other models with Comfort Profile | • | • | | • | |
| HOOD FEATURES | | | | | |
| Ducted operation using accessory kit | HEZ38 | 31401 | HEZ3 | 81401 | |
| Recirculating operation using accessory kits | HEZ38 | 31501 | HEZ3 | 881501 | |
| Metal grease filter Power levels | | 9 | | 9 | |
| Intensive setting | | 1 nutes | | 1 | |
| Automatic intensive revert setting (min) Automatic or manual control | | nutes | 6 M | inutes • | |
| Automatic after running (min) | | nutes | 6 m | inutes | |
| Interval operation Dishwasher-safe cast iron air inlet grid / standing area | | | | • | |
| Dishwasher safe filter cassette with spillage collection Dishwasher spillage overflow collector | | capacity pacity | | capacity apacity | |
| Electronic grease filter / cleanAir filter saturation | | / • | | ./ ● | |
| indicators | | | | ,, • | |
| SAFETY FEATURES | | | | | |
| Main on/off switch Two-stage residual heat indicators | | | | • | |
| Safety lock/Timed safety switch off | • | (• | • | /• | |
| Automatic pan recognition PERFORMANCE / TECHNICAL INFORMATIO | N - HOR | | | • | |
| Nominal voltage (V) | | -240 | 220 | 0-240 | |
| Maximum power output (W) | 7,4 | 100 | 7, | 400 | |
| Electrical cable length (cm) Rear left FlexInduction zone (kW/mm) | 2.20 | 20 200x240 | 2.20 | 210x210 | |
| Rear right FlexInduction zone (kW/mm) | 2.20 | 200x240 | 1.40 | 145x145 | |
| Front left FlexInduction zone (kW/mm) Front right FlexInduction zone (kW/mm) | 2.20 | 200x240 200x240 | 2.20 1.80 | 210x210 180x180 | |
| FlexInduction zone left (kW/mm) | 3.30 | 400x240 | 3.60 | 439x210 | |
| FlexInduction zone right (kW/mm) Rear left zone – with powerBoost (max. kW) | 3.30 | 400x240 70 | 3 | .70 | |
| Rear right zone – with powerBoost (max. kW) | | 70 | | .20 | |
| Front left zone – with powerBoost (max. kW) Front right zone – with powerBoost (max. kW) | | 70 70 | | .70 | |
| PERFORMANCE / TECHNICAL INFORMATIO | N - HOOD | | | | |
| Extractor Energy Efficiency Rating | , | A | | A | |
| Extraction rate in m3/h (1,2) - Ducted / Recirculating power level Minimum | 350 | /300 | 350 | 7/300 | |
| - Ducted / Recirculating power level Maximum | 530 | /480 | 350/300 530/480 | | |
| Ducted / Recirculating power level Intensive Max Noise level (sound pressure) based on dBA re 2 | | /600 | 690 | 0/600 | |
| - Ducted / Recirculating power level Minimum | 46/42 | | 46/42 | | |
| Ducted / Recirculating power level Maximum Ducted / Recirculating power level Intensive | 54/55 63 | | 54/55 63 | | |
| Noise level (sound power) based on dB(A) re 1 pW (| L,4) | | | | |
| Ducted / Recirculating power level Minimum Ducted / Recirculating power level Maximum | | /54 /67 | | 3/54 6/67 | |
| - Ducted / Recirculating power level Intensive | 66/67 75/75 | | 75/75 | | |
| Motor power (W) | 1 | 70 | | .70 | |
| | | 0050 | | | |
| OPTIONAL ACCESSORIES | | 9050 | HEZ3 | 390042 | |
| OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) | HEZ3 | 90042 | | | |
| Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectangular roasting pan with lid 9approx. | HEZ39 | 90042 | | 390011 | |
| Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) | HEZ39 | | HEZ3 | 390011 390012 | |
| Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectangular roasting pan with lid 9approx. 320x200mm) Steamer pan insert for use with HEZ390011 roasting pan Teppan Yaki (approx. 300x200mm) | HEZ39 HEZ39 HEZ39 | 90011 90012 90511 | HEZ3 HEZ3 HEZ3 | 390012 390511 | |
| Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectangular roasting pan with lid 9approx. 320x200mm) Steamer pan insert for use with HEZ390011 roasting pan Teppan Yaki (approx. 300x200mm) Teppan Yaki (approx. 400x200mm) Griddle plate (approx. 400x200mm) | HEZ39 HEZ39 HEZ39 HEZ39 | 90011 | HEZ3 HEZ3 HEZ3 HEZ3 | 390012 | |
| Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) Rectangular roasting pan with lid 9approx. 320x200mm) Steamer pan insert for use with HEZ390011 roasting pan Teppan Yaki (approx. 300x200mm) Teppan Yaki (approx. 400x200mm) | HEZ39 HEZ39 HEZ39 HEZ39 HEZ39 HEZ39 | 90011 90012 90511 90512 | HEZ3 HEZ3 HEZ3 HEZ3 HEZ3 | 390012 390511 390512 | |

| | FLEXIN | DUCTION | | | | | | | |
|--|--|--|--|---|---|---|--|---|--|
| DESIGN FAMILY | SE | RIE 8 | SE | RIE 8 | SEI | RIE 4 | SE | RIE 4 | |
| MODEL | PXX97 | 75KW1E | PXY8 | 75KW1E | PXF87 | '5BB1E | PXF6 | 75BB1E | |
| Width (mm) | | 16 | | 316 | | 16 | | 16 | |
| Control position | | ont | | ront | | ont | | ront | |
| Control type | | ch Display | | ch Display | | Select | | Select | |
| Style | | rt Profile | | rt Profile | | t Profile | Comfo | rt Profile | |
| KEY FEATURES | | | | | | | | | |
| Home Connect | | • | | • | | | | | |
| HoodControl | | • | | • | | - | | - | |
| 5" Full Touch colour display | | • | | • | | - | | - | |
| Dish categories | | • | | • | | - | | - | |
| Wireless temperature sensor | | 5 | | 5 | | - | | - | |
| Wireless sensor settings PerfectFry sensor settings | | 5 5 | | 5 | | | | - | |
| Number of FlexInduction zones | | 3 | | 2 | | 1 | | 1 | |
| Extended FlexInduction zone | | - | | 2 | | | | - | |
| Number of CombiZones | | - | | - | | | | - | |
| powerBoost | | • | | • | | • | | • | |
| panBoost | | • | | • | • | | | • | |
| MoveMode | 3 st | ages | 3 s | tages | | - | | - | |
| Automatic setting transfer | | • | | • | | | | - | |
| Energy consumption display | | • | | • | • | • | | • | |
| "Plug & Play" 13A connection | | | | | | | | | |
| FEATURES | | | | | | | | | |
| Number of individual zones | | 5 | | 4 | | 4 | | 4 | |
| Power levels | | 17 | | 17 | | 7 | | 17 | |
| Digital display | | • | | • | | • | | • | |
| Timer with automatic switch off for each zone | | • | | • | • | • | | • | |
| Count up timer QuickStart | | • | | • | | | | - | |
| Quickstart ReStart | | | | | | - | | - | |
| Keep warm function | | | | | | | | • | |
| Wipe protection function | | • | | • | | | | - | |
| Can be combined with other models with Comfort Profile | | • | | • | | | | | |
| | | | | | | | | | |
| SAFETY FEATURES | | | | | | | | | |
| Main on/off switch Two-stage residual heat indicators | | • | | • | | | | • | |
| Safety lock | | | | | | | | • | |
| Automatic pan recognition | | • | | • | | | | | |
| Timed safety switch off | | • | | • | | • | | • | |
| PERFORMANCE / TECHNICAL INFORMATION | | | | | | | | | |
| | 220 | -240 | 22/ | 0-240 | 220 | 240 | 220 |)-240 | |
| Nominal voltage (V) Maximum power output (W) | | ,100 | | 400 | | -240 100 | | 400 | |
| Electrical cable length (cm) | | 10 | | 10 | | 10 | | 10 | |
| GB plug | _ | - | - | - | - | | - | - | |
| Rear left FlexInduction zone (kW/mm) | 2.20 | 200x240 | 2.20 | 200 x230 | 2.20 | 200x240 | 2.20 | 200x240 | |
| Rear left zone (kW/mm) | - | - | - | - | - | - | - | - | |
| Rear right FlexInduction zone (kW/mm) | 2.20 | 200x240 | 2.20 | 200x230 | - | - | - | - | |
| Rear right zone (kW/mm) | - | - | - | - | - | - | 1.40 | 145x145 | |
| | | | | | | 280x280 | | - | |
| Rear centre zone (kW/mm) | 2.60 | 300x240 | - | - | 3.30 | LOUNEOU | - | | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) | - | - | - | - | - | - | - | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) | 2.20 | - 200x240 | 2.20 | 200x230 | 2.20 | - 200x240 | 2.20 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left zone (kW/mm) | 2.20 | 200x240 | - | - | 2.20 | 200x240 | 2.20 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left zone (kW/mm) Front right FlexInduction zone (kW/mm) | 2.20 | - 200x240 | 2.20 - 2.20 | 200x230 - 200x230 | 2.20 | - 200x240 | - | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left zone (kW/mm) Front right FlexInduction zone (kW/mm) Front right FlexInduction zone (kW/mm) | 2.20 - 2.20 | 200x240 - 200x240 | 2.20 | 200x230 | 2.20 - 2.20 | 200x240 - 200x240 | 2.20 - - 2.20 | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left zone (kW/mm) Front right FlexInduction zone (kW/mm) | 2.20 | 200x240 - 200x240 | 2.20 | - 200x230 | 2.20 - 2.20 | 200x240 - 200x240 | - | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left zone (kW/mm) Front right FlexInduction zone (kW/mm) Front right zone (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone right (kW/mm) | 2.20 - 2.20 - 3.30 | 200x240 - 200x240 - 400x240 | 2.20 - 3.30 | 200x230 - 400x230 | - 2.20 - 2.20 - | 200x240 - 200x240 - | - | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left Flexinduction zone (kW/mm) Front left zone (kW/mm) Front right Flexinduction zone (kW/mm) Front right Zone (kW/mm) Flexinduction zone left (kW/mm) | 2.20 - 2.20 - 3.30 | 200x240 - 200x240 - 400x240 | 2.20 - 3.30 3.30 | 200x230 - 400x230 400x230 | 2.20 - 2.20 - - - 1.40 | 200x240 - 200x240 - | - | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left Flexinduction zone (kW/mm) Front left zone (kW/mm) Front right Flexinduction zone (kW/mm) Front right Zone (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Extended Flexinduction rear left (kW/mm) Extended Flexinduction rear right (kW/mm) CombiZone left (kW/mm) | 2.20 - 2.20 - 3.30 3.30 | 200x240 - 200x240 - 400x240 400x240 - | 2.20 - 3.30 3.30 3.30 | 200x230 - 400x230 400x230 300x300 | 2.20 - 2.20 - - - 1.40 | 200x240 - 200x240 - - - 145x145 | - | - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left zone (kW/mm) Front right FlexInduction zone (kW/mm) Front right FlexInduction zone (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone right (kW/mm) Extended FlexInduction rear left (kW/mm) Extended FlexInduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) | 2.20 2.20 3.30 3.30 | 200x240 200x240 400x240 400x240 - | 2.20 - 3.30 3.30 3.30 3.30 - | 200x230 400x230 400x230 300x300 300x300 | 2.20 - 2.20 - - 1.40 - - | 200x240 - 200x240 - - 145x145 - - - | 2.20 - - - - - | 210x210 - - - - - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left Flexinduction zone (kW/mm) Front left zone (kW/mm) Front right Flexinduction zone (kW/mm) Front right zone (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Extended Flexinduction rear left (kW/mm) Extended Flexinduction rear right (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) Rear left zone – with powerBoost (max. kW) | 2.20 - 2.20 - 3.30 3.30 - - - | 200x240 - 200x240 - 400x240 400x240 - - | 2.20 - 3.30 3.30 3.30 3.30 - - | 200x230 400x230 400x230 300x300 300x300 | 2.20 - 2.20 - - 1.40 - - - 3. | 200x240 - 200x240 - - 145x145 - - | 2.20 | 210x210 - - - - - - - - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Flexthduction zone (kW/mm) Front right Zone (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone right (kW/mm) Extended Flexthduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) | 2.20 - 2.20 - 3.30 3.30 - - - 3.30 | 200x240 - 200x240 - 400x240 400x240 - - - - 70 | 2.20 - 3.30 3.30 3.30 3.30 - - | 200x230 - 400x230 400x230 300x300 300x300 - - | 2.20 - 2.20 - - 1.40 - - - 3. | 200x240 - 200x240 - 145x145 - - | 2.20 | 210x210 - - - - - - - - - - - - - - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right FlexInduction zone (kW/mm) Front right Zone (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone left (kW/mm) Extended FlexInduction rear left (kW/mm) Extended FlexInduction rear right (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone — with powerBoost (max. kW) Rear right zone — with powerBoost (max. kW) Rear centre zone — with powerBoost (max. kW) | 2.20 2.20 - 3.30 3.30 - - - - 3.30 3.30 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - | 200x230 400x230 400x230 300x300 300x300 | 2.20 2.20 1.40 | 200x240 200x240 145x145 | 2.20 | 210x210 - - - - - - - - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left Eledhoutcion zone (kW/mm) Front left zone (kW/mm) Front right Flexhduction zone (kW/mm) Front right Tome (kW/mm) Front right Tome (kW/mm) Flexhduction zone left (kW/mm) Flexhduction zone left (kW/mm) Extended Flexhduction rear left (kW/mm) Extended Flexhduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Front centre zone – with powerBoost (max. kW) | 2.20 2.20 3.30 3.30 3.30 - - - 3.3 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 | 200x230 400x230 400x230 300x300 300x300 | 2.20 - 2.20 - - 1.40 - - - 3. | 200x240 200x240 145x145 | 2.20 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left leaduction zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Zone (kW/mm) Front right Zone (kW/mm) Flexhaduction zone left (kW/mm) Flexhaduction zone left (kW/mm) Flexhaduction zone left (kW/mm) Extended Flexhaduction rear left (kW/mm) Extended Flexhaduction rear right (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone - with powerBoost (max. kW) Rear centre zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) Front centre zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) | 2.20 - 2.20 - 3.30 3.30 - - - - 3.3 3.3 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 | 200x230 - 400x230 400x230 300x300 300x300 - - | 2.20 - 2.20 - - 1.40 - - 3. | 200x240 200x240 145x145 | 2.20 | 210x210 - - - - - - - - - - - - - - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left leadnuction zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Flexthduction zone (kW/mm) Front right Zone (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone left (kW/mm) Extended Flexthduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone - with powerBoost (max. kW) Rear centre zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) | 2.20 - 2.20 - 3.30 3.30 - - - - 3.3 3.3 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 | 200x230 400x230 400x230 300x300 300x300 - .70 .70 | 2.20 - 2.20 - - 1.40 - - 3. | 200x240 200x240 145x145 | 2.20 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left lexiduction zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Zone (kW/mm) Front right Zone (kW/mm) Flexhduction zone left (kW/mm) Flexhduction zone left (kW/mm) Flexhduction zone left (kW/mm) Extended Flexhduction rear left (kW/mm) Extended Flexhduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone - with powerBoost (max. kW) Rear right zone - with powerBoost (max. kW) Front centre zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) Front left zone - with powerBoost (max. kW) Front right zone - with powerBoost (max. kW) | 2.20 - 2.20 - 3.30 3.30 - - - 3.3 3.3 3.3 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 3 | 200x230 400x230 400x230 300x300 300x300 - .70 .70 | 2.20 - 2.20 - 1.40 - - 3. 3. | 200x240 200x240 145x145 | 2.20 - - - - - 3 3 3 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Zone (kW/mm) Front right Zone (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone left (kW/mm) Extended FlexInduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone – with powerBoost (max. kW) Rear centre zone – with powerBoost (max. kW) Front centre zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front right zone – with powerBoost (max. kW) Front right zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front right zone – with powerBoost (max. kW) Front zone – with zone – with powerBoost (max. kW) Front zone – with zone – | 2.20 - 2.20 - 3.30 3.30 - - - - 3.3 3.3 3.3 | 200x240 200x240 400x240 400x240 70 70 70 70 70 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 3 | 200x230 400x230 400x230 300x300 300x300 | 2.20 - 2.20 - 1.40 - - 3. 3. | . 200x240 | 2.20 - - - - - - 3 3 3 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left Flexinduction zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Flexinduction zone (kW/mm) Front right zone (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Extended Flexinduction rear left (kW/mm) Extended Flexinduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front right zone – with powerBoost (max. kW) | 3.30 3.30 3.30 3 3.30 3.30 4.20 4.20 4.30 5.30 6.30 6.30 6.30 6.30 6.30 6.30 6.30 6 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 3 3 | 200x230 400x230 400x230 300x300 300x300 | 2.20 - 2.20 - 1.40 - - 3. 3. 3. 4.EZ3 | 200x240 | 2.20 - - - - - - 3 3 3 2 HEZ3 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front left Flexinduction zone (kW/mm) Front left zone (kW/mm) Front left zone (kW/mm) Front right Flexinduction zone (kW/mm) Front right zone (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Flexinduction zone left (kW/mm) Extended Flexinduction rear left (kW/mm) Extended Flexinduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front right zone – with powerBoost (max. kW) | 3.30 3.30 3.30 3 3.30 3.30 4.20 4.20 4.30 5.30 6.30 6.30 6.30 6.30 6.30 6.30 6.30 6 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 3 3 | 200x230 400x230 400x230 300x300 300x300 | 2.20 - 2.20 - 1.40 - - 3. 3. 3. 4.EZ3 | 200x240 200x240 145x145 145x145 70 | 2.20 - - - - - - 3 3 3 2 HEZ3 | 210x210 210x210 - - - - - - - - - - - - - - - - - - - | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front centre zone (kW/mm) Front left Elexiduction zone (kW/mm) Front left zone (kW/mm) Front right Flexthduction zone (kW/mm) Front right Zone (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone left (kW/mm) Extended Flexthduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone — with powerBoost (max. kW) Rear right zone — with powerBoost (max. kW) Front centre zone — with powerBoost (max. kW) Front centre zone — with powerBoost (max. kW) Front left zone — with powerBoost (max. kW) Front centre zone — with powerBoost (max. kW) Front left zone — with powerBoost (max. kW) Front right zone swith powerBoost (max. kW) Front right zone swith powerBoost (max. kW) Front right zone zone swith powerBoost (max. kW) Front right zone zone zone zone zone zone zone zone | 2.20 2.20 3.30 3.30 - - - 3.3 3.3 3.3 4.2 4.2 4.2 4.2 4.2 4.2 4.2 4.2 4.2 4.2 | 200x240 200x240 400x240 400x240 | 2.20 - 3.30 3.30 3.30 3.30 - - 3 3 3 3 4 HEZ3 HEZ3 | 200x230 400x230 400x230 300x300 300x300 | 2.20 2.20 1.40 3 3. 3. 3. 4EZ3: | 200x240 | 2.20 - - - - 3 3 3 2 HEZ3 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front centre zone (kW/mm) Front left Exiduation zone (kW/mm) Front left Exiduation zone (kW/mm) Front right Exetaduction zone (kW/mm) Front right Zone (kW/mm) Flexhaduction zone left (kW/mm) Flexhaduction zone left (kW/mm) Flexhaduction zone left (kW/mm) Extended Flexhaduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone right (kW/mm) Rear left zone — with powerBoost (max. kW) Rear right zone — with powerBoost (max. kW) Front centre zone — with powerBoost (max. kW) Front centre zone — with powerBoost (max. kW) Front left zone — with powerBoost (max. kW) Front left zone — with powerBoost (max. kW) Front right zone — with powerBoost (max. kW) | 2.20 . 2.20 . 3.30 3.30 | 200x240 200x240 400x240 400x240 | 2.20 3.30 3.30 3.30 3.30 - 3 3 3 3 HEZ3 HEZ3 | 200x230 400x230 400x230 300x300 300x300 | 2.20 2.20 1.40 | 200x240 200x240 145x145 | 2.20 | 210x210 | |
| Rear centre zone (kW/mm) Front centre zone (kW/mm) Front centre zone (kW/mm) Front left Exiduation zone (kW/mm) Front left Leone (kW/mm) Front right Flexthduction zone (kW/mm) Front right Zone (kW/mm) Flexthduction zone left (kW/mm) Flexthduction zone left (kW/mm) Extended Flexthduction rear left (kW/mm) Extended Flexthduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) Rear left zone – with powerBoost (max. kW) Rear right zone – with powerBoost (max. kW) Front centre zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front centre zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front left zone – with powerBoost (max. kW) Front right zone – with powerBoost (ma | 2.20 2.20 3.30 3.30 - - 3.3 3.3 3.3 4EZ3 4EZ3 4EZ3 4EZ3 4EZ3 4EZ3 | 200x240 200x240 400x240 400x240 | 3.30 3.30 3.30 3.30 3.30 3.30 4.22 4.22 4.22 4.22 4.23 4.23 4.23 4.23 | 200x230 400x230 400x230 300x300 300x300 | 2.20 2.20 1.40 | 200x240 200x240 200x240 145x145 | 2.20 | .70 | |

Induction hob specifications

| Mode | НОВ ТҮРЕ | INDUCTION | | | | | |
|--|---|----------------------|---------------------|--------------|------------|--------------|------------|
| Mode James Park | DESIGN FAMILY | SERIE 4 | SERIE 4 | SERIE 4 | SERIE 4 | SERIE 4 | SERIE 4 |
| Control projuge First Fi | MODEL | PIE845BB1E | PIE651BB1E | PWP631BB1E | PUE611BB1E | PWP631BF1B | PUE611BF1B |
| Total page | Width (mm) | 795 | 592 | 592 | 592 | 592 | 592 |
| State Stat | Control position | | | | | | |
| Name of Control Control | | | | | | | |
| New Control | | Stainless Steel Trim | Bevel front & sides | Bevel front | Frameless | Bevel front | Frameless |
| Note | KEY FEATURES | | | | | | |
| Find Transformation Group | Home Connect | | - | | - | | - |
| This companies | | | - | | | | - |
| Wiless semon settings | | | - | | | | - |
| Perfecting some realization among a | Wireless temperature sensor | | - | - | | | - |
| Number of Foundation some | Wireless sensor settings | | - | - | - | - | - |
| Extended Format/Control 2008 | , | | - | - | | | - |
| Number of Contact/ones | | | - | | | | - |
| Authoratic celling transfer | Number of CombiZones | | - | | | | - |
| MoveMarchies | powerBoost | • | • | • | • | • | • |
| Automatics centering transfer | panBoost | | - | - | | - | - |
| Page 1899 13 consentation | | | - | - | | - | - |
| Page | | | - | | | | - |
| Number of Individual zones | | | | - | | • | • |
| Number of Individual zones | FEATURES | | | | | | |
| Power levels | | 4 | 4 | 1 | Α | 1 | Ä |
| Times with absomatic switch off for each zone | Power levels | | | | | | |
| Count up primer | Digital display | | | | | | |
| Page | Timer with automatic switch off for each zone | • | • | • | • | | • |
| ReStart Municion | • | | | | | | |
| Neep protection function | | | - | | | | |
| SAFETY FEATURES Westage residual heat indicators Safety lock Automatic pair recognition Timed safety switch off PERFORMANCE / IECCHNICAL INFORMATION Nominal voltage (V) PERFORMANCE / IECCH | Keep warm function | 1 | - | - | | - | - |
| SAFETY FEATURES | Wipe protection function | | - | | | | - |
| Main on/off switch Ivo stage residual heat indicators Automatic par recognition Timed safety switch off PERFORMANCE / IECCHNICAL INFORMATION Nominal voltage (V) PREFORMANCE / IECCHNICAL INFORMATION PROMISE (IECCHNICAL INFORMATION) PROMISE (IECCHNICA | | | - | | | | - |
| Two-stage residual heat indicators | SAFETY FEATURES | | | | | | |
| Safety lock | Main on/off switch | | - | | | | |
| Automatic pair ecognition | | • | | | | | • |
| PERFORMANCE / TECHNICAL INFORMATION PERFORMANCE / TECHNICAL INFORM | • | | - | | | | |
| Nominal voltage (V) | Timed safety switch off | • | • | • | • | • | • |
| Nominal voltage (V) | PERFORMANCE / TECHNICAL INFORMATION | | | | | | |
| Maximum power output (W) | | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 | 220-240 |
| CB plug Rear left Fleshnduction zone (kW/mm) 1.40 | Maximum power output (W) | | | | | | |
| Rear left Floeinduction zone (kW/mm) | Electrical cable length (cm) | 110 | 110 | 110 | 110 | 110 | 110 |
| Rear left Zane (kW/mm) | | - | - | - | | • | • |
| Rear right FlexInduction zone (kW/mm) | | | 1 80 180 | | 1 80 180 | | 1 80 180 |
| Rear right zone (kW/mm) | Rear right FlexInduction zone (kW/mm) | | 1.00 100 | | | | 1.00 100 |
| Front centre zone (kW/mm) Front left FlexInduction zone (kW/mm) Front left FlexInduction zone (kW/mm) 2.20 210x210 1.80 180 1.8 | Rear right zone (kW/mm) | | 1.40 145 | 1.40 145 | 1.40 145 | 1.40 145 | 1.40 145 |
| Front left FlexInduction zone (kW/mm) | Rear centre zone (kW/mm) | | | | | | |
| Front left zone (kW/mm) | | | | | | | |
| Front right FlexInduction zone (kW/mm) 1.40 145x145 2.20 210 2.20 2.2 | Front left zone (kW/mm) | | | | 1.80 180 | | 1.80 180 |
| FlexInduction zone left (kW/mm) FlexInduction zone left (kW/mm) FlexInduction zone left (kW/mm) FlexInduction rear elft (kW/mm) Fixended FlexInduction rear right (kW/mm) Fixended FlexInduction rear | Front right FlexInduction zone (kW/mm) | | | | | | |
| FlexInduction zone right (kW/mm) Extended FlexInduction rear left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) CombiZone left (kW/mm) Rear left zone – with powerBoost (max. kW) Rear left zone – with powerBoost (max. kW) Rear left zone – with powerBoost (max. kW) Rear centre zone – with powerBoost (max. kW) Front zone – vibpowerBoost (max. kW) Front zone – vibpowerBoost (max. kW) Front zone zone – vibpowerBoost (max. kW) Front zone – vibpowerBoost (| Front right zone (kW/mm) | 1.40 145x145 | 2.20 210 | 2.20 210 | 2.20 210 | 2.20 210 | 2.20 210 |
| Extended FlexInduction rear left (kW/mm) | | | | | | | - |
| Extended FlexInduction rear right (kW/mm) | | | | | 1 1 | | |
| CombiZone right (kW/mm) | Extended FlexInduction rear right (kW/mm) | | | | | | |
| Rear left zone - with powerBoost (max. kW) 3.70 3.10 | CombiZone left (kW/mm) | | | 3.60 388x180 | | 3.60 388x180 | |
| Rear right zone – with powerBoost (max. kW) - 2.20 3.10 3.10 3.10 3.10 3.10 3.10 3.10 3.70 4.70 4.70 4.70 <td></td> <td></td> <td>2 10</td> <td>2.10</td> <td>2 10</td> <td>2.10</td> <td>2 10</td> | | | 2 10 | 2.10 | 2 10 | 2.10 | 2 10 |
| Rear centre zone - with powerBoost (max. kW) 3.70 - - - - - - - - - | | | | | | | |
| Front left zone – with powerBoost (max. kW) 3.70 3.10 3.10 3.10 3.10 3.10 3.10 3.10 3.1 | Rear centre zone – with powerBoost (max. kW) | | - | | - | - | - |
| Front right zone – with powerBoost (max. kW) 2.20 3.70 3.70 3.70 3.70 3.70 3.70 3.70 3.7 | Front centre zone – with powerBoost (max. kW) | | - | | | | |
| OPTIONAL ACCESSORIES Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) HEZ390042 HEZ390042 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> | | | | | | | |
| Wireless temperature sensor Set of four pans (3 x pans, 1 x sauté pan) HEZ390042 H | | 2.20 | 5.70 | 5.70 | 5.70 | 5.70 | 5.10 |
| Net of four pans (3 x pans, 1 x sauté pan) Net 2390042 | | | | | | | |
| Rectangular roasting pan with lid (approx. 320x200mm) | | | | | | | |
| (approx. 320x200mm) | | | HEZ390042 | HEZ390042 | HE2390042 | | HEZ390042 |
| Teppan Yaki (approx. 300x200mm) | (approx. 320x200mm) | - | - | - | | - | - |
| Teppan Yaki (approx. 300x200mm) | Steamer pan insert for use with HEZ390011 masting nan | | - | _ | | | - |
| Террал Үакі (арргох. 400х200mm) | - | | - | | | | _ |
| | Teppan Yaki (approx. 400x200mm) | | - | | | | - |
| | Griddle plate (approx. 400x200mm) | - | - | - | | - | - |

^{• =} Yes - = No

For full specification details, please log onto our website and download a full specification sheet.

¹ Air fow and noise declarations made in line with CECED Code of Conduct.

² Measured according to EN61591 on largest pipe diameter.

³ Sound pressure measured according to EN60704-2-13 on largest pipe diameter.

⁴ Sound power measured according to EN60704-3 on largest pipe diameter.

All models comply with COMMISSION REGULATION (EC) No 1275/2008 with regard to ecodesign requirements for standby and off mode electric power consumption.

Contact Bosch Customer Service

To arrange an engineer visit, obtain product advice or order replacement spare parts or accessories visit

www.bosch-home.co.uk or call 0344 892 8979

Republic of Ireland customers should visit **www.bosch-home.ie** to arrange an engineer's visit, or to order spare parts and accessories, or call

(01) 450 2655





Calls are charged at the basic rate, please check with your telephone service provider for exact charges.

Disclaimer: This brochure is current as from the publication date and supersedes all previous brochures for these products. This brochure should not be regarded as an infallible guide nor as an offer for sale of any particular product. Whilst BSH Home Appliances Ltd believes that all information contained within this brochure is correct at the time of going to print, no representation or warranty, express or implied, is or will be made and no responsibility or liability is or will be accepted by BSH Home Appliances Ltd in relation to the accuracy or completeness of this information and any liability is expressly disclaimed. To the extent permitted by law, BSH Home Appliances Ltd expressly excludes: i) all conditions, warranties and other terms which might otherwise be implied by statute, common law or the law of equity and ii) any liability for any direct, indirect or consequential loss or damage (including, without limitation, damages for loss of business or loss of profits) arising in contract, tort or otherwise from the use of or reliance on any information contained within this brochure or from any action or decision taken as a result of such use or reliance. BSH Home Appliances Ltd reserves the right to modify technical data and all other information contained within this brochure without notice. All rights reserved. No part of this publication may be reproduced in any form or without the prior written permission of BSH Home Appliances Ltd. All colour variations are due to the limitations of the printing process. We recommend a visit to a Bosch dealer to confirm that specifications and colours are to your satisfaction.

This brochure is printed on environment-friendly chlorine-free bleached paper.

BSH Home Appliances Limited

Grand Union House
Old Wolverton Road, Wolverton
Milton Keynes MK12 5PT
www.bosch-home.co.uk

BSH Home Appliances Limited

M50 Business Park Ballymount, Dublin 12

Tel: 1890 626 041 www.bosch-home.ie