

The easy way to perfect results.



BOSCH
Invented for life



The Bosch kitchen appliance catalogue

Edition June 2018



**EUROPE'S
BRAND NO.1***

*For major domestic appliances.
Source: Euromonitor, volume sales, 2017

Designed to make your everyday life easier.

Rangehoods

A range of designs to suit your dream kitchen. From focal point canopy to hidden integrated rangehoods, our whisper quiet rangehoods will be a pleasant surprise.

Ovens

High-quality stainless steel combined with sleek black glass offers a timeless design, while sophisticated features deliver the best results meaning less work and more cooking pleasure.

Compact appliances

For lovers of cooking, you can add combination steam, pure steam or combination microwave ovens to your kitchen.

Built-in refrigeration

Stylishly matching your kitchen cabinetry and packed full of sensor technology keeping your food fresher for longer.

Coffee machine

For lovers of coffee, your favourite café can be right in your kitchen. The coffee machine design matches the Series 8 ovens for a seamless and coordinated look.

Warming drawers

Keep your coffee cups on hand for the morning cappuccino or warm up plates before serving dinner. You can also defrost, prove dough and so much more.

Dishwashers

A dishwasher is a must in every modern kitchen to save you the hassle of cleaning up. Choose from built-under, semi and fully integrated models to perfectly integrate into your kitchen.

Cooktops

Choose a cooktop to match your cooking style: From our revolutionary FlameSelect® gas cooktops, innovative induction or traditional ceramic cooktops.

Find the right appliance for your dream kitchen.

Ovens page 12-23



60cm Built-in single ovens
Our ovens combine high-quality stainless steel and black glass for a sleek finish on all models. Multiple cooking and cleaning options offer convenience.



Double ovens
Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



90cm Built-in single oven
With a large interior cavity, boasting 77 usable litres (net), telescopic rails and catalytic liners, the 90cm oven offers total convenience.

Compact appliances page 24-33



Combination steam and pure steam ovens
Cooking with steam helps retain vitamins and minerals in fresh foods, as well as maintain original colour, shape and consistency.



Combination microwave and pure microwave ovens
Add speed to your traditional cooking process without compromising on taste.



Coffee machine
Whether your preference is a skinny latte, a double shot cappuccino or a delicious hot chocolate, our coffee machine brings café-style drinks to your home.




Warming drawers
Ensure food stays at just the right serving temperature. You can also defrost, prove dough or slow cook.

Cooktops page 34-53



Gas cooktops
The cooktop of choice in most professional kitchens, the new Bosch FlameSelect® gas cooktops are innovative, stylish and help you to always get perfect results.



Induction cooktops
Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.



Ceramic cooktops
With their electronic touch-controls and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.

Rangehoods page 54-63



Canopy wall-mounted rangehoods
Canopy wall-mounted rangehoods provide a focal point in any kitchen. Choose a design that compliments your style, plus they are also packed full of convenient features.



Integrated rangehoods
Sleek in design, Bosch fully integrated rangehoods are neatly concealed beneath the cupboard for a seamless look in the kitchen. Performance that is not seen or heard.



Slideout rangehoods
Extends when in use and slides neatly away when not in operation.

Dishwashers page 64-75



Built-under dishwashers
Can be fitted into a new or existing kitchen with style. It is height adjustable for a flush fit and can be installed with a continuous kick panel for a seamless integration with kitchen cabinetry.



Semi-integrated dishwashers
Can be fitted with a door panel to match the design of your kitchen, while providing a focal point in the visible, easy to use control panel. A continuous kick panel provides seamless integration.



Fully integrated dishwashers
Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry with a control panel that is neatly integrated into the top of the dishwasher door.

Refrigeration page 76-81



Built-in refrigeration
Concealed behind panels that match the rest of your kitchen, this fully integrated fridge-freezer fits seamlessly into your dream kitchen.



Bosch – a brand you can trust.



Design

Bosch is the No. 1 brand in design with over 300 design awards won over the past five years. This is more than any other home appliance brand and our promise to you is that every detail of every appliance has been carefully designed to make your time spent in the kitchen as enjoyable as possible.



Quality

Together with our years of experience in home appliances and latest German engineering, we manufacture quality products that are easy to use and yet deliver perfect results.



Performance

With Bosch Assist and advanced sensor technology found in PerfectBake™ and PerfectRoast™, your Bosch Series 8 ovens and compact appliances will modify the cooking process from start to finish for perfect baking and roasting results.



Convenience

A little peace of mind for your daily life at home with Bosch sensor technology for perfect cooking results. Our FlameSelect® gas cooktop technology will let you adjust power levels precisely and our self-cleaning functions will save you the trouble of cleaning up.



Sustainability

This signet denotes products that focus on energy and water efficiency while achieving top performance based on Bosch technologies – and, like all Bosch products, have been manufactured with the aim of minimizing their impact on the environment. The signet stands for the resource-efficiency of our products – quite simply, for their 'Green Technology'.

Bosch | Good, Better, Best

Design your kitchen

Your every day kitchen

These appliances are perfect for first time home owners wanting reliable appliances in a contemporary design that deliver value for money.



Series 4 | HBA534ES0A
EcoClean Direct Oven



Series 4 | PIJ611BB1E
60cm Induction Cooktop

OR



Series 6 | PCI6A5B90A
60cm Stainless Steel Gas Cooktop



Series 4 | DFS067A50A
60cm Slideout Rangehood

Want a bit more?


These appliances are perfect for families that need easy to operate home appliances with additional cooking features, a timeless design and German quality.



Series 6 | COA565GS0A
Microwave Oven with Steam Function



Series 6 | HBT578FS1A
60cm Pyrolytic Oven

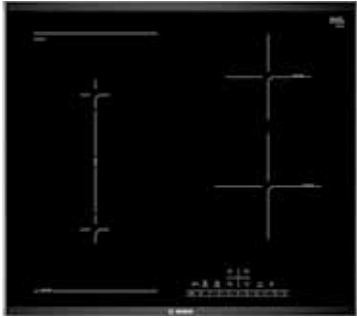

Series 6 | PVS675FB1E
60cm CombiInduction® Cooktop

OR



Series 6 | PCR7A5B90A
75cm Stainless Steel Gas Cooktop



Series 6 | DWB091E51A
90cm Wall-mounted Stainless Steel Canopy Rangehood

Best in class

These appliances are perfect if you want the latest technology with a premium finish and outstanding German quality. With a self-cleaning oven, steam oven, microwave oven, coffee machine and warming drawer all your cooking needs are covered. The FlexInduction® cooktop makes cooking to perfection a breeze.



Series 8 | HRG6767S2A
60cm Pyrolytic Oven with Added Steam



Series 8 | CSG656RS1A
60cm Combination Steam Oven



Series 8 | CMG656RS1A
60cm Combination Microwave Oven




Series 8 | BIC630NS1A
60cm Warming Drawer



Series 8 | PXX675DC1E
60cm FlexInduction® Cooktop

OR

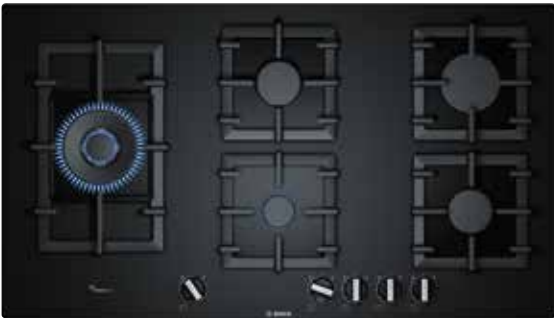

Series 6 | PPS9A6B90A
90cm Black Tempered Glass Gas Cooktop



Series 8 | DHL895CAU
86cm Integrated Rangehood



Contents

Ovens	12–23
Series 8 ovens	18–19
Series 6, 4 & 2 ovens	20–22
Compact appliances	24–33
Series 8 compact appliances	30–31
Series 6 compact appliances	32–33
Cooktops	34–53
Gas cooktops	36–41
Induction cooktops	42–49
Ceramic cooktops	50–53
Rangehoods	54–63
Wall-mounted rangehoods	60
Integrated rangehoods	61
Retractable slideout rangehoods	62
Dishwashers	64–75
Built-under dishwashers	72
Semi-integrated dishwashers	73
Fully integrated dishwashers	74
Refrigeration	76–81
Reference guides	82–101
Accessories	102–103
Technical diagrams	104–113
Customer service	114

Ovens



Ovens | Design

Put a new spin on your cooking with the Bosch oven range.

Each Bosch control panel is simple and intuitive, making cooking easier than ever.

Series 8 TFT Touch Graphic Display



The iconic control ring and clear TFT screen display, combined with the DirectSelect TouchControl buttons, make operating the Series 8 ovens simpler than ever before. Food images and helpful prompts guide you through each step, giving you total flexibility and control of cooking functions.

Series 8 TFT Touch Symbol Display



The intuitive control ring and clear TFT display with DirectSelect icons make it easy to operate your oven. Shortcuts to the two most commonly used heating functions, helpful icons and clear descriptions inside the control ring provide all the information you need to keep track of your cooking.

Series 6 LCD-display



Series 6 ovens are equipped with a white LCD-display and retractable knobs. The temperature appears in the display and can be set using the +/- knob. During preheating, the rising temperature is indicated by the lengthening of the red light line. When the AutoPilot function is used, this red line becomes shorter as the program progresses.

Series 4 LED-display



The new LED-display is equipped with pop-out knobs for easier cleaning and comes with a red display. Up to 10 AutoPilot programs and cleaning functions as well as temperature adjustments are controlled via the display.

Features may vary depending on models. Please check individual product specifications.

Ovens | Automatic functions

Bosch sensor technology. The oven that cooks by itself.

Series 8



Bosch Assist

The advanced sensor technology found in PerfectRoast™ and PerfectBake™ offers an extensive menu of food categories that help create your perfect meal. Simply select the desired dish, press start and your oven automatically sets the ideal heating mode, temperature and length of time, monitoring and modifying the cooking as required for the best results. Of course, you can also select these settings yourself every bit as easily.

PerfectBake™

Baking has never been easier, thanks to the unique PerfectBake™ sensor. This function constantly measures the precise moisture level of your dishes and automatically adjusts the entire baking process, which means you'll never have to set the heating mode, length of time or temperature ever again. Simply choose the type of dish, such as 'Cake in Tin', press start and let your Bosch oven bake your cake to perfection*.



PerfectRoast™ meat probe with 3 measuring points

Achieve the perfect roast lamb, Christmas turkey, stuffed meats and fish. The PerfectRoast™ meat probe features three sensitive measuring points and uses the lowest temperature reading to determine the core temperature before calculating the residual cooking time. The results are simply perfect. Used manually or with Bosch Assist, you can modify the suggested core temperature (within a recommended range) and combine with microwave and steam cooking functions.

AutoPilot with 10 automatic programs

The AutoPilot program helps achieve the best possible results with very little effort. Just insert your dish, enter its weight and select the desired program from the menu.

Series 6



Meat Probe with 1 measuring point

A sensor inside the meat probe constantly measures the temperature at the core of the meat. The meat probe is connected to the oven, no manual regulation and interaction with the oven is needed. The oven gives an acoustic signal and switches off automatically as soon as the desired core temperature is reached.



AutoPilot with up to 30 automatic programs

The AutoPilot program will cook your dish to perfection with up to 30 recipes to choose from. Just add the weight of the fish or meat and press "Start". AutoPilot then determines the cooking mode, temperature and cooking duration.

Features may vary depending on models. Please check individual product specifications.
*Only works from a cold start. Do not open the door during the cooking process or you will have to continue manually.

Ovens | Cleaning functions

At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. This chore is now a thing of the past, thanks to pyrolytic self-cleaning and EcoClean Direct.

Pyrolytic self-cleaning: the oven that cleans itself

During the pyrolytic cleaning function, the oven heats up to 480°C to burn off grease and food residue. This means you never have to clean your oven again.

Simply follow these 3 steps:

1. Activate the pyrolytic cleaning function.
2. Choose from three different cleaning levels, depending on the degree of residue that has accumulated.
3. Once the program is finished, wipe off the thin layer of ash in the base of the oven.



EcoClean Direct: makes cleaning easier

While your dishes bake or roast, the special direct coating of microfine ceramic particles on the oven cavity walls absorbs grease and residue and breaks them down through oxidation.

Simply follow the below steps and reduce your cleaning time significantly:

1. Activate the EcoClean Direct cleaning program.
2. Once completed, clean remaining surfaces that don't have the special coating.
3. Wipe the base of the oven and inside of the glass door.

The direct coating also regenerates every time you heat the oven and continues to do so for the entire service life of the appliance.



Universal pan and baking tray with ceramic non-stick coating

In addition to the classic universal pan, Bosch is now offering a new universal pan and baking tray for Series 6, 4 and 2 ovens with a ceramic non-stick coating. This special non-stick coating makes the surface easy to clean. And the ceramic coating has another advantage: You no longer need to use parchment paper or to grease the tray, which makes baking, roasting and cleaning much easier.



*Please remove all accessories when activating the specific EcoClean Direct program.

#Metal racks may show slight discolouration after prolonged use of the pyrolytic function. To prevent this you may choose to remove the wire racks during the pyrolytic cycle. Features may vary depending on models. Please check individual product specifications.

Ovens | Heating functions

Because there's hot, and then there's hot.

Perfect baking and roasting not only requires the right temperature, but also the appropriate heating function too. From 4D HotAir to slow cooking, Bosch ovens offer heating functions that deliver everything from haute cuisine to everyday feasts.

4D HotAir*

Thanks to 4D HotAir, you can place your food on any shelf from level one to four, and the results will be consistently perfect. The rotating fan alternates its direction during cooking to distribute heat evenly on every level. And for reliable results 'top to bottom', you can also bake and roast on up to four different levels simultaneously.^

3D HotAir

3D HotAir distributes the heat quickly and evenly throughout the entire oven cavity, allowing you to cook on up to three levels simultaneously. It's especially convenient when you need to cook both sweet and savoury dishes simultaneously without intermingling the flavours.

HotAir Eco/Gentle

HotAir Eco/Gentle uses less energy by using a single tray. This energy-efficient function distributes less heat into the oven and uses residual heat to maintain the set temperature.

Top and bottom heating*

Uses both the upper and lower heating elements. Heat travels to the centre of the oven, which is the best position to obtain the selected temperature. Suitable for traditional baking and roasting, and offers best results for cakes with moist toppings.

Top and bottom heat Eco

In addition to the top and bottom heat function, selected Series 8 ovens feature a new eco-friendly mode, which supports cooking on a single shelf for energy-efficient cooking. Prepare perfect sponges, pound cakes, delicate pastries and bread rolls while saving valuable energy.

Bottom heating

For cooking in a bain-marie and for the final baking stage. The heat is emitted from the lower heating element.

Intensive heating

Combines the top element with a more powerful bottom heating element that is perfect for crispy bases and baking in tins.

Hot air grilling*

Achieve rotisserie-style cooking for meat and poultry. The grill and fan alternate, which produces even and crisp cooking results.

Grill, large area

For grilling flat items, such as steaks and sausages, for making toast, and for cooking a gratin.

Grill, small area

For grilling small amounts of steaks or sausages, for making toast or where grilling on a smaller surface is required.

Pizza setting

Create crispy pizzas or give any dish that extra heat that's needed from underneath by using a combination of heating elements.

Keeping warm*

A new feature that keeps cooked food warm.

Slow cooking

For gentle and slow cooking of seared, tender pieces of meat in ovenware without a lid.

Preheat ovenware

A new feature that is useful for preheating ovenware and even dinnerware.

Drying

A new function for drying fruits, vegetables and herbs with maximum flavour. This function can also be used for drying out the oven cavity after the added steam function has been used.

Sabbath mode

Set a maximum timer of up to 74 hours using the Sabbath function. You can keep the food in the cooking compartment warm without having to switch the oven on or off.

Rapid heating

With rapid heating, you can shorten the heat-up time for selected heating functions, including 4D HotAir and top and bottom heating.

Fan forced hot air

A fan disperses heat evenly for cakes and pastries baked on two levels.

Fan assisted top and bottom heating

Uses both upper and lower heating elements while a fan disperses heat evenly.

Defrost

Perfect for gentle defrosting of meat, poultry, bread and much more.

Reheating*

For plated meals and baked items. Cooked food is gently reheated. The steam ensures the food does not dry out.

Dough proving*

For yeast dough and sourdough. Dough will rise considerably quicker than at room temperature. The surface of the dough does not dry out.

Features may vary depending on models. Please check individual product specifications. *Possible to use added steam for this type of heating (operation only possible when the water tank is full). ^To cook on all four levels simultaneously, four wire racks are required for best results. For up to three levels, all accessories are suitable, ie. universal tray or baking tray.

Ovens | Overview

Bosch ovens bring style and elegance to your kitchen.

Serie | 8



Series 8 | HRG6767S2A
60cm Pyrolytic Oven with Added Steam

Heating functions
17 functions
Added steam

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Graphic Display
Bosch Assist
PerfectRoast™ meat probe
PerfectBake™ sensor
2-level telescopic rails
Multi-level LED lighting
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
Pyrolytic self-cleaning with compatible trays, telescopic rails and shelf racking^
Drying function

Safety
Residual heat indicator
Quadruple-glazed
CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG6767S1A
60cm Pyrolytic Oven

Heating functions
13 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Graphic Display
Bosch Assist
PerfectRoast™ meat probe
PerfectBake™ sensor
2-level telescopic rails
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
Pyrolytic self-cleaning with compatible trays, telescopic rails and shelf racking

Safety
Residual heat indicator
Quadruple-glazed
CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG6753S1A
60cm Pyrolytic Oven

Heating functions
13 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Symbol Display
AutoPilot10: 10 automatic programs
2-level telescopic rails
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
Pyrolytic self-cleaning with compatible trays, telescopic rails and shelf racking

Safety
Residual heat indicator
Quadruple-glazed
CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG675BS1B*
60cm Pyrolytic Oven

Heating functions
13 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Symbol Display
AutoPilot10: 10 automatic programs
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
Pyrolytic self-cleaning with compatible trays and shelf racking

Safety
Residual heat indicator
Quadruple-glazed
CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG672BS1A
60cm Pyrolytic Oven

Heating functions
8 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Symbol Display
AutoPilot10: 10 automatic programs
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
Pyrolytic self-cleaning with compatible trays and shelf racking

Safety
Residual heat indicator
Quadruple-glazed
CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG655HS1A
60cm EcoClean Direct Oven

Heating functions
13 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Symbol Display
AutoPilot10: 10 automatic programs
2-level telescopic rails
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
EcoClean Direct: rear wall, side walls and ceiling

Safety
Residual heat indicator
Triple-glazed door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG655HW1A
60cm EcoClean Direct Oven

Heating functions
13 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Symbol Display
AutoPilot10: 10 automatic programs
2-level telescopic rails
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
EcoClean Direct: rear wall, side walls and ceiling

Safety
Residual heat indicator
Triple-glazed door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104



Series 8 | HBG633BS1A
60cm EcoClean Direct Oven

Heating functions
10 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
TFT Touch Symbol Display
Temperature display
Auto temperature proposal
SoftMove door

Cleaning
EcoClean Direct: rear wall

Safety
Residual heat indicator
Triple-glazed door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548mm

Complete specifications
Reference guide see page 84–85
Technical diagrams see page 104

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. ^Please remove the water tank prior to running the pyrolytic cleaning cycle. *Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Ovens | Overview


Serie | 6



Series 6 | HBT578FS1A
60cm Pyrolytic Oven

Heating functions
10 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LCD-display
Single point meat probe
AutoPilot 30: 30 automatic programs
1-level partly extendable telescopic rails
Temperature display
Auto temperature proposal
Electronic clock/timer with end-time programming
SoftClose door
Half Trays


Cleaning
Pyrolytic self-cleaning

Safety
Residual heat indicator
Quadruple-glazed CoolTouch door
Child lock (controls and door)


Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Series 6 | HBT578CS0A
60cm Pyrolytic Oven

Heating functions
10 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LCD-display
Single point meat probe
AutoPilot 30: 30 automatic programs
Temperature display
Auto temperature proposal
Electronic clock/timer with end-time programming
SoftClose door
Half Trays


Cleaning
Pyrolytic self-cleaning

Safety
Residual heat indicator
Quadruple-glazed CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Series 6 | HBG5575S0A
60cm EcoClean Direct Oven

Heating functions
7 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LCD-display
Single point meat probe
AutoPilot 10: 10 automatic programs
1 ClipRail telescopic rails
Temperature display
Electronic clock/timer with end-time programming
SoftClose door

Cleaning
EcoClean Direct: Rear wall, side walls and ceiling

Safety
Residual heat indicator
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Serie | 4



Series 4 | HBA574BS0A
60cm Pyrolytic Oven

Heating functions
7 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LED-display
AutoPilot 10: 10 automatic programs
Temperature display
Electronic clock/timer with end-time programming

Cleaning
Pyrolytic self-cleaning

Safety
Quadruple-glazed CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Serie | 2



Series 4 | HBA534ES0A
60cm EcoClean Direct Oven

Heating functions
7 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LED-display
1-level partly extendable telescopic rails
Electronic clock/timer with end-time programming

Cleaning
EcoClean Direct: Rear wall

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Series 4 | HBA534BS0A*
60cm EcoClean Direct Oven

Heating functions
7 functions

Capacity
71 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LED-display
Electronic clock/timer with end-time programming

Cleaning
EcoClean Direct: Rear wall

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Series 2 | HBF133BS0A
60cm EcoClean Direct Oven

Heating functions
5 functions

Capacity
66 litres (net) cavity volume
5 shelf positions

Convenience
Retractable control knobs with LED-display
Electronic clock/timer with end-time programming

Cleaning
EcoClean Direct: Rear wall

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
595 x 594 x 548 mm

Complete specifications
Reference guide see page 86–87
Technical diagrams see page 104

Ovens | Overview

Serie | 6



Series 6 | HVA541NS0
90cm Built-in Oven

Heating functions
9 functions

Capacity
77 litres (net) cavity volume
4 shelf positions

Convenience
Electronic clock/timer
1-level telescopic rails

Cleaning
Catalytic liners: Side and rear walls

Safety
Triple-glazed door

Dimensions (HxWxD)
478 x 896 x 568mm

Complete specifications
Reference guide see page 82–83
Technical diagrams see page 96



Series 6 | HBM43S550A
60cm EcoClean Double Oven

Heating functions
3 functions – top oven
5 functions – bottom oven

Capacity
35 litres (net) cavity volume – top oven
67 litres (net) cavity volume – bottom oven
2 shelf positions – top oven
5 shelf positions – bottom oven

Convenience
Electronic touch-control clock/timer with end-time programming
2-level partly extendable telescopic rails – bottom oven

Cleaning
EcoClean: Rear wall, side walls and ceiling liners – both top and bottom ovens

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
888 x 595 x 550mm

Complete specifications
Reference guide see page 82–83
Technical diagrams see page 97

Serie | 4



Series 4 | MBA534BS0A
60cm EcoClean Direct Double Oven

Heating functions
3 functions – top oven
7 functions – bottom oven

Capacity
34 litres (net) cavity volume – top oven
71 litres (net) cavity volume – bottom oven
3 shelf positions – top oven
5 shelf positions – bottom oven

Convenience
Retractable control knobs with LED-display
Electronic clock/timer with end-time programming

Cleaning
EcoClean Direct: Rear wall

Safety
Triple-glazed door
Child lock

Dimensions (HxWxD)
888 x 594 x 550 mm

Complete specifications
Reference guide see page 82–83
Technical diagrams see page 97

Ovens | Features and functions

Features and functions for everyday use.



Safety

SoftMove and SoftClose
SoftMove on Series 8 and SoftClose on Series 6 models is a special damping mechanism. Oven doors open and close softer and quieter than ever. This convenient feature not only offers a premium finish, it also protects the oven and door during the life of the oven.

CoolTouch doors
Bosch ovens meet the highest safety standards: The best Bosch CoolTouch oven doors reach a maximum temperature of only 30°C*. This means that curious children are even better protected against burns. The extra measure of safety is made possible by 30% better ventilation. It gives you a good feeling to know that with Bosch ovens nothing can go wrong.

Residual heat indicator
When the appliance is switched off, the display ring shows the residual heat in the cooking compartment. As the residual heat cools down, the display ring becomes darker, then disappears.

Cabinetry cooling fan
The fan circulates cool air around the oven to keep the appliance and the surrounding cabinetry free from the hot air vented by the oven.

Automatic switch-off
If left unattended the oven will switch off after a period of time.

Child lock
All Bosch ovens are equipped with a child lock that prevents unwanted changes to settings. The control panel is locked so the appliance can only be switched off using the On/Off button.

Optional door lock function on selected models.



Convenience

Half Trays
The new Series 6, 4 and 2 slim sized universal pans are ideal for preparing two versions of the same dish. They're also perfect for smaller quantities. For example, cook potato wedges on one slim tray and stuffed tomatoes on a second one. Because the trays are separated, the liquid from the tomatoes won't flow into the potatoes. And when dishes need to be refrigerated before or after cooking, they also fit inside Bosch refrigerators – as well as our dishwashers for cleaning.

Telescopic rail system
The Bosch telescopic rails are fully or partially extendable (depending on model) and are ideal for loading and removing trays with ease. Whether you choose a single or double rail option, all shelves are pyrolytic proof and compatible with microwave and steam cooking. Trays are also interchangeable between Series 8 full-sized ovens and compact appliances, excluding the pure steam compact oven.

ClipRail telescopic rails
Standard shelf systems provide no more than three positions for telescopic rails. For Series 6 ovens, Bosch is now offering one telescopic rail system for all levels. These new rails can be installed on any level – including the grill level for more convenient toasting. The level-independent rails are easy to install and uninstall. Therefore they can be easily clicked on a different level.

Oven clock and timer with programming
The electronic clock displays time of day and also acts as a countdown timer with an audible beep to indicate the end of the timer function. Programming adds extra convenience. Simply select the end-time (when you arrive home, eg. 6.30pm), the length of cooking, along with the cooking function and temperature, and the oven will do the rest.



Performance

Added steam function
Enhance your cooking results by adding a little bit of moisture from time to time, thanks to the added steam function. Whether you're reheating dishes, proving dough, baking or roasting, you can set the oven to automatically add bursts of steam, or you can add steam manually to regulate the intensity. Create succulent roasts and perfectly browned bread crusts with ease.

Precise temperature control
Electronic thermostats monitor the oven cavity temperature to maintain temperature consistency during the cooking process.

Extra large cavity
Bosch ovens offer up to 71 usable litres of cooking space and larger baking trays. The increased cavity creates more uniform baking results due to the improved heat circulation between the racks. The Series 6 90cm oven model has an interior capacity of 77 usable litres (net).

Lighting
Depending on the model, Bosch ovens and compact appliances offer our classic halogen lighting, LED ceiling light or the new multi-level LED lighting.

Energy-efficient LED lighting offers vibrant illumination and longevity. The multi-level LED lighting offers illumination on each level, which is exceptionally convenient when baking on multiple levels.

Integrated halogen lighting ensures the interior cavity is brightly lit. More efficient than standard lights, they are durable and are designed to last longer.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Features may vary depending on models. Please check individual product specifications.
*Measured at the centre of the window after 1 hour with a 180°C oven temperature / top and bottom heat.

Compact appliances






Compact appliances | Steamers

Steams so gently that even vitamins stay for dinner.

There's no healthier or tastier way to prepare food than steaming. Cooked in gentle steam, foods retain their original vitamins and aromas while releasing their full natural flavour. Vegetables stay crisp, poultry and fish become juicy and tender. If you prefer, you can even cook without fat. Thanks to an integrated water tank, no direct water connection is needed, giving you much more flexibility in deciding where to place your oven.

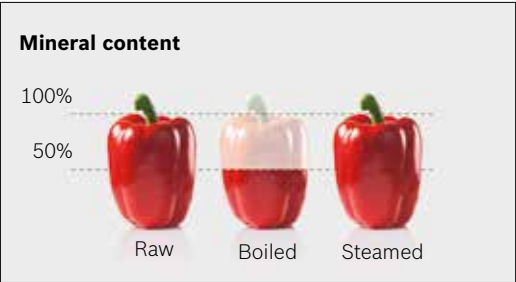

Preserving vitamins and minerals.
Dishes that are cooked in hot steam not only retain their vitamins and minerals, but also their full, natural flavour. So you can also go easy on the extra seasoning and use much less salt when cooking. In short, healthy food has never tasted better.

The perfect ingredient for perfect results: steam.

Series 8



Steam oven
With the Series 8 steam oven you can prepare an entire meal on up to three levels at once – for example, cook salmon, asparagus and rosemary potatoes simultaneously – and everything will turn out perfectly. Or perhaps you'd rather cook a sweet dessert at the same time? No problem: The humidity prevents flavours from intermingling so that each dish retains its own authentic flavour.



Combination steam oven
With the Series 8 combination steam oven, you can bake, steam or both. Combine the benefits of pure steam cooking with functions of a conventional oven and discover the results of giving your roasts and home-made bread a crispy finish. The premium combination steam oven also comes with Bosch Assist, the PerfectBake™ sensor and PerfectRoast™ meat probe for perfect cooking and baking results.

Series 6



Microwave with steam function
With the new Series 6 microwave with steam function, you can prepare your dishes on a single level with perfect results. And it isn't just the preparation that's easy: cleaning and the occasional descaling can also be performed with minimal of fuss.

Compact appliances | Combination microwave oven and warming drawers

Fits every kitchen. And every need.

Series 8 and Series 6

Combination microwaves

Sometimes you just can't get the food on the table fast enough. All our microwave ovens help you maintain perfect control over your menu and your schedule. Whether you're heating up baby food, pre-cooked meals or frozen foods, you'll get outstanding results quickly, hygienically and without compromising on taste. So instead of killing time waiting for dinner to be ready, you and your loved ones will have much more time to enjoy it.



Automatic functions to speed up your cooking

Heat, defrost, roast or grill anything, thanks to up to 1000 watts and up to five power levels. The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, enter its weight and select the desired program from the menu.



Series 8

Warming drawers

Our Series 8 warming drawers can do much more than just keep food and plates warm; they're also perfect for slow-cooking meat, defrosting frozen foods and proving dough.

The warming drawer's from Bosch can be installed either separately or in combination with Series 8 ovens, compact ovens and our built-in automatic coffee machine. The practical 'push and pull' technology ensures they are always easy to open, even when you have both hands full. They come in two sizes: 140mm high with 20 usable litres (net) and 290mm high with 52 usable litres (net).



Compact appliances | Built-in coffee machine

Your favourite café is now open 24/7.

Latte, cappuccino or espresso? With the Series 8 built-in coffee machine, you can treat yourself and your guests to any beverage at the touch of a button. Bosch barista technology guarantees a full-bodied aroma and perfect crema – for coffees as delicious as those brewed by your favourite café.

SensoFlow System for a perfect aroma


The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow System heats the water to just the right temperature, for a full-bodied espresso aroma from the first to the last cup.

Your choice of coffee at the touch of a button

With the MyCoffee function, save your 8 favourite beverages with individual names. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.

Automatic cleaning of the milk system

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato instead of cleaning.

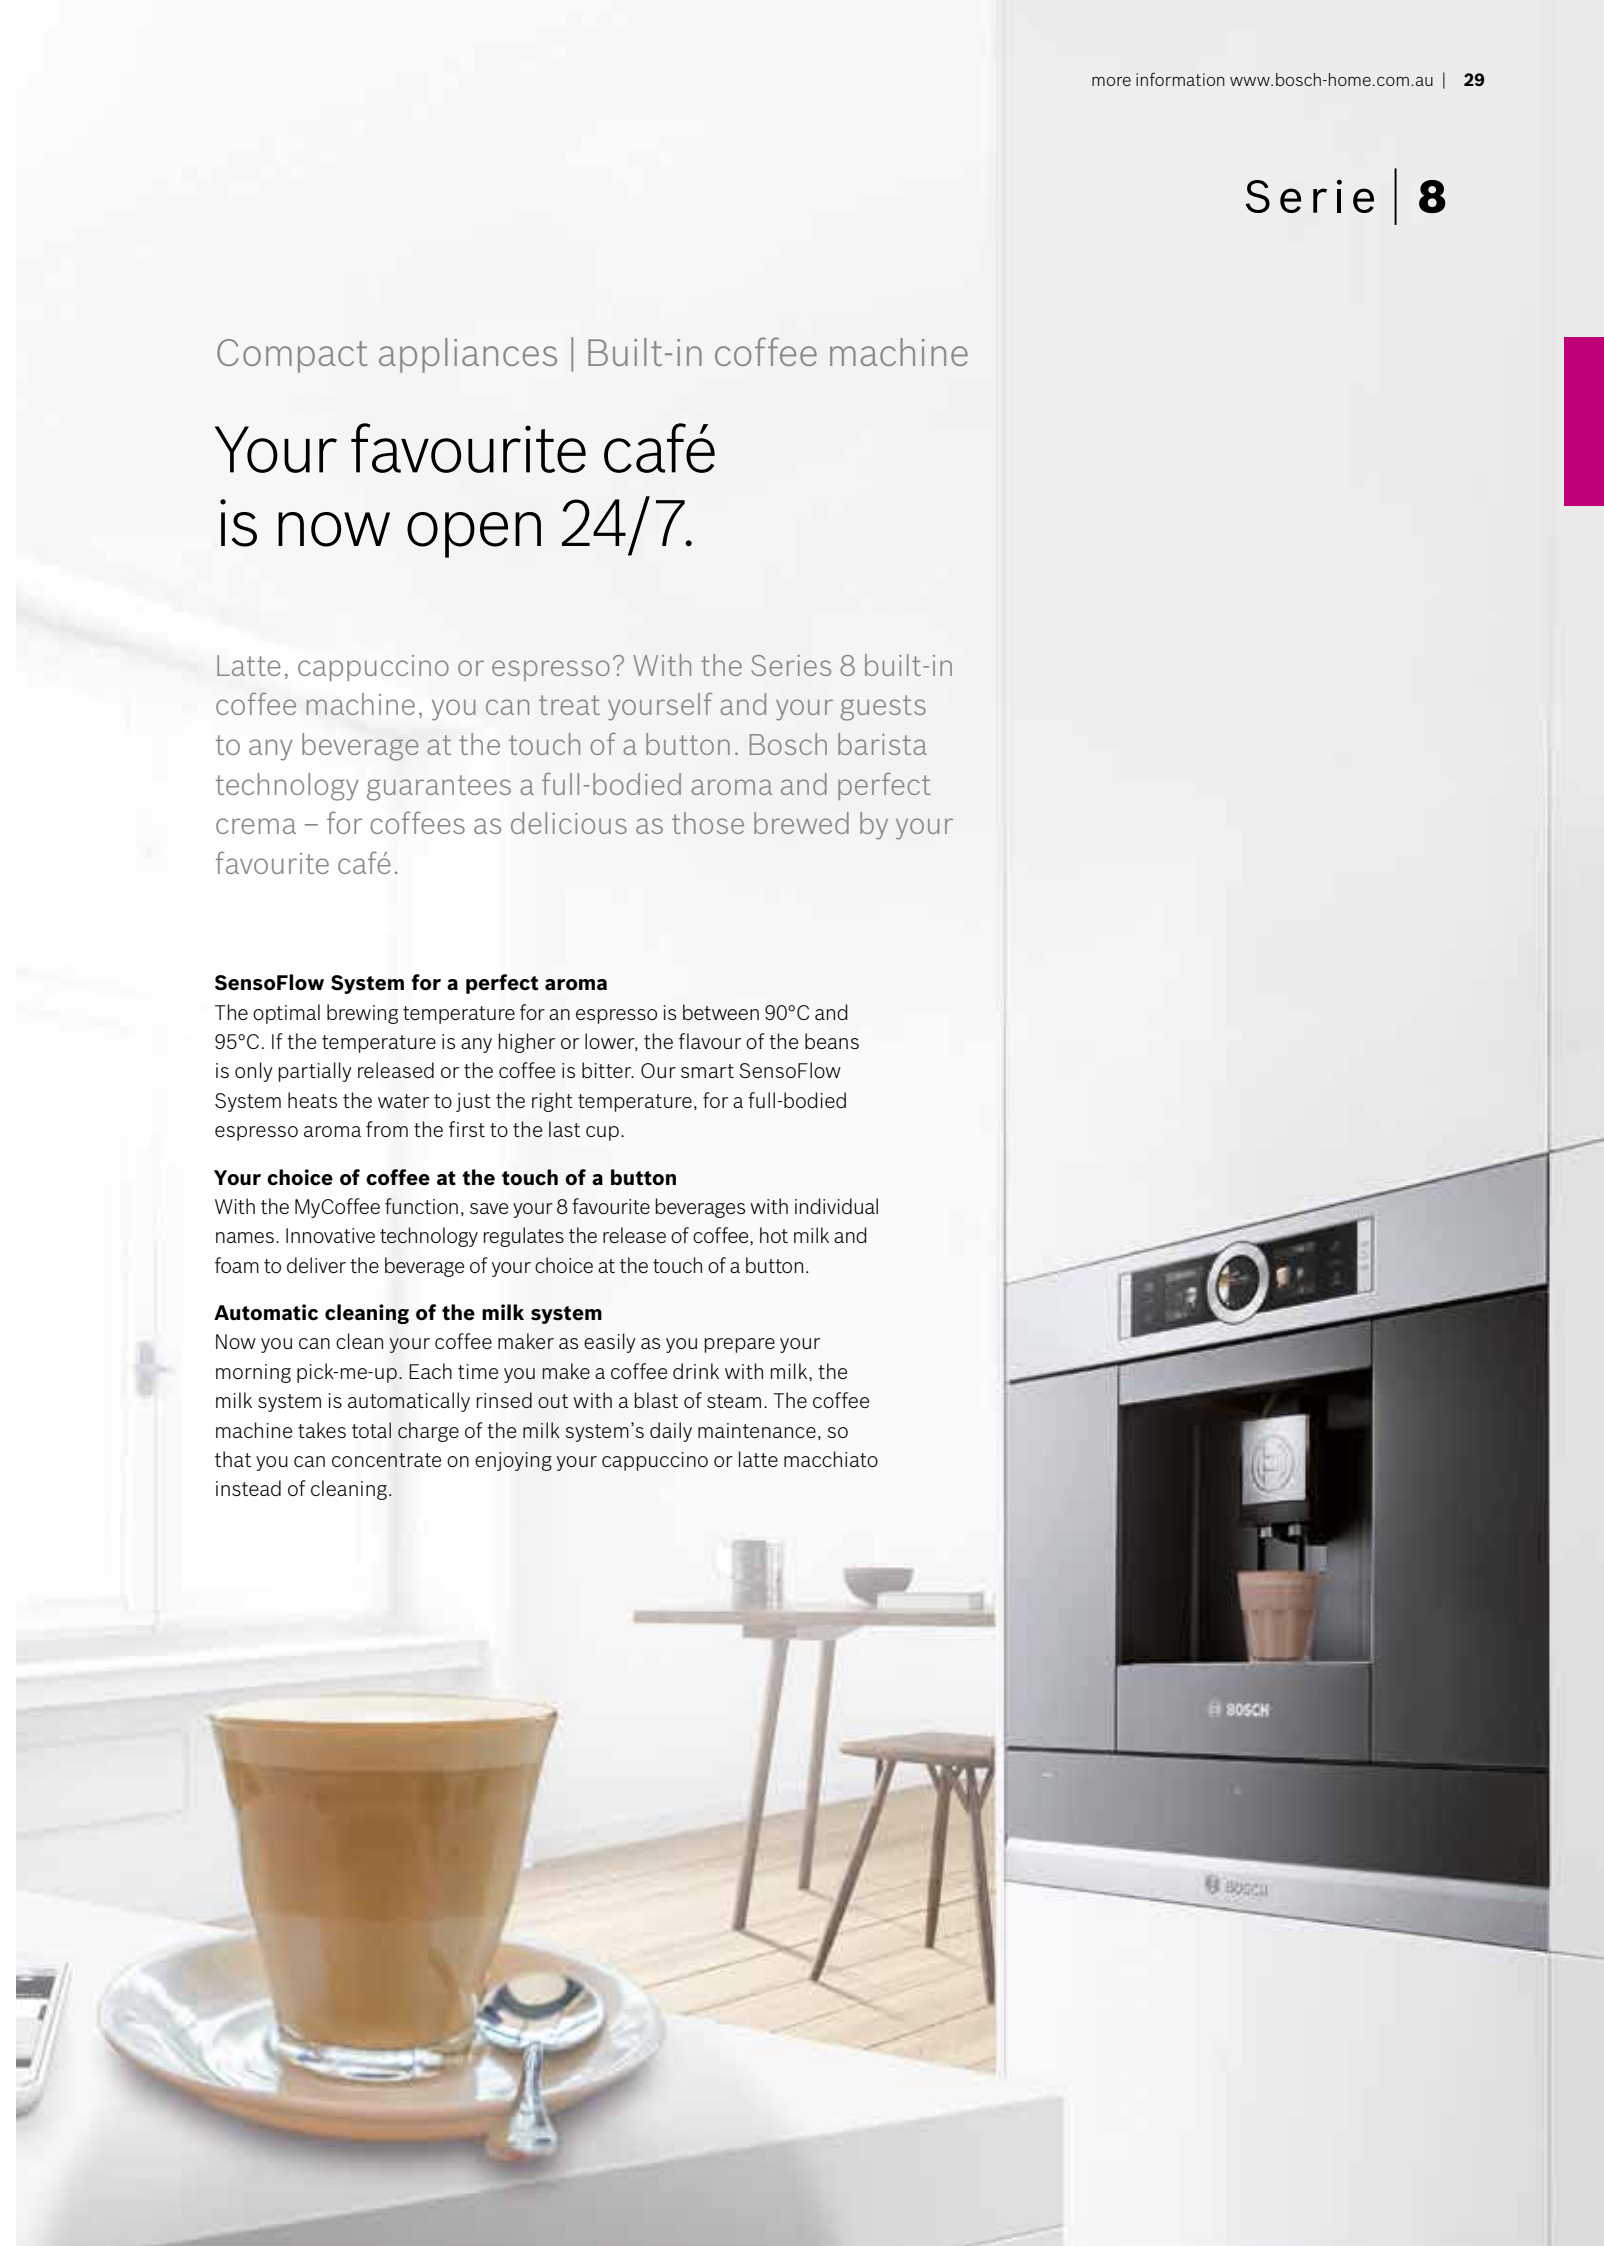

Serie | 8

Compact appliances | Overview

Designed to create perfect symmetry in your kitchen.

Serie | 8



Series 8 | CSG656RS1A
60cm Combination Steam Oven

Heating functions
18 heating functions
Multi-level pure steaming
Conventional cooking combined with steam cooking for tender and crispy results

Capacity
47 litres (net) cavity volume
3 shelf positions
1 litre removable water tank with empty water tank indicator

Convenience
TFT Touch Graphic Display
Bosch Assist
PerfectBake™ sensor
PerfectRoast™ meat probe
1-level telescopic rails
Temperature display
Automatic temperature proposal
SoftMove door

Cleaning
EcoClean Direct: rear wall, side walls and ceiling
Drying function
Descaling program

Safety
Residual heat indicator
Triple-glazed door
Child lock

Dimensions (HxWxD)
455 x 594 x 548mm

Complete specifications
Reference guide see page 88–89
Technical diagrams see page 105

Series 8 | CDG634BS1
60cm Pure Steam Oven

Heating functions
4 heating functions
Multi-level pure steaming

Capacity
38 litres (net) cavity volume
4 shelf positions
1.3 litre removable water tank with empty water tank indicator

Convenience
TFT Touch Symbol Display
AutoPilot20: 20 automatic programs
Temperature display
Automatic temperature proposal
SoftMove door

Cleaning
Descaling program

Safety
Residual heat indicator
Triple-glazed door
Child lock

Dimensions (HxWxD)
455 x 594 x 548mm

Complete specifications
Reference guide see page 88–89
Technical diagrams see page 105

Series 8 | CMG656RS1A
60cm Combination Microwave Oven

Heating functions
13 heating functions
Conventional cooking combined with microwave
5 inverter microwave power levels up to 1000W

Capacity
45 litres (net) cavity volume
3 shelf positions

Convenience
TFT Touch Graphic Display
Bosch Assist
PerfectBake™ sensor
PerfectRoast™ meat probe
1-level telescopic rails
Temperature display
Automatic temperature proposal
SoftMove door

Cleaning
EcoClean Direct: rear wall, side walls and ceiling

Safety
Residual heat indicator
Quadruple-glazed CoolTouch door
Child lock (controls and door)

Dimensions (HxWxD)
455 x 594 x 548mm

Complete specifications
Reference guide see page 88–89
Technical diagrams see page 105

Series 8 | CMG633BS1B
60cm Combination Microwave Oven

Heating functions
7 heating functions
Conventional cooking combined with microwave
5 inverter microwave power levels up to 1000W

Capacity
45 litres (net) cavity volume
3 shelf positions

Convenience
TFT Touch Symbol Display
AutoPilot14: 14 automatic programs
Temperature display
Automatic temperature proposal
SoftMove door

Safety
Residual heat indicator
Triple-glazed door
Child lock (controls and door)

Dimensions (HxWxD)
455 x 594 x 548mm

Complete specifications
Reference guide see page 88–89
Technical diagrams see page 105

Series 8 | CTL636ES1
60cm Built-in Coffee Machine

Flavour
SensoFlow System: Heating system for maximum and constant brewing temperature
AromaPro Concept: Optimal aroma extraction

Convenience
TFT Touch Graphic Display with interactive menu
MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso

Performance
SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic
CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety

Hygiene
Removable brewing unit: Easy and hygienic cleaning under running water
AutoMilk Clean: Automatically steam cleans the milk system after every beverage

Dimensions (HxWxD)
455 x 594 x 375mm

Complete specifications
Reference guide see page 90
Technical diagrams see page 105

Series 8 | BID630NS1A/BIC630NS1A
60cm Warming Drawers

Heating functions
40°C–80°C temperature control

Capacity
BID630NS1A: 52 litres (net) cavity volume
BIC630NS1A: 20 litres (net) cavity volume

Convenience
Fully extendable telescopic drawer
Ceramic-glass base element
Suitable for: plate warming, keep warm, slow cooking, defrost and proving dough

Dimensions (HxWxD)
BID630NS1A: 290 x 594 x 548mm
BIC630NS1A: 140 x 594 x 548mm

Complete specifications
Reference guide see page 90
Technical diagrams see page 106

Compact appliances | Overview

Serie | 6



Series 6 | COA565GS0A
60cm Microwave
with Steam Function

Heating functions

4 heating functions
Pure steaming function
5 inverter microwave power levels up to 1000W
Grill function with up to 2000W

Capacity

36 litres (net) cavity volume
0.8 litre removable water tank with empty water tank indicator

Convenience

Retractable control knobs with LCD-display
AutoPilot 15: 15 automatic programs
Electronic clock/timer with end-time programming

Cleaning

Steam cleaning system for water pipe
Descaling program

Safety

Triple-glazed door
Child lock

Dimensions (HxWxD)

455 x 594 x 545 mm

Complete specifications

Reference guide see page 88–89
Technical diagrams see page 106



Series 6 | CMA585MS0A
60cm Combination
Microwave Oven

Heating functions

5 heating functions
5 microwave power levels up to 900W
Grill function with up to 1750W

Capacity

44 litres (net) cavity volume

Convenience

Retractable control knobs with LCD-display
AutoPilot 15: 15 automatic programs
Electronic clock/timer with end-time programming

Safety

Triple-glazed door
Child lock

Dimensions (HxWxD)

454 x 594 x 570 mm

Complete specifications

Reference guide see page 88–89
Technical diagrams see page 106



Series 6 | BEL554MS0A
60cm Built-in Microwave

Heating functions

5 microwave power levels up to 900W
Grill function with up to 1200W

Capacity

25 litres (net) cavity volume

Convenience

Retractable control knob and touch control with LED-display
AutoPilot 8: 8 automatic programs
Electronic clock/timer with end-time programming

Safety

Triple-glazed door

Dimensions (HxWxD)

382 x 594 x 388 mm

Complete specifications

Reference guide see page 88–89
Technical diagrams see page 106

Compact appliances | Microwave with steam function

Your every wish is fulfilled.



Our new built-in microwave with steam function is equipped with an added grill – perfect for grilling with up to 2000W. Of course, it also serves as a microwave – for example, for quickly defrosting or warming up dishes. Because it has a water tank, this compact oven can be used both as an added steam microwave and for pure steam cooking. Not only is steaming foods easy, but cleaning and descaling the stainless-steel oven cavity is also very simple. And the display – equipped with features such as AutoPilot – is there to ensure that the oven is also extremely easy to use.



Fast warm-up thanks to the microwave function.



Perfectly prepared steamed fish and vegetables thanks to the steam function.

Cooktops



Cooktops | FlameSelect®

We didn't discover fire, but we've taken it to a new level. Nine, to be precise.


The new gas cooktops with FlameSelect® from Bosch are packed with innovative technology. They offer you a completely new level of precision when it comes to adjusting the flame by selecting predefined power levels. But that's not all. Thanks to our timeless design and carefully selected materials, Bosch gas cooktops are also a true feast for the eyes.



Stop cooking with intuition. Start cooking with perfection.

At Bosch, we want to make your cooking with gas as easy, safe and enjoyable as possible. That's why we developed FlameSelect® for you. Unlike conventional gas cooktops with inaccurate power settings, FlameSelect® and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels. So now, gas cooktops with FlameSelect® offer you all the benefits of gas cooking combined with the comfort and precision of an electric cooktop.

Nine levels of precise power selection

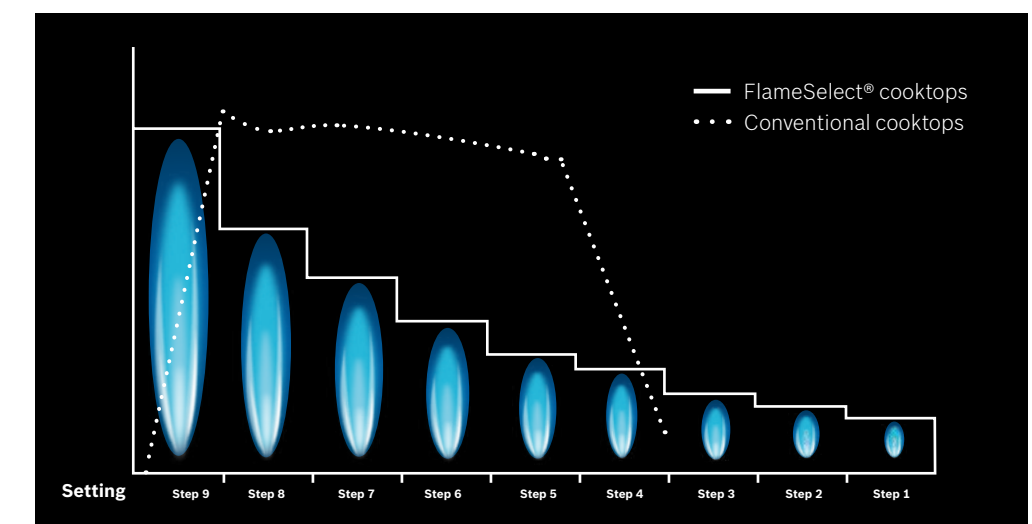

Easy to use. Easy to clean. Easy to love.



Our pan supports

When it comes to design you have the choice between single pan supports for easy handling and cleaning, or continuous pan supports for high stability of cookware. Both variants are available in cast iron and are extremely robust.



Our gas cooktop surfaces

Our cooktops are available in black tempered glass and stainless steel to perfectly match your kitchen and individual taste.

Cooktops | Gas features and functions

Features and functions for everyday use.

Cooktops | Gas cooktops

Fire that does exactly what you want.

Gas provides fast and instant versatility. Our German-designed gas cooktops all feature Bosch flame failure technology fitted to each burner and conveniently come with front or side mounted controls.



Efficiency

- One-hand ignition**
Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one hand, there is also no separate ignition button to clean.
- Easy clean tempered glass**
Premium models with tempered glass base are easy to clean for total convenience with a frameless finish for a stylish and sleek look.
- Cleaning rounded off to perfection**
The rounded edges of our gas cooktops ensure effortless cleaning – dirt simply doesn't have anywhere to collect.



Simplicity

- FlameSelect®**
FlameSelect® and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels, making your cooking with gas as easy, safe and enjoyable as possible.
- Flame failure device**
For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.
- Cast-iron supports**
Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.



Performance

- High-power wok-style burner**
Selected gas cooktop models feature a powerful wok-style burner, which provides up to 19.5 MJ/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.
- Flexible burners**
All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of your pan.

Features may vary depending on models. Please check individual product specifications.

Gas cooktops | Overview

Gas cooktops

Serie | 6



FlameSelect®

Series 6 PPS9A6B90A 90cm Black Tempered Glass Gas Cooktop
Heating functions 5 Burners: 1 x 15 MJ/h wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports Standard and semi-flush built-in option
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 915 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107



FlameSelect®

Series 6 PPQ7A6B20A 75cm Black Tempered Glass Gas Cooktop
Heating functions 5 Burners: 1 x 15 MJ/h wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports Standard and semi-flush built-in option
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 752 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107



FlameSelect®

Series 6 PPH6A6B20A 60cm Black Tempered Glass Gas Cooktop
Heating functions 4 Burners: 1 x 13.6 MJ/h wok burner, 2 standard burners, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports Standard and semi-flush built-in option
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 590 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107



FlameSelect®

Series 6 PCT9A5B90A 90cm Stainless Steel Gas Cooktop
Heating functions 6 Burners: 2 x 19.5 MJ/h dual flame wok burners, 1 high-speed burner, 2 standard burners, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 915 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107




FlameSelect®

Series 6 PCR9A5B90A 90cm Stainless Steel Gas Cooktop
Heating functions 5 Burners: 1 x 19.5 MJ/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 915 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107



FlameSelect®

Series 6 PCR7A5B90A 75cm Stainless Steel Gas Cooktop
Heating functions 5 Burners: 1 x 19.5 MJ/h dual flame wok burner, 1 high-speed burner, 2 standard burners, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 750 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107



FlameSelect®

Series 6 PCI6A5B90A 60cm Stainless Steel Gas Cooktop
Heating functions 4 Burners: 1 x 15 MJ/h wok burner, 1 high-speed burner, 1 standard burner, 1 economy burner
Convenience FlameSelect® valve technology (precise control in 9 steps) One-hand ignition via sword control knobs Enamelled cast-iron pan supports
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 582 x 520mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107



PBH6B5B90A PBH6B5B60A

Series 2 PBH6B5B90A/ PBH6B5B60A 60cm Stainless Steel Gas Cooktop
Heating functions 4 Burners: 1 x 15 MJ/h wok burner, 2 standard burners, 1 economy burner
Convenience One-hand ignition via sword control knobs PBH6B5B90A: Enamelled cast-iron pan supports PBH6B5B60A: Steel pan supports with cast iron finish
Safety Flame failure for each burner stops gas flow if flames go out
Dimensions (WxD) 580 x 510mm
Other Suitable for NG (ex factory) and LPG (via included conversion kit)
Complete specifications Reference guide see page 92–93 Technical diagrams see page 107


Cooktops | Induction

The best cooking needs just one ingredient: Bosch.


Modern cooking offers so many wonderful new tastes and textures, you need a cooktop that's flexible enough to keep up.

**Bosch FlexInduction®**

The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. The FlexZone can be used as two separate zones or combined into a single 'super-zone' where the entire zone becomes your cooking canvas.

**Bosch CombiInduction®**

Experience the magic of CombiZone – two cooking zones can be linked, making the switch from small to large pans effortless. Plus, the MoveMode function automatically switches from boil to simmer with a simple slide of the saucepan.


**Bosch Induction**

Bosch's benchmark Induction cooktops put you in control with 17 power levels plus PowerBoost for each zone, dual function timer with automatic switch-off, residual heat indicators, child lock and more.

Induction speeds up your cooking

Induction cooktops offer the most efficient way of cooking at lower temperatures, ie. melting chocolate, etc.

Time required to heat 2 litres of water at 15°C–90°C

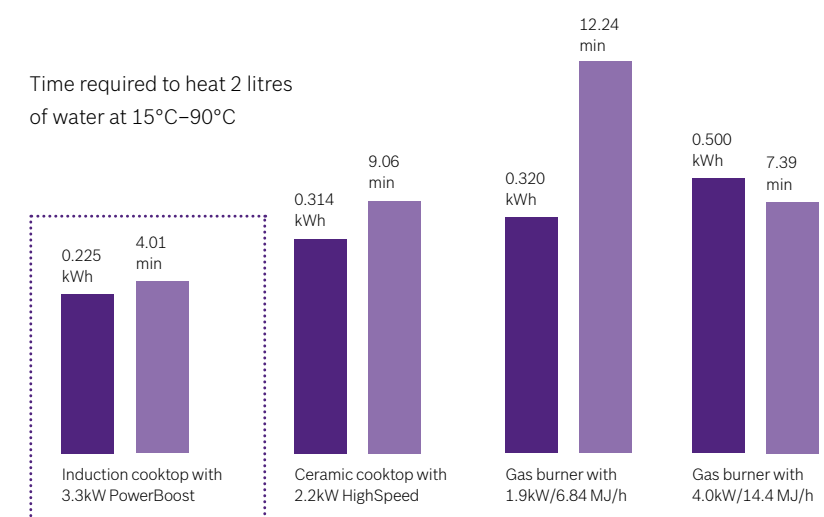

Source: BSH Hausgeräte GmbH, Germany (overseas test results)

Old pots, new technology

Most of your old pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.


Cooktops | FlexInduction®

FlexInduction® cooktops

Introducing Bosch FlexInduction®, the result of decades of research and development. Introducing true freedom in the kitchen.



Ideal for small pots, large pots, multiple pots, frying pans or casserole dishes – you name it, thanks to the unique coil shapes you get the ultimate flexibility and heat distribution. At the touch of a button, two induction zones become one large FlexInduction® surface.

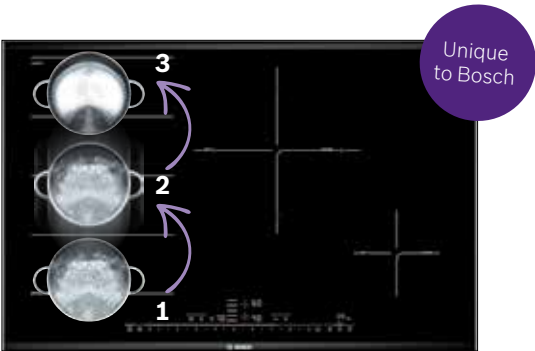

MoveMode

Pre-set 3 different power levels and move from boil to simmer in just seconds.

1. Perfect for rapid boiling (Power level 9 – Front FlexZone)
2. Medium heat cooking (Power level 5 – Middle FlexZone)
3. Ideal for simmering (Power level 1 – Back FlexZone)



PerfectFry™ sensor – for a steak that is just right

With up to 5 automatic settings, the pan is heated to just the right temperature. Sensors inside the cooktop continuously measure the temperature and maintain it for perfect results. Works with Bosch PerfectFry™ sensor pans, see page 103 for details.

Cooktops | CombiInduction®


CombiInduction® cooktops

Bosch CombiInduction® lets you switch from small to large and oversized pans, like Teppan Yaki, simply and easily. So now there's no limit to the tastes you can create.



CombiZone

With Bosch CombiInduction® you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard cooking zones into one large cooking zone.

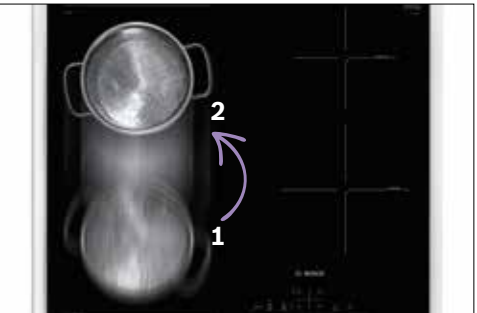

MoveMode

When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next, without a hiccup, you are always in control.



Teppan Yaki – try beef, prawns, scallops, set your imagination free.



Griddle plate – perfectly grill your favourite meats, fish or vegetables.




Stainless Steel Roasting Pan – for big roasts and large family dishes.

Cooktops | Induction overview

Induction cooktops


Serie | 8




Series 8 PXV975DC1E* 90cm FlexInduction® Cooktop
Heating functions 5 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans 320mm triple circuit zone 17 power levels PowerBoost for each zone ShortBoost for each zone
Convenience Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone MoveMode: 3 automatic power levels PerfectFry™ sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 916 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108



Series 8 PXE875DC1E* 80cm FlexInduction® Cooktop
Heating functions 4 induction cooking zones: 1 large FlexInduction® zone for large pans or multiple smaller pans 17 power levels PowerBoost for each zone ShortBoost for each zone
Convenience Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone MoveMode: 3 automatic power levels PerfectFry™ sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 816 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108



Series 8 PXX675DC1E 60cm FlexInduction® Cooktop
Heating functions 4 induction cooking zones: 2 large FlexInduction® zones for large pans or multiple smaller pans 17 power levels PowerBoost for each zone ShortBoost for each zone
Convenience Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone MoveMode: 3 automatic power levels PerfectFry™ sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 606 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108



Series 8 PIV995DC1E* 90cm Induction Cooktop
Heating functions 5 induction cooking zones: 1 large 32cm triple circuit zone 17 power levels PowerBoost for each zone ShortBoost for each zone
Convenience Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone PerfectFry™ sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 916 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108

Serie | 6



Series 8 PIV975DC1E* 90cm Induction Cooktop
Heating functions 5 induction cooking zones: 1 large 32cm triple circuit zone 17 power levels PowerBoost for each zone ShortBoost for each zone
Convenience Electronic DirectSelect Premium touch-controls Dual timer with auto switch-off for each zone PerfectFry™ sensor with 5 automatic frying programs Keep warm: low setting for keeping food warm QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 916 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108



Series 6 PVS875FB1E 80cm CombiInduction® Cooktop
Heating functions 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans or multiple smaller pans 17 power levels PowerBoost for each zone
Convenience Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off for each zone MoveMode: 2 automatic power levels QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 816 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108



Series 6 PXE651FC1E 60cm FlexInduction® Cooktop
Heating functions 4 induction cooking zones: 1 large FlexInduction® zone for large pans or multiple smaller pans 17 power levels PowerBoost for each zone
Convenience Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off for each zone MoveMode: 2 automatic power levels PerfectFry™ sensor with 4 automatic frying programs QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 592 x 522mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108



Series 6 PVS675FB1E 60cm CombiInduction® Cooktop
Heating functions 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans or multiple smaller pans 17 power levels PowerBoost for each zone
Convenience Electronic DirectSelect 1.0 touch-controls Dual timer with auto switch-off for each zone MoveMode: 2 automatic power levels QuickStart ReStart Energy consumption display
Cleaning WipeProtection pauses all settings for easy cleaning while cooking
Safety 2-stage residual heat indicators Child lock
Dimensions (WxD) 606 x 527mm
Complete specifications Reference guide see page 94–95 Technical diagrams see page 108

Cooktops | Induction
features and functions

Features and functions
for everyday use.

Serie | 6



Series 6 | PIE631FB1E
60cm Induction Cooktop

Heating functions
4 induction cooking zones
17 power levels
PowerBoost for each zone

Convenience
Electronic DirectSelect 1.0 touch-controls
Dual timer with auto switch-off for each zone
Keep warm: low setting for keeping food warm
QuickStart
ReStart
Energy consumption display

Cleaning
WipeProtection pauses all settings for easy cleaning while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
592 x 522mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109

Serie | 4



Series 4 | PIJ611BB1E
60cm Induction Cooktop

Heating functions
3 induction cooking zones including XL 28cm cooking zone
17 power levels
PowerBoost for each zone

Convenience
TouchSelect electronic controls
Dual timer with auto switch-off for each zone
QuickStart
ReStart

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
592 x 522mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109



Safety & Cleaning

WipeProtection
Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

2-stage residual heat indicators
Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h' – residual heat insufficient to cook, but zone is still hot enough to advocate caution.

Child lock
Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

Automatic safety switch-off
Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.



Convenience

Dual function timer including automatic switch-off for each zone
Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (ie. level 5.5) for up to 99 minutes – ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

QuickStart
Start cooking quicker. New Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

ReStart
Things happen quickly in the kitchen – spilling something on the control panel or accidentally switching off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Energy consumption display*
Each time you finish cooking, your Energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Automatic pot detection
Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.

Keep warm
Ideal setting for keeping food warm before serving at the touch of a button.



Performance

DirectSelect Premium
Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

DirectSelect 1.0
Enjoy total convenience with DirectSelect 1.0. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/- repeatedly.

TouchSelect
With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

17 power levels
Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

PowerBoost – now with even more power!
PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.

ShortBoost
Reduce the time to heat up pans – this boost function heats up the pan for 30 seconds at high power before automatically reducing the heat to the correct power setting.

Cooktops | Ceramic

The world of Bosch ceramic cooktops.

There is a wide range of ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.

Cooktops | Ceramic features and functions

Features and functions for everyday use.



Safety & Cleaning

WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h' – residual heat insufficient to cook, but zone is still hot enough to advocate caution.



Convenience

Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.

ReStart

Things happen quickly in the kitchen – if you spill something on the control panel or accidentally switch off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Energy consumption display*

Each time you finish cooking, your energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casseroles and other (large) cooking dishes.

Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.

Keep warm

Ideal setting for keeping food warm before serving at the touch of a button.



Performance

DirectSelect Premium

Taking easy to use, intuitive controls to the next level, new DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

PowerBoost

PowerBoost now on selected Bosch ceramic cooktops lets you heat up large volumes of water even faster than on the highest power level.

Cooktops | Ceramic overview

Ceramic cooktops

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as practical and easy-to-clean.

Serie | 8



Series 8 | PKM875DP1A
80cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones:
2 dual circuit zones, 1 dual circuit/extended roasting zone
17 power levels
PowerBoost for each zone

Convenience
Electronic DirectSelect
Premium touch-controls
Dual timer with auto switch-off for each zone
Keep warm – low setting for keeping food warm
ReStart – quickly reinstates previous settings
Energy consumption display

Cleaning
WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
816 x 527mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109



Series 8 | PKG775DB1A
70cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones:
2 dual circuit zone
17 power levels

Convenience
Electronic DirectSelect
Premium touch-controls
Dual timer with auto switch-off for each zone
Automatic electronic boil start
Keep warm – low setting for keeping food warm
ReStart – quickly reinstates previous settings
Energy consumption display

Cleaning
WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
710 x 527mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109



Series 8 | PKN675DB1A
60cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones:
1 dual circuit zones, 1 dual circuit/extended roasting zone
17 power levels

Convenience
Electronic DirectSelect
Premium touch-controls
Dual timer with auto switch-off for each zone
Automatic electronic boil start
Keep warm – low setting for keeping food warm
ReStart – quickly reinstates previous settings
Energy consumption display

Cleaning
WipeProtection pauses settings for easy cleaning of the control panel while cooking

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
606 x 527mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109

Serie | 4



Series 4 | PKE611D17A
60cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones
17 power levels


Convenience
Electronic TouchSelect +/- touch-controls
ReStart - quickly reinstates previous settings

Safety
2-stage residual heat indicators
Child lock

Dimensions (WxD)
592 x 522mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109

Serie | 2



Series 2 | PKE611CA1A
60cm Ceramic Cooktop

Heating functions
4 QuickTherm cooking zones
9 power levels

Convenience
Side control sword knobs


Safety
Residual heat indicator

Dimensions (WxD)
592 x 522mm

Complete specifications
Reference guide see page 94–95
Technical diagrams see page 109




Rangehoods

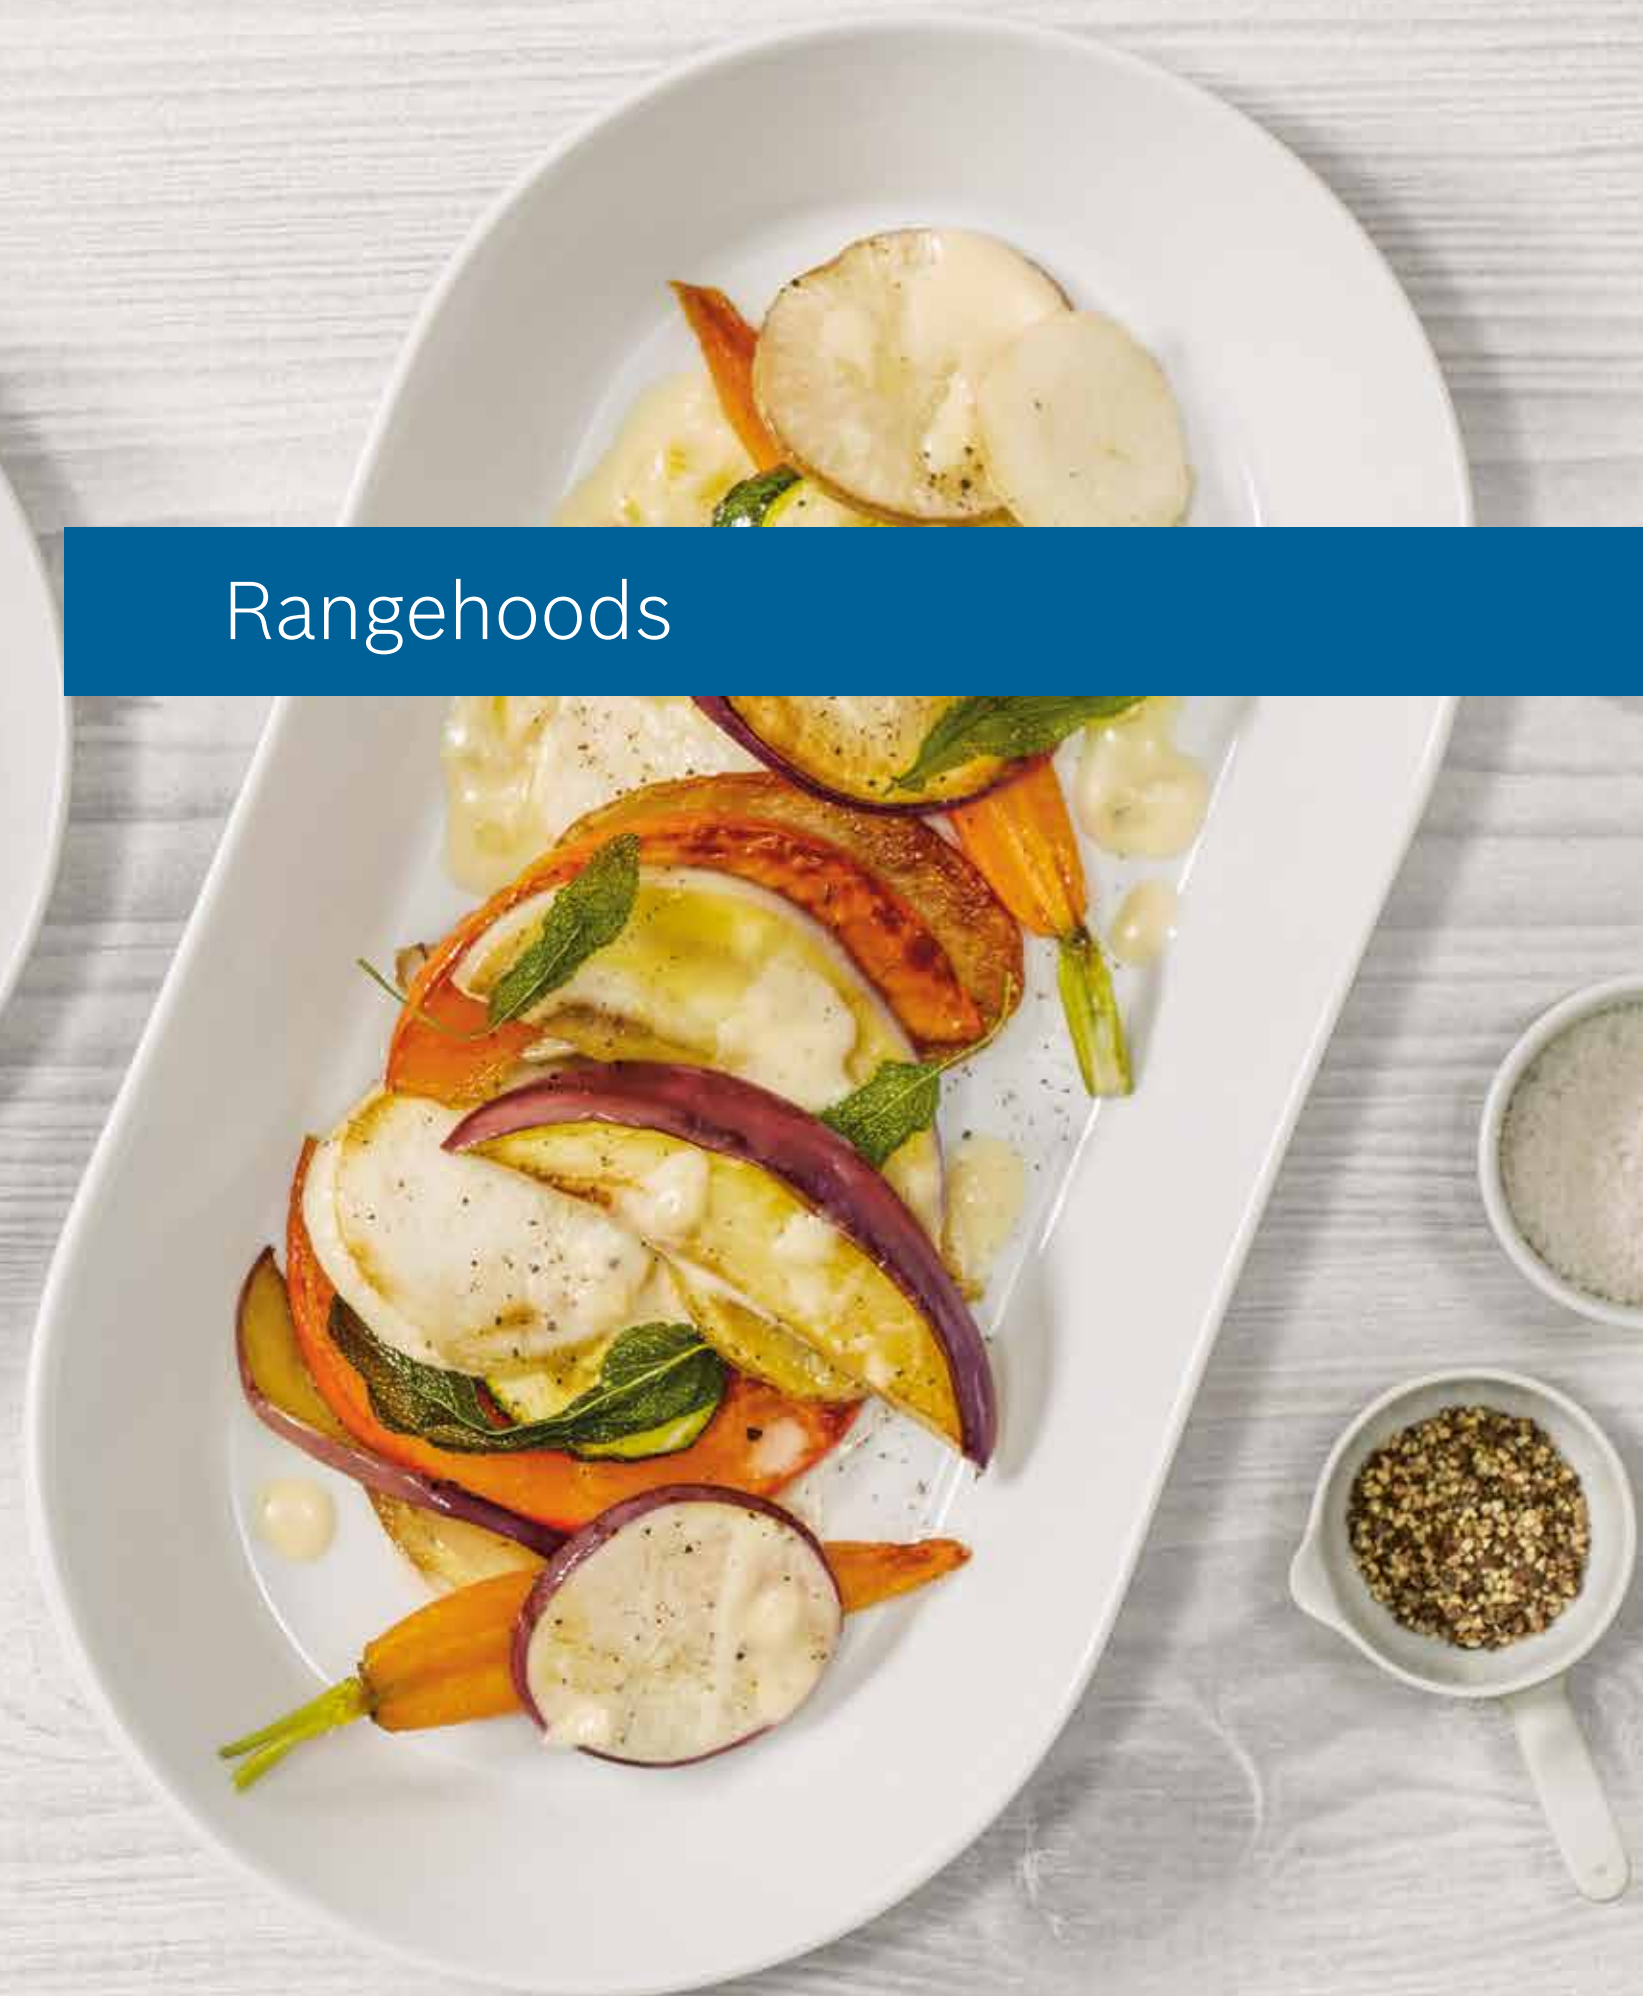


Rangehoods | Design

A breath of fresh air in hood design.

The right rangehood can reduce odours and steam and leave your kitchen feeling fresh and clean. And a Bosch hood will do it all with silent efficiency.

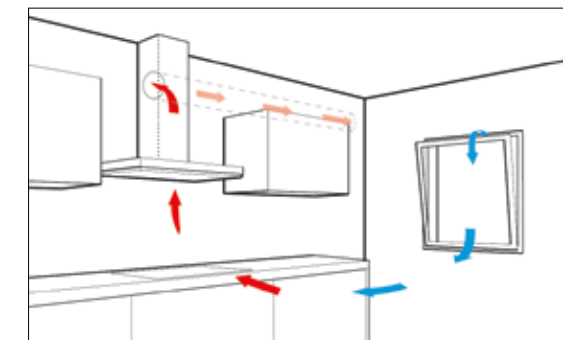**Ducted extraction**

Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.

**Recirculation kit**

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.




CleanAir module
Accessory to be purchased separately*

*Available for selected Bosch rangehoods

What extraction rate do I need?

It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: a minimum of 6 times per hour; and a maximum of 12 times per hour.

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.

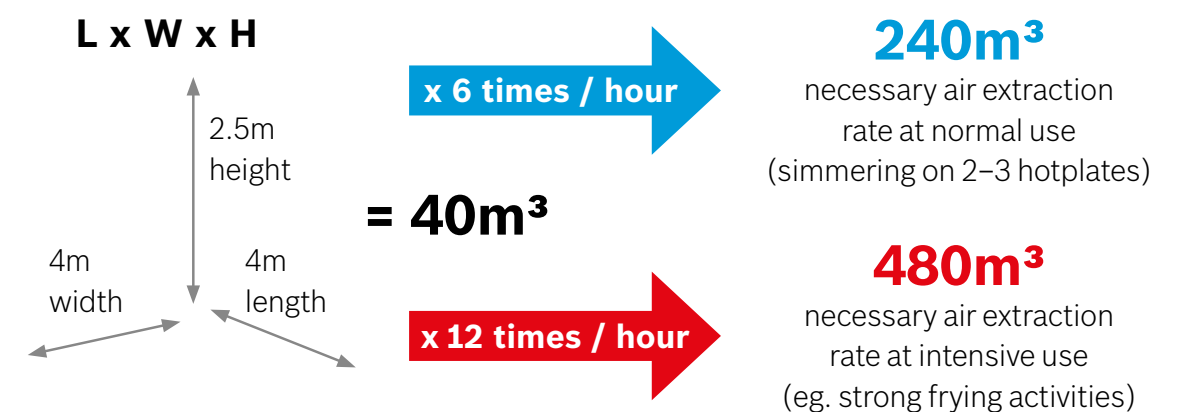

Bosch extraction rates are tested in line with EU standards. See page 98 for more information.

Aeroplane

120dB



Road traffic

83dB



Talking

74dB

Rangehoods | Silence

Relax in a quieter kitchen with family and friends.

A few decibels can make the difference between harmful, loud and pleasant. Operating at 40dB(A)*, our quietest rangehood means you can have it on while listening to music, enjoying a conversation or while your baby rests.

Silence

Noise is measured in numeric decibels or dB(A). It is important to note that a few decibels can make a huge difference.

EcoSilence Drive® motor

The EcoSilence Drive® motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. To reduce motor noise even further (1dB(A) noise reduction compared to other motors), we have optimised the airflow inside the hood. The result: low noise levels with high power.

Bosch Rangehood
DFS097E50A

40dB



30dB Leaves rustling



*DFS097E50A at minimum level 40dB (150mm ducted).

Rangehoods | Overview

Wall-mounted rangehoods

Powerful performance, classic design.

Serie | 6



Series 6 DWB091E51A 90cm Wall-mounted Stainless Steel Canopy Rangehood
Power functions 810m³/h maximum extraction capacity with rim ventilation 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on time 1–10 mins EcoSilence Drive® brushless motor
Convenience Whisper quiet: 44dB at minimum level (150mm ducted) Sound insulation mats Electronic controls with LED-display 3 x 3W LED SoftLights with dimmer function
Cleaning Dishwasher-safe metal grease filters Electronic filter saturation indicator
Dimensions (HxWxD) 628–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)
Optional Accessory DSZ6240 CleanAir recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 109

Serie | 4



Series 4 DWW097A50A 90cm Wall-mounted Stainless Steel Canopy Rangehood
Power functions 730m³/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting EcoSilence Drive® brushless motor
Convenience Whisper quiet: 45dB at minimum level (150mm ducted) Sound insulation mats Push button control 3 x 3W LED lights
Cleaning Dishwasher-safe metal grease filters
Dimensions (HxWxD) 672–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir recirculated)
Optional Accessory DSZ6240 CleanAir recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 109

Serie | 2



Series 2 DWP96BC50A 90cm Wall-mounted Stainless Steel Canopy Rangehood
Power functions 600m³/h maximum extraction capacity 3 power settings
Convenience Very quiet: 51dB at minimum level (150mm ducted) Push button control 2 x 1.5W LED lights
Cleaning Dishwasher-safe metal grease filters
Dimensions (HxWxD) 799–975 x 900 x 500mm (ducted or recirculated)
Optional Accessory DHZ5275 Recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 110



Series 2 DWP66BC50A 60cm Wall-mounted Stainless Steel Canopy Rangehood
Power functions 570m³/h maximum extraction capacity 3 power settings
Convenience Very quiet: 49dB at minimum level (150mm ducted) Push button control 2 x 1.5W LED lights
Cleaning Dishwasher-safe metal grease filters
Dimensions (HxWxD) 799–975 x 600 x 500mm (ducted or recirculated)
Optional Accessory DHZ5275 Recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 110

Integrated rangehoods

Great performance in a tiny space. These neatly concealed rangehoods are housed underneath the kitchen unit and can only be seen if you look underneath the kitchen cabinetry.

Serie | 8



Series 8 DHL895CAU 86cm Integrated Rangehood
Power functions 820m³/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting Automatic run-on time 30 mins EcoSilence Drive® brushless motor
Convenience Whisper quiet: 41dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 1W LED lights with dimmer function
Cleaning Dishwasher-safe metal grease filters Electronic filter saturation indicator
Dimensions (HxWxD) Product: 418 x 860 x 282mm Built-in: 418 x 836 x 264mm (ducted or recirculating)
Optional Accessory DHZ5605 Recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 110

Serie | 6



Series 6 DHL785BAU 70cm Integrated Rangehood
Power functions 730m³/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting
Convenience Very quiet: 53dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 20W halogen lights
Cleaning Dishwasher-safe metal grease filters
Dimensions (HxWxD) Product: 418 x 700 x 282mm Built-in: 418 x 676 x 264mm (ducted or recirculating)
Optional Accessory DHZ5605 Recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 110



Series 6 DHL575CAU 52cm Integrated Rangehood
Power functions 610m³/h maximum extraction capacity with rim ventilation 3 power settings + 1 intensive setting with automatic revert to previous setting
Convenience Very quiet: 50dB at minimum level (150mm ducted) Low-lift push button controls for power and light 2 x 1W LED lights
Cleaning Dishwasher-safe metal grease filters
Dimensions (HxWxD) Product: 418 x 520 x 300mm Built-in: 418 x 496 x 264mm (ducted or recirculating)
Optional Accessory DHZ5605 Recirculation kit
Complete specifications Reference guide see page 96–99 Technical diagrams see page 111

Serie | 4



Series 4 DHL555BAU 53cm Integrated Rangehood
Power functions 650m³/h maximum extraction capacity 3 power settings + 1 intensive setting
Convenience Whisper quiet: 41dB at minimum level (150mm ducted) Slide controls for power and light 2 x 20W halogen lights
Cleaning Dishwasher-safe metal grease filters
Dimensions (HxWxD) Product: 255 x 530 x 380mm Built-in: 255 x 500 x 350mm (ducted or recirculating))
Optional Accessory DHZ7305 Charcoal filter
Complete specifications Reference guide see page 96–99 Technical diagrams see page 111

Rangehoods | Overview

Retractable slideout rangehoods

To operate, the slideout section is pulled out, enlarging the extraction surface. The pelmet front can even be matched to your kitchen units.* So this rangehood will be almost invisible in your kitchen.

Serie | 6



Serie | 4



Serie | 2



Series 6 | DFS097E50A
90cm Slideout Rangehood

Power functions
730m³/h maximum extraction capacity
3 power settings + 2 intensive settings with automatic revert to previous setting
Automatic run-on time 1–10 mins
EcoSilence Drive® brushless motor

Convenience
Whisper quiet: 40dB at minimum level (150mm ducted)
Electronic controls with LED-display
Sound insulation mats
2 x 3W LED SoftLights with dimmer function
Easy installation system

Cleaning
Dishwasher-safe metal grease filters
Electronic filter saturation indicator

Dimensions (HxWxD)
Product: 426 x 898 x 290mm
Built-in: 385 x 524 x 290mm (ducted or recirculating)

Optional Accessories
DSZ4683 CleanAir recirculation kit
DSZ4681 CleanAir active carbon filter

Complete specifications
Reference guide see page 96–99
Technical diagrams see page 111

Series 4 | DFS097A50A
90cm Slideout Rangehood

Power functions
740m³/h maximum extraction capacity
3 power settings + 1 intensive setting with automatic revert to previous setting
Automatic run-on time 1–10 mins
EcoSilence Drive® brushless motor

Convenience
Whisper quiet: 43dB at minimum level (150mm ducted)
Low-lift push button controls for power and light
2 x 3W LED lights
Easy installation system

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
Product: 426 x 898 x 290mm
Built-in: 385 x 524 x 290mm (ducted or recirculating)

Optional Accessories
DSZ4683 CleanAir recirculation kit
DSZ4681 CleanAir active carbon filter

Complete specifications
Reference guide see page 96–99
Technical diagrams see page 111

Series 4 | DFS067A50A
60cm Slideout Rangehood

Power functions
740m³/h maximum extraction capacity
3 power settings + 1 intensive setting with automatic revert to previous setting
Automatic run-on time 1–10 mins
EcoSilence Drive® brushless motor

Convenience
Whisper quiet: 43dB at minimum level (150mm ducted)
Low-lift push button controls for power and light
2 x 3W LED lights
Easy installation system

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
Product: 426 x 598 x 290mm
Built-in: 385 x 524 x 290mm (ducted or recirculating)

Optional Accessories
DSZ4683 CleanAir recirculation kit
DSZ4681 CleanAir active carbon filter

Complete specifications
Reference guide see page 96–99
Technical diagrams see page 112

Series 2 | DFM064W50A
60cm Slideout Rangehood

Power functions
400m³/h maximum extraction capacity
3 power settings

Convenience
Quiet: 59dB at minimum level (150mm ducted)
Rocker switches for power and light
2 x 20W halogen lights

Cleaning
Dishwasher-safe metal grease filters

Dimensions (HxWxD)
Product: 203 x 598 x 290mm
Built-in: 162 x 526 x 290mm (ducted or recirculating)


Optional Accessory
DSZ4545 Recirculation kit

Complete specifications
Reference guide see page 96–99
Technical diagrams see page 112

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. *For cabinetry match pelmet required from cabinet maker. Stainless Steel pelmet included, black and white available as optional accessory.

Rangehoods | Features and functions

Features and functions for everyday use.

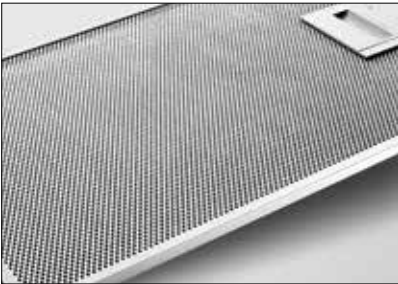

Cleaning

Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.

LED lighting

The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.

Halogen lighting

Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.

Variable power settings

All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.

CleanAir Recirculation

The CleanAir module is an optional accessory for rangehoods. The special active carbon filter, when compared to ducted systems, is equal in performance for odour reduction and grease absorption. It also produces up to 3dB(A) less noise than conventional recirculation systems. Easy to install, the surface of the carbon filter is the equivalent of around 50 soccer fields offering more performance and greater energy efficiency.

Convenience

Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.

Electronic control

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function; control at your fingertips.

Electronic button control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.

Rocker switch control

It doesn't get any easier: one switch with 3 power levels and one for turning the lights on and off.

Performance

Dishwasher-safe metal filters

For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.

Metal grease filter

Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.

Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.

Rim ventilation filter

With its smooth uninterrupted surface and grease separation of 80–92%*, the rim ventilation filter from Bosch has a multi-patented filter sealing system and flow-optimised filter system with 12-layer filter mats.

Extraction rates

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height. Bosch rangehoods offer powerful maximum extraction rates for when you are cooking up a storm in the kitchen. While the variable power settings allow you to navigate just the extraction power you need for each meal.

Features may vary depending on models. Please check individual product specifications. *Depending on motor output

A stack of plates is shown on a light-colored, textured surface. The stack includes a dark brown plate at the bottom, followed by a white plate with thin vertical lines, and a plain white plate on top. A blue rectangular box with the text "Dishwashers" is positioned to the right of the plates.

Dishwashers

Dishwashers | Design

Integrate your dishwasher for a seamless look.

Bosch built-under, semi and fully integrated dishwashers are designed to fit your new kitchen to perfection. Semi and fully integrated dishwashers can be fitted with a door panel to match the design of your kitchen cabinetry while built-under dishwashers can easily be fitted into an existing kitchen with a continuous kick panel.

Built-under



Built-under dishwashers **fit into a new or existing kitchen with style**

- Flat control panel
- Adjustable height for flush fit
- Option of continuous kick panel flush with kitchen cabinetry

Semi-integrated



Integrate your dishwasher for a **seamless look**

- Can be fitted with a door panel to match the design of your kitchen cabinetry*
- Continuous kick panel provides seamless integration

Fully integrated



Fully integrated dishwashers are designed to **fit your new kitchen to perfection**

- Can be concealed entirely behind a door panel to match the design of your kitchen cabinetry*
- Control panel neatly integrated into the top of the dishwasher door
- Continuous kick panel provides seamless integration
- Optional stainless steel front panel accessory

*Door panel not included

**WORLD'S
BRAND NO.1***

*For dishwashers. Source: Euromonitor, volume sales, 2017.

Dishwashers | Features and functions

Discover the features available as standard in our range of dishwashers.

Our Bosch dishwashers come with many convenient features included as standard. Quieter, more efficient and with improved safety features, you can enjoy more family time and perfectly clean dishes every wash.

We've increased our standard. So you can do the same.

EcoSilence Drive®

Our advanced motor has been built to provide you with maximum efficiency, economy and durability while operating. EcoSilence Drive® wash and drain pumps work without brushes, resulting in ultra-silent performance and top results.

DosageAssist™ detergent system

Unique to Bosch, DosageAssist™ maximises the effectiveness of the detergent tablet by dropping it into a specially engineered tray that is targeted by water jets, resulting in a tablet that dissolves evenly under control. For superior cleaning performance and a quieter wash.

Heat Exchanger

Uses residual heat to rinse and dry dishes, saving energy, reducing temperature shock, and providing hygienically clean results by not drawing air from outside of the dishwasher.

AquaStop™ Plus

The AquaStop™ Plus system consists of a double-walled supply hose, a safety valve, as well as a floor sump with float switch, offering 100% protection against water damage. Guaranteed by Bosch.

Last Program Used Memory

The last program used is remembered for ultimate convenience. Simply press 'Start' for clean dishes.

Anti-fingerprint finish

The anti-fingerprint stainless steel finish ensures no prints are left behind and the dishwasher always looks its best.

Child door and button locks

For added safety, the door can be locked manually to prevent children from inadvertently opening the door. The buttons can also be locked to prevent tampering during operation.

Whisper quiet washing

Bosch dishwashers are amongst the quietest in the world. With brushless motors and advanced sound insulation technology for whisper quiet operation from just 40dB. Quieter than a buzzing bee!

Three stage self-cleaning filter

An additional nozzle in the spray arm cleans the bottom of the dishwasher while also breaking down food to pass through the filter and prevent blockages.

AutoBrilliance™ automatic detergent sensor

The AutoBrilliance™ function adapts the temperature for multi-function detergent tablets, ensuring the rinse aid is fully utilised, delivering sparkling results every time.

AquaSensor™ technology

The AquaSensor™ helps you save more water as it measures the amount of soiling at the end of the pre-rinse cycle, reusing water when it can, saving up to 20% for the entire wash.

Introducing our innovative features in selected models.

Our clever dishwashers include advanced features that offer you even more convenience and flexibility.



TimeLight®

You might not hear anything coming from your dishwasher, but it still might be on. To prevent you from interrupting the cycle, we've developed TimeLight®: an illumination that projects the remaining wash cycle time onto the floor when the dishwasher is in operation.



EmotionLight

Show-off your sparkling clean glassware beautifully with the interior illumination from EmotionLight. The LED lights never need to be changed and will last for the lifetime of your dishwasher.



10 year anti-rust warranty

Our appliances are made from top quality materials and in addition to our standard appliance warranty, we provide a free-of-charge warranty against rusting-through of the dishwasher's stainless steel inner cavity.



InfoLight®

Selected models feature InfoLight® – a red LED light that discreetly beams onto the floor during the wash cycle and disappears after the drying cycle is complete.



Full colour TFT display

The multi-coloured TFT display shows wash progress, time remaining, and thanks to the advanced technology, displays the predefined water and energy consumption for each wash option.



Polinox® inner tub

Extremely durable, odourless and rust-free, the patented Polinox® inner tub on Series 4 and selected Series 6 models is German engineered with robust materials that withstand dints, scratches and discolouration, based on 10 year simulation tests.



Dishwashers | Wash programs

Your guide to our wash programs and options:

Wash programs

Automatic programs

By choosing the automatic program, your dishwasher will assess how soiled the items are and adjust the program time and temperature accordingly.

Eco Wash 45°C

Save on your utility bills and reduce the impact on our environment by using this water and energy-efficient program for mixed loads.

Pots & Pans 70°C

An intensive wash cycle designed for heavily soiled dishes such as pans with baked-on food.

Quick 60mins 65°C

A 60 minute wash and dry cycle for dishes of various soiling levels for situations when time is of the essence.

Quick 29mins 45°C

A 29 minute* express wash designed to clean lightly soiled dishes in a short time, such as drinking glasses at a dinner party.

ExtraQuiet 40dB 50°C

Washes dishes exceptionally quietly at just 40dB, perfect for eat-in kitchens, open spaces or running your dishwasher at night.

Pre-Rinse

Uses only cold water to rinse dishes, ideal for odour reduction of dirty dishes between full wash cycles.

Glass Wash 40°C

Gently cleans glasses such as high-quality crystal stems while providing optimum drying to add an extra sparkle to your glassware.

Super Wash 60°C

With high water pressure and high temperatures, the Super Wash program leaves even the dirtiest of dishes brilliantly clean and dry.

Wash options

SpeedPerfect® & VarioSpeed

Reduces program time by up to 50% for the fastest wash possible – perfect for when time is of the essence.

ExtraDry

Uses a higher temperature final rinse, providing even better drying results. Especially useful for drying glassware and plastics.

HalfLoad Plus

Provides perfect wash performance for up to seven place settings stacked anywhere in the dishwasher while operating resource-efficiently.

Machine Care

Helps remove grime and limescale build-up from your dishwasher to keep it clean and fresh. We recommend using this function once a month or after every 30 wash cycles.

IntensiveZone™

Transforms the entire bottom basket into a power cleaning zone by increasing the water pressure, saving you the chore of scrubbing heavily soiled pots and pans.

HygienePlus™

Utilises a hotter final rinse, perfect for removing bacteria from your cooking utensils, chopping boards and baby bottles.

For baby bottles, we recommend using traditional sanitation methods in conjunction with this option.


Accessory

Wine glasses should be washed by hand. Or by Bosch.

The GlassSecure Tray protects your glasses. Designed for Bosch dishwashers equipped with any VarioFlex® basket system, this unique tray securely holds four long stemmed glasses in place. The locking mechanism lifts and secures all four glasses at once. Glasses are angled and positioned to provide optimum cleaning and drying with the highest glass protection.



Features may vary depending on models. Please check individual product specifications.
* With use of rinse aid.

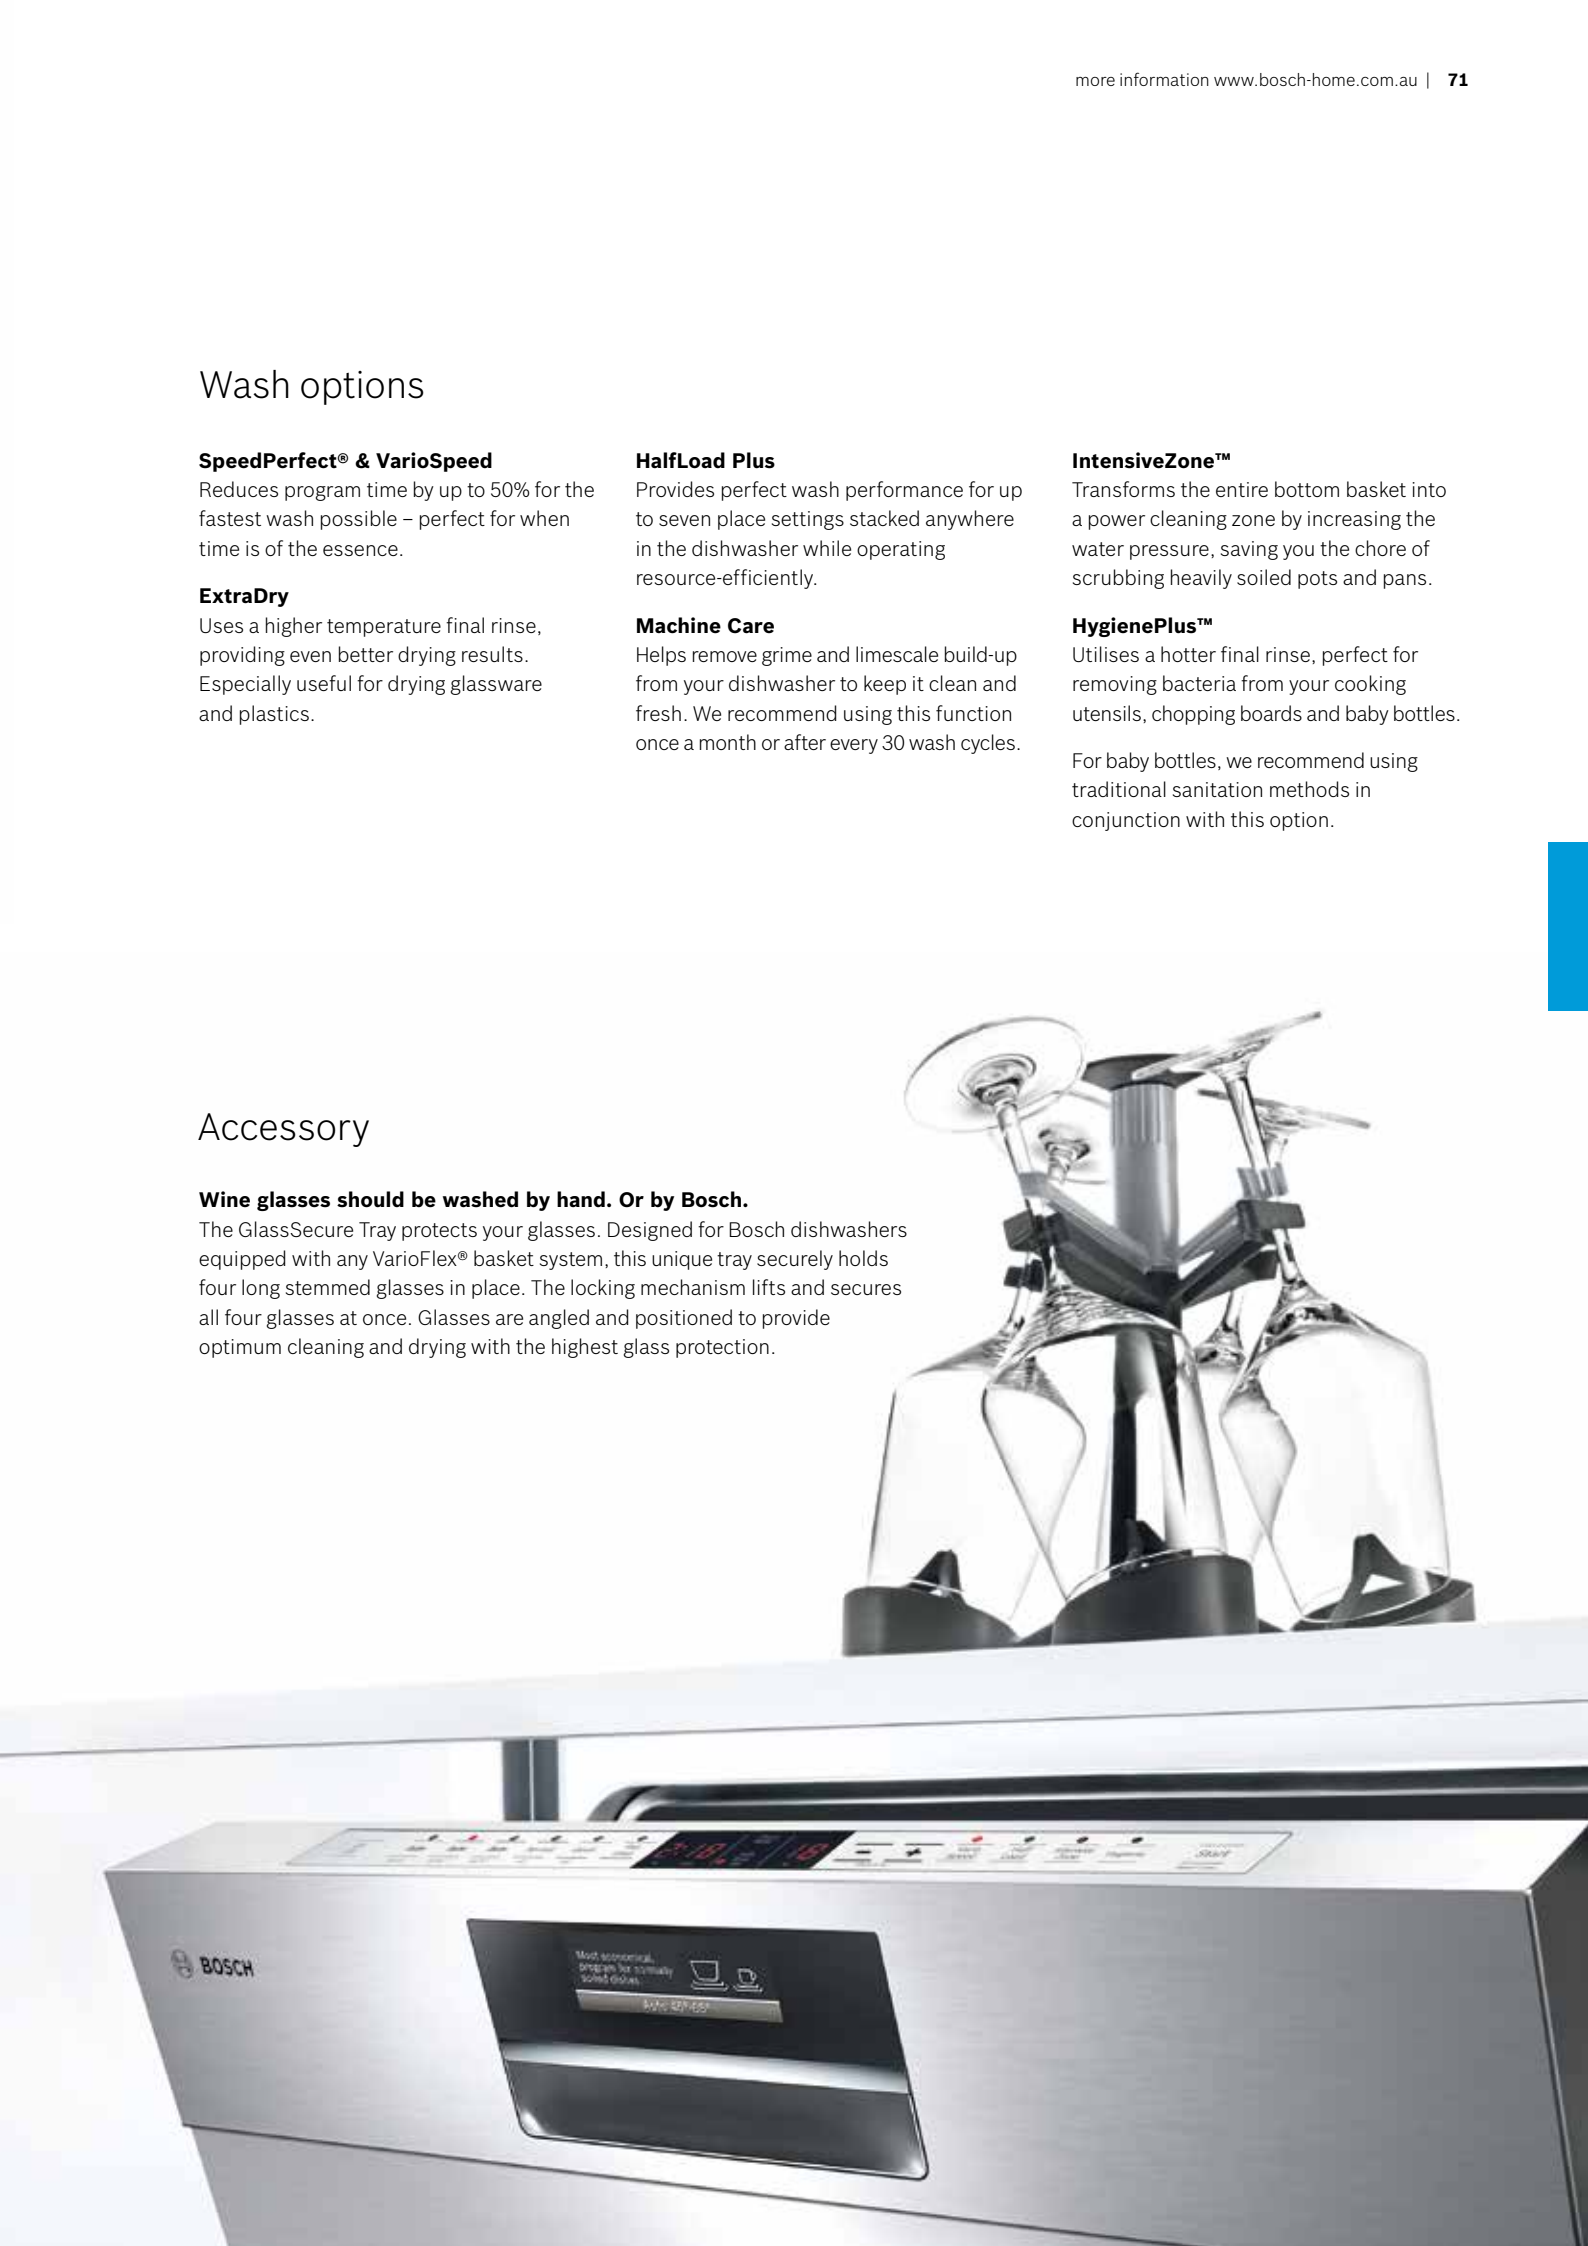

Dishwashers | Overview

Built-under dishwashers

Serie | 8



Serie | 6



Serie | 4



Series 8 SMU88TS04A Built-under Dishwasher
Capacity 15 International place settings
Water efficiency 5 Star (12 litres per wash)
Energy efficiency 4 Star (235 kWh per year)
Features Full colour TFT display EmotionLight internal lighting SensorTouch Buttons EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 8 (plus 6 wash options)
Flexibility VarioDrawer™ Pro VarioFlex® Pro basket system Rackmatic™ Plus
Sound 42dB rating (40dB on ExtraQuiet wash program)
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 112

Series 6 SMP66MX01A Built-under Dishwasher
Capacity 15 International place settings
Water efficiency 5 Star (12 litres per wash)
Energy efficiency 4 Star (235 kWh per year)
Features InfoLight® Floor Projection EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 6 (plus 4 wash options)
Flexibility VarioDrawer™ VarioFlex® Plus basket system Rackmatic™ Plus
Sound 44dB rating
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 112

Series 6 SMU66JS01A Built-under Dishwasher
Capacity 14 International place settings
Water efficiency 5 Star (11 litres per wash)
Energy efficiency 4 Star (220 kWh per year)
Features Anti-fingerprint finish EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 6 (plus 4 wash options)
Flexibility VarioFlex® Plus basket system Rackmatic™ Plus
Sound 44dB rating
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 112

Series 4 SMU46KS01A Built-under Dishwasher
Capacity 14 International place settings
Water efficiency 4 Star (13.4 litres per wash)
Energy efficiency 4 Star (230 kWh per year)
Features Anti-fingerprint finish EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 6 (plus 4 wash options)
Flexibility VarioDrawer™ VarioFlex® basket system Rackmatic™ Plus
Sound 46dB rating
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 112

Semi-integrated dishwashers

Serie | 8



Serie | 6



Serie | 4



Series 4 SMU46GS01A Built-under Dishwasher
Capacity 14 International place settings
Water efficiency 4 Star (13.4 litres per wash)
Energy efficiency 4 Star (230 kWh per year)
Features Anti-fingerprint finish EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 6 (plus 4 wash options)
Flexibility VarioFlex® basket system Rackmatic™ Plus
Sound 46dB rating
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 112

Series 8 SMI88TS02A Semi-integrated Dishwasher
Capacity 15 International place settings
Water efficiency 5 Star (12 litres per wash)
Energy efficiency 4 Star (235 kWh per year)
Features Full colour TFT display EmotionLight internal lighting SensorTouch Buttons EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 8 (plus 6 wash options)
Flexibility VarioDrawer™ Pro VarioFlex® Pro basket system Rackmatic™ Plus
Sound 42dB rating (40dB on ExtraQuiet wash program)
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 112

Series 6 SMI66MS01A Semi-integrated Dishwasher
Capacity 15 International place settings
Water efficiency 5 Star (12 litres per wash)
Energy efficiency 4 Star (235 kWh per year)
Features EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 6 (plus 4 wash options)
Flexibility VarioDrawer™ VarioFlex® Plus basket system Rackmatic™ Plus
Sound 44dB rating
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 113

Series 4 SMI46GS01A Semi-integrated Dishwasher
Capacity 14 International place settings
Water efficiency 4 Star (13.4 litres per wash)
Energy efficiency 4 Star (230 kWh per year)
Features EcoSilence Drive® DosageAssist™ detergent system AutoBrilliance™ AquaSensor™ HeatExchanger 3 stage self-cleaning filter Time delay
Wash programs 6 (plus 4 wash options)
Flexibility VarioFlex® basket system Rackmatic™ Plus
Sound 46dB rating
Safety AquaStop™ Plus Child lock
Dimensions (HxWxD) 815–875 x 598 x 573mm
Complete specifications Reference guide see page 100–101 Technical diagrams see page 113

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Dishwashers | Overview

Fully integrated dishwashers

Serie | 8



Series 8 | SMV88TX02A
Fully Integrated Dishwasher

Capacity
15 International place settings

Water efficiency
5 Star (12 litres per wash)

Energy efficiency
4 Star (235 kWh per year)

Features
Full colour TFT display
EmotionLight internal lighting
TimeLight® Floor Projection
SensorTouch Buttons
EcoSilence Drive®
DosageAssist™ detergent system
AutoBrilliance™
AquaSensor™
HeatExchanger
3 stage self-cleaning filter
Time delay

Wash programs
8 (plus 6 wash options)

Flexibility
VarioDrawer™ Pro
VarioFlex® Pro basket system
Rackmatic™ Plus

Sound
42dB rating (40dB on ExtraQuiet wash program)

Safety
AquaStop™ Plus
Child lock

Dimensions (HxWxD)
815–875 x 598 x 550mm

Complete specifications
Reference guide see page 100–101
Technical diagrams see page 113

Serie | 6



Series 6 | SMV66MX01A
Fully Integrated Dishwasher

Capacity
15 International place settings

Water efficiency
5 Star (12 litres per wash)

Energy efficiency
4 Star (235 kWh per year)

Features
InfoLight® Floor Projection
EcoSilence Drive®
DosageAssist™ detergent system
AutoBrilliance™
AquaSensor™
HeatExchanger
3 stage self-cleaning filter
Time delay

Wash programs
6 (plus 4 wash options)

Flexibility
VarioDrawer™
VarioFlex® Plus basket system
Rackmatic™ Plus

Sound
44dB rating

Safety
AquaStop™ Plus
Child lock

Dimensions (HxWxD)
815–875 x 598 x 550mm

Complete specifications
Reference guide see page 100–101
Technical diagrams see page 113

Serie | 4



Series 4 | SMV46GX01A
Fully Integrated Dishwasher

Capacity
14 International place settings

Water efficiency
4 Star (13.4 litres per wash)

Energy efficiency
4 Star (230 kWh per year)

Features
InfoLight® Floor Projection
EcoSilence Drive®
DosageAssist™ detergent system
AutoBrilliance™
AquaSensor™
HeatExchanger
3 stage self-cleaning filter
Time delay

Wash programs
6 (plus 4 wash options)

Flexibility
VarioFlex® basket system
Rackmatic™ Plus

Sound
46dB rating

Safety
AquaStop™ Plus
Child lock

Dimensions (HxWxD)
815–875 x 598 x 550mm

Complete specifications
Reference guide see page 100–101
Technical diagrams see page 113

Dishwashers | Silence

So quiet we had to add a light to let you know it’s running.

At Bosch we know that the kitchen is a central part of the home where people gather. With this in mind, we have designed a range of whisper quiet dishwashers with an ExtraQuiet program that operates at just 40dB. That’s even quieter than the sound of a buzzing bee!

Aeroplane

120dB



Road traffic

83dB



Talking

74dB

Bosch Built-under Dishwasher
SMU88TS04A
ExtraQuiet program

40dB



30dB
Leaves rustling



All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.



Refrigerators



Serie | 8



Series 8 | KIN34P60AU Fully Integrated Bottom Mount Fridge Freezer

Capacity	
Total gross capacity:	287 litres
Fridge gross capacity:	196 litres
Fridge net capacity:	189 litres
Freezer gross capacity:	91 litres
Freezer net capacity:	75 litres

Energy
3 Star MEPS 2010, 330kWh per year

Efficiency
FrostFree MultiAirFlow cooling

Freshness & Storage
SuperFreezing & SuperCooling
Vegetable CrisperBox and deli drawer on telescopic rails
BigBox extra large freezer storage

Convenience
Digital temperature controls
EasyLift shelf and EasyLift door bins can be raised or lowered even when fully loaded
LED lighting
SoftClose door system
Reversible door hinges
Door open and temperature-rise alarm
Full ventilation through the plinth for ease of installation

Dimensions
Product (H x W x D): 1772 x 556 x 545mm
Cavity (H x W x D): 1775 x 560 x 550mm

Complete specifications
Technical diagrams see page 113

Refrigeration | Features and functions

Features and functions for everyday use.



Freshness & Storage

CrisperBox

Great space for fresh fruit and vegetables. The moisture-regulated CrisperBox not only provides plenty of space for fruit and vegetables, it also helps to keep them crisp and fresh for longer.

ChillerBox

Keep fish and meat fresh and safe. The ChillerBox is a safe place to keep fish, meat and sausages. A cold current of air from the freezer section creates a temperature in the ChillerBox that is lower than in the rest of the refrigerator. Perishable food stays fresh here for much longer. The ChillerBox is also absolutely ideal for chilling drinks.

SuperCooling

Adding new food into the fridge causes the internal temperature to rise, which means the fridge has to work harder to cool down and regulate the temperature again. SuperCooling will prepare your fridge by rapidly reducing the temperature, keeping the contents cool, while quickly cooling the new groceries down to 2°C.

SuperFreezing

Adding new food to the freezer can increase the internal temperature, which can partly defrost existing food. The SuperFreezing function rapidly lowers the temperature in the freezer, ensuring the fresh food is frozen quickly, while surrounding food remains frozen.



Convenience

EasyLift system

Convenient levers quickly and easily adjust the EasyLift glass shelf up or down even when fully loaded. The EasyLift door can be adjusted to accommodate tall items providing flexible storage i.e. bottles of different heights. A full extension telescopic rail system on the drawers ensures easy access and maximum storage.

SoftClose door

Thanks to a special damping mechanism, the fridge door closes softer and quieter than before. When it is open at a 20° angle or less, the door closes automatically and helps prevent the fridge from being left open.

Telescopic rails

For easy access even to items at the back of drawers. Get even better access to your fresh fruit and vegetable drawers – they glide gently towards you on telescopic rails, which makes inserting and removing food child's play.

TouchControl electronic display panel

Control all functions easily and precisely with just a soft touch, using TouchControl panel. Electronic controls conveniently set into the top of the door frame provide precise and independent temperature control of both the fridge and freezer compartments.

LED lighting

Bright LED lighting across all shelves provides the highest possible visibility throughout the fridge.



Performance

FrostFree

You'll never have to defrost your fridge-freezer again. With a FrostFree model, there's no more condensation of humidity in the appliance or on your food. The generator which draws the heat out of the freezer compartment, defrosts itself automatically from time to time. Thanks to that, there is less humidity in the appliance and practically no formation of ice. This not only saves you time but also energy – because ice formation in conventional refrigerators significantly reduces energy efficiency.

MultiAirflow

Even cooling on all levels. Thanks to a constant stream of cold air on all levels, the ventilator-supported MultiAirflow ensures that there are fewer temperature fluctuations. This also means that the cool-down time is shorter. This feature protects your food and guarantees consistently optimal conditions in the entire refrigeration compartment.



Reference guides

Reference Guide Ovens

Model		HRG6767S2A Series 8	HBG6767S1A Series 8	HBG6753S1A Series 8	HBG675BS1B* Series 8	HBG672BS1A Series 8	HBG655HS1A Series 8	HBG655HW1A Series 8	HBG633BS1A Series 8
Type		Pyrolytic Oven with Added Steam	Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven	EcoClean Direct Oven
Dimensions	Width (cm)	60	60	60	60	60	60	60	60
	Appliance dimensions (H x W x D)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm
	Built-in dimensions (H x W x D)	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm
	Cavity dimensions (H x W x D)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm
Heating Functions	Number of heating functions	17	13	13	13	8	13	13	10
	4D HotAir	●^#	●^#	●#	●#	●#	●#	●#	●#
	3D HotAir								
	Fan-forced hot air								
	Fan-forced hot air eco/gentle								
	HotAir Eco/Gentle	●^	●^	●	●	●	●	●	●
	Top and bottom heating	●^*#	●^#	●#	●#	●#	●#	●#	●#
	Top and bottom heating Eco	●^	●^	●	●	●	●	●	●
	Fan assisted top and bottom heating								
	Bottom heating	●	●	●	●		●	●	●
	Intensive heating	●							
	Hot air grilling	●^*	●^	●	●	●	●	●	●
	Grill – large area	●	●	●	●	●	●	●	●
	Grill – small area	●	●	●	●	●	●	●	●
	Pizza setting	●^	●^	●		●	●	●	●
	Slow cooking	●	●	●	●		●	●	
	Keep warm	●*	●	●	●		●	●	
	Preheat ovenware	●	●	●	●		●	●	
	Drying	●							
	Reheating (with added steam)	●^							
	Dough proving (with added steam)	●							
	Defrost	●	●	●	●	●	●	●	●
	Sabbath mode	●	●	●	●	●	●	●	●
	Automatic rapid heat function	●	●	●	●	●	●	●	●
	Automatic temperature proposal	●	●	●	●	●	●	●	●
	Temperature display	●	●	●	●	●	●	●	●
	Electronic thermostat	●	●	●	●	●	●	●	●
Sensor & Automatic Functions	Bosch Assist (Fully automated cooking)	●	●						
	PerfectBake™ sensor	● ¹	● ¹						
	PerfectRoast™ meat probe	● ¹	● ¹						
	AutoPilot (Automatic programs)			● (10)	● (10)	● (10)	● (10)	● (10)	
Capacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)
	Water tank	1 litre (net)							
Design		Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and white glass	Stainless steel and black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Symbol Display
	Electronic clock/timer with end-time programming	●	●	●	●	●	●	●	●
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
	SoftMove door technology	●	●	●	●	●	●	●	●
	Interior light	LED (ceiling) and Multi-level LED lighting (left and right side)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)
	No. of shelf positions	5	5	5	5	5	5	5	5
	Full glass inner door	●	●	●	●	●	●	●	●
	Removable door	●	●	●	●	●	●	●	●
Cleaning	Water tank empty indicator	●							
	Pyrolytic cleaning function with compatible accessories and shelving	●	●	●	●	●			
	EcoClean cleaning system						Ceiling, sides and rear wall (EcoClean Direct)	Ceiling, sides and rear wall (EcoClean Direct)	Rear wall (EcoClean Direct)
	Catalytic cleaning system								
	Descaling	●							
	Drying	●							
Safety	Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Triple-glazed door	Triple-glazed door	Triple-glazed door
	Residual heat indicator	●	●	●	●	●	●	●	●
	Automatic safety switch-off	●	●	●	●	●	●	●	●
	Child lock function	● (controls & door)	● (controls & door)	● (controls & door)	● (controls & door)	● (controls & door)	● (controls & door)	● (controls & door)	● (controls & door)
	Cooling fan	●	●	●	●	●	●	●	●
Technical requirements	Maximum temperature	300°C	300°C	300°C	300°C	300°C	300°C	300°C	300°C
	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW	3.6kW
	Power requirements	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz
Supplied accessories	Fully extendable telescopic rails	● (2 fold pyrolytic proof)	● (2 fold pyrolytic proof)	● (2 fold pyrolytic proof)			● (2 fold)	● (2 fold)	
	No. wire racks	2	2	2	2	1	2	2	1
	No. split grill trays								
	No. universal pans	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)	1	1	1
Optional accessories	No. baking trays	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)		1 (pyrolytic proof)	1	1	1
		Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103

¹ Silicon based cookware and bakeware is not compatible for use. *Compatible with Added steam function. ^Compatible with PerfectRoast™ meat probe.

#Compatible with Rapid heat. ¹Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Ovens

Model		HBT578FS1A Series 6	HBT578CS0A Series 6	HBG5575S0A Series 6	HBA574BS0A Series 4	HBA534ES0A Series 4	HBA534BS0A Series 4	HBF133BS0A Series 2	HVA541NS0 Series 6	HBM43S550A Series 6	MBA534BS0A Series 4
Type		Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven	Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven	EcoClean Direct Oven	Catalytic Oven	EcoClean Double Oven	EcoClean Direct Double Oven
Dimensions	Width (cm)	60	60	60	60	60	60	60	90	60	60
	Appliance dimensions (H x W x D)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	478 x 896 x 568mm	888 x 595 x 550mm	888 x 594 x 550mm
	Built-in dimensions (H x W x D)	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585-595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	585–595 x 560–568 x 550mm	575–597 x 560–568 x 550mm	467–470 x 860–864 x 560mm	872–886 x 560–570 x 550mm	875-888 x 560–568 x 550mm
	Cavity dimensions (H x W x D)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	329 x 479 x 420mm	308 x 615 x 405mm	172 x 468 x 433mm (top) 329 x 482 x 418mm (bottom)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)
Heating Functions	Number of heating functions	10	10	7	7	7	7	5	9	3 (top) and 5 (bottom)	3 (top) and 7 (bottom)
	4D HotAir										
	3D HotAir	●^#	●^#	●^#	●	●#	●#	●#		●# (bottom)	●# (bottom)
	Fan-forced hot air								●		
	Fan-forced hot air eco/gentle								●		
	HotAir Eco/Gentle	●^	●^	●^	●	●	●	●			● (bottom)
	Top and bottom heating	●^#	●^#	●^	●	●	●	●	●	●# (top and bottom)	●# (top and bottom)
	Top and bottom heating Eco										
	Fan assisted top and bottom heating								●		
	Bottom heating	●	●	●	●	●	●		●	● (bottom)	● (bottom)
	Intensive heating										
	Hot air grilling	●^	●^	●^	●	●	●	●	●	● (bottom)	● (bottom)
	Grill – large area	●	●	●	●	●	●	●	●	● (top and bottom)	● (top and bottom)
	Grill – small area								●	● (top)	● (top)
	Pizza setting	●^	●^	●^	●	●	●		●		● (bottom)
	Slow cooking	●	●								
	Keep warm	●	●								
	Preheat ovenware										
	Drying										
	Reheating (with added steam)										
	Dough proving (with added steam)										
	Defrost	●	●								
	Sabbath mode	●	●								
	Automatic rapid heat function	●	●	●	●	●	●	●		●	
	Automatic temperature proposal	●	●								
	Temperature display	●	●	●	●						
	Electronic thermostat										
Sensor & Automatic Functions	Bosch Assist (Fully automated cooking)										
	PerfectBake™ sensor										
	PerfectRoast™ meat probe										
	Single point meat probe	●	●	●							
	AutoPilot (Automatic programs)	● (30)	● (30)	● (10)	● (10)						
Capacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	66 litres (net)	77 litres (net)	35 litres (net) top 67 litres (net) bottom	34 litres (net) top 71 litres (net) bottom
Design		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel and black glass	Stainless steel with metal bar handle	Stainless steel with metal bar handle
	Cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Gray enamel cavity	Enamel cavity	Gray enamel cavity	Gray enamel cavity
	Display	LCD-display control (white)	LCD-display control (white)	LCD-display control (white)	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)	Electronic clock/timer with LED-display	Electronic touch-control clock/ timer with LED-display	LED-display control (red)
	Electronic clock/timer with end-time programming	●	●	●	●	●	●	●	●	●	●
	Controls	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs	Rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	SoftClose door	●	●	●							
	Interior light	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen 2 (left and right side walls)	Halogen 1 (top) and 1 (bottom)	Halogen (ceiling)
	No. of shelf positions	5	5	5	5	5	5	5	4	2 (top) and 5 (bottom)	3 (top) and 5 (bottom)
	Full glass inner door	●	●	●	●	●	●	●		●	●
	Removable door	●	●	●	●	●	●	●	●	●	●
Cleaning	Pyrolytic cleaning function	●	●		●						
	EcoClean Direct cleaning system			Ceiling, sides and rear wall		Rear wall	Rear wall	Rear wall		Ceiling, sides and rear wall	Rear wall
Safety	Catalytic cleaning system								Side and rear walls		
	Door	Quadruple-glazed CoolTouch door	Quadruple-glazed CoolTouch door	Triple-glazed door	Quadruple-glazed CoolTouch door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door (top and bottom)	Triple-glazed door (top and bottom)
	Residual heat indicator	●	●	●							
	Automatic safety switch-off	●	●		●						
	Child lock function	●	●	●	●	●	●	●		●	●
Technical requirements	Cooling fan	●	●	●	●	●	●	●	●	●	●
	Maximum temperature	30–275°C	30–275°C	50–275°C	50–275°C	50–275°C	50–275°C	50–275°C	250°C	275°C	50–275°C
	Total connected load	3.6kW	3.6kW	3.4kW	3.6kW	3.4kW	3.4kW	2.95kW	3.3kW	5.5kW	5.9kW
	Power requirements	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz
Supplied accessories	ClipRail telescopic rails			● (1 fold)							
	Partially extendable telescopic rails	● (1 fold)				● (1 fold)			● (1 fold)	● (1 fold – bottom)	
	No. wire racks	2	2	2	2	2	2	1	1	3	2
	No. split grill trays									2	
	No. universal pans	1	1	1	1	1	1	1		2	1
	No. baking trays	1	1	1				1	2	1	
Optional accessories	No. of half trays (slimline universal pans)	1 (consists of 2 parts)	1 (consists of 2 parts)								
		Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103

¹ Silicon based cookware and bakeware is not compatible for use. ^Compatible with single point meat probe. #Compatible with Rapid heat.
[†]Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Compact Appliances

Model		CSG656RS1A Series 8	CDG634BS1 Series 8	CMG656RS1A Series 8	CMG633BS1B Series 8	COA565GS0A Series 6	CMA585MS0A Series 6	BEL554MS0A Series 6
Type		Combination Steam Oven	Pure Steam Oven	Combination Microwave Oven	Combination Microwave Oven	Microwave with Steam Function	Combination Microwave Oven	Microwave
Dimensions	Width (cm)	60	60	60	60	60	60	60
	Appliance dimensions (H x W x D)	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 548mm	455 x 594 x 545mm	454 x 594 x 570mm	382 x 594 x 388mm
	Built-in dimensions (H x W x D)	450–455 x 560–568 x 550mm	450–455 x 560–568 x 550mm	450–455 x 560–568 x 550mm	450–455 x 560–568 x 550mm	450–452 x 560-568 x 550mm	450–452 x 560-568 x 550mm	380–382 x 560 x 550mm
	Cavity dimensions (H x W x D)	235 x 480 x 415mm	265 x 325 x 439mm	237 x 480 x 392mm	237 x 480 x 392mm	236 x 432 x 350mm	250 x 420 x 420mm	208 x 328 x 369mm
Heating Functions	Number of heating functions	18	4	13	7	4	5	
	4D HotAir	● ¹ ^#		● ¹ ^# ²	● ¹ # ²			
	3D HotAir						● ¹ #	
	HotAir Eco/Gentle	● ¹ ^		● ¹ ^	●			
	Top and bottom heating	● ¹ ^#		● ¹ ^# ²				
	Top and bottom heating Eco	● ¹ ^		● ¹ ^				
	Bottom heating	●		●				
	Intensive heating	●#						
	Hot air grilling	● ¹ ^		● ¹ ^ ²	● ¹ ²		● ¹ # ²	
	Grill – large area	●		● ¹ ²	● ¹ ²	● ¹ ² (2000W)	● ¹ ² (1750W)	● ¹ ² (1200W)
	Grill – small area	●		● ¹ ²	● ¹ ²	● ¹ ²		
	Pizza setting	● ¹ ^		● ¹ ^			● ¹ #	
	Slow cooking	●		●				
	Keep warm	● ¹ *		●				
	Preheat ovenware	●		●	●			
	Drying	●						
	Reheating (using steam)	● ¹ ^	●					
	Dough proving (using steam)	●	●					
	Defrost (using steam)	●	●					
	Pure Steaming	● ¹ ^	●			●		
	Sabbath mode	●		●				
	Automatic rapid heating	●		●	●	●	●	
	Automatic temperature proposal	●	●	●	●			
	Temperature display	●	●	●	●			
	Pure Microwave			●	●	●	● (5 power levels – 90, 180, 360, 600, 900W)	● (5 power levels – 90, 180, 360, 600, 900W)
	Microwave with INNOWAVE inverter technology			● (5 power levels – 90, 180, 360, 600, 1000W)	● (5 power levels – 90, 180, 360, 600, 1000W)	● (5 power levels – 90, 180, 360, 600, 1000W)		
	Electronic thermostat					●	●	
Sensor & Automatic Functions	Bosch Assist (Fully automated cooking)	●		●				
	PerfectBake™ sensor	● ¹		● ¹				
	PerfectRoast™ meat probe	● ¹		● ¹				
	AutoPilot (Automatic programs)		● (20)		● (14)	● (15)	● (15)	● (8)
Capacity	Volume (usable litres)	47 litres (net)	38 litres (net)	45 litres (net)	45 litres (net)	36 litres (net)	44 litres (net)	25 litres (net)
	Water tank (steam ovens only)	1 litre (net)	1.3 litre (net)			0.8 litres (net)		
Design	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel and black glass	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Black glass with stainless steel trims
	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Stainless steel	Stainless steel	Stainless steel
	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display	TFT Touch Graphic Display	TFT Touch Symbol Display	LCD-display control (white)	LCD-display control (white)	LED-display control (white)
	Electronic clock/timer with end-time programming	●	●	●	●	●	●	●
	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	SoftMove door technology	●	●	●	●			
	Interior light	LED (ceiling)	Halogen (left)	LED (ceiling)	LED (ceiling)	LED (ceiling)	LED (ceiling)	LED (ceiling)
	No. of shelf positions	3	4	3	3			
	Full glass inner door	●	●			●	●	●
	Removable door	●	●			●	●	●
Cleaning	Water tank empty indicator	●	●			●		
	EcoClean cleaning system in ceiling, sides and rear wall	● (EcoClean Direct)		● (EcoClean Direct)				
	Steam cleaning system	●				●		
	Descaling program	●	●			●		
Safety	Drying	●						
	Door	Triple-glazed door	Triple-glazed door	Quadruple-glazed CoolTouch door	Triple-glazed door	Triple-glazed door	Triple-glazed door	Triple-glazed door
	Residual heat indicator	●		●	●			
	Automatic safety switch-off	●	●	●	●	●	●	●
	Child lock function	●	●	●	●	●	●	
Technical requirements	Cooling fan	●	●	●	●	●	●	
	Maximum temperature	250°C maximum top and bottom heating temperature; 30°C–100°C steam temperature	30–100°C steam temperature	300°C maximum temperature; 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W	275°C maximum temperature; 1000W maximum microwave power output with 5 power levels: 90/180/360/600/1000W	40–230°C	40–230°C	
	Total connected load	3.3kW	1.9kW	3.6kW	3.6kW	3.1kW	3.35kW	1.45kW
	Power requirements	220–240V / 50–60Hz	220–240V / 50Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50Hz	230–240V / 50Hz	220–230V / 50Hz
Supplied accessories	Fully extendable telescopic rails	● (1 fold)						
	Partially extendable telescopic rails			● (1 fold)				
	No. wire racks	2		1	1			
	No. universal pans / Baking trays	1 pan		1 pan / 1 tray	1 pan			
	No. non perforated steam trays	1 small	1 large					
	No. perforated steam trays	1 small, 1 extra large	1 large					
	Cleaning sponge		●					
	Grid high / Grid flat						1 high / 1 flat	1 high
	Turntable						●	●
Optional accessories	Plug-in grid / Glass pan / Steam container					●		
		Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103	Refer to page 102–103

¹ Silicon based cookware and bakeware is not compatible for use. *Compatible with Added steam function. ^Compatible with PerfectRoast™ meat probe.

#Compatible with Rapid heat. ² Compatible with Microwave function.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Coffee Machine

Model		CTL636ES1 Series 8
Type		Built-in fully-automatic coffee machine
Dimensions	Appliance dimensions (H x W x D)	455 x 594 x 375mm
	Built-in dimensions (H x W x D)	449 x 558 x 354mm
Design	Stainless steel and black glass	●
Flavour	SensoFlow System: Heating system for maximum and constant brewing temperature	●
	AromaPro Concept: Optimal aroma extraction	●
	One-touch preparation: Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caff� Latte at the touch of a button	●
	AromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes	●
	Beverage temperature adjustable individually: coffee 3 levels, hot water 4 levels	●
	Including BRITA Intenza water filter: Reduces the lime content of water and filters substances affecting smell and taste	●
	TFT Touch Graphic Display with interactive menu	●
	MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso	●
	IndividualCup Volume: Cup sizes adjustable individually, to ensure your cup gets filled just as far as you would like	●
	Coffee outlet and milk frother height-adjustable: Up to 15cm high Latte Macchiato glasses fit underneath	●
	OneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities	●
	Water tank removable for easy refilling	● (2.4 litre volume)
Convenience	Early warning if water tank almost empty or bean container almost empty	●
	Flexible milk solution: Decide for yourself if you prefer connecting the provided milk container or using any other container, e.g. a milk carton	●
	Short user manual always at hand inside appliance	●
	SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic	●
	CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety	●
	One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother	●
	In addition to beverages also available separately: milk foam, warm milk, hot water	●
	Reduced heat-up time: Fastest first cup	●
	Water pump with 19 bar pressure	●
	Separate chute for ground coffee	●
	15,000 cup warranty: Consistently high appliance quality from the first cup to the 15,000th (valid for non-commercial use within 24 months)	●
	Removable brewing unit: Easy and hygienic cleaning under running water	●
Hygiene	AutoMilk Clean: Automatically steam cleans the milk system after every beverage	●
	Milk frother removable and dishwasher-proof	●
	SinglePortion Cleaning: Complete emptying of all pipes after each brewing process	●
	Electrical connection rating	1600W
Technical requirements	Current	10A
	Voltage	220–240V / 50–60Hz
Supplied accessories	1 BRITA water filter cartridge	●
	1 measuring spoon	●
	1 milk container (insulated), connection hose and pipe	●
	1 test strip	●
	1 set assembly screws	● (9)



All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Warming Drawers

Model		BID630NS1A Series 8	BIC630NS1A Series 8
Type		60cm Built-in Warming Drawer	60cm Built-in Warming Drawer
Dimensions (H x W x D)	Appliance dimensions	290 x 594 x 548mm	140 x 594 x 548mm
	Built-in dimensions	290 x 560–568 x 550mm	140 x 560–568 x 550mm
	Internal dimensions	242 x 468 x 458mm	92 x 468 x 458mm
Heating functions	Base element and fan heating with 4 power levels	●	●
Suitable for	Slow cooking	●	●
	Proving yeast dough	●	●
	Defrosting	●	●
	Keeping food warm	●	●
	Pre-warming cups, plates and ovenware	●	●
Temperature range	from approx. 40–80°C	●	●
Design		Stainless steel and black glass	Stainless steel and black glass
	Cavity	52 litre interior drawer volume	20 litre interior drawer volume
	Electronic rotary temperature control	●	●
	Inner compartment ceramic glass base	●	●
	Max. weight load	25kg	25kg
Technical requirements	Total connected load	0.81kW	0.81kW
	Voltage	220–240V / 50–60Hz	220–240V / 50–60Hz



Reference Guide Gas Cooktops

Model		PPS9A6B90A Series 6	PPQ7A6B20A Series 6	PPH6A6B20A Series 6	PCT9A5B90A Series 6	PCR9A5B90A Series 6	PCR7A5B90A Series 6	PCI6A5B90A Series 6	PBH6B5B90A Series 2	PBH6B5B60A Series 2
Type		Gas	Gas	Gas	Gas	Gas	Gas	Gas	Gas	Gas
Dimensions	Width (cm)	90	75	60	90	90	75	60	60	60
	Appliance dimensions (W x D)	915 x 520mm	752 x 520mm	590 x 520mm	915 x 520mm	915 x 520mm	750 x 520mm	582 x 520mm	580 x 510mm	580 x 510mm
	Cut-out dimensions (W x D)	850–852 x 490–502mm	560–562 x 480–492mm	560–562 x 480–492mm	850–852 x 490–502mm	850–852 x 490–502mm	560–562 x 480–492mm	560–562 x 480–492mm	560 x 480–490mm	560 x 480–490mm
Design		Black tempered frameless glass	Black tempered frameless glass	Black tempered frameless glass	Stainless Steel	Stainless Steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Burner / Zone Output		5 burners including:	5 burners including:	4 burners including:	6 burners including:	5 burners including:	5 burners including:	4 burners including:	4 burners including:	4 burners including:
	Front left		Economy burner 4 MJ/h	Standard Burner 6.85 MJ/h	Dual flame wok burner 19.5 MJ/h	Economy burner 4 MJ/h	Economy burner 4 MJ/h		Wok burner 15 MJ/h	Wok burner 15 MJ/h
	Centre left	Wok burner 15 MJ/h						Wok burner 15 MJ/h		
	Rear left		Standard Burner 6.85 MJ/h	Standard Burner 6.85 MJ/h	Standard Burner 6.85 MJ/h	Standard Burner 6.85 MJ/h	Standard Burner 6.85 MJ/h		Standard burner 6.5 MJ/h	Standard burner 6.5 MJ/h
	Front centre	Economy burner 4 MJ/h			Economy burner 4 MJ/h			Economy burner 4 MJ/h		
	Middle centre		Wok burner 15 MJ/h			Dual flame wok burner 19.5 MJ/h	Dual flame wok burner 19.5 MJ/h			
	Rear centre	Standard Burner 6.85 MJ/h			Standard Burner 6.85 MJ/h			Standard Burner 6.85 MJ/h		
	Front right	Standard Burner 6.85 MJ/h	Standard Burner 6.85 MJ/h	Economy burner 4 MJ/h	Dual flame wok burner 19.5 MJ/h	Standard Burner 6.85 MJ/h	Standard Burner 6.85 MJ/h		Economy burner 4 MJ/h	Economy burner 4 MJ/h
	Centre right							High-speed burner 11 MJ/h		
Convenience	Rear right	High-speed burner 11 MJ/h	High-speed burner 11 MJ/h	Wok burner 13.6 MJ/h	High-speed burner 11 MJ/h	High-speed burner 11 MJ/h	High-speed burner 11 MJ/h		Standard burner 6.5 MJ/h	Standard burner 6.5 MJ/h
	FlameSelect® valve technology (precise control in 9 steps)	●	●	●	●	●	●	●		
	Individual cast-iron trivets with rubber feet	●	●	●		●	●			
	3 piece cast-iron trivets with rubber feet				●	●				
	2 piece cast-iron trivets with rubber feet							●	●	
	Steel trivets with cast iron finish and rubber feet									●
Safety	Enamelled cast-iron burner caps	●	●	●	●	●	●	●	●	●
	Flame failure fitted to each burner	●	●	●	●	●	●	●	●	●
Controls	Sword knob controls	●	●	●	●	●	●	●	●	●
Technical requirements	Total connected load	43.7 MJ/h	43.7 MJ/h	31.3 MJ/h	67.7 MJ/h	48.2 MJ/h	48.2 MJ/h	36.85 MJ/h	32 MJ/h	32 MJ/h
	Power requirements	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz
	Minimum worktop thickness	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm
Supplied accessories	Wok ring support	●	●	●	●	●	●	●	●	●
	Espresso cross support	●	●	●	●	●	●	●		
	LPG conversion kit	●	●	●	●	●	●	●	●	●
Optional accessories	4 piece cookware set HEZ390042	●	●	●	●	●	●	●	●	●
	Stainless steel wok HEZ390090	●	●	●	●	●	●	●	●	●
	Simmer plate HEZ298105	●	●	●	●	●	●	●	●	●
Other	Suitable for NG or LPG	●	●	●	●	●	●	●	●	●



Reference Guide Electric Cooktops

Model		PXV975DC1E* Series 8	PXE875DC1E* Series 8	PXX675DC1E Series 8	PIV995DC1E* Series 8	PIV975DC1E* Series 8	PVS875FB1E Series 6	PXE651FC1E Series 6	PVS675FB1E Series 6	PIE631FB1E Series 6	PIJ611BB1E Series 4	PKM875DP1A Series 8	PKG775DB1A Series 8	PKN675DB1A Series 8	PKE611D17A Series 4	PKE611CA1A Series 2
Type		FlexInduction®	FlexInduction®	FlexInduction®	Induction	Induction	CombiInduction®	FlexInduction®	CombiInduction®	Induction	Induction	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic
Dimensions	Width (cm)	90	80	60	90	90	80	60	60	60	60	80	70	60	60	60
	Appliance dimensions (W x D)	916 x 527mm	816 x 527mm	606 x 527mm	916 x 527mm	916 x 527mm	816 x 527mm	592 x 522mm	606 x 527mm	592 x 522mm	592 x 522mm	816 x 527mm	710 x 527mm	606 x 527mm	592 x 522mm	583 x 513mm
	Cut-out dimensions (W x D)	880 x 490–500mm	750–780 x 490–500mm	560 x 490–500mm	880 x 490–500mm	880 x 490–500mm	750–780 x 490–500mm	560 x 490–500mm	560 x 490–500mm	560 x 490–500mm	560 x 490–500mm	780 x 500mm	560–640 x 490–500mm (fits cut-out for 60cm)	560 x 500mm	560 x 490–500mm	560 x 490–500mm
Design		Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, beveled front, sides and back with stainless steel trim	Black ceramic glass, frameless with beveled front and sides	Black ceramic glass, beveled front and back with stainless steel trim	Black ceramic glass, beveled front	Black ceramic frameless glass	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic frameless glass	Black ceramic frameless glass
Burner / Zone Output (Size)		5 zones including:	4 zones including:	4 zones including:	5 zones including:	5 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	3 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
	Front left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW (210mm)	FlexZone: 2.2kW / 3.7kW Boost (240 x 200mm)	CombiZone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)		Dual circuit zone: 1.2kW / 2.1kW (145 / 210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 2kW (180mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
	Rear left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	CombiZone: 2.2kW / 3.7kW (210mm)	FlexZone: 2.2kW / 3.7kW Boost (240 x 200mm)	CombiZone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)		Standard zone: 1.2kW (145mm)	Dual circuit zone: 0.8kW / 2.0kW (120 / 180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170 / 265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
	Front centre															
	Rear centre	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)			Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)						Dual circuit zone: 1.7kW / 2.4kW (180 / 230mm)				
	Front right	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.4kW / 2.2kW (145mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Dual circuit/roaster zone: 1kW / 2kW / 3.4kW / 4.6kW (120 / 180 / 270 / 370mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Dual circuit zone: 1kW / 2.2kW (145 / 210mm)	Standard zone: 2.2kW (210mm)	Standard zone: 2.0kW (180mm)
	Rear right	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 2.6kW / 3.7kW (280mm)	FlexZone: 2.2kW / 3.7kW Boost (190 x 240mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)		Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
		*Total FlexZone: 3.3kW / 3.7kW Boost (400 x 230mm)	*Total FlexZone: 3.3kW / 3.6kW Boost (400 x 240mm)	*Total FlexZone: 3.3kW / 3.7kW Boost (380 x 240mm)												
Performance	17-stage power setting	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	9-stage power setting															●
	PerfectFry™ Sensor	●	●	●	●	●		● (4 levels)								
	PowerBoost	●	●	●	●	●	●	●	●	●	●	●				
	ShortBoost	●	●	●	●	●										
	FlexZone	●	●	●				●								
	CombiZone						●		●							
Convenience	MoveMode	3 Auto Power Levels	3 Auto Power Levels	3 Auto Power Levels			2 Auto Power Levels		2 Auto Power Levels							
	WipeProtection	●	●	●	●	●	●	●	●	●		●	●	●		
	Keep Warm	●	●	●		●						●	●	●		
	QuickStart	●	●	●	●	●	●	●	●	●	●					
	ReStart	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Energy consumption display	●	●	●	●	●	●	●	●	●		●	●	●		
	Dual function timer with automatic switch-off	●	●	●	●	●	●	●	●	●	●	●	●	●		
	Automatic pot detection	●	●	●	●	●	●	●	●	●	●					
	Automatic boil start											●	●	●		
Safety	Child lock	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	2-stage residual heat indicators	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
	Residual heat indicator															●
	Automatic safety stuff-off	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
Electronic touch-controls	DirectSelect Premium	●	●	●	●	●			●	●		●	●	●		
	DirectSelect 1.0						●	●	●	●						
	TouchSelect										●				●	
	Sword control knobs															●
Technical requirements	Total connected load	11.1kW	7.4kW	7.4kW	11.1kW	11.1kW	7.4kW	7.4kW	6.9kW	7.4kW	7.4kW	11.2kW	6.6kW	7.5kW	6.6kW	6.6kW
	Power requirements	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50–60Hz
	Minimum worktop thickness	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	30mm (30mm over oven, see space requirements for oven)	30mm (see space requirements for oven)	30mm (see space requirements for oven)	20mm (30mm over oven, see space requirements for oven)	20mm (20mm over oven, see space requirements for oven)	20mm (20mm over oven, see space requirements for oven)	20mm (20mm over oven, see space requirements for oven)	20mm (20mm over oven, see space requirements for oven)	20mm (20mm over oven, see space requirements for oven)
Optional accessories	Griddle plate HEZ390522	●	●	●			●	●	●	●						
	Teppan Yaki Large (40 x 20cm) HEZ390512	●	●	●			●	●	●	●						
	4 piece cookware set HEZ3900042	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Stainless steel roasting pan with lid HEZ390011	●	●	●			●	●	●	●						
	Stainless steel wok HEZ390090	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	PerfectFry™ Sensor induction pan 19cm HEZ390220	●	●	●	●	●		●								
	PerfectFry™ Sensor induction pan 21cm HEZ390230	●	●	●	●	●		●								

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. *Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Rangehoods


Model		DWB091E51A Series 6	DWW097A50A Series 4	DWP96BC50A Series 2	DWP66BC50A Series 2	DHL895CAU Series 8	DHL785BAU Series 6	DHL575CAU Series 6	DHL555BAU Series 4	DFS097E50A Series 6	DFS097A50A Series 4	DFS067A50A Series 4	DFM064W50A Series 2
Type		Canopy	Canopy	Canopy	Canopy	Integrated	Integrated	Integrated	Integrated	Slideout	Slideout	Slideout	Slideout
Dimensions	Width (cm)	90	90	90	60	86	70	52	53	90	90	60	60
	Appliance dimensions (H x W x D)	628–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	672–954 x 900 x 500mm (ducted) or 689 x 900 x 500mm (CleanAir module)	799–975 x 900 x 500mm (ducted or recirculated)	799–975 x 600 x 500mm (ducted or recirculated)	418 x 860 x 282mm	418 x 700 x 282mm	418 x 520 x 300mm	255 x 530 x 380mm	426 x 898 x 290mm	426 x 898 x 290mm	426 x 598 x 290mm	203 x 598 x 290mm
	Built-in Dimensions (H x W x D)					418 x 836 x 264mm	418 x 676 x 264mm	418 x 496 x 264mm	255 x 500 x 350mm	385 x 524 x 290mm	385 x 524 x 290mm	385 x 524 x 290mm	162 x 526 x 290mm
Design		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish	Stainless steel	Stainless steel	Stainless steel	Steel body with metallic finish
	LED-display	●								●			
	On/Off main switch control	●	●	●	●	●	●	●		●			
	Electronic controls for power and light	●					●	●		●	●	●	
	Push button controls for power and light		●	●	●	●							
	Slide controls for power and light								●				
	Rocker switches for power and light												●
	Concealed power and light controls										●	●	●
	Lighting	3 x 3W LED SoftLights with dimmer function	3 x 3W LED lights	2 x 1.5W LED lights	2 x 1.5W LED lights	2 x 1W LED lights with dimmer function	2 x 20W halogen lights	2 x 1W LED lights	2 x 20W halogen lights	2 x 3W LED Softlights with dimmer function	2 x 3W LED lights	2 x 3W LED lights	2 x 20W halogen lights
Power functions	Maximum extraction rate	810m³/h	730m³/h	600m³/h	570m³/h	820m³/h	730m³/h	610m³/h	650m³/h	730m³/h	740m³/h	740m³/h	400m³/h
	3 power levels plus 2 intensive settings	●								●			
	3 power levels plus 1 intensive setting		●			●	●	●	●		●	●	
	3 power levels			●	●								●
	Intensive setting with automatic switch back to previous setting 6min	●	●			●	●	●		●	●	●	
	Residual shutdown with automatic run-on time 1–10min	●				● (30 mins)				●	●	●	
	Rim ventilation system	●				●	●	●					
	EcoSilence Drive® brushless motor	●	●			●				●	●	●	
	Powerful single motor with twin fan			●	●		●	●					
	Powerful twin motor								●				
	Powerful single motor												●
Noise*	Noise min. / max.	44dB / 66dB	45dB / 55dB	51dB / 69dB	49dB / 69dB	41dB / 64dB	53dB / 66dB	50dB / 67dB	41dB / 59dB	40dB / 54dB	43dB / 55dB	43dB / 50dB	59dB / 68dB
	Noise max. (intensive setting)	72dB	65dB			71dB	69dB	70dB	69dB	65dB	68dB	68dB	
	Sound insulation mats	●	●							●			
Convenience	Dual layer metal grease filters	●	●			●	●	●	●	●	●	●	●
	Dishwasher-safe metal grease filter	● (3)	● (3)	● (3)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)	● (2)
	Saturation indicator for filters	●					●			●			
	Back-pressure flap (one-way)	●		●	●								
Technical requirements	Total connected load	269W	139W	220W	220W	272W	315W	252W	240W	146W	146W	140W	145W
	Power requirements	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50–60Hz	220–240V / 50–60Hz	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50Hz	220–240V / 50Hz
	Ducting connection diameter	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm
Included accessories										Stainless steel pelmet included as separate accessory^	Stainless steel pelmet included as separate accessory^	Stainless steel pelmet included as separate accessory^	Stainless steel pelmet included as separate accessory^
Optional accessory	CleanAir Recirculation kit	DSZ6240	DSZ6240							DSZ4683	DSZ4683	DSZ4683	
	Recirculation kit			DHZ5275	DHZ5275	DHZ5605	DHZ5605	DHZ5605					DSZ4545
	Charcoal filter for recirculation								DHZ7305				
	White pelmet									DSZ4952	DSZ4952	DSZ4652	DSZ4652
	Black pelmet									DSZ4956	DSZ4956	DSZ4656	DSZ4656
	Stainless steel pelmet for front controls									DSZ4965			
Other	Installation kit for 90cm cupboard									DSZ4920	DSZ4920		
	Ducted and recirculated air operation	●	●	●	●	●	●	●	●	●	●	●	●

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. *The dB(A) value plus approx. 10–14 units is equivalent to a dB(A) re1pW value. ^Please ask your retailer at point of purchase. #Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. *The dB(A) value plus approx. 10–14 units is equivalent to a dB(A) re1pW value. ^Please ask your retailer at point of purchase. #Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.


Rangehood extraction options

There are two ways to clean the air in your kitchen: ducting or recirculation. Both methods remove odours effectively. Choose the best extraction option for your kitchen:

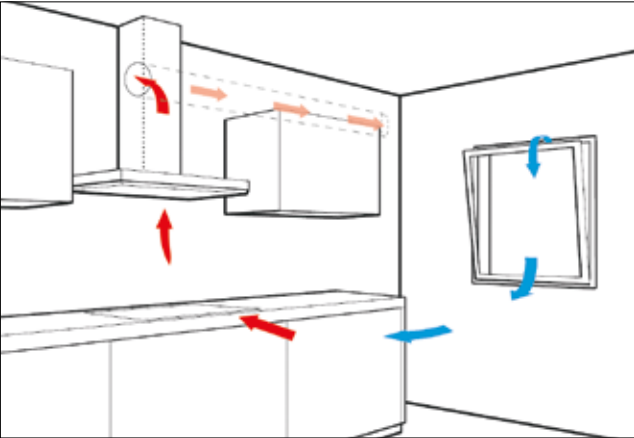

Ducted extraction

- ✓ Ducting is the most effective way to clear the air in your kitchen.
- ✓ A ducted rangehood directs air from the kitchen to the outside through a metal duct.
- ✓ The rangehood needs to be situated on or close to an outside wall, so the outside can be reached via ducting.

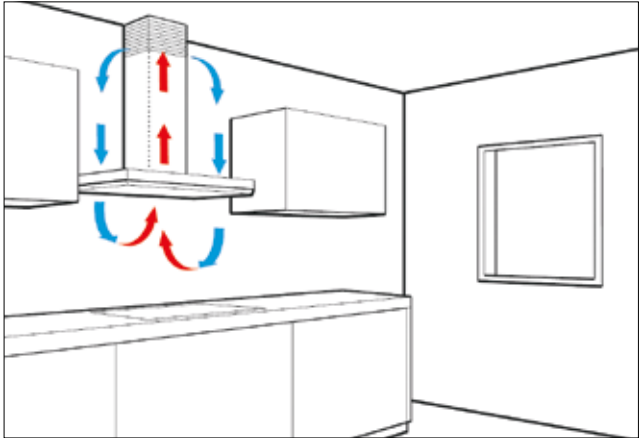


Recirculation kit

- ✓ Odours are extracted and filtered, through a carbon filter, then purified air is returned to the room.
- ✓ Can be installed anywhere – without the need to install a duct pipe through the wall or ceiling.
- ✓ To maintain performance, the carbon filter needs to be replaced on a regular basis.

DID YOU KNOW?

There are different types of air extraction measurements. At Bosch, we adopt a stringent method in accordance with the European measurement standard EN 61591.

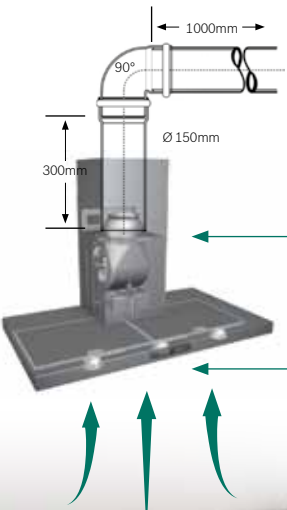

Bosch Air Extraction Measurement

Measurement of net fan power at air outlet above motor in appliance **with connection to ducting system**

Other Hood Performance Measurements

Measurement of net fan power at air outlet above motor in appliance **without connection to ducting system**



Calculate the extraction power you need

When choosing a rangehood, always match its air extraction power to the size of your kitchen. An effective rangehood should be able to replace the air in your kitchen up to 12 times per hour.

Kitchen size	Volume of kitchen (L x W x H) (m³)	x 12 =	Max. Extraction rate needed
Small	3 x 4 x 2.5m	x 12 =	360m³/h
Medium	4 x 4 x 2.5m	x 12 =	480m³/h
Large	4 x 5 x 2.5m	x 12 =	600m³/h
Open plan*	4 x 8 x 2.5m	x 12 =	720m³/h

Calculate yourself

x 12 =

* For open plan kitchens 50% of the adjacent room to the kitchen is added to the extraction rate calculations.
Above example:
Open plan room size: 4m x 8m x 2.5m
Actual kitchen size: 4m x 4m x 2.5m
Extraction rate calculations: 4m x 6m x 2.5m

Reference Guide Dishwashers

Model		SMU88TS04A Series 8	SMP66MX01A Series 6	SMU66JS01A Series 6	SMU46KS01A Series 4	SMU46GS01A Series 4		SMI88TS02A Series 8	SMI66MS01A Series 6	SMI46GS01A Series 4	SMV88TX02A Series 8	SMV66MX01A Series 6	SMV46GX01A Series 4
Type		Built-under	Built-under	Built-under	Built-under	Built-under		Semi-integrated	Semi-integrated	Semi-integrated	Fully integrated	Fully integrated	Fully integrated
Water	Star rating (litres per wash)	5 Star (12 litres)	5 Star (12 litres)	5 Star (11 litres)	4 Star (13.4 litres)	4 Star (13.4 litres)		5 Star (12 litres)	5 Star (12 litres)	4 Star (13.4 litres)	5 Star (12 litres)	5 Star (12 litres)	4 Star (13.4 litres)
Energy	Star rating (kWh per year)	4 Star (235kWh)	4 Star (235kWh)	4 Star (220kWh)	4 Star (230kWh)	4 Star (230kWh)		4 Star (235kWh)	4 Star (235kWh)	4 Star (230kWh)	4 Star (235kWh)	4 Star (235kWh)	4 Star (230kWh)
Dimensions	Appliance dimensions (H x W x D)	815–875 x 598 x 573mm	815–875 x 598 x 573mm	815–875 x 598 x 573mm	815–875 x 598 x 573mm	815–875 x 598 x 573mm		815–875 x 598 x 573mm	815–875 x 598 x 573mm	815–875 x 598 x 573mm	815–875 x 598 x 550mm	815–875 x 598 x 550mm	815–875 x 598 x 550mm
Capacity	International place settings	15	15	14	14	14		15	15	14	15	15	14
Design	Interior tub material	Stainless steel	Stainless steel	Stainless steel	Polinox®	Polinox®		Stainless steel	Stainless steel	Polinox®	Stainless steel	Stainless steel	Polinox®
	Display type	2 x TFT Displays	Integrated LED-display	LED-display	LED-display	LED-display		2 x TFT Displays	LED-display	LED-display	Iterated TFT Display	Integrated LED-display	Integrated LED-display
	TimeLight® Floor Projection										●		
	InfoLight® Floor Projection		●									●	●
	EmotionLight internal lighting	●						●			●		
	Anti-fingerprint finish			●	●	●							
	SensorTouch Buttons	●						●			●		
Wash programs	Auto Gentle 35–45°C	●						●			●		
	Auto Wash 45–65°C	●	●	●	●	●		●	●	●	●	●	●
	Auto Intensive 65–75°C	●	●	●				●	●		●	●	
	Pre-Rinse				●	●				●			●
	Pots & Pans 70°C				●	●				●			●
	Eco Wash 45°C	●	●	●	●	●		●	●	●	●	●	●
	Quick Wash 29min 45°C*	●	●	●	●	●		●	●	●	●	●	●
	Quick Wash 60min 65°C	●	●	●				●	●		●	●	
	Intensive 65°C												
	ExtraQuiet 40dB (50°C)	●						●			●		
	Glass Wash 40°C		●		●			●			●		
	Super Wash 60°C	●		●		●			●	●		●	●
Wash options	SpeedPerfect® / VarioSpeed	●	●	●	●	●		●	●	●	●	●	●
	HalfLoadPlus	●	●	●	●	●		●	●	●	●	●	●
	IntensiveZone™	●						●			●		
	HygienePlus™	●						●			●		
	Machine Care	●	●	●	●	●		●	●	●	●	●	●
	ExtraDry	●	●	●	●	●		●	●	●	●	●	●
ActiveWater Features	AutoBrilliance™	●	●	●	●	●		●	●	●	●	●	●
	AquaSensor™	●	●	●	●	●		●	●	●	●	●	●
	DosageAssist™ detergent system	●	●	●	●	●		●	●	●	●	●	●
	EcoSilence Drive®	●	●	●	●	●		●	●	●	●	●	●
	3 stage self-cleaning filter	●	●	●	●	●		●	●	●	●	●	●
	Heat Exchanger	●	●	●	●	●		●	●	●	●	●	●
	Last Program Used Memory	●	●		●	●		●	●	●	●	●	●
Flexibility	VarioDrawer™ (cutlery drawer)	Pro	●		●			Pro	●		Pro	●	
	Basket System	VarioFlex® Pro	VarioFlex® Plus	VarioFlex® Plus	VarioFlex®	VarioFlex®		VarioFlex® Pro	VarioFlex® Plus	VarioFlex®	VarioFlex® Pro	VarioFlex® Plus	VarioFlex®
	Rackmatic™ Plus	●	●	●	●	●		●	●	●	●	●	●
	Top basket roll on/roll off adjust												
	Cutlery basket	●	●	●	●	●		●	●	●	●	●	●
	GlassSecure tray		●		●			●			●		
	3 small item clips	●		●		●			●	●		●	●
	Large Item Sprayhead	●	●	●	●	●		●	●	●	●	●	●
	Vapour barrier plate	●	●	●	●	●		●	●	●	●	●	●
Convenience	dB rating / ExtraQuiet rating	42dB / 40dB	44dB	44dB	46dB	46dB		42dB / 40dB	44dB	46dB	42dB / 40dB	44dB	46dB
	Time delay	●	●	●	●	●		●	●	●	●	●	●
Safety	AquaStop™ Plus	●	●	●	●	●		●	●	●	●	●	●
	Child lock	●	●	●	●	●		●	●	●	●	●	●



All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. * With use of rinse aid.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Accessories

Look online at www.bosch-home.com.au/store to purchase Bosch accessories and spare parts:

Oven and Cooker Accessories		
	Wire rack for universal pan Fits into the universal pan for all grilling applications. Universal pan and wire rack can be removed together. To suit all Bosch Series 8 60cm ovens	HEZ324000
	Pizza stone Pizza baking stone with wooden bread paddle. Baking stone is pyrolytic proof. To suit all Bosch 60cm ovens	HEZ327000
	Stainless steel roasting pan Stainless steel roasting pan with glass lid, induction suitable. To suit all Bosch 60cm ovens	HEZ390011
	Porcelain tray – large To suit Bosch Series 8 60cm combination steam oven CSG656RS1A	HEZ36D353P
	Pizza pan To suit all Bosch 60cm ovens and all Series 8 60cm combination steam and microwave ovens	HEZ617000
	Split grill tray, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ625071
	Enamelled baking tray – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ631070
	Universal pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens	HEZ632070
	Universal pan with ceramic non-stick coating To suit all Bosch Series 6, 4, and 2 60cm ovens	HEZ532010
	Baking tray with ceramic non-stick coating To suit all Bosch Series 6, 4, and 2 60cm ovens	HEZ531010
	Half trays (slimline universal pan) Slim sizes trays are perfect when cooking smaller quantities of food. To suit all Bosch Series 6, 4, and 2 60cm ovens. Consists of 2 parts and fits perfectly in Bosch dishwashers and Bosch integrated fridges	HEZ530000

	Lid for Professional pan To suit Bosch Series 8 60cm ovens	HEZ633001
	Professional pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ633073
	Wire rack (standard) To suit all Bosch Series 8 60cm ovens	HEZ634000
	Glass pan To suit all Bosch Series 8 60cm ovens and 60cm combination steam and microwave ovens	HEZ636000
	2-level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638270
	3-level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens	HEZ638370
	ClipRail telescopic rails To suit all Bosch Series 6, 4, and 2 60cm ovens	HEZ538000
	Telescopic extension rails, 2 fold To suit all Bosch Series 6, 4, and 2 60cm ovens	HEZ538200
	Metal strip To suit all Bosch 60cm ovens and all 60cm steam, combination steam and microwave ovens	HEZ660060
	Wire rack (microwave) To suit Bosch Series 8 60cm microwave ovens CMG633BS1B, CMG656RS1A	HEZ634080
	Heat resistant and dishwasher safe glass dish To suit Bosch Series 8 60cm ovens	HEZ864000



Cooktop Accessories		
	Griddle plate For use on two combined cooking zones. Evens heat to perfectly grill your favourite meats, fish or vegetables. To suit Bosch FlexInduction® and CombiInduction® cooktops PXV975DC1E, PXE875DC1E, PXE651FC1E, PXX675DC1E, PVS875FB1E, PVS675FB1E	HEZ390522
	Teppan Yaki Enjoy induction the Japanese way! Try beef, prawns, scallops, lobster, chicken and chopped vegetables. Also great for steamers and available in 40 x 20cm size. To suit Bosch FlexInduction® and CombiInduction® cooktops PXV975DC1E, PXE875DC1E, PXX675DC1E, PVS875FB1E, PVS675FB1E	Large – HEZ390512
	Stainless steel roasting pan (optional with steamer inset) Cook large dishes without hot spots for results you'll be delighted with. A high performance roasting pan that no induction kitchen should be without. For use on two combined cooking zones. To suit all Bosch 60cm ovens	HEZ390011
	PerfectFry™ sensor induction pan 19cm To suit Bosch PerfectFry™ sensor induction cooktops PXV975DC1E, PXE875DC1E, PXE651FC1E, PXX675DC1E, PIV995DC1E, PIV975DC1E	HEZ390220
	PerfectFry™ sensor induction pan 21cm To suit Bosch PerfectFry™ sensor induction cooktops PXV975DC1E, PXE875DC1E, PXE651FC1E, PXX675DC1E, PIV995DC1E, PIV975DC1E	HEZ390230
	4 Piece Cookware Set 4 piece induction cookware set consisting of 2 pots, 1 casserole and 1 fry pan.	HEZ390042
	Stainless steel wok Stainless steel wok for induction and ceramic cooktops. Includes glass lid and draining grid.	HEZ390090
	Simmer plate for gas cooktops Reduces the power of the gas cooktop accordingly in order to simmer food.	HEZ298105

Rangehood Accessories		
	CleanAir recirculation kit Fits Bosch DWB091E51A, DWW097A50A	DSZ6240
	Recirculation kit For Bosch DFM064W50A	DSZ4545
	CleanAir recirculation kit For Bosch DFS097E50A, DFS097A50A, DFS067A50A	DSZ4683
	CleanAir active carbon filter For Bosch DFS097E50A, DFS097A50A, DFS067A50A	DSZ4681
	Recirculation kit For Bosch DWP66BC50A, DWP96BC50A	DHZ5275
	Recirculation kit Consisting of 2 charcoal filters, charcoal filter support, deflector, flexible hose 150mm and 1500mm long, 2 clamps and mounting material. To suit DHL895CAU, DHL785BAU, DHL575CAU	DHZ5605
	Charcoal filter For Bosch DHL555BAU	DHZ7305
	White pelmet Fits Bosch 60cm slideout rangehoods DFS067A50A, DFM064W50A	DSZ4652
	Black pelmet Fits Bosch 60cm slideout rangehoods DFS067A50A, DFM064W50A	DSZ4656
	White pelmet Fits all Bosch 90cm slideout rangehoods	DSZ4952
	Black pelmet Fits all 90cm Bosch slideout rangehoods	DSZ4956
	Stainless steel pelmet for vario control Fits Bosch DFS097E50A	DSZ4965
	Mounting kit for 90cm cupboard Fits Bosch DFS097A50A, DFS097E50A	DSZ4920

Technical diagrams



All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Series 8 | 60cm Pyrolytic Oven with Added Steam

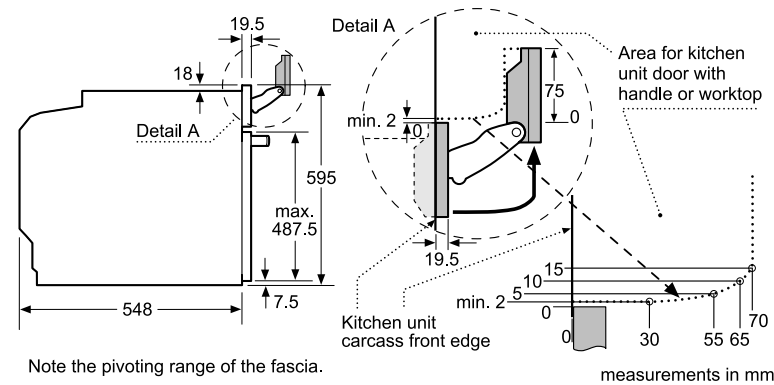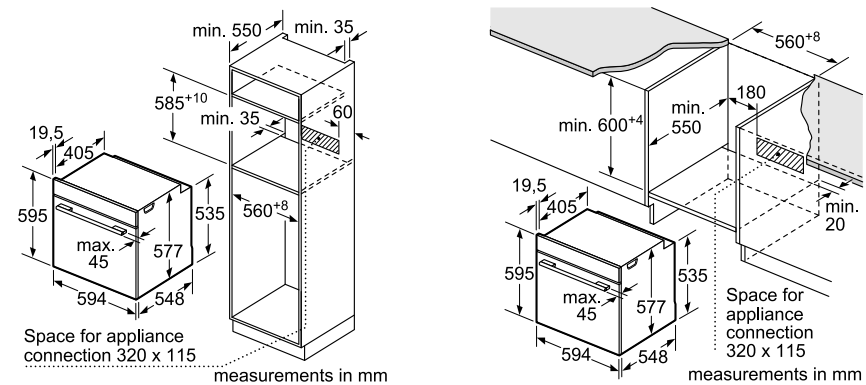



HRG6767S2A

Series 8 | 60cm Pyrolytic and EcoClean Direct Ovens

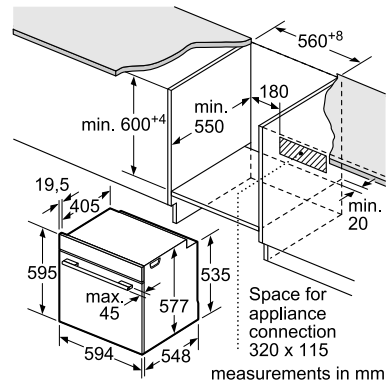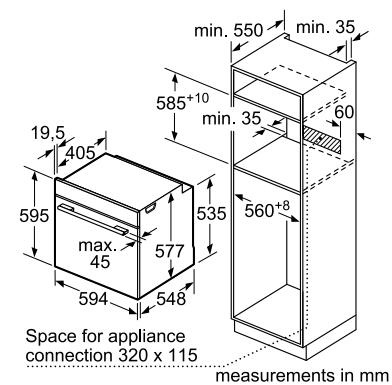



HBG6767S1A, HBG6753S1A, HBG675BS1B, HBG672BS1A,
HBG655HS1A, HBG655HW1A, HBG633BS1A

Series 8 | 60cm Combination Steam Oven

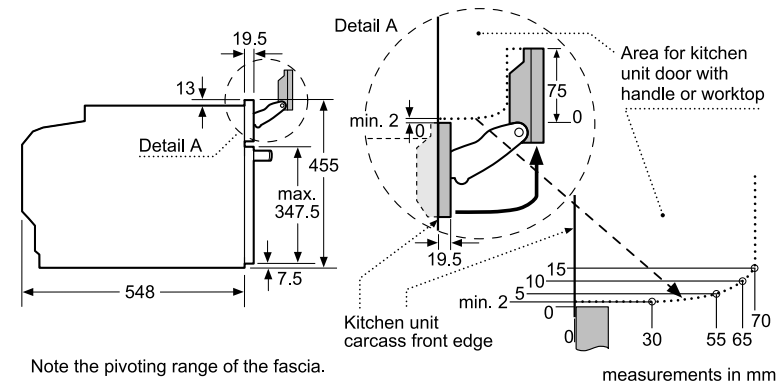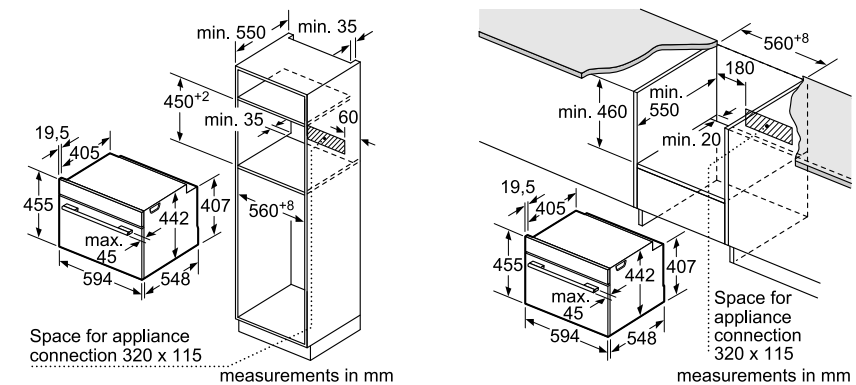



CSG656RS1A

Series 8 | 60cm Pure Steam Oven

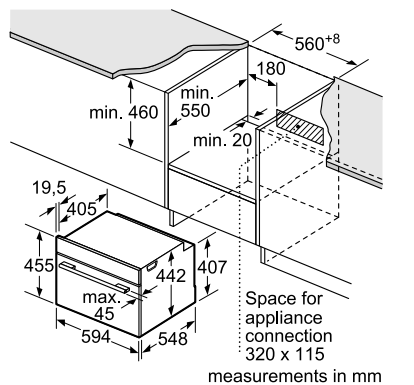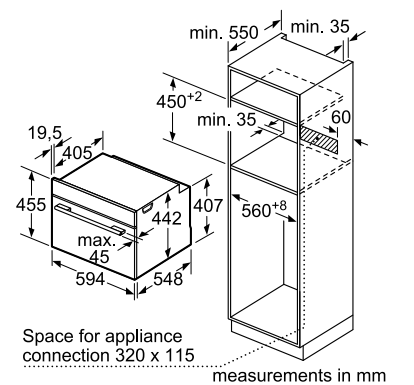



CDG634BS1

Series 6, 4 & 2 | 60cm Pyrolytic and EcoClean Direct Ovens

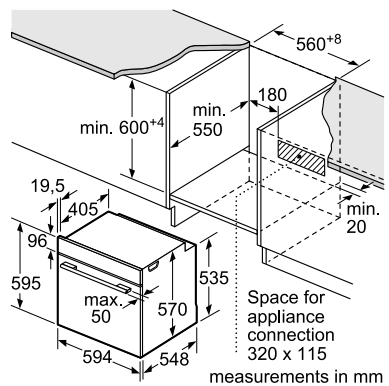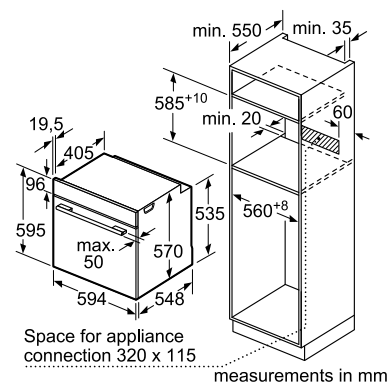



HBT578FS1A, HBT578CS0A, HBA574BS0A, HBG5575S0A,
HBA534ES0A, HBA534BS0A, HBF133BS0A

Series 6 | 90cm Oven

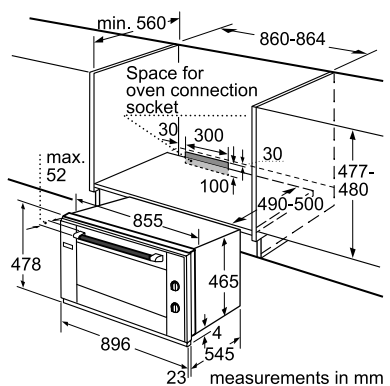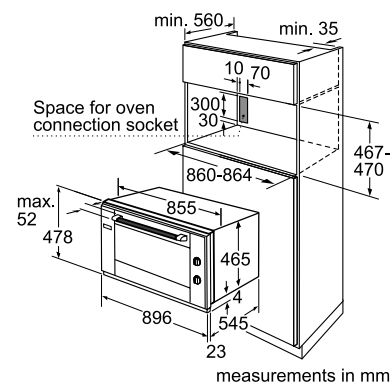


HVA541NS0

Series 6 | 60cm EcoClean Double Oven

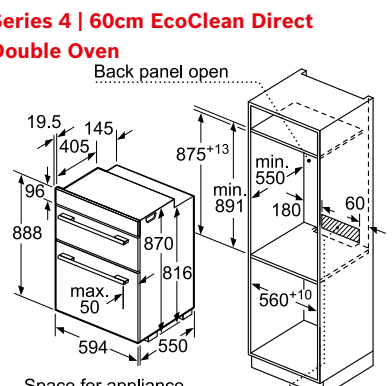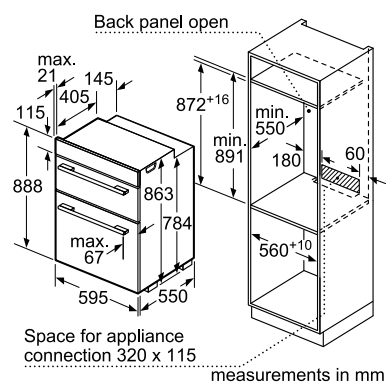



MBA534BS0A

Series 4 | 60cm EcoClean Direct Double Oven

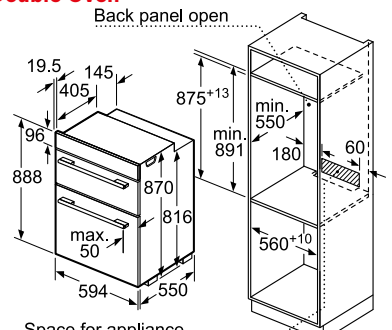



MBA534BS0A

Series 8 | 60cm Combination Microwave Oven

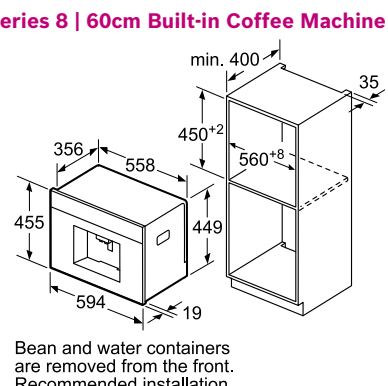
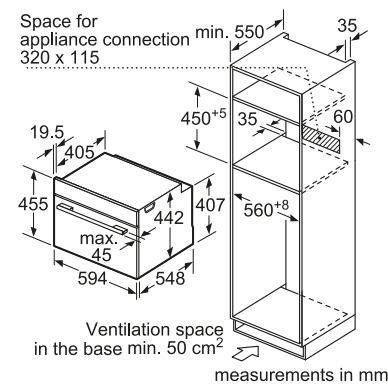


CTL636ES1

Series 8 | 60cm Built-in Coffee Machine

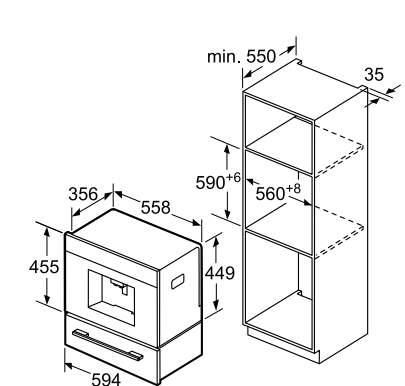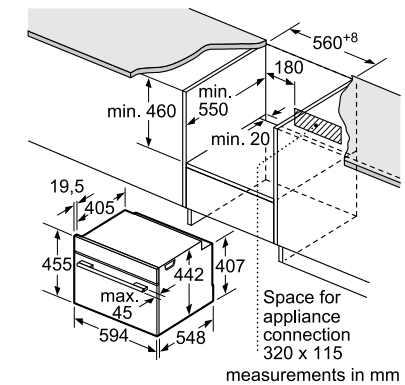


CTL636ES1

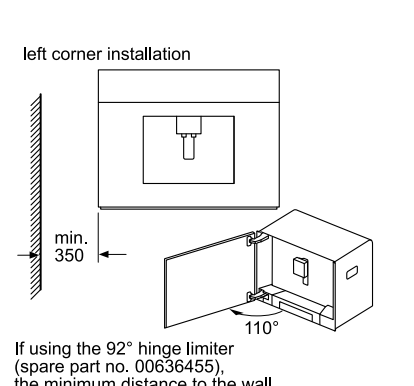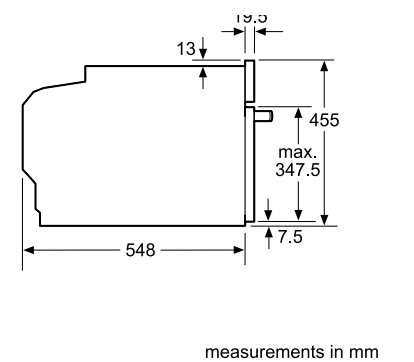

Technical diagrams

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.


Series 8 | 60cm Warming Drawer

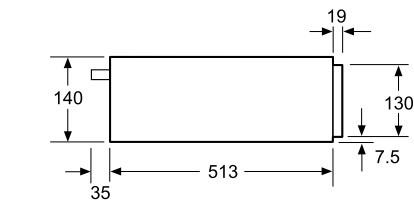

Over a warming drawer compact ovens with an appliance height of 455 mm can be installed. An intermediate floor is not required.


BIC630NS1A

measurements in mm

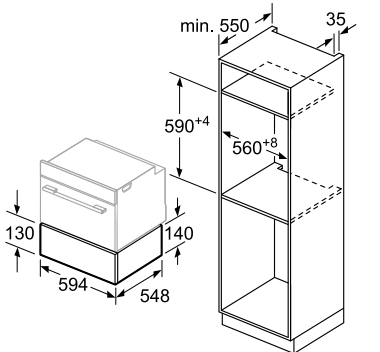

measurements in mm

Series 8 | 60cm Warming Drawer

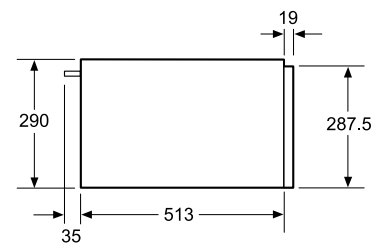


Ovens with an appliance height of 595 mm can be installed above a warming drawer. An intermediate floor is not required.

BID630NS1A

measurements in mm


Series 6 | 60cm Microwave with Steam Function

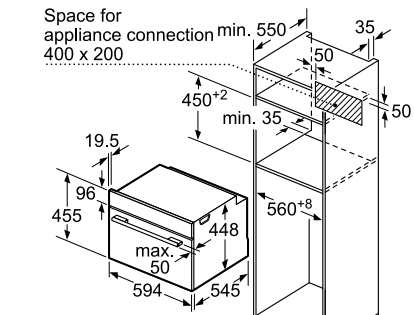


Ventilation space in the base min. 50 cm²

COA565GS0A

measurements in mm

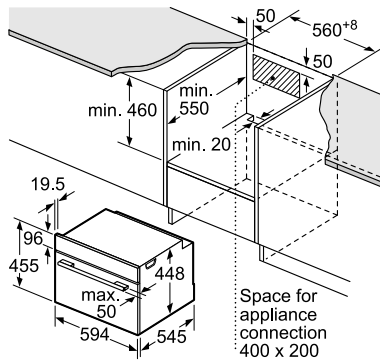


measurements in mm

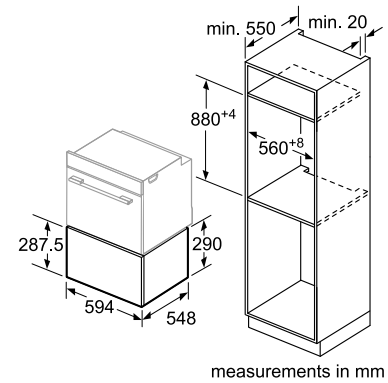


BID630NS1A

measurements in mm

Series 6 | 60cm Combination Microwave Oven

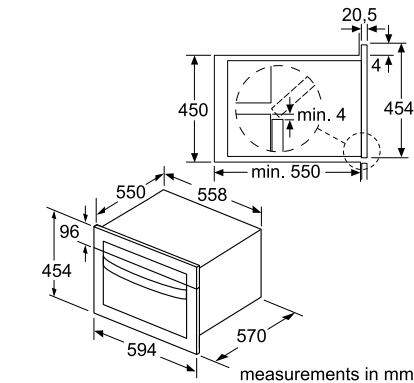


measurements in mm

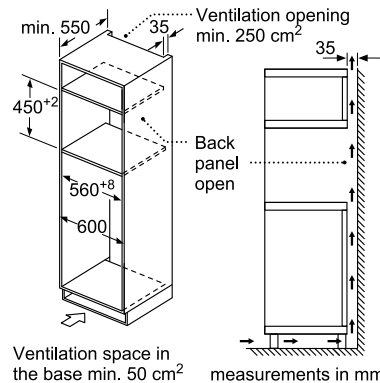

Ventilation space in the base min. 50 cm²

measurements in mm


Series 6 | 60cm Built-in Microwave

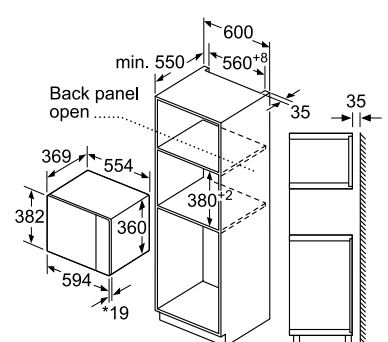

* 20 mm for metal fascia


measurements in mm

Microwave, corner installation

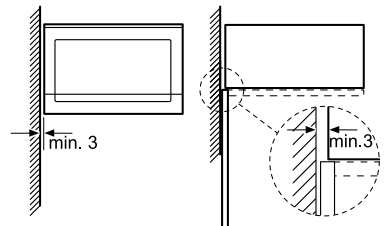

Measurements in mm

BEL554MS0A

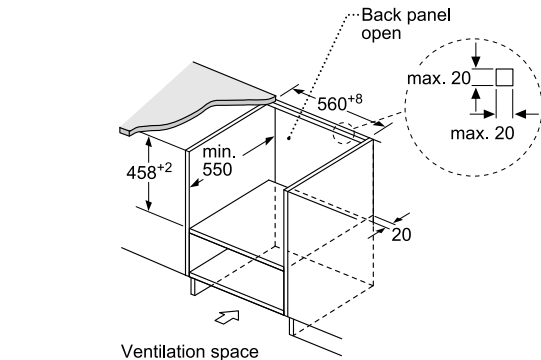

Ventilation space in the base min. 50 cm²


measurements in mm

CMA585MS0A

Technical diagrams


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

Series 6 | 90cm Black Tempered Glass FlameSelect® Gas Cooktop

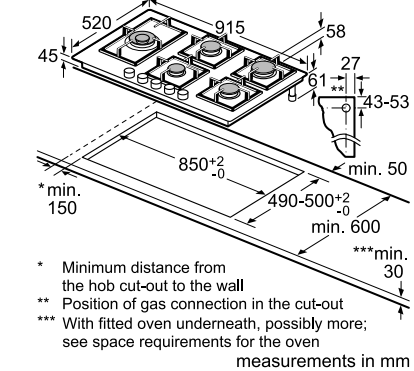

* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven


measurements in mm

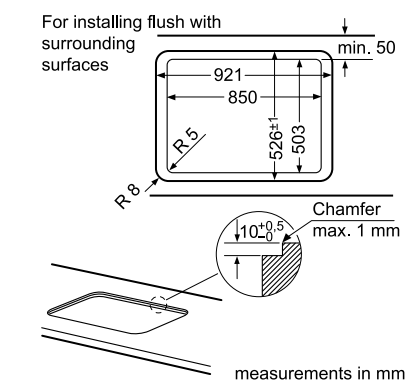

PPS9A6B90A

measurements in mm


Series 6 | 75cm Black Tempered Glass FlameSelect® Gas Cooktop

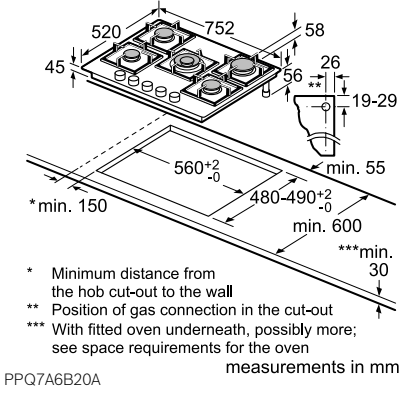

* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven


PPQ7A6B20A

measurements in mm

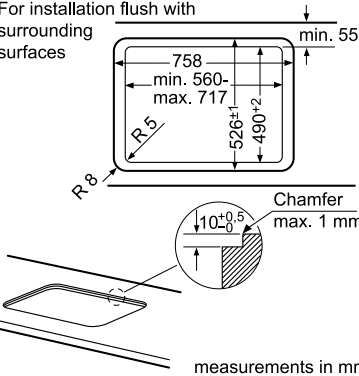

measurements in mm


Series 6 | 60cm Black Tempered Glass FlameSelect® Gas Cooktop

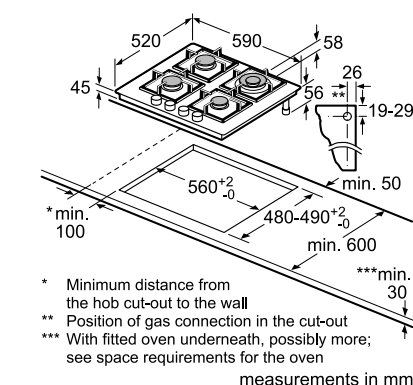

* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven


PPH6A6B20A

measurements in mm

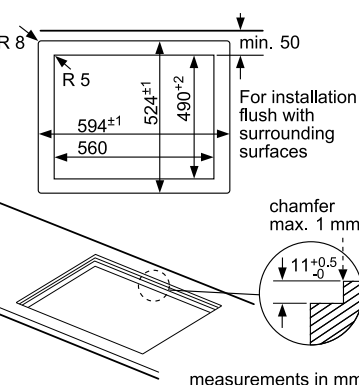

measurements in mm

Series 6 | 90cm FlameSelect® Gas Cooktop

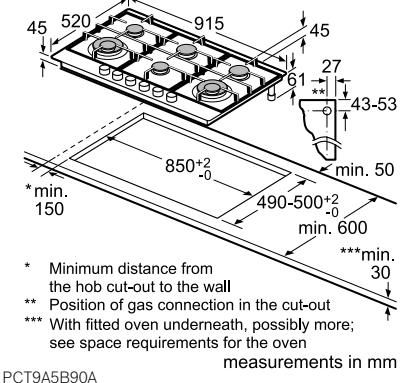


* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

PCT9A5B90A

measurements in mm

Series 6 | 90cm FlameSelect® Gas Cooktop

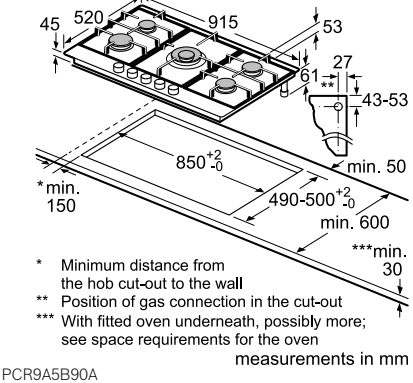


* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

PCR9A5B90A

measurements in mm

Series 6 | 75cm FlameSelect® Gas Cooktop

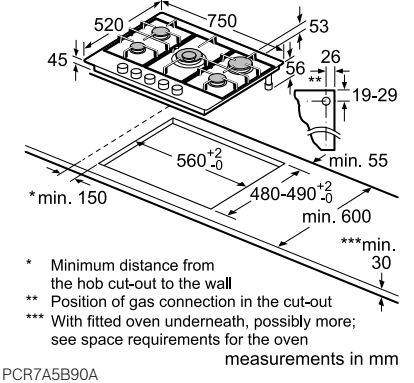


* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

PCR7A5B90A

measurements in mm

Series 6 | 60cm FlameSelect® Gas Cooktop

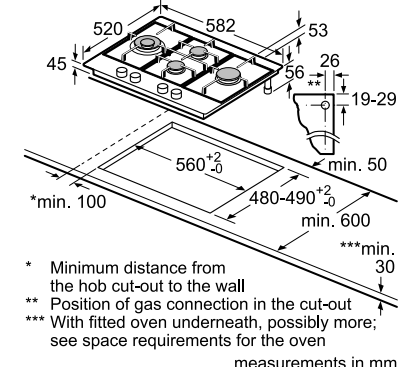


* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

PCI6A5B90A

measurements in mm

Series 2 | 60cm Gas Cooktop

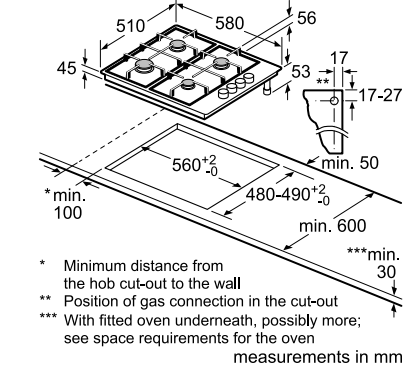


* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

PBH6B5B90A

measurements in mm

Series 2 | 60cm Gas Cooktop

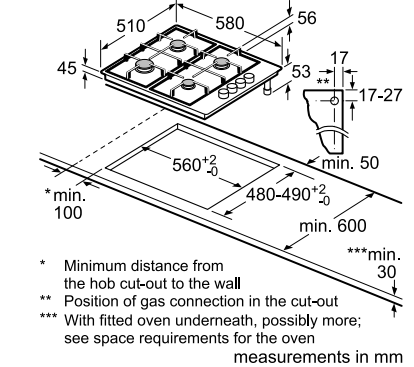

* Minimum distance from the hob cut-out to the wall
** Position of gas connection in the cut-out
*** With fitted oven underneath, possibly more; see space requirements for the oven

PBH6B5B60A

measurements in mm

This much is for sure: you can trust in our service.

Reliable, experienced, fast. The customer service of Bosch; before and after purchase.

Quality service straight from the manufacturer. Original Bosch.

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

Reliability guaranteed. No compromises.

All Bosch home appliances are produced with maximum care using high-quality materials. We promise it in our 2-year manufacturer's warranty on all appliances.

Lifetime service. It goes without saying at Bosch.

Once your warranty period is over, we are still there to assist you. You can rely on expert care and first-rate service throughout the life cycle of your appliance. From missing instruction manuals to appliance repair – we take care of everything.

Original accessories.

Effective care products.

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

Extensive customer service network. Just a call away.

Customer Care

Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

Service & Repairs

Our team is there to provide the right advice on faults, arranging a visit of a service engineer and ordering the right accessories or spare parts.

Customer care, service and repairs: 1300 369 744

24 Hour phone support Monday to Friday*

*Phone lines open 7am Monday until midnight on Friday.



@BoschHomeAU



BSH Home Appliances Pty Ltd

1555 Centre Road Clayton VIC 3168

Postal Address

Locked Bag 66, Clayton South VIC 3169

Customer Line

Phone: 1300 369 744

www.bosch-home.com.au



Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without prior notice. Please contact your local Bosch retailer for the latest information.

Whilst every care has been taken in the preparation of this publication, BSH does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KR05/2018 – BH 3688 B



@BoschHomeAU