

Serie 6, , 177.2 x
55.8 cm,
KIR81AF30M



KSZ10020 :

- **LED:**
- **A++ %40 A.**
- **SuperCooling:**
- :
- **EasyAccess:**



Gross weight: 147.000 lbs
 : 1
 : 1
 : 558 mm
 Height: 1772 mm
 : 545 mm
 : 62.1 kg
 Required niche size for installation (HxWxD): 1775x560x550 mm
 :
 : 6
 : Yes
 Frost free system:
 : Yes
 Reversible Door Hinge: Yes
 : 230 cm
 : 37 dB(A) re 1pW
 Multi-Flow Air Tower: No
 Economy setting: No
 Cold technology: 1 compressor/1 cold circuit
 : Yes
 Temperature Controlled Drawer: No
 Humidity Control Drawer: Yes
 Number of Door Bins - Refrigerator: 5
 Door bin adjustability - Refrigerator: Yes
 Tilt-out door bins in fridge: Yes
 Gallon wide door bins: Yes
 Number of Gallon storage: 2
 Motorized Shelf: No
 Material of the shelves: Glas, plastic
 : No
 : 90 W
 Fuse protection: 10 A
 () : 220-240 V
 Frequency: 50 Hz
 :
 : 37 dB(A) re 1pW
 ENERGY STAR® certified: No
 : GB plug
 Required cutout/niche size for installation (in): x
 Dimensions of the packed product: 72.45 x 24.01 x 25.19
 Net weight: 137.000 lbs



Serie 6, , 177.2 x
55.8 cm,
KIR81AF30M

- 7
- 1 compressor/1 cold circuit
-
- ,

Serie 6, , 177.2 x
55.8 cm,
KIR81AF30M

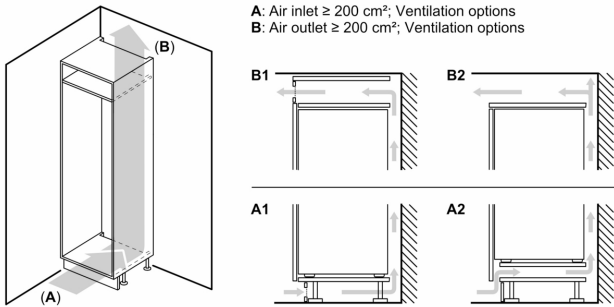

Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges




Δ Weight
A: Appliance door height including hinges in mm

B: Undamped hinge, unit front in kg


C: Damped hinge, unit front in kg

D: Additional possible load in kg with heavy load kit

A	B	C	D
1500-1750	22	22	
720-1400	19	19	B+5 / C+5
A1	15	19	
A2	15	19	

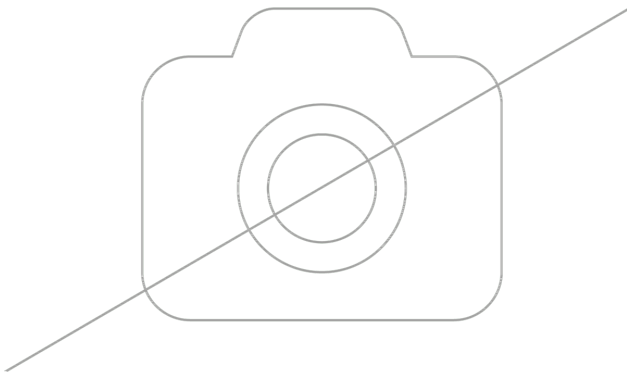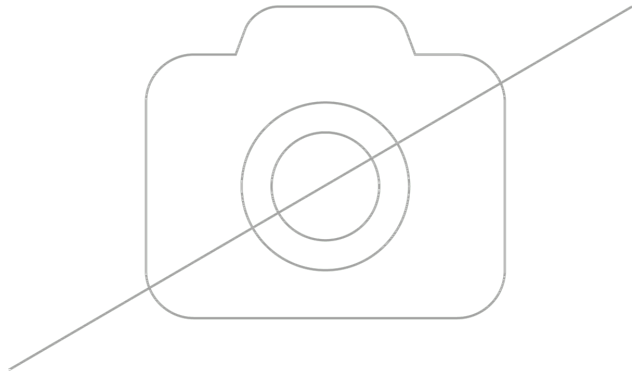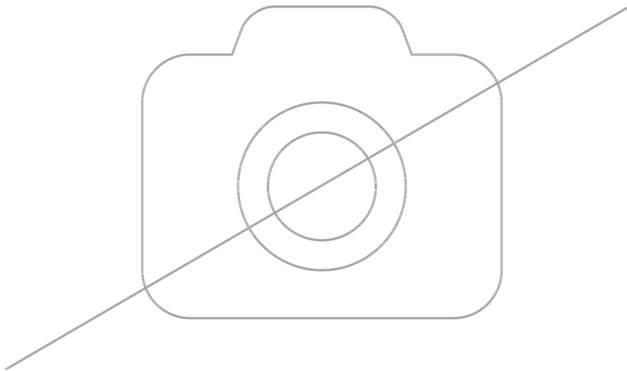


Maximal permissible weight of the unit fronts



Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door	undamped hinge,	damped hinge,
Hinges in mm:	Door in kg:	Door in kg:
1500-1750	22	22

measurements in mm
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.