

**Serie | 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge
KIV38X22GB**



Included accessories
1 x butter dish

**The bottomfreezer with vegetable drawer:
lots of space for your fruits and vegetables.**

- **MultiBox:** transparent drawer with wave bottom, ideal for the storage of fruits and vegetables
- The new organized shelving system, paired with LED lighting, clearly displays all freezer items!
- **FreshSense:** Internal sensors monitor the internal and external temperatures and adjust to provide longer freshness.
- MultiBox drawer with a corrugated bottom keeps freshness of fruits and vegetables much more longer than standart freshness system.

Technical Data

Built-in / Free-standing : Built-in
 Number of compressors : 1
 Number of independent cooling systems : 1
 Width of the appliance : 541 mm
 Depth of the product : 545 mm
 Net weight : 56.913 kg
 Required niche size for installation (HxWxD) : 1775.0 x 562.0 x 550 mm
 Door panel options : Not possible
 Door hinge : Right reversible
 Number of Adjustable Shelves in fridge compartment : 4
 Shelves for Bottles : No
 Frost free system : No
 Interior ventilator : No
 Reversible Door Hinge : Yes
 Length electrical supply cord : 230 cm
 Noise level : 40 dB(A) re 1 pW
 Multi-Flow Air Tower : No
 Fast cooling switch : No
 Fast freezing switch : Yes
 Temperature Controlled Drawer : No
 Humidity Control Drawer : No
 Number of Door Bins - Refrigerator : 5
 Door bin adjustability - Refrigerator : No
 Tilt-out door bins in fridge : Yes
 Gallon Storage : Yes
 Number of Gallon storage : 5
 Motorized Shelf : No
 Material of the shelves : Safety glass
 Door opened indicator freezer : No
 Automatic motor-driven ice-maker : No
 Connection Rating : 90 W
 Fuse protection : 13 A
 Voltage : 220-240 V
 Frequency : 50 Hz
 Storage Period in Event of Power Failure (h) : 7 h
 Approval certificates : VDE
 Main colour of product : N/A
 Door panel options : Not possible
 Noise level : 40 dB(A) re 1 pW
 Energy consumption annual - NEW (2010/30/EC) : 275.00 kWh/ annum
 Refrigerator Net capacity - NEW (2010/30/EC) : 217 l
 Freezer Net capacity - NEW (2010/30/EC) : 59 l
 Frost free system : No
 Freezing capacity) - NEW (2010/30/EC) : 6 kg/24h
 Energy Star Qualified : No
 Approval certificates : VDE
 Plug type : GB plug
 Required cutout/niche size for installation (in) : x x
 Dimensions of the packed product : 73.22 x 24.40 x 25.19
 Net weight : 125.000 lbs
 Gross weight : 136.000 lbs

Serie | 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge KIV38X22GB

The bottom freezer with vegetable drawer: lots of space for your fruits and vegetables.

Performance and consumption

- Energy Efficiency Class: No
- Total capacity: 294 litres
- Airborne acoustical noise emissions: 40 dB dB(A) re 1 pW
- Climate Class SN-ST

Design

- Easy clean interior

Comfort and Safety

- LED electronic control
- Automatic defrost in fridge section

Fridge Section

- Capacity refrigeration zone: 222 litres
- 5 safety glass shelves of which 4 are height adjustable
- 5 large door shelves

Freshness System

- Vegetable container with wavy bottom

Freezer Section

- Freezer capacity: 72 litres
- Freezing capacity: 6 kg in 24 hours
- Storage time in power failure: 13 Hours
- 3 transparent freezer drawers
- Freezing calendar

Dimensions

- Dimensions: H 177.2 cm x L 54.1 cm x D 54.5 cm
- Niche Dimension H X W x D: 177.5 cm x 56.2 cm x 55 cm
- Gross capacity, total: 294 l
- Gross capacity cooling 222 l



Technical Information

- Door right hinged, reversible Door




Country Specific Options

- Based on the results of the standard 25-hour test. Actual consumption depends on usage/position of the appliance.
- Gross capacity**** freezer: 72 l (-18°C and below)

Serie | 2, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge KIV38X22GB

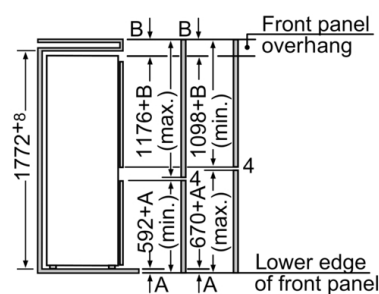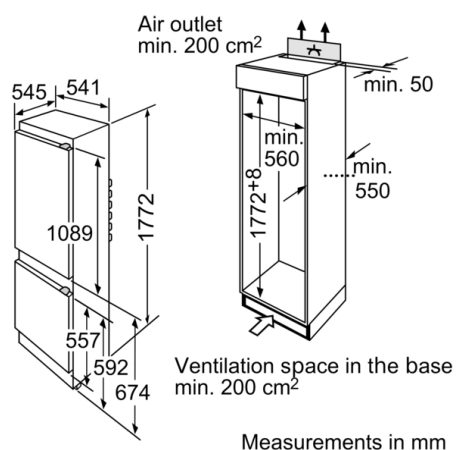

The specified unit door dimensions are valid for a door gap of 4 mm. If a different gap width is used (max. 14 mm), the dimensions must be adjusted.

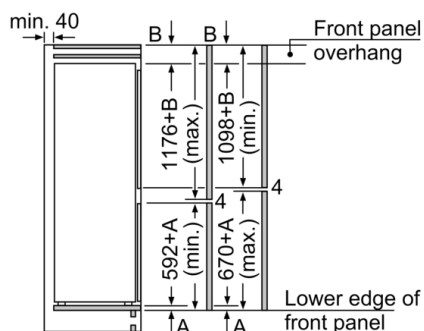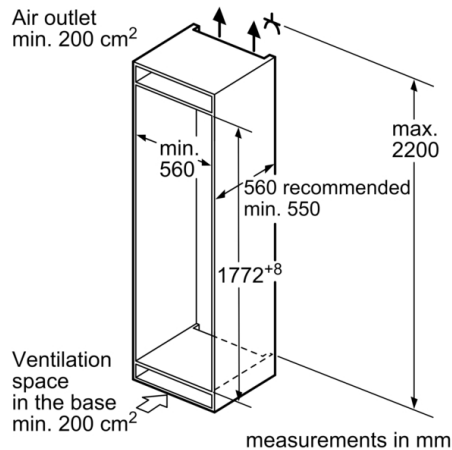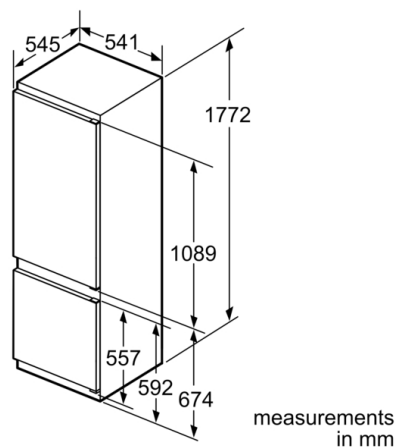

The specified unit door dimensions are valid for a door gap of 4 mm.

measurements in mm