

**Serie | 6, Slideout rangehood, 90 cm,
Stainless steel
DFS097E50A**



Optional accessories

DSZ4565 : Standard recirculation kit
DSZ4920 : Installation kit for 90cm wide wall unit

The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

- **Extra silent:** the high-performance rangehood, with minimal noise.
- **Grease filtration level:** filters out over 85% of the grease from kitchen air
- **EcoSilence Drive™:** the powerful, energy-saving drive for hoods.
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.

Technical Data

Typology : Pull-out
Approval certificates : Australia Standards, VDE
Length electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
Minimum distance above an electric cooktop : 430 mm
Minimum distance above a gas cooktop : 650 mm
Net weight : 14.2 kg
Type of control : Electronic
Number of power settings : 3-stages + 2 intensive settings
Maximum output air extraction : 399 m³/h
Boost position output recirculating : 628 m³/h
Maximum output recirculating air : 358 m³/h
Boost position air extraction : 739 m³/h
Number of lights : 2
Noise level : 55 dB(A) re 1 pW
Diameter of air outlet : 150 / 120 mm
Grease filter material : Washable aluminium
EAN code : 4242005058068
Connection Rating : 146 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : AU plug
Installation type : Built-in



Serie | 6, Slideout rangehood, 90 cm, Stainless steel DFS097E50A

The slideout rangehood practically disappears into your upper cabinet, giving you a sleek kitchen finish.

Power and Mode of Operation

- Maximum extraction 739 m³/h
- 3 power levels + 2 intensive levels
- Ducted and recirculated-air operation
- Accessories required for recirculation mode: CleanAir Module

Design & Innovation

- Appliance colour: Stainless steel
- Stainless steel fascia panel/pelmet included
- Electronic controls with red LED display
- 2 x 3 Watt LED Lights

Convenience

- Intensive operation automatic revert - 6min
- Automatic run on for Automatic run on - 10 min
- Additional sound insulation mats for optimised sound absorption
- Noise min./max. Normal Level: 40/55 dB
- SoftLight with dimming function
- Saturation display for filters
- Easy installation system

Cleaning

- Dishwasher safe metal grease filters

Safety and Quality

- EcoSilence BLDC brushless motor

2 year warranty


Dimensions (HxWxD)

- Appliance dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm


Technical Information

- Noise level according to EN 60704-3 exhaust air:
 - Max. normal use: 55 dB(A) re 1 pW
 - Intensive: 67 dB(A) re 1 pW
- Power rating: 146 W
- Average Energy Consumption: 37.2 kWh/year
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Install into a 60cm or 90cm cupboard

Serie | 6, Slideout rangehood, 90 cm, Stainless steel DFS097E50A

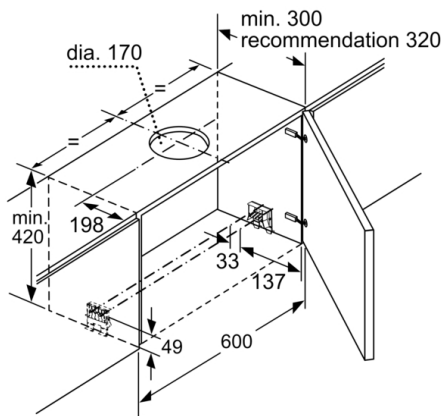


measurements in mm

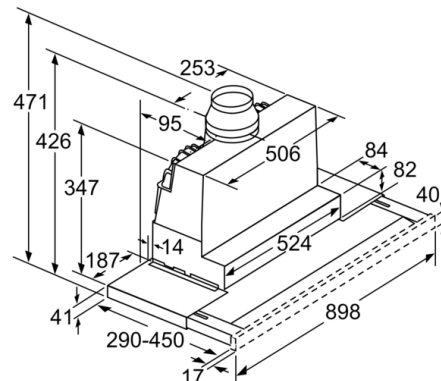


Depth of the filter drawer can be adjusted by up to 29 mm

measurements in mm

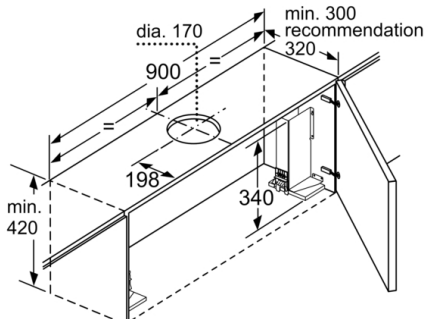


When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.


measurements in mm

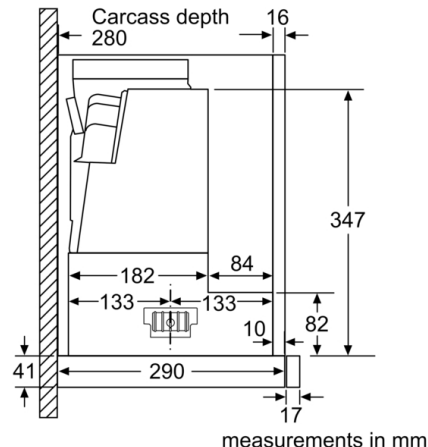

measurements in mm

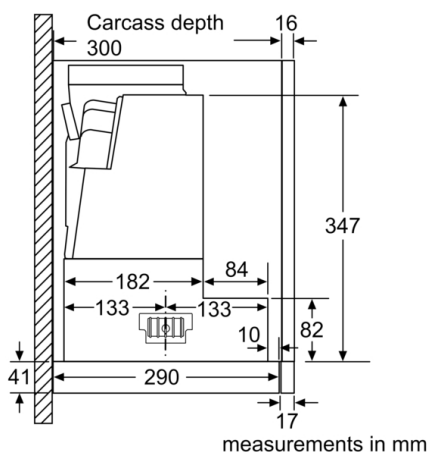

measurements in mm

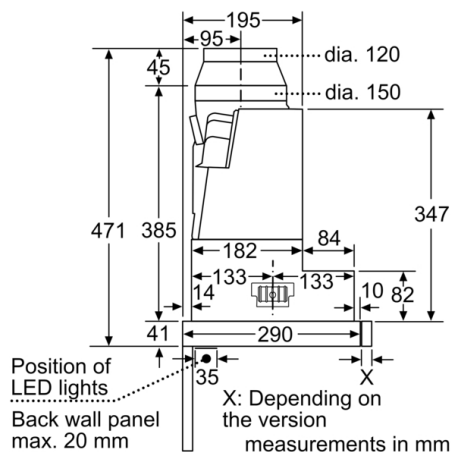

measurements in mm

**Serie | 6, Slideout rangehood, 90 cm,
Stainless steel
DFS097E50A**

