

Series 6, integrated rangehood, 52 cm, Stainless steel DHL575CAU



DHZ5316 Standard odor filter (replacement)
DHZ5605 Standard recirculation kit

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **Metal Grease Filter:** cleans the air, captures grease, easy monthly clean-up.
- **Intensive speed setting with reset:** automatically resets the hood to normal speed setting

Typology: Built-in/Built-under
Length electrical supply cord: 150.0 cm
Required niche size for installation (HxWxD): ... 418mm x 496.0mm x 264mm mm
Minimum distance above an electric cooktop: 600 mm
Minimum distance above a gas cooktop: 650 mm
Net weight: 7.9 kg
Type of control: Electronic
Number of power settings: 3-stages + intensive setting
Max. air extraction: 560 m³/h
Boost position output recirculating: 581 m³/h
Max. air recirculation: 533 m³/h
Boost position air extraction: 610 m³/h
Number of lights: 2
Noise level: 67 dB(A) re 1pW
Diameter of air outlet: 150 / 120 mm
Grease filter material: Washable aluminium
EAN code: 4242005039876
Connection rating: 252 W
Fuse protection: 3 A
Voltage: 230 V
Frequency: 50 Hz
Plug type: AU plug
Installation typology: Built-in



4 242005 039876

Series 6, integrated rangehood, 52 cm, Stainless steel DHL575CAU

The integrated rangehood: offers a sleek and seamless design in the kitchen with fully integrated installation.

Design & Innovation

- Appliance colour: Stainless steel
- Accessory required for recirculation mode: Standard recirculation kit

Power and Mode of Operation

- 3 power settings plus intensive setting
- Extraction rate according to EN 61591 Ø 15 cm: max. Normal use 560 m³/h. Intensive 610 m³/h
- Twin channel high performance fan motor
- Noise min./max. Normal Level: 50/67 dB

Comfort & Convenience


- Dishwasher safe Metal grease filters
- Intensive operation automatic revert - 6min
- 2 x 1 Watt LED lights

2 year warranty


Dimensions (HxWxD)

- Dimensions exhaust air (HxWxD): 418-418 x 520 x 300 mm
- Dimensions recirculating (HxWxD): 418-418 x 520 x 300 mm
- Installation dimensions (HxWxD): 418 x 496 x 264 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.5 m
- Noise level according to EN 60704-3 exhaust air:
 - Max. normal use: 67 dB(A) re 1 pW
 - Intensive: 70 dB(A) re 1 pW


**Series 6, integrated rangehood, 52
cm, Stainless steel
DHL575CAU**

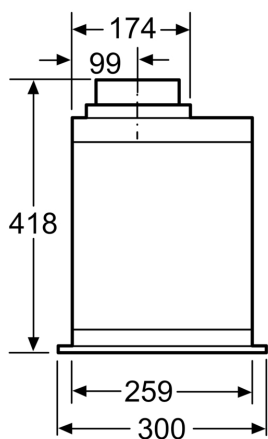

measurements in mm

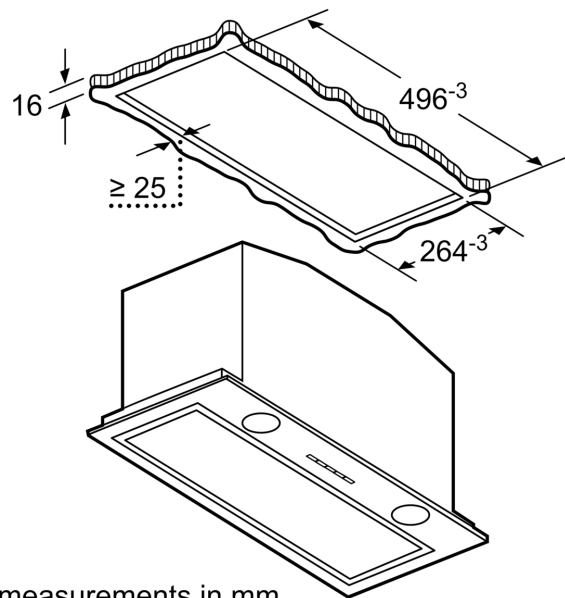


measurements in mm

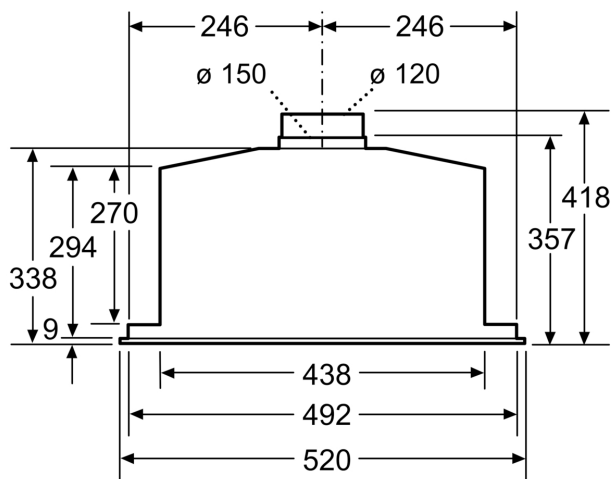

measurements in mm

Measurements in mm

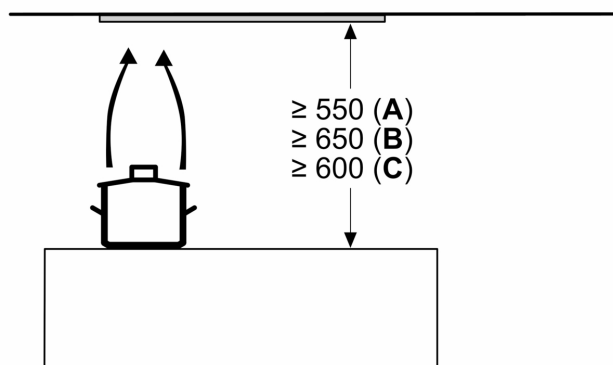

A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand