

Serie | 2, wall-mounted cooker hood,
60 cm, Stainless steel
DWP64BC50A



Optional accessories

DHZ5275 : Standard recirculation kit

Canopy hood: perfect performance
matching your kitchen.

- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes

Technical Data

Typology :	Chimney
Approval certificates :	Australia Standards, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	553-730/573-730
Height of product, without chimney (mm) :	246
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	7.796
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	365
Number of lights :	2
Noise level (dB) :	66
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242005100620
Connection Rating (W) :	100
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Wall-mounted



Serie | 2, wall-mounted cooker hood, 60 cm, Stainless steel DWP64BC50A

**Canopy hood: perfect performance matching
your kitchen.**

Design & Innovation

- Pyramid design
- Appliance colour: Stainless steel


Power and Mode of Operation

- 3 power settings via Push button
- Extraction rate exhaust air according to EN 61591: max. 365 m³/h
- Extraction rate in recirculation mode: Max. normal use: 211 m³/h
- Ducted and recirculated-air operation
- For recirculated extraction optional recirculation kit (accessory) needed
- Push button controls for power and light
- Twin channel high performance fan motor
- Noise min./max. Normal Level: 50/66 dB
- Noise level in recirculation mode: Max. normal use: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Energy Efficiency Class: D (at a range of energy efficiency classes from A++ to E)
- Average Energy Consumption: 53.1 kWh/year
- Power rating: 100 W

Comfort & Convenience

- Dishwasher safe metal grease filters
- 2 x 1.5W LED
- with one-way flap: prevents outside air from entering your kitchen
- Appliance width: 600 mm
- Dimensions exhaust air (HxWxD): 799-975 x 600 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 600 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m


Serie | 2, wall-mounted cooker hood, 60 cm, Stainless steel DWP64BC50A

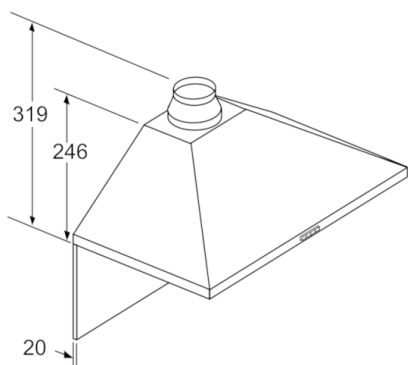


If a back panel is used,
the design of the appliance
must be considered.

measurements in mm

measurements in mm



- A: Socket
- B: Exhaust air: ≥ 280 ; circulated air: ≥ 490
- C: electric
- D: Gas, from upper edge of pan support

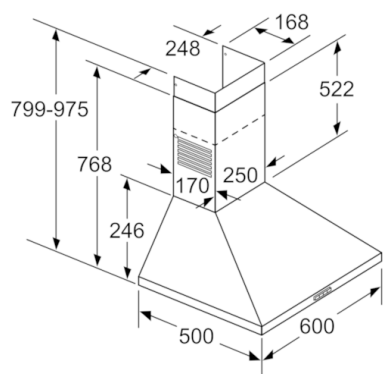

measurements in mm