

**Serie | 2, wall-mounted cooker hood,  
90 cm, Stainless steel  
DWP94BC50A**



**Optional accessories**

DHZ5275 : Standard recirculation kit

**Canopy hood: perfect performance  
matching your kitchen.**

- **Silent:** maximum extractor performance with little noise
- **LED lighting:** for perfect, energy-efficient illumination of the cooktop.
- With exhaust, the air is cleaned by a grease filter and then ducted to the outside which ensures optimal kitchen air quality.
- 3-Speed Power Level Options To Suit Your Cooking Style And Recipes

**Technical Data**

Typology :	Chimney
Approval certificates :	Australia Standards, VDE
Length electrical supply cord (cm) :	130
Height of the chimney (mm) :	553-730/573-730
Height of product, without chimney (mm) :	246
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	9.186
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	365
Number of lights :	2
Noise level (dB) :	65
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242005100644
Connection Rating (W) :	100
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	AU plug
Installation typology :	Wall-mounted



## **Serie | 2, wall-mounted cooker hood, 90 cm, Stainless steel DWP94BC50A**

**Canopy hood: perfect performance matching  
your kitchen.**

---

### **Design & Innovation**

- Pyramid design
- Appliance colour: Stainless steel

### **Power and Mode of Operation**

- 3 power settings via Push button
- Extraction rate exhaust air according to EN 61591: max. 365 m<sup>3</sup>/h
- Extraction rate in recirculation mode: Max. normal use: 213 m<sup>3</sup>/h
- Ducted and recirculated-air operation
- For recirculated extraction optional recirculation kit (accessory) needed
- Noise min./max. Normal Level: 50/65 dB
- Noise level in recirculation mode: Max. normal use: 67 dB(A) re 1 pW (54 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W


### **Comfort & Convenience**

- Dishwasher safe metal grease filters
- 2 x 1.5W LED
- with one-way flap: prevents outside air from entering your kitchen

### **Technical Information**

- Dimensions exhaust air (HxWxD): 799-975 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 900 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m


## Serie | 2, wall-mounted cooker hood, 90 cm, Stainless steel DWP94BC50A

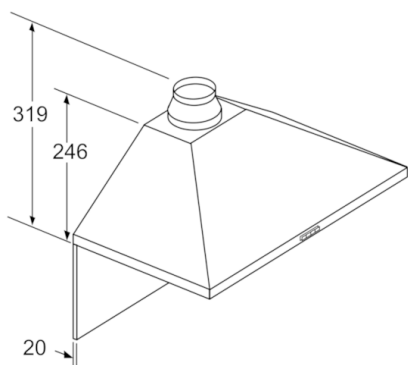


If a back panel is used,  
the design of the appliance  
must be considered.

measurements in mm

measurements in mm



- A: Socket
- B: Exhaust air:  $\geq 280$ ; circulated air:  $\geq 490$
- C: electric
- D: Gas, from upper edge of pan support

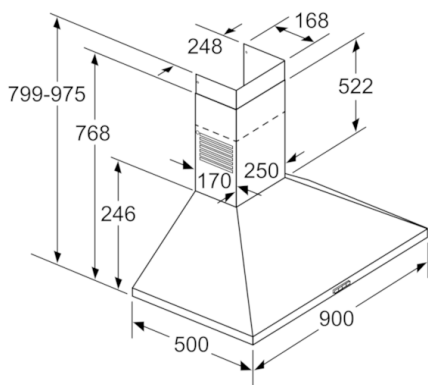

measurements in mm