

Series 4, Freestanding dual fuel cooker, Stainless steel HXR39KI50A



- **Cast Iron Pan Support** provides extra support for your heavier pots and pans.
- **Cleaning Assistance:** less cleaning effort thanks to the new cleaning option, which can be especially used for cleaning of light soiling.
- **Drop down door with SoftClose mechanism**
- **Red LED display control:** easy-to-use thanks to the time functions.

Built-in / Free-standing: Free-standing
 Color / Material Front: Stainless steel
 Dimensions (HxWxD): 850-865x600x600 mm
 Length electrical supply cord: 146.0 cm
 Net weight: 59.3 kg
 Gross weight: 63.7 kg
 EAN code: 4242005044788
 Number of cavities (2010/30/EC): 1
 Usable volume of cavity: 66 l
 Energy efficiency rating: A
 Energy consumption per cycle conventional (2010/30/EC): 0.98 kWh/cycle
 Energy consumption per cycle forced air convection (2010/30/EC): 0.79 kWh/cycle
 Energy efficiency index (2010/30/EC): 95.2 %
 Connection rating: 3300 W
 Fuse protection: 16 A
 Voltage: 220-240 V
 Frequency: 50-60 Hz
 Plug type: no plug



HEZ317000	Pizza pan, enamelled
HEZ327000	Pizza stone
HEZ333001	Lid for professional pan
HEZ333073	Professional pan, suit. pyrolytic clean.
HEZ431002	Baking tray, enamelled
HEZ438001	1 level telescopic shelf rails
HEZ438201	2 level telescopic shelf rails
HEZ438301	3 level telescopic shelf rails
HEZ625071	Grill tray, anthracite
HEZ864000	Glass tray
HEZ915003	Glass roasting dish, 5,4 L

Series 4, Freestanding dual fuel cooker, Stainless steel HXR39KI50A

Cooktop:

- 4 burners: 2 standard, 1 economy, 1 wok burner
- Front left: Wok burner 13.6 MJ/h
- Rear left: Standard burner 6.85 MJ/h
- Rear right: Standard burner 6.85 MJ/h
- Front right: Economy burner 4 MJ/h
- One-hand electronic ignition via controls
- Flame failure device fitted to each individual burner
- Enamelled cast-iron trivets with rubber feet

Heating Functions

OVEN

- Multi-function oven with 7 heating methods:
- Hotair gentle
- 3D Hotair Top/bottom heating Pizza setting Bottom heating Hot air grilling Grill - large area
- Temperature range 50 °C - 275 °C
- Cavity volume: 66 l

Racks and Rails

- Cavity with shelf support rails, 2 level telescopic shelf rails, partially extendable

Design

- Mechanical Control, LED-display control (red)

Cleaning

- EcoClean Direct: coating of ceiling, back panel, side liners
- Full glass inner door

Convenience

- Electronic clock/timer with LED display
- Fast heat
- Halogen lighting
- Standard drawer for kitchen utensils
- Height adjustable legs by 15 mm

Accessories

- 1 x enamel baking tray, 1 x universal pan, 2 x grid, 1 x grill tray, 1 x wok attachment ring

Safety Features

- Triple glazed door
- Child lock

Technical Information


- Length of mains cable: 146 cm
- Nominal voltage: 220 - 240 V
- Total connected load electric: 3.3 KW
- Total connected load gas: 8 KW
- Preset of natural gas (10mbar)

Dimensions


- Appliance dimensions (HxWxD): 850 mm x 600 mm x 600 mm
- Suitable for natural gas and LPG

2 year warranty

**Series 4, Freestanding dual fuel
cooker, Stainless steel
HXR39KI50A**

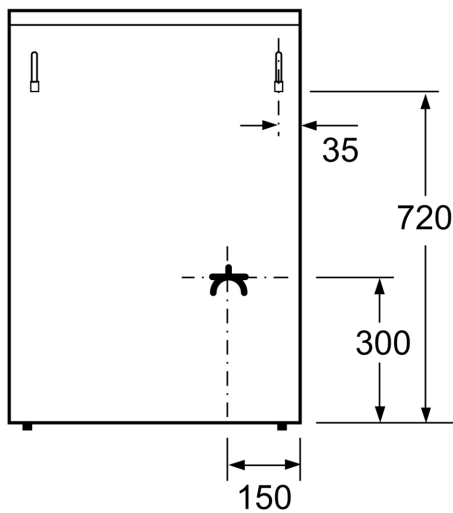


Measurements in mm

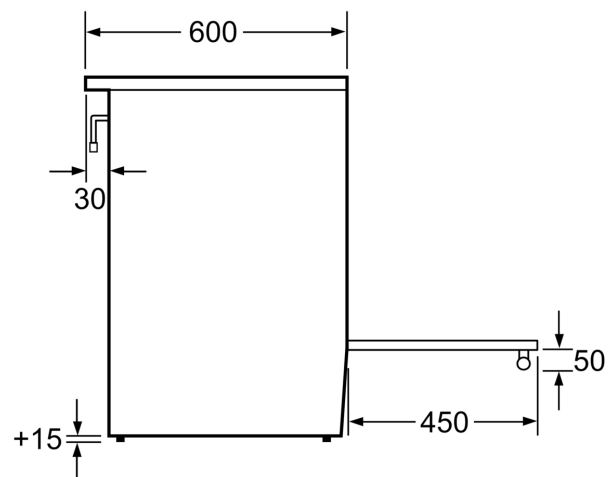


Measurements in mm

measurements in mm

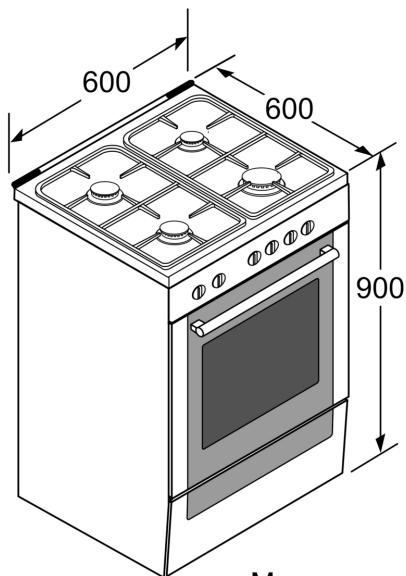

Measurements in mm

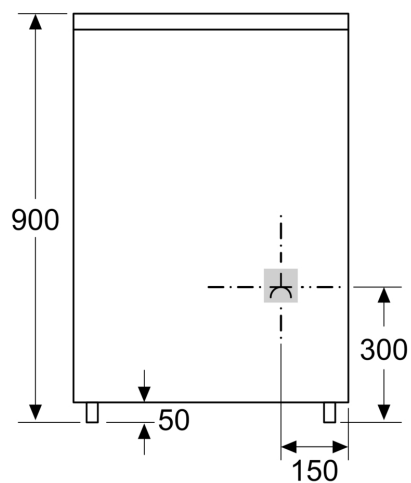

Socket