


Series 8, Electric Cooktop, 60 cm, surface mount with frame PKN675DB1A

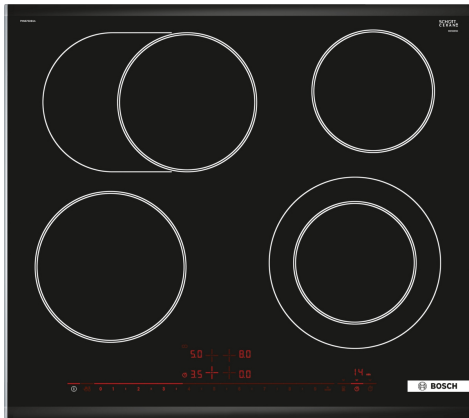

The glass-ceramic radiant hob: makes cooking and cleaning especially easy.

- **DirectSelect Premium:** direct, simple selection of the desired cooking zone, power and additional functions.
- **Restart:** restores cooktop settings in case of an unintentional switch-off.
- **Timer with switch-off function:** turns off the assigned cooking zone after the set time.
- **Child Lock:** locks the control panel to prevent unauthorized use.
- **Energy consumption display:** shows energy consumption for the most recent cooking process.

HEZ32WA00 Wireless food thermometer
HEZ390090 Wok Set consisting of 3 Items
HEZ394301 Connecting strip
HEZ9SE030 Set of 2 pots and 1 pan

Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 4
Required niche size for installation (HxWxD): 44 x 560-560 x 500-500 mm
Width of the appliance: 606 mm
Dimensions (HxWxD): 44x606x527 mm
Dimensions of the packed product (HxWxD): 100 x 750 x 590 mm
Net weight: 6.9 kg
Gross weight: 8.9 kg
Residual heat indicator: separate
Location of control panel: Front
Basic surface material: Ceramic glass
Color of surface: Black, Alu, brushed
EAN code: 4242002843889
Voltage: 220-240 V
Frequency: 60; 50 Hz



4 242002 843889

Series 8, Electric Cooktop, 60 cm, surface mount with frame PKN675DB1A

- Connected load: 7.5 KW

The glass-ceramic radiant hob: makes cooking and cleaning especially easy.

- 60 cm Cooktop Radiant: space for 4 pots or pans. 60 cm: space for 4 pots

Flexibility of cooking zones

- Ring zone double: use regular or larger cookware on the expandable cooking zone.
- Cooking zone front left: 180 mm, 2 KW
- Cooking zone rear left: 170 mm, 265 mm, 1.8 KW
- Cooking zone rear right: 145 mm, 1.2 KW
- Cooking zone front right: 145 mm, 210 mm, 1 KW

Usage convenience

- Direct Select Premium Touch Control: directly control the power on the extra large illuminated touch bar (invisible when switched off).
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm function - low setting for keeping food warm at the touch of a button: keep dishes warm at preset low power level.
- Timer with automatic switch off for all zones: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).
- Count-up timer: shows how much time has passed since starting the timer (e.g. for potatoes).

Time saving & efficiency

- Automatic boil start - heats the hotplate using the highest setting and then switches automatically to the lower setting previously selected.: boil water more quickly than at the highest regular power level.
- ReStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.

Design

- Stainless steel side profiles with beveled front

Safety


- Digital 2-stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- WipeProtection: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Power on indicator: indicates if the cooktop is heating.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.
- Energy consumption display: shows the electricity consumption of the last cooking process.

Installation

- Dimensions of the product (HxWxD mm): 44 x 606 x 527
- Required niche size for installation (HxWxD mm) : 44 x 560 x (500 - 500)
- Min. worktop thickness: 16 mm

**Series 8, Electric Cooktop, 60 cm,
surface mount with frame
PKN675DB1A**

measurements in mm

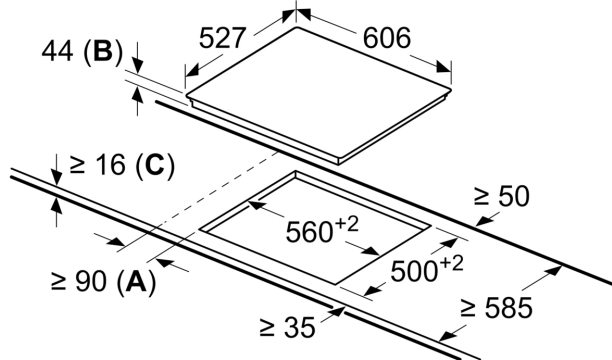

- A:** Minimum distance from the hob cut-out to the wall.
- B:** Recessed depth
- C:** With fitted oven underneath min. 20, possibly more; see space requirements for the oven.