


**Series 6, Gas cooktop, 75 cm,
Tempered Glass, Black
PPQ7A6B21A**

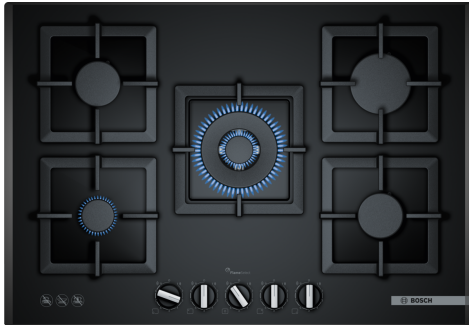

HEZ211310 Simmer cap
HEZ298105 Simmer plate

**The tempered-glass gas cooktop with
FlameSelect: achieve perfect cooking
results thanks to nine precisely defined
power levels.**

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input:Gas
 Total number of positions that can be used at the same time: 5
 Type of control setting devices:Sword knobs
 Min. required niche size for installation (HxWxD):45 x 560-562 x
 480-492 mm
 Width of the appliance:752 mm
 Dimensions (HxWxD): 58x752x520 mm
 Dimensions of the packed product (HxWxD): 145 x 793 x 597 mm
 Net weight:18.5 kg
 Gross weight: 20.0 kg
 Residual heat indicator: without
 Location of control panel: Front
 Basic surface material: Tempered Glass
 Color of surface:Black
 Color of frame: Black
 Length electrical supply cord: 100.0 cm
 EAN code:4242005429745
 Gas connection rating: 11500 W
 Fuse protection:3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz





**Series 6, Gas cooktop, 75 cm,
Tempered Glass, Black
PPQ7A6B21A**

**The tempered-glass gas cooktop with
FlameSelect: achieve perfect cooking
results thanks to nine precisely defined
power levels.**

Design

- Black, Tempered Glass surface
- Single pan supports, cast iron

Usage convenience

- FlameSelect (9 steps): precisely adjust the flame in nine defined and consistent levels.
- sword knobs: easily access knobs in front with strong grip for effortless turning.
- One-hand electronic ignition via controls: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Left front: Economy burner up to 4 Mj/h (depending on gas type)
- Left rear: Standard burner up to 6.5 Mj/h (depending on gas type)
- Center front: Dual flame wok burner up to 15 Mj/h (depending on gas type)
- Right rear: High-speed burner up to 11 Mj/h (depending on gas type)
- Right front: Standard burner up to 6.85 Mj/h (depending on gas type)

Safety

- Flame failure device fitted to each individual burner: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm

Accessories

- 1 x Wok attachment ring, cross support for espresso included
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included.
- Power cord 1 m with plug.