


**Series 6, Gas cooktop, 90 cm,
Tempered Glass, Black
PPS9A6B91A**

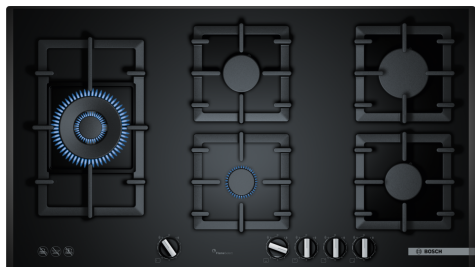

HEZ298105 Simmer plate

**The tempered-glass gas cooktop with
FlameSelect: achieve perfect cooking
results thanks to nine precisely defined
power levels.**

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Wok burner:** powerful cooking at up to 4 kW (depending on gas type).
- **Semi-continuous cast-iron pan support:** for high stability and easy cleaning.
- **Sword knobs:** for an ergonomic control.
- **Surface colour:** elegant black tempered-glass design.

Product name/family:gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Energy input:Gas
 Total number of positions that can be used at the same time: 5
 Type of control setting devices:Sword knobs
 Min. required niche size for installation (HxWxD):45 x 850-852 x 490-502 mm
 Width of the appliance:915 mm
 Dimensions (HxWxD): 58x915x520 mm
 Dimensions of the packed product (HxWxD): ... 165 x 1116 x 659 mm
 Net weight:22.8 kg
 Gross weight: 25.0 kg
 Residual heat indicator: without
 Location of control panel: Front
 Basic surface material: Tempered Glass
 Color of surface:Black
 Color of frame:Black
 Length electrical supply cord: 150.0 cm
 EAN code:4242005429752
 Gas connection rating: 11500 W
 Fuse protection:3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



Series 6, Gas cooktop, 90 cm, Tempered Glass, Black PPS9A6B91A

**The tempered-glass gas cooktop with
FlameSelect: achieve perfect cooking
results thanks to nine precisely defined
power levels.**

Design

- Black, Tempered Glass surface
- Single pan supports, cast iron

Usage convenience

- FlameSelect (9 steps): precisely adjust the flame in nine defined and consistent levels.
- sword knobs: easily access knobs in front with strong grip for effortless turning.
- One-hand electronic ignition via controls: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Left: Wok burner up to 15 Mj/h (depending on gas type)
- Center front: Economy burner up to 3.8 Mj/h (depending on gas type)
- Center rear: Standard burner up to 6.85 Mj/h (depending on gas type)
- Right rear: High-speed burner up to 11 Mj/h (depending on gas type)
- Right front: Standard burner up to 6.85 Mj/h (depending on gas type)

Safety

- Flame failure device fitted to each individual burner: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Dimensions of the product (HxWxD mm): 58 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm

Accessories

- 1 x Wok attachment ring, cross support for espresso included
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included.
- Power cord 1.5 m with plug.