


**Series 4, Induction cooktop, 60 cm,  
surface mount without frame  
PUE611BB5H**

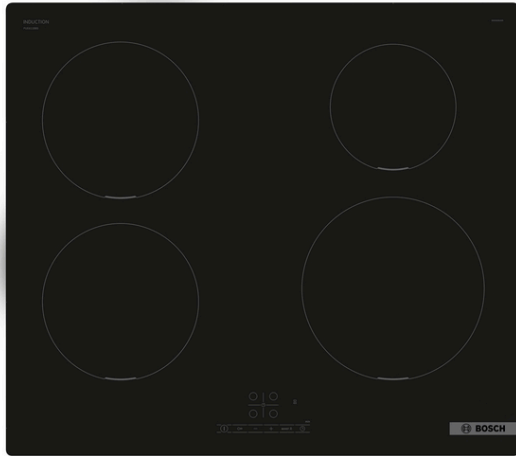

**Optional accessories**

HEZ32WA00 : Wireless food thermometer  
HEZ9FE280 : Iron pan Ø 18 / 28 cm  
HEZ9SE030 : Set of 2 pots and 1 pan  
HEZ9SE060 : 6 pieces Set

**The induction cooktop: fast, safe and  
energy-efficient cooking that's easy to  
clean.**

- **17 power levels:** offer precise and flexible heat control for every cooking need.
- **TouchSelect +/-:** lets you easily select the cooking zone and adjust the power level with simple touch control.
- **Power Boost:** up to 35% faster heating compared to highest power level.
- **Ceramic glass:** offers a slim, durable surface that's stylish and easy to clean.
- **Quick Start:** start straight away and select the desired cooking level.

**Technical Data**

Product name/family : Cooking zone ceramic  
Built-in / Free-standing : Built-in  
Energy input : Electric  
Total number of positions that can be used at the same time : 4  
Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500 mm  
Width of the appliance : 592 mm  
Dimensions (HxWxD) : 51x592x522 mm  
Dimensions of the packed product (HxWxD) : 130x753x610 mm  
Net weight : 9.8 kg  
Gross weight : 11.6 kg  
Residual heat indicator : separate  
Location of control panel : Front  
Basic surface material : Ceramic  
Color of surface : Black  
Length electrical supply cord : 110 cm  
EAN code : 4242005484843  
Voltage : 220-240 V  
Frequency : 50; 60 Hz



4 242005 484843

## **Series 4, Induction cooktop, 60 cm, surface mount without frame PUE611BB5H**

**The induction cooktop: fast, safe and energy-efficient cooking that's easy to clean.**

- 60 cm cooktop: space for 4 pots or pans

### **Flexibility of cooking zones**

- Cooking zone front left: 180 mm, 1.8 KW (max. power 3.1 KW)
- Cooking zone rear left: 180 mm, 1.8 KW (max. power 3.1 KW)
- Cooking zone rear right: 145 mm, 1.4 KW (max power 2.2 KW)
- Cooking zone front right: 210 mm, 2.2 KW (max. power 3.7 KW)

### **Comfort & Convenience**

- Electronic TouchSelect +/- controls: control the power with imprinted +/- touch buttons.
- 17 power levels for each cooking zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Switch-off timer: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Count-down timer: an alarm sounds at the end of the time set (e.g. for pasta).

### **Time saving & efficiency**

- Power Boost for all zones : boil water faster with up to 50% more power than at the highest standard level.
- QuickStart: Quick and automatic first pot detection: when switching on, the cooktop automatically selects the cooking zone with cookware on it.
- ReStart - Quickly reinstates previous settings: in case of unintentional switch-off, restore all previous settings by switching on the cooktop again within 4 seconds.
- Quick Stop: quickly switch off a cooking zone with one longer touch.

### **Design**

- Frameless: slightly raised installation without metal trim.

### **Safety**


- Digital 2-stage residual heat indicator: indicates which cooking zones are still hot or warm.
- Childproof lock: prevent unintended activation of the cooktop.
- Main switch: switch off all cooking zones at the touch of a button.
- Automatic safety switch-off: for safety reasons, heating stops after a preset time without interaction.

### **Installation**


- Dimensions of the product (HxWxD mm): 51 x 592 x 522
- Required niche size for installation (HxWxD mm) : 51 x 560 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 4.6 KW
- Power cord: 1.1 m, connected directly
- PowerManagement Function: enables the total power of the cooktop to be limited if necessary (for suitability and installation, consult a licensed electrician).

## Series 4, Induction cooktop, 60 cm, surface mount without frame PUE611BB5H

Measurements in mm

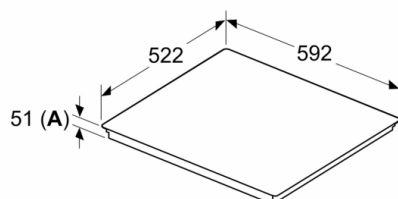

Measurements in mm



A: Min. distance from the hob cut-out to the wall


B: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm

See space requirements for the oven


C	D	E
585-600	50	≥ 35
> 600	≥ 50	≥ 50

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required

A: Recessed depth

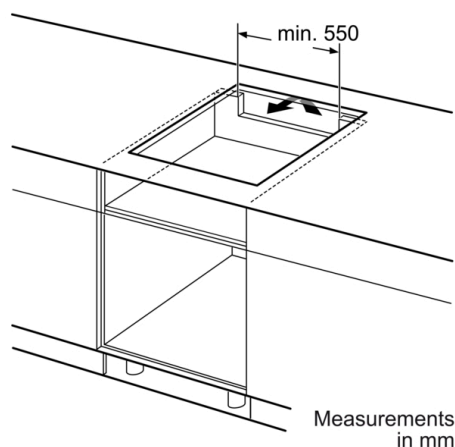


Measurements in mm

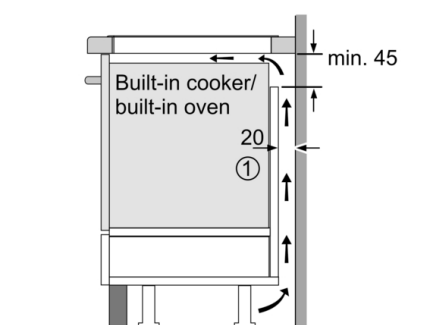

① Ventilation gap must be present

All measurements in mm

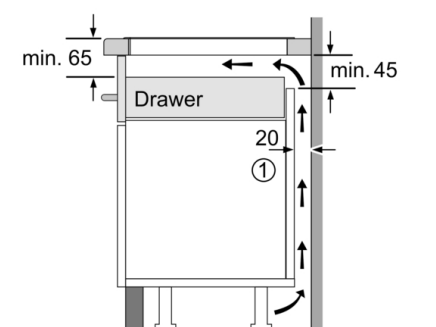

① Ventilation gap must be present.

Measurements in mm