


**500 Series, Canopy cooker hood,  
Stainless steel  
DHL755BUC**

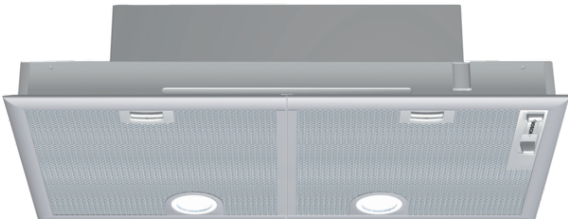

**Create a Seamless Design That Blends  
With the Surrounding Cabinetry With This  
Custom Insert Hood.**

- Dishwasher safe aluminum mesh filters
- 400 CFM Blower Included
- 2 Halogen Lights - 12 Volt, 20 Watt Max., G-4 Base

**Technical Data**

Operating Mode :	Ducted
Number of lights :	2
Type of lamps used :	Halogen
Total power of the lamps (W) :	40
Grease filter material :	Washable aluminium
Grease filter type :	Multilayer cassette
UPC code :	825225853299
Watts (W) :	270
Volts (V) :	120
Frequency (Hz) :	60
Approval certificates :	CSA, ETL, UL
Power cord length (cm) :	150
Plug type :	120V-3 prong
Overall appliance dimensions (HxWxD) (in) :	6 1/4 " / x 28 11/16 " x
Overall appliance dimensions (HxWxD) (mm) :	159 MM x 730.0 x 380.0
Product packaging dimensions (HxWxD) (in) :	11.81 x 31.49 x 17.32
Product packaging dimensions (HxWxD) (mm) :	300 x 800 x 440
Required distance above cooktop/ranges :	30 "/30 "
Net weight (lbs) :	24.000
Net weight (kg) :	10.730
Gross weight (lbs) :	26.000
Gross weight (kg) :	11.9
Motor location :	Integrated motor in hood body
Maximum CFM :	400
Diameter of air duct (in) top :	6
No-return airflow flap :	No

## **500 Series, Canopy cooker hood, Stainless steel DHL755BUC**

**Create a Seamless Design That Blends With the Surrounding Cabinetry With This Custom Insert Hood.**

---

### **Performance**

- Four Power Levels
- Quickly and Quietly Clears the Air of Smoke and Odor

### **Convenience**

- Dishwasher-safe Mesh Filters
- Slide Switch Control
- 2 Halogen Lights - 12 Volt, 20 Watt Max., G-4 Base

### **Key Features**

#### **Design**

#### **Efficiency**

- This Sophisticated Ventilation System Can be Used in Wall Installations
- 6" round duct at discharge.

**500 Series, Canopy cooker hood, Stainless steel**  
**DHL755BUC**

