

**800 Series, Single Wall Oven, 30",  
Stainless Steel  
HBL8451UC**



HEZTR301 Telescopic Oven Rack 30"

**The Bosch Wall Oven Installs Flush and  
Features a QuietClose® Door**

- **Top-/Bottom heat:** perfect results on one level thanks to optimal distribution of heat.
- **Self-Clean Mode:** cleans the oven with a 2,3, or 4 hour self-clean cycle
- **Flap door with SoftClose:** the oven door closes especially gently and quietly.
- **Convection Multi-Rack:** uses a third heating element and fan to evenly circulates air around the cavity so you get consistently even results.
- **TFT Display:** easily switch between oven modes on this easy to see control panel -- featuring SteelTouch™ Buttons.

UPC code: ..... 825225906513  
 Product color: ..... Stainless Steel  
 Alternative colors available: ..... HBL8461UC  
 Energy source: ..... Electric  
 Watts: ..... 5000 W  
 Fuse protection: .....30 A  
 Volts: ..... 240/208 V  
 Frequency: ..... 60 Hz  
 Power Cord Length: ..... 50"  
 Power cord length: ..... 127.0 cm  
 Plug type: .....no plug, fixed connection  
 Required Cutout Size (HxWxD) (in): 27" - 28 5/8" x 28 1/2" x 23 1/2"  
 Dimensions: ..... 737x755x622 mm  
 Product Packaging Dimensions (HxWxD): ..... 31 1/4" x 34" x 31 1/2"  
 Product packaging dimensions (HxWxD): .....863 x 863 x 787 mm  
 Net Weight: ..... 177.000 lbs  
 Net Weight: ..... 80.2 kg  
 Gross Weight: .....193.000 lbs  
 Gross weight: ..... 87.5 kg



## **800 Series, Single Wall Oven, 30", Stainless Steel HBL8451UC**

### **The Bosch Wall Oven Installs Flush and Features a QuietClose® Door**

---

#### **Design**

- Touch control with SteelTouch™ Buttons for Easier Operation of the Oven

#### **Performance**

- Industrial-style design heavy-duty metal knobs have a premium look and feel
- Custom Cooking Modes: Pizza, Pie, Warm and Proof
- Genuine European Convection for Even Baking Results on Multiple Racks.
- Temperature Conversion for Convection Cooking
- Meat Probe Takes Guesswork out of Cooking
- Fast Preheat Reduces Preheat Time

#### **Efficiency**

- EcoClean™ 2-Hour Self-Clean Cycle


#### **Convenience**

- Two Oven Lights to Better Monitor Cooking Progress
- Timer with Cook Time and Delay Start Function
- Extra Large Door Window for Easy Monitoring of Cooking Process
- Star-K certified. 100°-450° F

#### **Capacity**


- Large Capacity at 4.6 Cu Ft.
- Recessed 8 Pass Broil Element for Increased Capacity and Safety

## 800 Series, Single Wall Oven, 30", Stainless Steel HBL8451UC

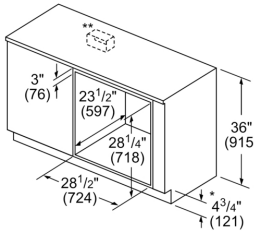

\* Includes  $\frac{3}{4}$ " (19) base plate  
 \*\* For single ovens installed under a worktop, the junction box may be located to the left or right of the unit within reach of the power cable.


measurements in inches (mm)

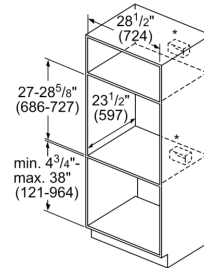


\* For single ovens installed in a wall cabinet, the junction box may be located above or beneath the unit within reach of the power cable.

measurements in inches (mm)

### Flush installation Top view

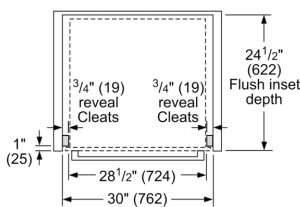


### Side view

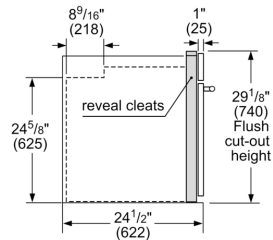

measurements in inches (mm)

### Flush installation Single oven over storage or warming drawer

#### Side view

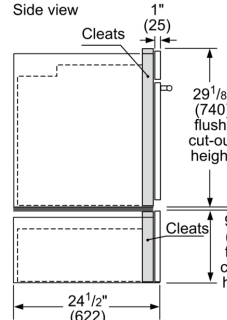

Single wall oven


\*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum  $\frac{1}{2}$ " (13) required between cut-outs\*

Warming drawer

measurements in inches (mm)

### Standard installation 30" single oven over storage or warming drawer

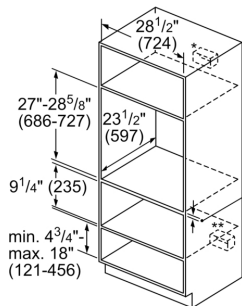

\* Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.


\*\* Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.

minimum  $\frac{3}{4}$ " (18) required between cut-outs

measurements in inches (mm)

### Flush installation Single oven over storage or warming drawer

#### Side view

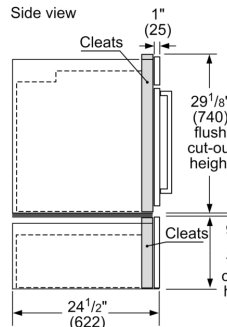

Single wall oven


\*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.

minimum  $\frac{1}{2}$ " (13) required between cut-outs\*

Warming drawer

measurements in inches (mm)


**Standard installation**  
30" steam convection oven over single oven\*\*\*

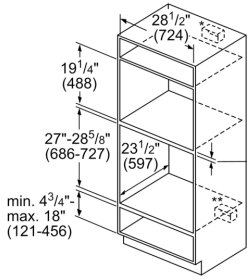

- \* Junction box may be located above or next to the unit within reach of the power cable.
- \*\* Junction box may be located below (depending on space) or next to the unit within the reach of the power cable.
- \*\*\* Most combinations available as combo oven (one cut-out, one electrical hook-up).
- Minimum dimension between cut-outs:
  - 1" (25) for wall oven cut-out of 28<sup>5</sup>/<sub>8</sub>"
  - 2<sup>3</sup>/<sub>8</sub>" (67) for wall oven cut-out of 27"

measurements in inches (mm)

**Flush installation**  
Steam convection oven over single oven\*\*

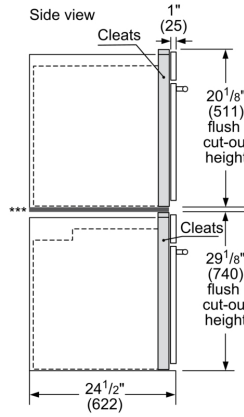

- \*\*\* Flush installation requires a base plate underneath the body: 30" products – Dimensions: H 5<sup>1</sup>/<sub>16</sub>" (8) x W 28<sup>1</sup>/<sub>2</sub>" (724) x D 22<sup>1</sup>/<sub>2</sub>" (571)
- minimum 1/2" (13) required between cut-outs\*
- \*IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements.
- \*\* Most combinations available as combo oven (one cut-out, one electrical hook-up).

measurements in inches (mm)