

## 500 Series, Pull-out Hood, 36" HUI56551UC



### Optional accessories

HUIF06UC : Recirc Kit/Filter for HUI, 30" & 36"

HUIRED56UC : CFM Reducer for HUI Pull-Out, 36" Wide

**This sleek, 36" integrated pull-out hood allows you to close the hood when not in use, providing a flush-look with cabinetry**

- 5 Exhaust Connections Possible (Transition Sold Separately)
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- Absorb odors with Charcoal Replacement Filters (Available for sale)
- Blowers sold separately - Integrated , inline or Remote blowers to customize

### Technical Data

Operating Mode :	Convertible: Ducted / Recirculating
Number of speed settings :	3-stage
Optional accessories :	HUIF06UC, HUIRED56UC
Number of lights :	2
Type of lamps used :	Halogen
UPC code :	825225920533
Material :	Stainless steel
Watts (W) :	370
Current (A) :	15
Volts (V) :	120
Frequency (Hz) :	60
Power cord length (in) :	50"
Power cord length (cm) :	127
Plug type :	fixed connection
Overall appliance dimensions (HxWxD) (in) :	/ x 35 7/8" x
Overall appliance dimensions (HxWxD) (mm) :	x 911.0 x 279.0
Product packaging dimensions (HxWxD) (in) :	16.92 x 40.55 x 18.11
Product packaging dimensions (HxWxD) (mm) :	430 x 1030 x 460
Net weight (lbs) :	37.000
Net weight (kg) :	16.993
Gross weight (lbs) :	42.000
Gross weight (kg) :	19.1
Motor location :	Integrated motor in hood body
Diameter of air duct (in) top :	6
Diameter of air duct (in) back :	6
Discharge direction :	vertical
No-return airflow flap :	No

## **500 Series, Pull-out Hood, 36" HUI56551UC**

**This sleek, 36" integrated pull-out hood allows you to close the hood when not in use, providing a flush-look with cabinetry**

---

### **Design**

- The Pull-Out Hood Visor Fully Extends During Use, and Neatly Tucks Away When not Needed
- Front Stainless Steel Visor Panel can be Replaced with the User's Own Custom Strip to Match Surrounding Cabinetry (Custom Strip Not Provided)

### **Performance**

- 500 CFM Integrated Blower Included
- Three Speed Slider Control
- 2 Halogen Lights - 120 V, 20 Watt Max., G-4 Base
- 6 inch Round Duct at Discharge


### **Efficiency**

- Absorbs odors with charcoal replacement filters (Separate Purchase Required)



### **Convenience**

- Aluminum Mesh Filters are dishwasher safe for ease of cleaning
- Converts to Recirculation Mode with Accessory Kit (Separate Purchase Required)
- For areas with Make-Up Air Requirements, our CFM Reducer Kit reduces the CFM to under 300 (Separate Purchase Required)


## 500 Series, Pull-out Hood, 36" HUI56551UC

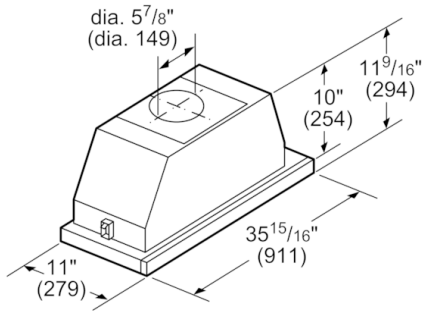

measurements in inches (mm)

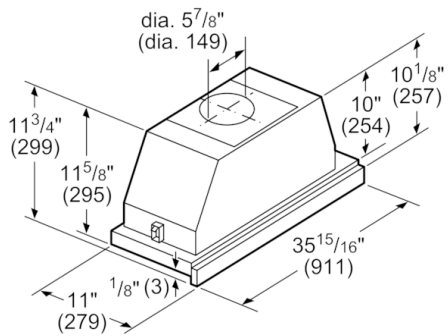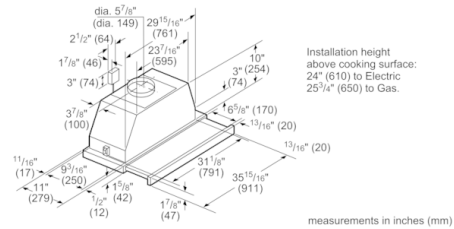

measurements in inches (mm)

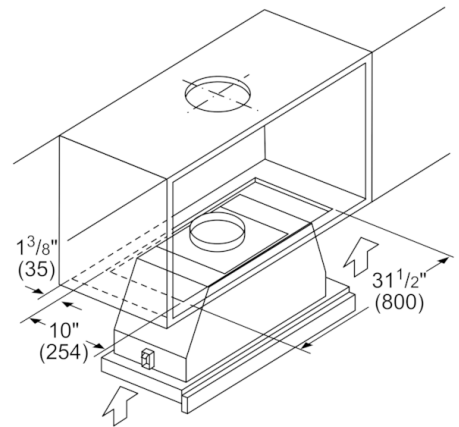

measurements in inches (mm)