

Dishwasher, 24", Stainless steel SHE3ARF5UC



- Quietest Dishwasher Brand.
- Saves up to 280 gallons of water each year
- Self-Latching Door Stays Put and Latches
- Red Remaining Time Display
- Delicate Wash for Fine China

UPC code: 825225899051
 Color: Stainless steel
 Panel ready: No
 Alternative colors available: SHE3ARF2UC, SHE3ARF6UC
 Watts: 1400 W
 Fuse protection: 12 A
 Volts: 120 V
 Frequency: 60 Hz
 Total Annual Energy Consumption: 269 kWh
 ENERGY STAR®: Yes
 Plug type: fixed connection
 Required Cutout Size (HxWxD) (in): 33 7/8" x 24" x 24"
 Min. required cutout size (HxWxD): 860-890 x 610 x 610 mm
 Overall appliance dimensions (HxWxD): 860 x 598 x 573 mm
 Length Outlet Hose (in): 90 1/2"
 Length outlet hose: 230 cm
 Product Packaging Dimensions (HxWxD): 35 7/8" x 26 7/8" x 26"
 Product packaging dimensions (HxWxD): 930 x 670 x 660 mm
 Tub Material: Stainless steel with Polinox base
 ADA Compliant: No
 Number of Place Settings: 14



- SGZ1010UC Drain hose extension kit
- SGZ1052UC Dishwasher Accessory Kit
- SGZPC001UC Powercord kit
- SMZ4000UC silverware basket US Duo

Dishwasher, 24", Stainless steel SHE3ARF5UC

Key Features

- Quietest Dishwasher Brand.
- Saves up to 280 gallons of water each year
- Self-Latching Door Stays Put and Latches
- Red Remaining Time Display
- Delicate Wash for Fine China

Design

- Stainless Steel TallTub w/ *PP
- Silver Colored Fascia in Stainless Steel

Performance

- 5 Wash Cycles and 3 Options
- Sanitize Option eliminates bacteria and enhances drying results
- Variable Spray Pressure

Efficiency

- 269 kWh/yr - Energy Star®
- Exceeds ENERGY STAR Requirements for Water by 69%
- EcoSense™ Reduces Energy Usage by up to 20%


Convenience

- Bosch Exclusive 24/7 Overflow Leak Protection
- 24 h Delay Start Timer
- SpeedCycle

Capacity

- 14 Place Setting Capacity
- 300 Series Racks
- Duo-Flex Silverware Basket
- Manual Height Adjustment for Upper Rack

Dishwasher, 24", Stainless steel SHE3ARF5UC

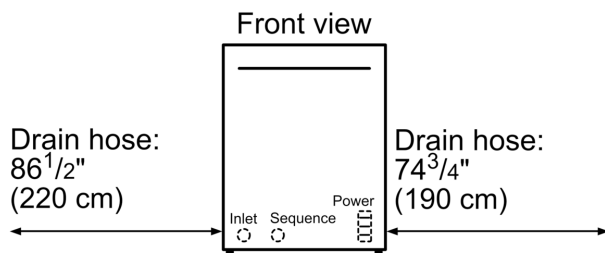

The electric connection socket and the water inlet are located on the front of the appliance, the outlet on the rear.