


Series 4, Induction hob, surface mount without frame PUE611BB5E

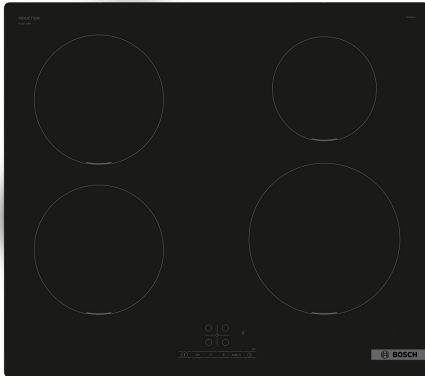

The induction hob: cook fast, clean and safely while using very little energy.

- **17 Power Levels for Each Cooking Zone**
- **Touch Select:** selection of the desired cooking zone and easy setting of the desired power level.
- **PowerBoost:** Up to 50% more power for faster heating.
- **Quick Start:** start straight away and select the desired cooking level.
- **Restart:** restores hob settings in case of an unintentional hob switch-off.

Product name/family: Cooking zone ceramic
 Built-in / Free-standing: Built-in
 Energy input: Electric
 Total number of positions that can be used at the same time: 4
 Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
 Width of the appliance: 592 mm
 Dimensions: 51x592x522 mm
 Dimensions of the packed product (HxWxD): 130x753x610 mm
 Net weight: 10.5 kg
 Gross weight: 11.6 kg
 Residual heat indicator: yes
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black
 Length electrical supply cord: 110 cm
 Sealed Burners: No
 Power Boost: All cooking zones
 Power of heating element (kW): 1800.0 W
 Power of 5th heating element (kW): 1400.0 W
 Power of 3rd heating element (kW in boost): [3.1] kW
 Power of 5th heating element (kW in boost): [2.2] kW
 Connection rating: 4600 W
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Universal Product Code: 825225988021
 Energy input: Electric
 Plug type: No plug (electrical connection by electrician)
 Appliance Dimensions (h x w x d) (in): x x
 Dimensions of the packed product: 5.11 x 24.01 x 29.64
 Net weight: 23.000 lbs
 Gross weight: 26.000 lbs
 Total number of positions that can be used at the same time: 4
 Length electrical supply cord: 110 cm
 Required niche size for installation (HxWxD): 51 x 560-560 x 490-500 mm
 Dimensions: 51x592x522 mm
 Dimensions of the packed product (HxWxD): 130x753x610 mm
 Net weight: 10.5 kg
 Gross weight: 11.6 kg




4 242005 285082



**Series 4, Induction hob, surface
mount without frame
PUE611BB5E**


**The induction hob: cook fast, clean and
safely while using very little energy.**

Series 4, Induction hob, surface mount without frame PUE611BB5E

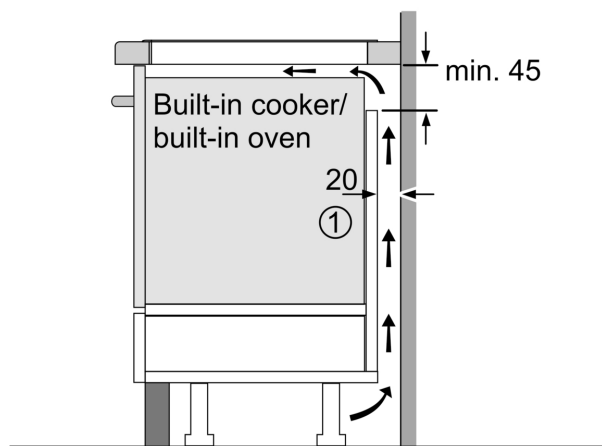


①
Ventilation gap must
be present

All measurements in mm

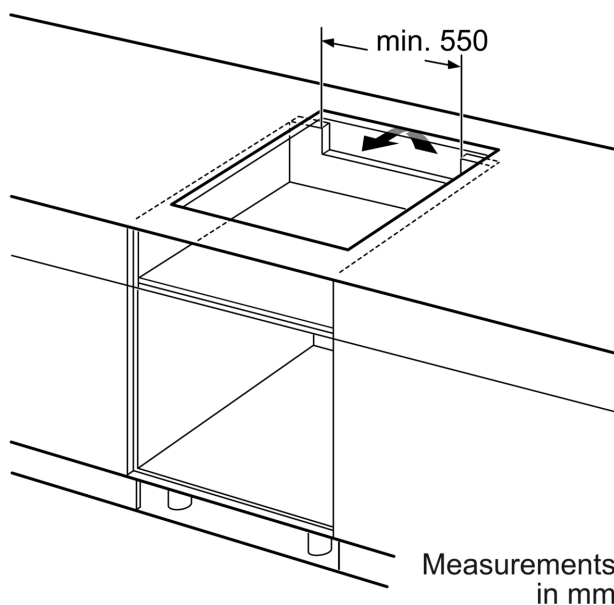


Measurements
in mm



A: Minimum distance from the hob cut-out to the wall.
B: Recessed depth.
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

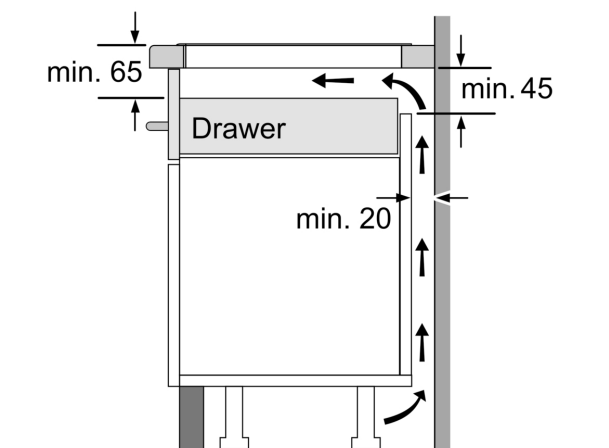

Measurements in mm