

Series 8, Built-in fully automatic coffee machine, Stainless steel CTL636ES1



Optional accessories

TCZ7003Accessories small appliancesTCZ8001ACleaning tabletsTCZ8002ADescaling tabletsTCZ8004ACare set espressoTCZ8009Ninsulated milk containerY988081012 :Y988081300 :Y988081302 :Y988081303 :

The built-in coffee center with OneTouch Function: offers great variety and highest versatility.

- AromaDouble Shot: Extra-strong coffee without the bitterness thanks to two specialised grinding and brewing processes
- CeramDrive: High quality, durable ceramic grinder
- Intelligent Heater inside: Perfect brewing temperature and full aroma with the SensoFlow System
- **OneTouch DoubleCup**: Your choice of espresso or milk drinks with a click even two cups at once.
- **OneTouch Function**: All espresso drinks at the touch of a button whether espresso or cappuccino.

Technical Data

Built-in / Free-standing:Built-in
Frothing nozzle:No
Display: No
Water protection system: No
Portion sizes:All cups
Dimensions:
Dimensions of the packed product (HxWxD): 550 x 480 x 670 mm
Min. required niche size for installation (HxWxD):449 x 558 x 356
mm
EAN code:
Fuse protection:10 A
Voltage:
Frequency:
Plug type: Gardy plug w/ earthing





Series 8, Built-in fully automatic coffee machine, Stainless steel CTL636ES1

The built-in coffee center with OneTouch Function: offers great variety and highest versatility.

Flavour

- "sensoFlow system" Innovative heating system
- One-touch function for Cappuccino, Espresso macchiato, Latte macchiato, Caffè Latte, personalised milk mix beverage
- aromaDouble Shot Extra strong coffee without compromise in aroma
- Beverage temperature adjustable individually: Coffee: 3 levels, Hot water: 4 grades

Convenience

- TFT display with interactive menu
- 8 personalised beverages Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso
- 20-250 ml
- Cappuccino: Prepare two cups simultaneously for all coffee varieties
- Removable 2.4 litre water tank
- Early warning when bean container or water tank are close to empty

Performance

- "silent ceram drive" Premium ceramic grinding unit
- coffeeSensor System: The grinding unit automatically adjusts to bean variety
- One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother
- In addition to beverages also available separately: milk foam, warm milk, hot water
- Reduced heat up time: fastest first cup
- Water pump with 19 bar pressure
- Separate container for pre-ground coffee

Hygiene

- Removable brewing unit: Easy and hygienic cleaning under running water
- steam blast: Fully-automatic steam cleaning of the milk system after every beverage
- All milk nozzle parts are easily removable, separable, easy to clean and dishwasher proof
- Single portion cleaning: Complete emptying of all pipes after each brewing process
- Automatic quick rinse programme when switched on or off
- Removable drip tray including container for coffee grounds
- Fully automatic descaling & cleaning programme
- Display of remaining cups before Descaling, Cleaning, Change of water filter
- Containers for water, milk and coffee beans are easily accessible but hidden behind a door, so the kitchen always looks clean
- Bean container with aroma preserving lid for up to 500grams
- Illumination for keys, yes, no
- Adjustable grind settings (multilevel)


- Different display languages available
- Child lock: prevents unintended use of machine
- Wattage: 1600 W


Accessories

- Separate milk container with thermally insulated aluminium housing (0.7 l volume)
- Included accessories: 1 x scoop, 1 x milk container (insulated), 1 x milk pipe, 9 x assembly screws, 1 x test strip, 1 x connection hose for milk frother




Series 8, Built-in fully automatic coffee machine, Stainless steel CTL636ES1

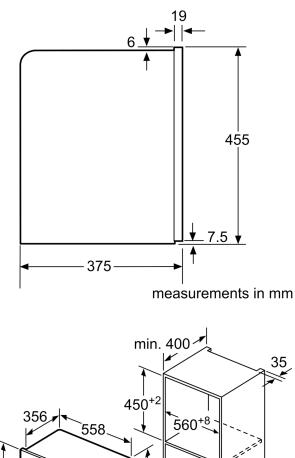




Bean and water containers are removed from the front. Recommended installation height 95-145 cm. measurements in mm



are removed from the front. Recommended installation height 95-145 cm. measurements in mm

left corner installation



If using the 92° hinge limiter (spare part no. 00636455), the minimum distance to the wall is only 100 mm. measurements in mm



