

**Serie | 2, Telescopic cooker hood, 60 cm, Silver metallic
DFM063W55B**

D



Telescopic cooker hoods extend when in use and slide neatly away when not in operation.

- **Silent:** maximum extractor performance with minimal noise.
- An impressive extraction rate of m³/h ensures this hood will have your kitchen odour free in no time.
- Beautifully designed to provide excellent viewability when not in use

Technical Data

Typology : Pull-out
Approval certificates : CE, VDE
Length of electrical supply cord : 175 cm
Required niche size for installation (HxWxD) : 162mm x 526.0mm x 290mm mm
Minimum distance above an electric hob : 430 mm
Minimum distance above a gas hob : 650 mm
Net weight : 8.9 kg
Type of control : mechanical
Number of speed settings : 2
Maximum output air extraction : 328 m³/h
Maximum output recirculating air : 181 m³/h
Number of lights (Stck) : 2
Noise level : 64 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable aluminium
EAN code : 4242005132331
Connection rating : 130 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : GB plug
Installation type : Built-in

Optional accessories

DSZ4545 : Standard recirculation kit
DSZ4551 : Standard odor filter (replacement)



4 242005 132331

**Serie | 2, Telescopic cooker hood, 60 cm,
Silver metallic
DFM063W55B**

**Telescopic cooker hoods extend when in use
and slide neatly away when not in operation.**

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 328 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 64 dB dB*

Features

- 2 power levels
- Rocker switch control for extractor speeds and light
- Automatic On/Off operation when telescopic canopy is pulled out and pushed back
- 2 x halogen lights
- Colour Temperature: 2700 K
- 2 removable metal grease filter cassettes
- Installation: Cupboard 60 cm

Design

- Telescopic hood
- Rocker switch control
- Mechanical

Performance/technical information







- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 328 m³/h according to EN 61591
- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW (51 dB(A) re 20 µPa sound pressure)
- Power rating: 130 W
- Light Intensity: 352 lux
- Electrical cable length 1.75 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 203-203 x 598 x 290 mm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: E*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 67.6 kWh/year*

Optional accessories

- Recirculating kit DSZ4545

** In accordance with the EU-Regulation No 65/2014*

**Serie | 2, Telescopic cooker hood, 60 cm,
Silver metallic
DFM063W55B**

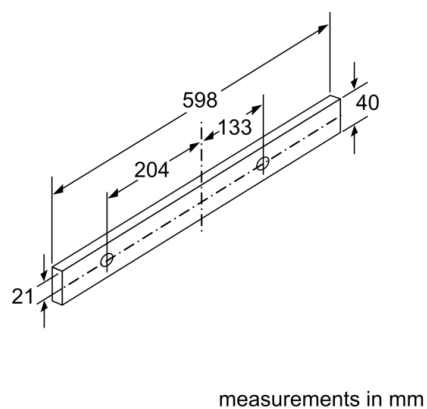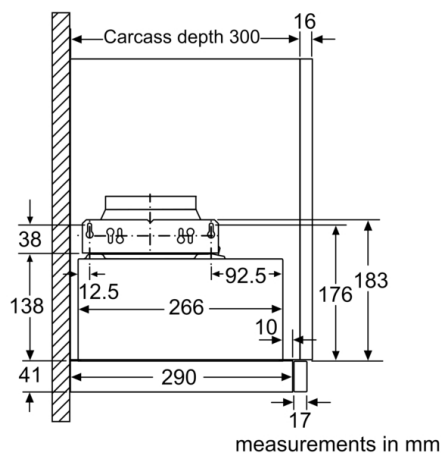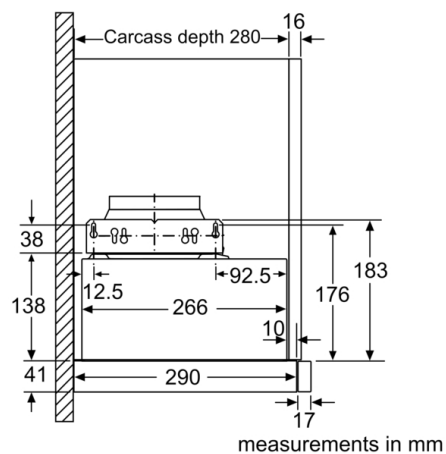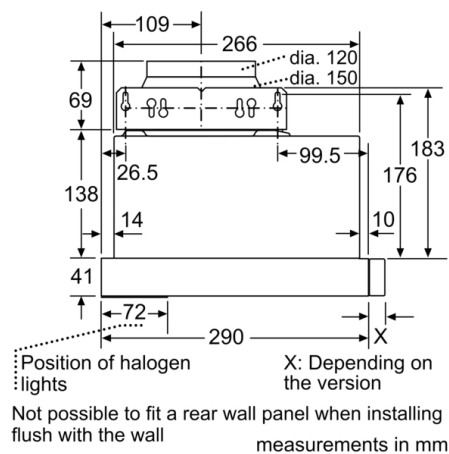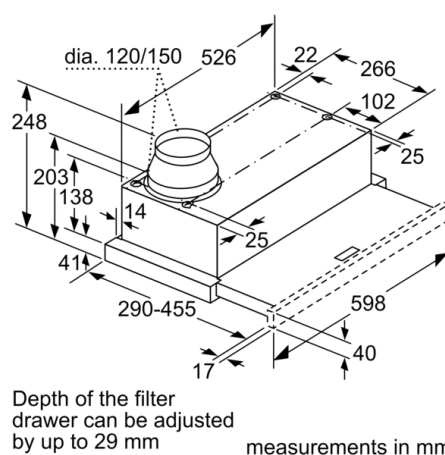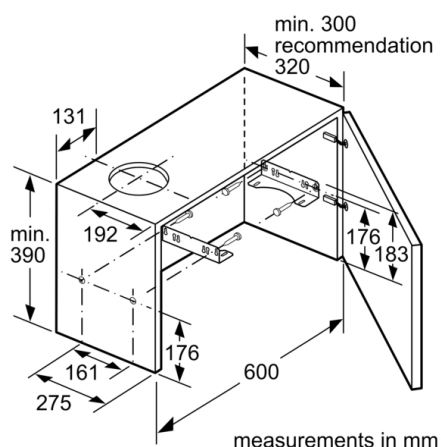

**Serie | 2, Telescopic cooker hood, 60 cm,
Silver metallic
DFM063W55B**

