


**Serie | 4, Canopy cooker hood, 53 cm,  
Silver metallic  
DHL555BLGB**



**Optional accessories**

DHZ7305 : Standard odor filter

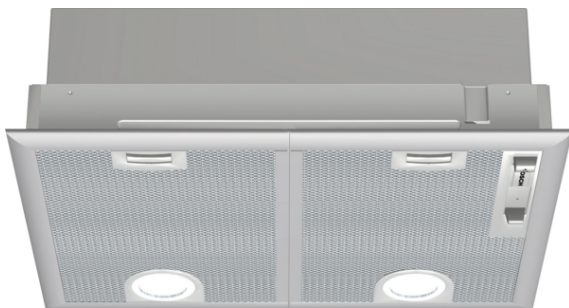

**Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.**

- **Especially silent:** maximum hood performance, minimum noise.
- **Grease filtration level:** filters out over 85% of the grease from kitchen air.
- **LED illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.
- An impressive extraction rate of m<sup>3</sup>/h ensures this hood will have your kitchen odour free in no time.

**Technical Data**

Typology : Built-in/Built-under

Approval certificates : CE, E17D UKCA marking, VDE

Length of electrical supply cord : 130 cm

Required niche size for installation (HxWxD) : 255mm x 500.0mm x 350mm mm

Minimum distance above an electric hob : 650 mm

Minimum distance above a gas hob : 650 mm

Net weight : 7.5 kg

Type of control : mechanical

Maximum output air extraction : 363 m<sup>3</sup>/h

Boost position output recirculating : 395.0 m<sup>3</sup>/h

Maximum output recirculating air : 268 m<sup>3</sup>/h

Boost position air extraction : 618 m<sup>3</sup>/h

Number of lights (Stck) : 2

Noise level : 56 dB(A) re 1 pW

Diameter of air outlet : 120 / 150 mm

Grease filter material : Washable aluminium

EAN code : 4242005122462

Connection rating : 206 W

Fuse protection : 10 A

Voltage : 220-240 V

Frequency : 50 Hz

Plug type : GB plug

Installation type : Built-in



## Serie | 4, Canopy cooker hood, 53 cm, Silver metallic DHL555BLGB

### Optional accessories

- Recirculating kit DHZ7305

\* In accordance with the EU-Regulation No 65/2014

**Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.**

### Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Extraction rate exhaust air according to EN 61591:  
max. normal use 362 m<sup>3</sup>/h, intensive 618 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB\*

### Features

- Slider switch control for extractor speeds and light
- 3 power levels & intensive setting
- Twin motor
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 removable metal grease filter cassettes


### Design

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Slider switch control
- Mechanical


### Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 618 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 56 dB(A) re 1 pW  
Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 438 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating (HxWxD): 255-255 x 530 x 380 mm
- Built-in dimensions (HxWxD): 255 x 500 x 350 mm
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 79.8 kWh/year\*


**Serie | 4, Canopy cooker hood, 53 cm, Silver metallic  
DHL555BLGB**

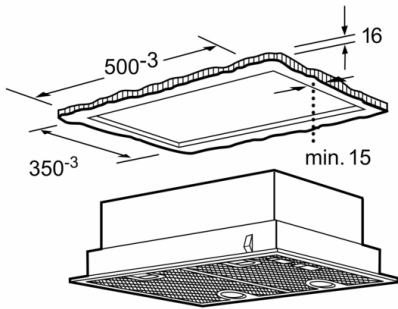


measurements in mm

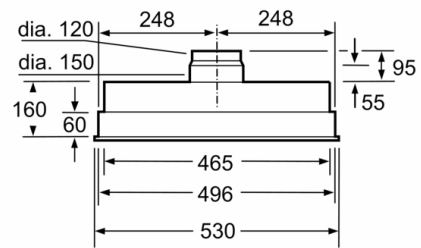

measurements in mm

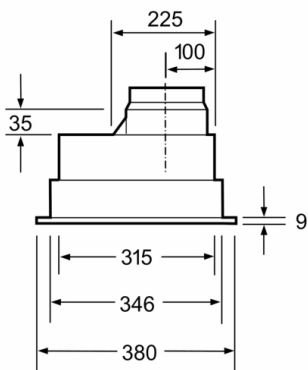

measurements in mm

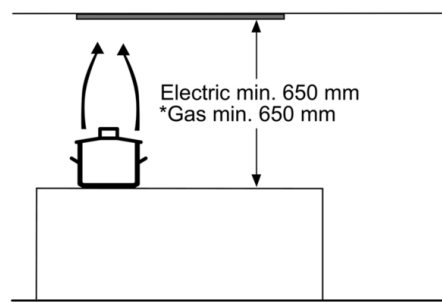

\* from upper edge of pan support

measurements in mm