

## Series 4, Canopy cooker hood, 53 cm, Silver metallic DHL555BLGB



DHZ7305 Standard odor filter  
DHZ7402 Installation kit for canopy

**Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.**

- **Especially silent:** maximum hood performance, minimum noise.
- **Enjoy the benefits of a cleaner and healthier kitchen, free from excessive grease and unwanted odors.**
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.
- **High extraction rate - for continuously clean air in the kitchen.**

Typology:	Built-in/Built-under
Length electrical supply cord:	130.0 cm
Required niche size for installation (HxWxD):	... 255mm x 500.0mm x 350mm mm
Height of the appliance:	..... 255 mm
Minimum distance above an electric hob:	..... 650 mm
Minimum distance above a gas hob:	..... 650 mm
Net weight:	..... 7.4 kg
Type of control:	..... mechanical
Number of speed settings:	..... 3-stages + intensive setting
Max. air extraction:	..... 363 m <sup>3</sup> /h
Boost position output recirculating:	..... 395.0 m <sup>3</sup> /h
Max. air recirculation:	..... 268 m <sup>3</sup> /h
Boost position air extraction:	..... 618 m <sup>3</sup> /h
Maximum Air flow:	..... 363 m <sup>3</sup> /h
Number of lights:	..... 2
Noise level:	..... 56 dB(A) re 1pW
Diameter of air outlet:	..... 120 / 150 mm
Grease filter material:	..... Washable aluminium
EAN code:	..... 4242005122462
Connection rating:	..... 206 W
Fuse protection:	..... 10 A
Voltage:	..... 220-240 V
Frequency:	..... 50 Hz
Plug type:	..... GB plug
Installation typology:	..... Built-in



## Series 4, Canopy cooker hood, 53 cm, Silver metallic DHL555BLGB

**Canopy cooker hoods are designed to be fully integrated for more flexibility when planning your kitchen.**

### **Key performance features:**

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Extraction rate exhaust air according to EN 61591:
  - max. normal use 362 m<sup>3</sup>/h, intensive 618 m<sup>3</sup>/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB\*

### **Features**

- Slider switch control for extractor speeds and light
- 3 power levels & intensive setting
- Twin motor
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 removable metal grease filter cassettes

### **Design**

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Slider switch control
- Mechanical

### **Performance/technical information**


- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 618 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
  - Max. normal use: 56dB(A) re 1 pW
  - Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 438 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating (HxWxD): 255-255 x 530 x 380 mm
- Built-in dimensions (HxWxD): 255 x 500 x 350 mm
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 79.8 kWh/year\*

### **Optional accessories**


- Recirculating kit DHZ7305

\* In accordance with the EU-Regulation No 65/2014


**Series 4, Canopy cooker hood, 53  
cm, Silver metallic  
DHL555BLGB**

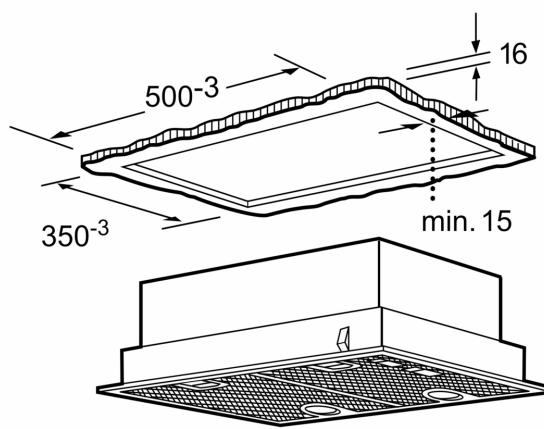


measurements in mm

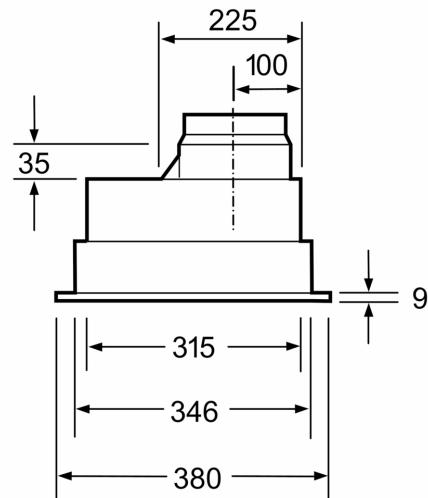

measurements in mm

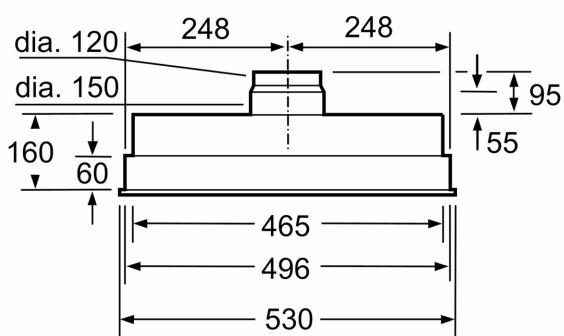

measurements in mm

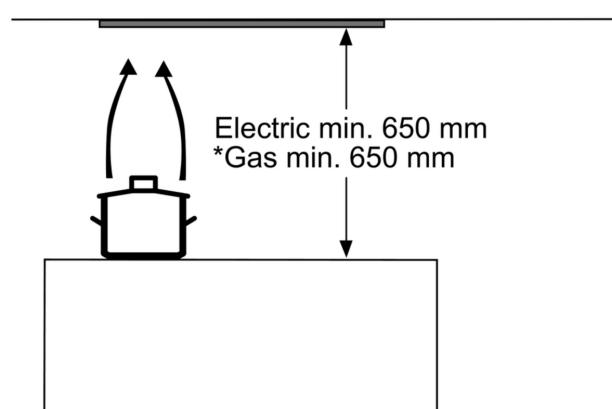

\* from upper edge of pan support

measurements in mm