

Wall-mounted cooker hood, 90 cm, clear glass DWA09E750B



Optional accessories

DHZ1225 : Chimney extension 1000 mm
 DHZ1235 : Chimney extension 1500 mm
 DHZ5325 : Standard recirculation kit
 DHZ5326 : Standard odor filter (replacement)
 DSZ5201 : CleanAir active carbon filter spare part
 DSZ6200 : CleanAir Recirculation Kit

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- An impressive extraction rate of 690 m³/h ensures this hood will have your kitchen odour free in no time.
- Halogen lighting provides energy efficient and bright lighting of the hob area.
- Intensive speed setting with revert gives a quick intensive 10 min burst to clear strong odours and then reverts back to the normal setting.

Technical Data

Color chimney :	Stainless steel
Typology :	Chimney
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	130
Height of the chimney (mm) :	581-897/581-1007
Height of product, without chimney (mm) :	57
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	19.974
Type of control :	Electronic
Maximum output air extraction (m ³ /h) :	400
Boost position output recirculating (m ³ /h) :	360
Maximum output recirculating air (m ³ /h) :	280
Boost position air extraction (m ³ /h) :	690
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	57
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242002627021
Connection rating (W) :	260
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	GB plug
Installation type :	Wall-mounted



4 242002 627021

**Wall-mounted cooker hood, 90 cm, clear glass
DWA09E750B**

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

Key Information

- Electronic control
- Electronic power level display

Design

- 90 cm wide
- Designed for wall mounted installation
- Height adjustable chimney sections

Features


- Soft touch button control for extractor speeds and light
- 3 power levels & intensive setting
- Automatic intensive revert
- 2 x 20W low energy halogen lights
- 1 removable metal grease filter cassette

Performance/technical information





- Suitable for ducted or recirculating operation
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 420 m³/h
 - Intensive 690 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13
 - exhaust air:
 - Max. normal use: 56 dB(A) re 1 pW (42 dB(A) re 20 µPa sound pressure)
 - Intensive: 69 dB(A) re 1 pW (55 dB(A) re 20 µPa sound pressure)
- Extractor hose 120mm
- Recirculating kit DHZ5325

Wall-mounted cooker hood, 90 cm, clear glass

DWA09E750B

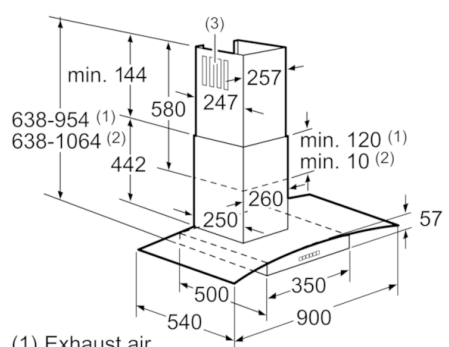

- (1) Exhaust air
(2) Circulated air
(3) Air outlet - Fit the exhaust air slot facing downwards
- Measurements in mm

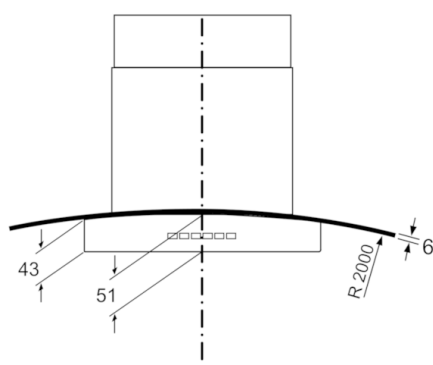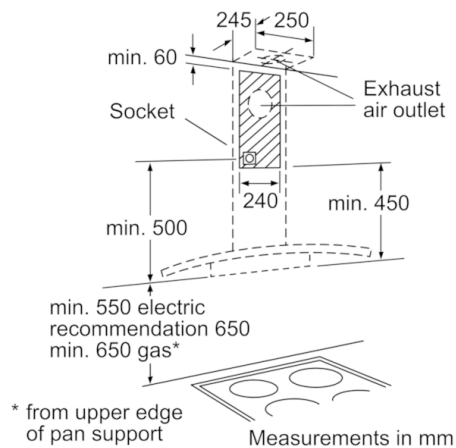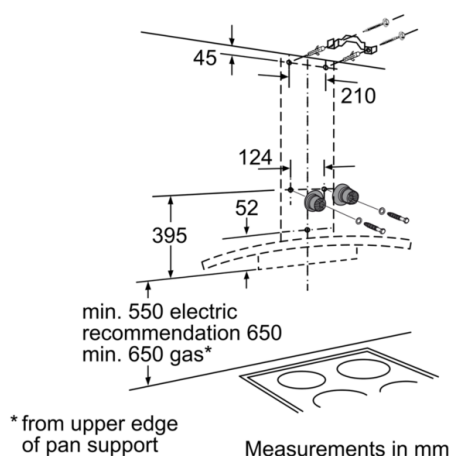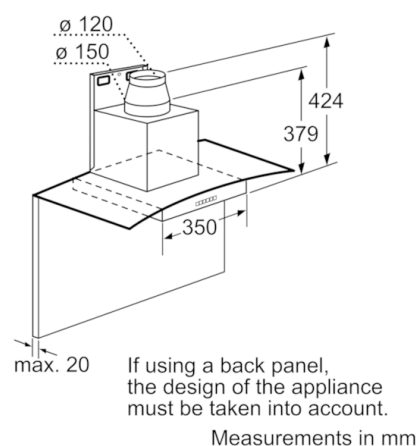

Measurements in mm