

**Series 2, Wall-mounted cooker hood,  
90 cm, clear glass black printed  
DWK095G60B**



DWA0LK6A carbon filter

**C**

**Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.**

- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **High extraction rate - for continuously clean air in the kitchen.**
- **3-speed power Level options to suit your cooking style and recipes.**
- **Ducted or Non-ducted Options**

Typology: .....Wall-mounted  
 Length electrical supply cord: ..... 130.0 cm  
 Height of the appliance: ..... 354 mm  
 Minimum distance above an electric hob: ..... 470 mm  
 Minimum distance above a gas hob: .....570 mm  
 Net weight: ..... 11.8 kg  
 Type of control: .....Electronic  
 Number of speed settings: ..... 3  
 Max. air extraction: ..... 629 m<sup>3</sup>/h  
 Max. air recirculation: ..... 230 m<sup>3</sup>/h  
 Maximum Air flow: ..... 629 m<sup>3</sup>/h  
 Number of lights: ..... 2  
 Noise level: .....67 dB(A) re 1pW  
 Diameter of air outlet: ..... 120 / 150 mm  
 Grease filter material: .....Washable aluminium  
 EAN code: .....4242005176106  
 Connection rating: ..... 216 W  
 Fuse protection: .....10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50 Hz  
 Plug type: ..... GB plug  
 Installation typology: .....Wall-mounted



4 242005 176106

## **Series 2, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK095G60B**

**Wall mounted chimney hoods add style  
and sophistication to the kitchen and give  
you complete freedom in your kitchen  
planning.**

---

### **Key performance features:**

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Maximum extraction rate exhaust air 629 m<sup>3</sup>/h according to EN 61591
- Noise max. Normal Level: Noise, max. speed in normal use: 67 dB dB\*

### **Special features**

- TouchControl with Electronic display
- 3 power levels
- 2 x LED lights
- Colour Temperature: 3000 K
- 2 removable metal grease filter cassettes
- Filter cover glass, Removable metal grease filters
- Rim ventilation

### **Design**

- Chimney extractor hood
- Installation: wall
- TouchControl
- Electronic control

### **Performance/technical information**


- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 629 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 67 dB(A) re 1 pW
- Power rating: 216 W
- Light Intensity: 377 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 750-1080 x 896 x 386 mm
- Dimensions recirculating (HxWxD): 862-1080 x 896 x 386 mm
- Blower Efficiency Class: D\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: D\*
- Average Energy Consumption: 94.5 kWh/year\*

### **Optional accessories**

- Recirculating kit DWA0LK6A

\* In accordance with the EU-Regulation No 65/2014

**Series 2, Wall-mounted cooker hood,  
90 cm, clear glass black printed  
DWK095G60B**

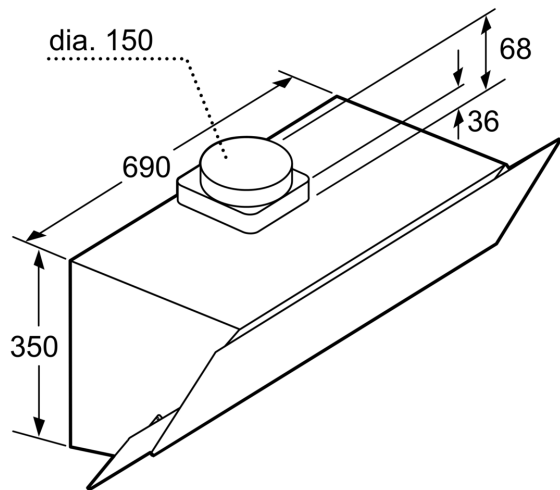

measurements in mm

