

Series 4, Wall-mounted cooker hood, 80 cm, clear glass black printed, Black DWK85DF61B



Optional accessories

DWZ0GX6K1	Chimney extension 1000 mm
DWZ0GX6L1	Chimney extension 1500 mm
DWZ1GK1I6	Long-life Clean Air recirculation kit
DWZ1XX1E1	reducer
DWZ1XX1H2	backpressure flap standard

- **Ergonomic by Design:** generous headroom and a clear view of your cooking.
- **Perfect extraction** : whether recirculating or ducted.
- **DirectSelect:** easy control of power and light settings.
- **LED Lighting:** bright lighting on your cooking with reliable LEDs.
- **Dual filter system:** two filters for improved air quality and odour control.

Technical Data

Color chimney:	Black
Typology:	Wall-mounted
Length electrical supply cord:	150 cm
Required niche size for installation (HxWxD):	GENERAL.N_A mm
Height of the chimney:	GENERAL.N_A mm
Height of the appliance:	309 mm
Minimum distance above an electric hob:	450 mm
Minimum distance above a gas hob:	650 mm
Net weight:	11.1 kg
Type of control:	Electronic
Number of speed settings:	3
Max. air extraction:	561 m³/h
Max. air recirculation:	507 m³/h
Maximum Air flow:	561 m³/h
Number of lights:	2
Noise level:	63 dB(A) re 1 pW
Diameter of air outlet:	150 mm
Grease filter material:	Washable aluminium
EAN code:	4242005584185
Connection rating:	223 W
Fuse protection:	4 A
Voltage:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation typology:	Wall-mounted



Series 4, Wall-mounted cooker hood, 80 cm, clear glass black printed, Black DWK85DF61B

Design:

- Inclined glass common design
- wall-mounted
- Black glass
- Suitable for ducted or recirculating operation
- In recirculation operation, chimless use possible

Core Features:

- Capacitor motor
- 2 x LED 1.5W
- 1 metal grease filter(s).

Comfort Features:

- Electronic control via TouchControl, backlit
- 3 power levels
- Automatic reset from intensive to normal setting after 4 min

Cleaning Comfort:

- Large opening angle of the glass plate for an easy filter accessibility and easy cleaning.
- Easy to clean smooth surfaces and materials.
- Removable metal grease filters dishwasher-safe

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode:
- Speed 1: extraction rate 240 m³/h; noise level 45 dB(A) re1pW
- Speed 2: extraction rate 444 m³/h; noise level 59 dB(A) re1pW
- Speed 3: extraction rate 561 m³/h; noise level 63 dB (A) re1pW
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 72.9 kWh/year*
- Blower Efficiency Class: C*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: E*

Performance Recirculation:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Long-life Clean Air recirculation kit (available as optional accessory):
- Speed 1: extraction rate 217 m³/h; noise level 54 dB(A) re1pW
- Speed 2: extraction rate 426 m³/h; noise level 69 dB(A) re1pW
- Speed 3: extraction rate 506 m³/h; noise level 73 dB (A) re1pW

Technical Information and Sustainability:


- Consumption data:
- Power rating: 223 W
- Voltage: Nominal voltage: 220 - 240 V
- Sustainability:
- Silent blower technology
- Available Long-life Clean Air odour filter with extended lifetime up to 4 times
- The Long-life Clean Air odour filter absorbs intense odours, such as fish, as well as pollen. The lifetime can be extended up to 4 times by refreshing the filter in the oven

Planning and Installation Information:

- Dimensions exhaust air (HxWxD): 741-956 x 790 x 399 mm
- Dimensions recirculating (HxWxD): 776-991 x 790 x 399 mm
- Diameter pipe Ø 150mm
- Electrical cable length 1.5 m
- If connecting to an existing exhaust, a reducer piece from 150mm to 120mm can be ordered as special accessory, if needed.
- In exhaust mode a backpressure flap (DWZ1XX1H2) is recommended.


Series 4, Wall-mounted cooker hood, 80 cm, clear glass black printed, Black DWK85DF61B

Measurements in mm

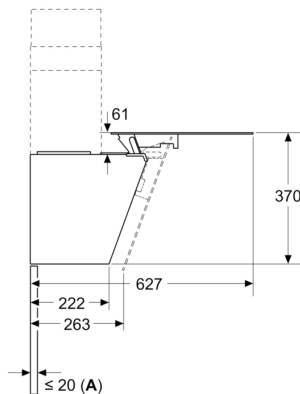


A: Max. back wall thickness

Measurements in mm

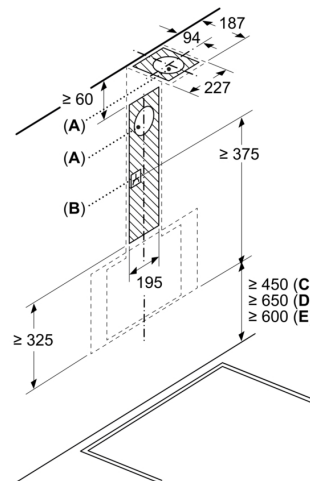


A: Exhaust-air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm
Wall installation with chimney

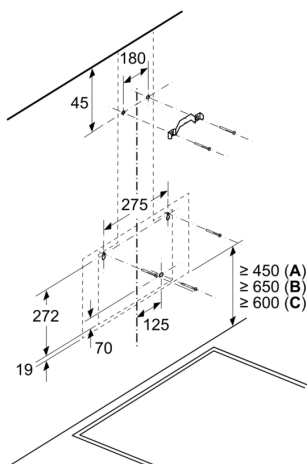


A: Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

Measurements in mm
Appliance in exhaust air mode

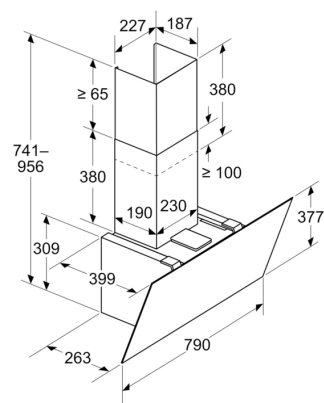

Measurements in mm
Appliance in circulated air mode without duct

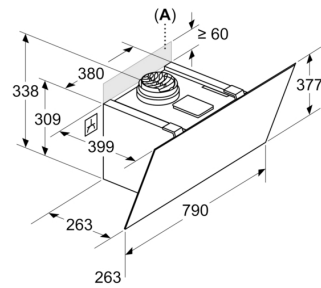

A: Socket only outside the marked area