

Series 2, Wall-mounted cooker hood, 80 cm, Black DWK87EM60B



B



- **Especially silent:** maximum hood performance, minimum noise.
- **TouchSelect control:** Quickly select hood settings via touch.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Typology:Wall-mounted
 Length electrical supply cord: 130.0 cm
 Height of the chimney: 484-770/554-830 mm
 Height of the appliance: 296 mm
 Minimum distance above an electric hob: 450 mm
 Minimum distance above a gas hob: 650 mm
 Net weight: 14.4 kg
 Type of control:Electronic
 Number of speed settings: 3-stages + intensive setting
 Max. air extraction: 399 m³/h
 Boost position output recirculating: 474 m³/h
 Max. air recirculation: 349 m³/h
 Boost position air extraction: 669 m³/h
 Maximum Air flow: 399 m³/h
 Number of lights: 2
 Noise level: 60 dB(A) re 1 pW
 Diameter of air outlet: 120 / 150 mm
 Grease filter material:Washable aluminium
 EAN code: 4242005199730
 Connection rating: 255 W
 Fuse protection: 10 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz
 Plug type: GB plug
 Installation typology:Wall-mounted

DHZ1225	Chimney extension 1000 mm
DHZ1235	Chimney extension 1500 mm
DHZ5276	Standard odor filter (replacement)
DHZ9550	Brushed steel back panel
DHZ9551	Brushed steel back panel
DWZ0XX0J0	Long Life recirculation kit
DWZ1DX1I6	Clean Air Plus recirculation kit
DWZ1EK1U1	Standard recirculation kit
DWZ1FX5C6	Clean Air Plus recirc. kit external
DWZ1FX5D1	Long Life recirculation kit external
DZZ0XX0P0	Long Life odor filter (replacement)
DZZ1XX1B6	Clean Air Plus odor filter (replacement)



4 242005 199730

Series 2, Wall-mounted cooker hood, 80 cm, Black DWK87EM60B

- Average Energy Consumption: 59.4 kWh/year*

* In accordance with the EU-Regulation No 65/2014

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 $\varnothing$ 15 cm:
 - max. Normal use 399 m³/h
 - Intensive 669 m³/h
- Noise max. Normal Level: Noise, max. speed in normal use: 60 dB dB*

Design


- TouchControl with Electronic display
- Electronic display
- 3 power levels & intensive setting
- Automatic intensive revert (6mins)
- 2 removable metal grease filter cassettes
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Installation: wall
- Rim ventilation
- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information


- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 669 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 60 dB (A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 60 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 60 dB(A) re 1 pW
 - Intensive: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
 - Extraction rate in recirculation mode: Max. normal use: 349 m³/h
 - Intensive: 474 m³/h
 - Noise level in recirculation mode: Max. normal use: 69 dB(A) re 1 pW
 - Intensive: 76 dB(A) re 1 pW
- Power rating: 255 W
- Light Intensity: 114 lux
- Electrical cable length 1.3 m
- Diameter pipe $\varnothing$ 150 mm ($\varnothing$ 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 780-1066 x 800 x 434 mm
- Dimensions recirculating (HxWxD): 850-1126 x 800 x 434 mm
- Dimensions recirculating with CleanAir module (HxWxD):
 - 956 x 800 x 434 mm - mounting with outer chimney
 - 1016-1306 x 800 x 434 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*

**Series 2, Wall-mounted cooker hood,
80 cm, Black
DWK87EM60B**

measurements in mm

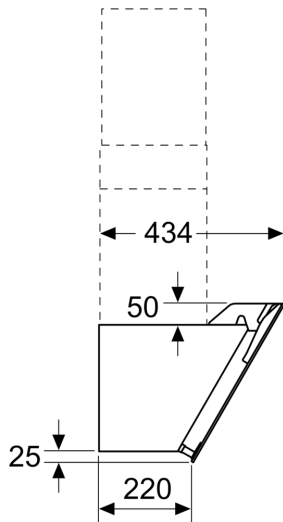

measurements in mm

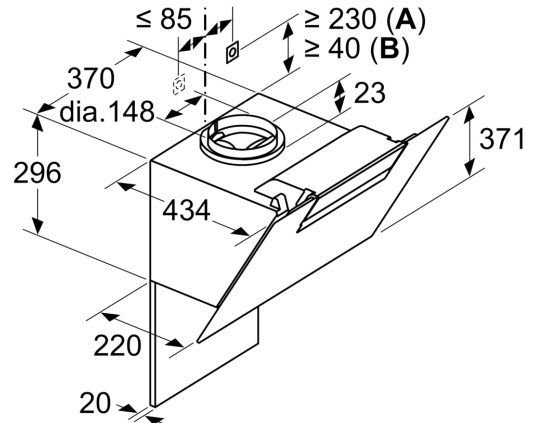


A: Integrated Clean Air

B: Exhaust air or standard circulated air set

Note the maximum thickness of the back panel.

Measurements in mm

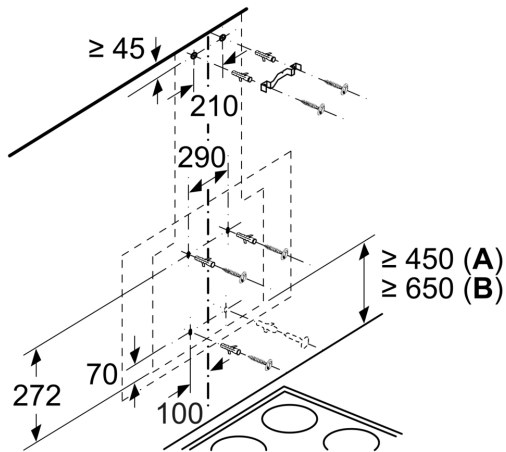


From upper edge of pan support

A: Electric

B: Gas

Measurements in mm

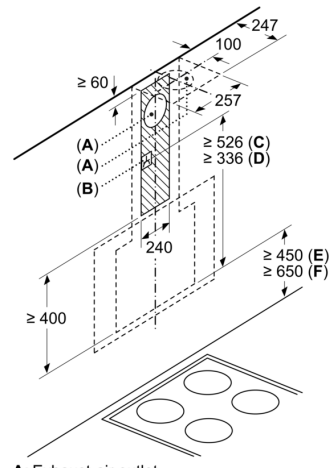

A: Exhaust-air outlet

B: Socket

C: Clean Air Plus circulated air kit


D: Exhaust air or standard circulated air kit

From upper edge of pan support

E: Electric

F: Gas

measurements in mm

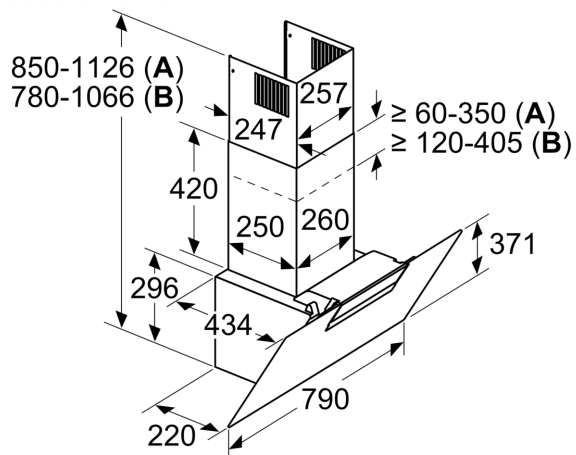

- A:** Circulated air
B: Exhaust air – slots to be mounted facing down