

**Serie | 6, Wall-mounted cooker hood,
90 cm, clear glass black printed
DWK97JQ60B**



A



Optional accessories

DWZ0AK0R0 : Long Life recirculation kit (chimless)
 DWZ0AK0S0 : Long Life recirculation kit
 DWZ0AX5K0 : Chimney extension 1000 mm
 DWZ0AX5L0 : Chimney extension 1500 mm
 DWZ1AK1I6 : Clean Air Plus recirculation kit
 DWZ1AK1V6 : Clean Air Plus recirc. kit (chimless)
 DWZ1AX6E1 : Chimney standard black
 DZZ1XX1B6 : Clean Air Plus odor filter (replacement)

**Angled hood: perfect for keeping an eye on
your pots and pans.**

- **PerfectAir sensor:** automatic extractor control for high performance with low noise.
- **DirectSelect control:** direct selection of desired settings and light.
- **Extra silent:** the high-performance hood, with minimal noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **Grease filtration level:** filters out over 85% of the grease from kitchen air.

Technical Data

Typology : Wall-mounted
 Approval certificates : CE, E17D UKCA marking, VDE
 Length of electrical supply cord : 130 cm
 Height of product, without chimney : 323 mm
 Minimum distance above an electric hob : 450 mm
 Minimum distance above a gas hob : 650 mm
 Net weight : 23.0 kg
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction : 431 m³/h
 Boost position output recirculating : 441 m³/h
 Maximum output recirculating air : 355 m³/h
 Boost position air extraction : 714 m³/h
 Number of lights (Stck) : 2
 Noise level : 53 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 EAN code : 4242002946849
 Connection rating : 143 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : GB plug
 Installation type : Wall-mounted



Serie | 6, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK97JQ60B

Angled hood: perfect for keeping an eye on your pots and pans.

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 431 m³/h
Intensive 714 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 53 dB dB*

Features

- PerfectAir sensor
- TouchControl with lightline
- 3 power levels and 2 intensive settings
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Dimmer function
- Efficient BLDC technology
- Automatic after running (Automatic after running (10 min))
- Automatic intensive revert (6mins)
- 2 removable metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- Installation: wall
- Rim ventilation

Design

- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Installation system: Wall fixing inclined/flat/cube
- Extraction rate according to EN 61591 max. 714 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 53 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 53 dB(A) re 1 pW
Intensive: 65 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 53 dB (A) re 1pW
- Power rating: 143 W
- Light Intensity: 238 lux
- Electrical cable length 1.3 m
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 890 x 499 mm
- Dimensions recirculating (HxWxD): 988-1258 x 890 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1118 x 890 x 499mm - mounting with outer chimney
1188-1458 x 890 x 499 mm - mounting with telescopic chimney
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 34.6 kWh/year*


Optional accessories

- Recirculating kit DWZ0AX5L0

* In accordance with the EU-Regulation No 65/2014


Serie | 6, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK97JQ60B

Measurements in mm

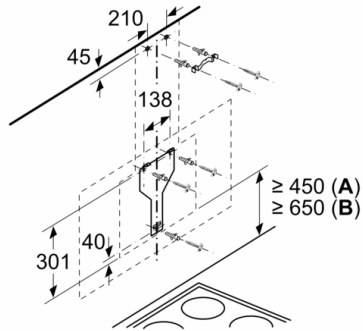


From upper edge of pan support

A: Electric
B: Gas

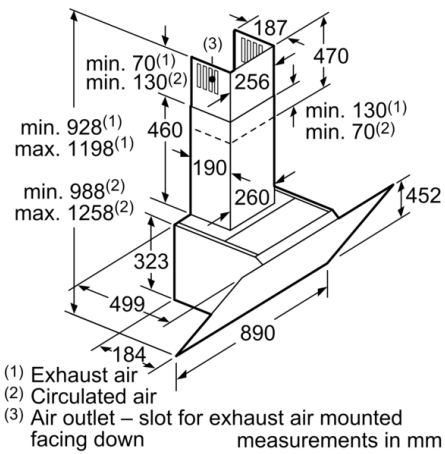


(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air mounted facing down
measurements in mm

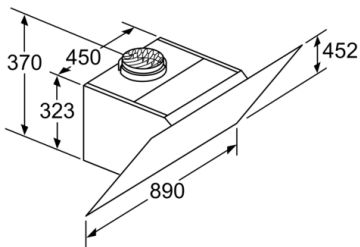


Appliance in circulated air mode without duct
Circulated air set required

measurements in mm

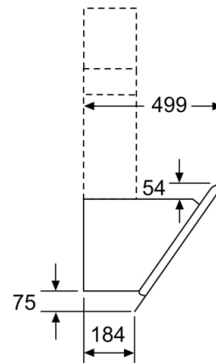

measurements in mm

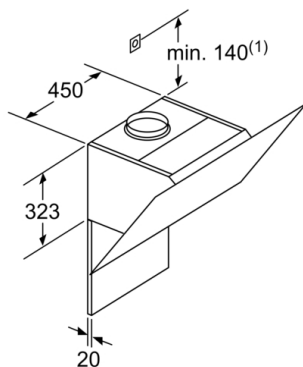

(1) Position of socket

Note the maximum thickness of the back panel.

measurements in mm

Measurements in mm

