

**Serie | 8, Wall-mounted cooker hood,
90 cm, clear glass black printed
DWK98PR60B**



A⁺



**Angled hood: perfect for keeping an eye on
your pots and pans.**

- **PerfectAir sensor:** automatic extractor control for high performance with low noise.
- **Extra silent:** the high-performance hood, with minimal noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- Manage your appliances with your voice, thanks to the Amazon Alexa voice control.*
- **Cooktop-based hood control:** use the hob to control your hood.

Technical Data

Typology : Wall-mounted
Approval certificates : CE, E17D UKCA marking, VDE
Length of electrical supply cord : 130 cm
Height of product, without chimney : 323 mm
Minimum distance above an electric hob : 450 mm
Minimum distance above a gas hob : 650 mm
Net weight : 21.4 kg
Type of control : Electronic
Number of speed settings : 3-stage + 2 intensive
Maximum output air extraction : 468 m³/h
Boost position output recirculating : 460 m³/h
Maximum output recirculating air : 378 m³/h
Boost position air extraction : 837 m³/h
Number of lights (Stck) : 2
Noise level : 55 dB(A) re 1 pW
Diameter of air outlet : 120 / 150 mm
Grease filter material : Washable aluminium
EAN code : 4242002966748
Connection rating : 166 W
Fuse protection : 10 A
Voltage : 220-240 V
Frequency : 50; 60 Hz
Plug type : GB plug
Installation type : Wall-mounted

Optional accessories

DWZ0AK0R0 : Long Life recirculation kit (chimless)
DWZ0AK0S0 : Long Life recirculation kit
DWZ0AX5K0 : Chimney extension 1000 mm
DWZ0AX5L0 : Chimney extension 1500 mm
DWZ1AK1I6 : Clean Air Plus recirculation kit
DWZ1AK1V6 : Clean Air Plus recirc. kit (chimless)
DWZ1AX6E1 : Chimney standard black
DZZ1XX1B6 : Clean Air Plus odor filter (replacement)



Serie | 8, Wall-mounted cooker hood, 90 cm, clear glass black printed DWK98PR60B

Angled hood: perfect for keeping an eye on your pots and pans.

- Dimensions recirculating (HxWxD): 1017-1287 x 894 x 548 mm

Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use: 467 m³/h
Intensive: 837 m³/h
- Noise max. Normal Level: Noise, max. speed in normal use: 55 dB dB*

Home Connect: Remote Monitoring and Control

- The Home Connect functionality can be extended by integrating numerous applications from external cooperation partners (partnerships)
- Voice Control enabled via popular voice assistants (only in countries where this service is available)

Features

- Hob based hood control
- PerfectAir sensor
- Additional noise reduction insulation
- TouchControl with lightline
- 3 power levels and 2 intensive settings
- Automatic intensive revert (6mins)
- 2 x 3W LED light
- Colour Temperature: 3500 K
- Dimmer function
- Efficient BLDC-technology
- Automatic after running (Automatic after running (10 min))
- 2 removable metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame
- Rim ventilation
- Installation: wall

Design

- Chimney extractor hood
- TouchControl
- Electronic control
- Efficient BLDC technology

Performance/technical information

- Installation system: Wall fixing inclined/flat/cube
- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 837 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 55dB(A) re 1 pW
Intensive: 67 dB(A) re 1 pW
- Power rating: 166 W
- Light Intensity: 519 lux
- Electrical cable length 1.3 m
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 31.5 kWh/year*
- Diameter pipe ø 150 mm (ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 957-1227 x 894 x 548 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1147 x 894 x 548mm - mounting with outer chimney
1217-1487 x 894 x 548 mm - mounting with telescopic chimney


Optional accessories

- Recirculating kit DWZ0AX5L0

* In accordance with the EU-Regulation No 65/2014


**Serie | 8, Wall-mounted cooker hood, 90 cm,
clear glass black printed
DWK98PR60B**

Measurements in mm

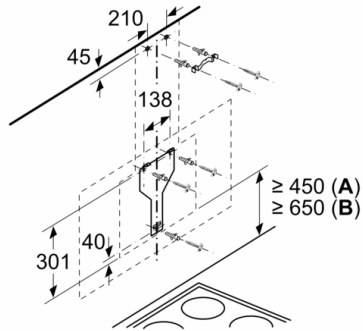


From upper edge of pan support

A: Electric
B: Gas

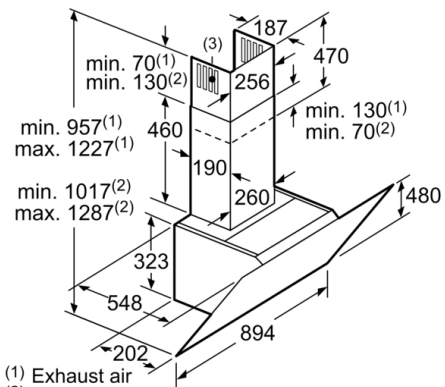


(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air to be mounted facing down measurements in mm

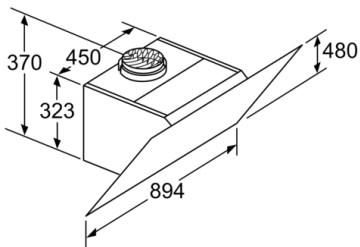


Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

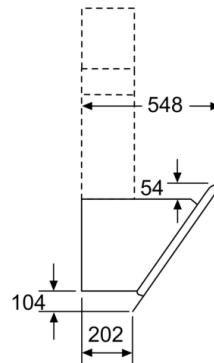

measurements in mm

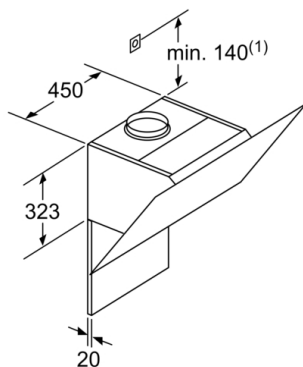

(1) Position of socket

Note the maximum thickness of the back panel.

measurements in mm

Measurements in mm

