

**Serie | 2, Wall-mounted cooker hood,
60 cm, Stainless steel
DWP64CC50M**



D

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

- **Silent:** maximum extractor performance with minimal noise.
- An impressive extraction rate of m³/h ensures this hood will have your kitchen odour free in no time.
- 3-speed power Level options to suit your cooking style and recipes.
- Dishwasher safe aluminum mesh filters
- Ducted or Non-ducted Options

Technical Data

Typology : Wall-mounted
Approval certificates : CE, VDE
Length of electrical supply cord : 120 cm
Height of the chimney : 410-765/410-765 mm
Height of product, without chimney : 250 mm
Minimum distance above an electric hob : 650 mm
Minimum distance above a gas hob : 650 mm
Net weight : 11.3 kg
Type of control : mechanical
Number of speed settings : 3
Maximum output air extraction : 380 m³/h
Maximum output recirculating air : 235 m³/h
Number of lights (Stck) : 2
Noise level : 64 dB(A) re 1 pW
Diameter of air outlet : 150 mm
Grease filter material : Washable aluminium
EAN code : 4242002985299
Connection rating : 135 W
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : GB plug
Installation type : Wall-mounted

Optional accessories

DWZ6HP1U2 : Standard recirculation kit



4 242002 985299

Serie | 2, Wall-mounted cooker hood, 60 cm, Stainless steel DWP64CC50M

Optional accessories

- Recirculating kit DWA0KP6A
- * In accordance with the EU-Regulation No 65/2014

Wall mounted chimney hoods add style and sophistication to the kitchen and give you complete freedom in your kitchen planning.

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 380 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 64 dB dB*

Features

- 3 power levels
- 2 x LED 5W
- Colour Temperature: 4000 K
- 2 removable metal grease filter cassettes
- Installation: wall


Design

- Chimney extractor hood
- Push button control
- Mechanical


Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Maximum extraction rate exhaust air 380 m³/h according to EN 61591
- Extraction rate in recirculation mode:
Max. normal use: 235 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- Noise level in recirculation mode:
Max. normal use: 70 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Power rating: 135 W
- Light Intensity: 1000 lux
- Electrical cable length 1.2 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 790-1015 x 598 x 470 mm
- Dimensions recirculating (HxWxD): 790-1015 x 598 x 470 mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 72.8 kWh/year*


**Serie | 2, Wall-mounted cooker hood, 60 cm,
Stainless steel
DWP64CC50M**

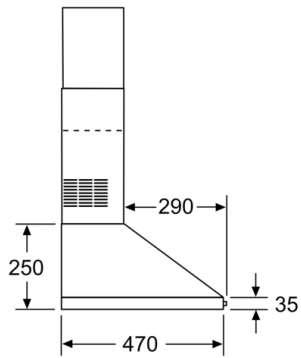

measurements in mm

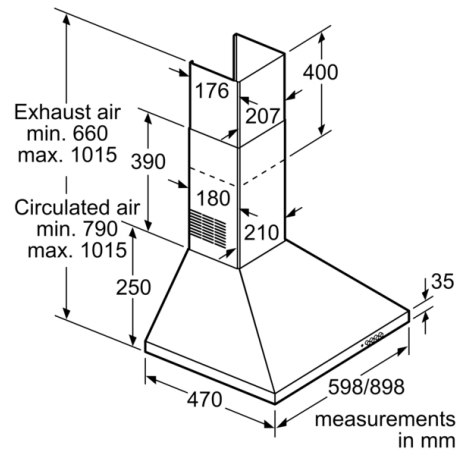

measurements in mm

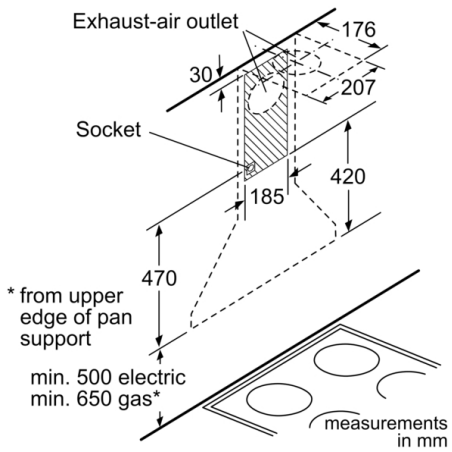

measurements in mm