


Long-life recirculation kit, initial equipment DWZ0XX0J0

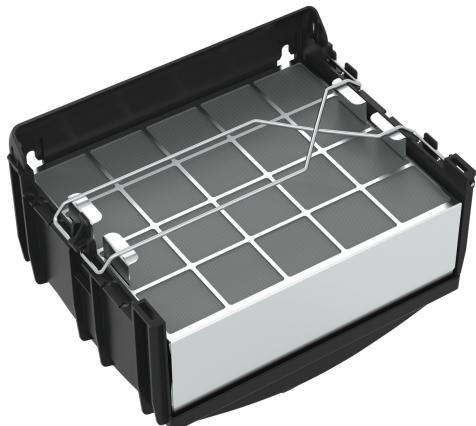

- For recirculation operation
- Combined with wall chimney hoods
- Improved reduction of odour compared to standard recirculation systems
- Reduction of Noise
- Can be used multiple times, the regenerative active carbon filter is regenerated in the oven with a recommendation of every 4 months. Simply place in the oven for 2 hours at 200°C.

Technical Data

Dimensions of the packed product (HxWxD): 405x300x400 mm
Pallet dimensions: 180.0 x 80.0 x 120.0
Standard number of units per pallet: 24
Net weight: 2.7 kg
Gross weight: 3.9 kg
EAN code: 4242005099375



Long-life recirculation kit, initial equipment **DWZ0XX0J0**

Optional accessories

- For recirculation operation
- Combined with wall chimney hoods
- Improved reduction of odour compared to standard recirculation systems
- Reduction of Noise
- Can be used multiple times, the regenerative active carbon filter is regenerated in the oven with a recommendation of every 4 months. Simply place in the oven for 2 hours at 200°C.
- Integrated design: the Integrated CleanAir recirculation kit is installed discreetly behind the chimney. Installation is possible at different heights.
- Including multiple regenerative CleanAir active carbon filter, filter holder, flexible hose, 2 clamps and mounting material

Long-life recirculation kit, initial equipment
DWZ0XX0J0

