

Serie | 2, Free-standing fridge-freezer with freezer at bottom, 176 x 60 cm, White
KG33NWEAG



NoFrost bottomfreezer : no need to defrost your freezer

- **Perfect Fit:** place your fridge right next to walls and other appliances to save space.
- **LED lights** bring a completely new lighting concept to fridges
- **HolidayMode:** protecting frozen foods and preventing energy wastage in the fridge.
- **NoFrost:** you'll never have to defrost your fridge-freezer again.
- **SuperFreezing:** Protects frozen food from defrosting.

Technical Data

Energy Efficiency Class: E

Average annual energy consumption in kilowatt hour per year (kWh/a): 237 kWh/annum

Sum of volume of frozen compartments: 89 l

Sum of volume of chill compartments: 193 l

Airborne acoustical noise emissions : 42 dB(A) re 1 pW

Airborne acoustical noise emission class: D

Construction type: Free-standing

Door panel options: Not possible

Width of the appliance: 600 mm

Depth of the product: 660 mm

Net weight: 59.6 kg

Connection rating: 100 W

Fuse protection: 10 A

Door hinge: Right reversible

Voltage: 220-240 V

Frequency: 50 Hz

Approval certificates: CE, VDE

Length of electrical supply cord: 240 cm

Storage Period in Event of Power Failure (h): 12 h

Number of compressors: 1

Number of independent cooling systems: 1

Interior ventilator: No

Reversible Door Hinge: Yes

Number of Adjustable Shelves in fridge compartment (Stck): 2

Shelves for Bottles: No

Installation type: N/A

Included accessories

3 x egg tray



Serie | 2, Free-standing fridge-freezer with freezer at bottom, 176 x 60 cm, White KGN33NWEAG

NoFrost bottomfreezer : no need to defrost your freezer

Design features

- White doors and white side panels
- Integrated horizontal handle
- Right hinged door, door reversible
- LED electronic control

Food freshness system

- 1 compressor

Key features - Fridge section

- 1 MultiBox - Transparent drawer with a rippled bottom, ideal for storing fruits and vegetables.
- MultiAirflow system - improves circulation of air around the fridge
- Bright interior LED fridge light
- 3 safety glass shelves (2 height adjustable)
- Door shelves in fridge door: 1 large and 2 small.
- Super Cooling: No

Key features - Freezer section

- No Frost, never have to defrost ever again
- 3 freezer drawers
- SuperFreezing function with automatic deactivation
- Calendar frozen food
- Freezer malfunction warning signal: optical and acoustical warning system

Additional features

- Optical and acoustical
- 3 x egg tray


Dimension and installation

- Connection value 100 W
- 220 - 240 V
- Height adjustable front feet
- Dimensions: 176 cm H x 60 cm W x 66 cm D
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

Performance and Consumption


- EU19_EEK_D: E
- Total Volume : 282 l
- Net Fridge Volume : 193 l
- Net Freezer Volume : 89 l
- Freezing capacity 24h : 10 kg
- Annual Energy Consumption: 237 kWh/a
- Climate Class: SN-T
- Noise Level : 42 dB , EU19_Noise emission class_D: D
- Temperature rise time : EU19_Temperature rise time_D: 12 H

Serie | 2, Free-standing fridge-freezer with freezer at bottom, 176 x 60 cm, White KGN33NWEAG

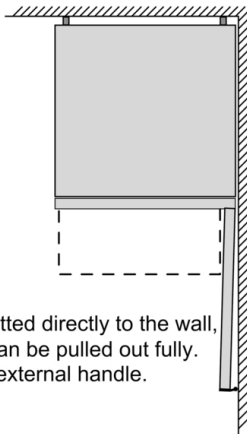


If the appliance is fitted directly to the wall, all of the drawers can be pulled out fully.
* With and without external handle.

| Appliance name | a | b | c | d | e | f | g |
|----------------------|------|-----|-----|-----|-----|------|----|
| KGN33 (Inner handle) | 1760 | 600 | 660 | 590 | 600 | 1210 | 12 |



| Description |
|--|
| a Height |
| b Width |
| c Depth with door closed, without handle |
| d Cabinet depth |
| e Width with door opened to 90° |
| f Depth with door opened |
| g Air gap for installation in recess or fitted cabinet |

measurements in mm

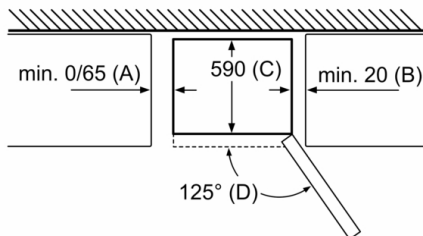

| Appliance name | A | B | C | D |
|-----------------------|------|----|-----|-----|
| KGN33, 36, 39, 46, 49 | 0/65 | 20 | 590 | 125 |
| KGF39, 49 | 0/65 | 20 | 590 | 125 |

Dimension A:
In models with vertical integrated handles, in order to open easily, a minimum distance of 65 mm is needed.

measurements in mm