

Serie | 4, Built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge
KIV85VFF0G



Included accessories

3 x egg tray
 1 x ice cube tray

Optional accessories

KSZ10020 : Bottle Rack



The bottom freezer with electronic temperature control and MultiBox: set the temperature easily and precisely.

- LED lights bring a completely new lighting concept to fridges
- **VarioZone:** more flexibility due to variable-use glass shelves and drawers in the freezer compartment.
- **Big Box drawer:** for stacking storage containers or for large frozen food items.
- **Low Frost:** defrost less often thanks to lower ice formation - saves work and is energy-efficient.
- The egg rack keeps your eggs safe

Technical Data

Energy Efficiency Class: F

Average annual energy consumption in kilowatt hour per year (kWh/a): 285 kWh/annum

Sum of volume of frozen compartments: 102 l

Sum of volume of chill compartments: 159 l

Airborne acoustical noise emissions : 38 dB(A) re 1 pW

Airborne acoustical noise emission class: C

Construction type: Built-in

Door panel options: Not possible

Width of the appliance: 541 mm

Depth of the product: 545 mm

Required niche size for installation (HxWxD): 1775.0 x 560 x 550 mm

Net weight: 65.9 kg

Connection rating: 90 W

Fuse protection: 13 A

Door hinge: Right reversible

Voltage: 220-240 V

Frequency: 50 Hz

Approval certificates: CE, VDE

Length of electrical supply cord: 230 cm

Storage Period in Event of Power Failure (h): 10 h

Number of compressors: 1

Number of independent cooling systems: 1

Interior ventilator: No

Reversible Door Hinge: Yes

Number of Adjustable Shelves in fridge compartment (Stck): 3

Shelves for Bottles: No

Frost free system: No

Installation type: Full-integrated

Type of hinge: Flush-folding



4 242005 204199

Serie | 4, Built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge KIV85VFF0G

The bottom freezer with electronic temperature control and MultiBox: set the temperature easily and precisely.

- Built-in fridge-freezer
- Fully integrated

Functions

- Fixed hinge
- Fixed hinge
- Easy clean interior
- Interior design with metal applications

Design features

- LED electronic control
- 1 compressor
- SuperFreezing function with automatic deactivation
- Automatic defrost fridge

Design features

- 4 safety glass shelves in fridge compartment of which 3 are height adjustable
- 1 removable door storage compartments.
- Bright interior LED fridge light

Freshness System

- 1 MultiBox - Transparent drawer with a rippled bottom, ideal for storing fruits and vegetables.

Food freshness system

- 4 transparent freezer drawers, including 1 BigBox

Key features - Fridge section

- Right hinged door, door reversible
- Connection value 90 W
- 220 - 240 V

Dimension and installation

- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D
- Dimensions: 177.2 cm H x 54.1 cm W x 54.5 cm D

Key features - Freezer section

- 3 x egg tray, 1 x ice cube tray

Design features

Dimension and installation

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.


Additional features

Performance and Consumption

- EU19_EEK_D: F
- Total Volume : 261 l
- Net Fridge Volume : 159 l
- Net Freezer Volume : 102 l
- Freezing capacity 24h : 4.6 kg
- Annual Energy Consumption: 285 kWh/a
- Climate Class: SN-ST
- Noise Level : 38 dB , EU19_Noise emission class_D: C
- Temperature rise time : EU19_Temperature rise time_D: 10 H



Serie | 4, Built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge KIV85VFF0G

measurements in mm
Recommended gap dimensions for flat hinges




F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3


The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

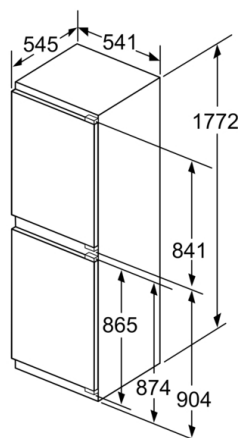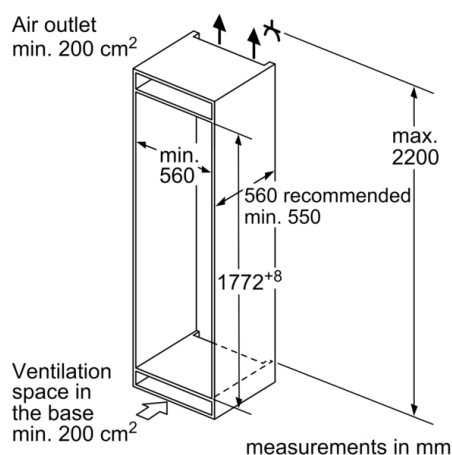

measurements in mm

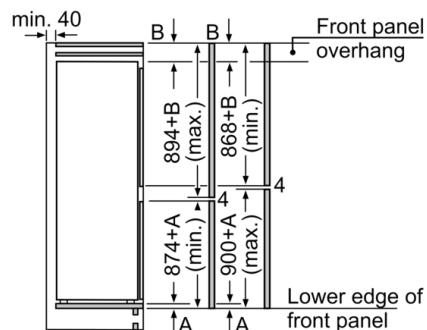

The specified unit door dimensions are valid for a door gap of 4 mm.
measurements in mm



Maximal permissible weight of the unit fronts
Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges
Δ Weight
A: Appliance door height including hinges in mm
B: Undamped hinge, unit front in kg
C: Damped hinge, unit front in kg

A	B	C
1500-1750	22	22
720-1400	19	19
A1	15	19
A2	15	19