


**Series 8, Domino gas hob, 30 cm,  
Ceramic glass, Black  
PRA3A6B70**

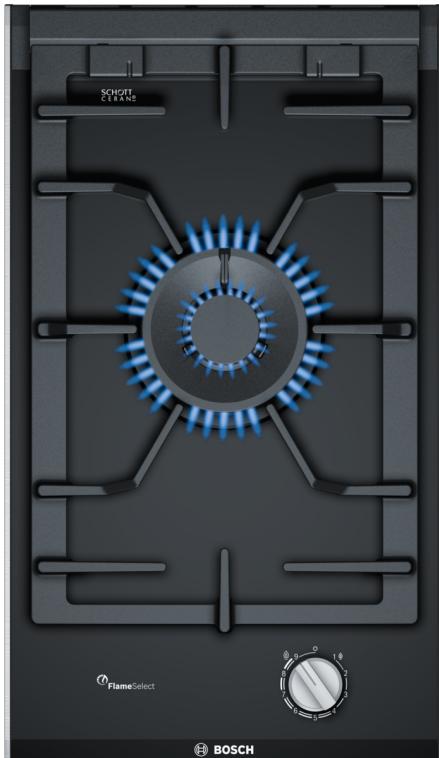

**The domino gas hob with FlameSelect:  
achieve perfect cooking results thanks to  
nine precisely defined power levels.**

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Dual flame power burner with two heat options, quickly boil water or maintain a precise simmer.**
- **Dishwasher-proof pan supports: make cleaning your hob even easier.**
- **Continuous cast-iron pan support: for high firmness and stability of cookware.**
- **Biomethane-ready: your gas hob can also be powered with renewable biomethane gas.**

**Technical Data**

Appliance type: .....	Vario/Domino gas hob w control
Appliance type: .....	Vario/Domino gas hob w control
Built-in / Free-standing: .....	Built-in
Built-in / Free-standing: .....	Built-in
Heating type: .....	Gas
Heating type: .....	Gas
Number of cooking zones: .....	1
Number of cooking zones: .....	1
Min. required niche size for installation (HxWxD):	45 x 270 x 490-500 mm
Min. required niche size for installation (HxWxD):	45 x 270 x 490-500 mm
Width of the appliance: .....	306 mm
Width of the appliance: .....	306 mm
Dimensions: .....	59 x 306 x 527 mm
Dimensions: .....	59 x 306 x 527 mm
Dimensions of the packed product (HxWxD):	..... 190 x 380 x 580 mm
Dimensions of the packed product (HxWxD):	..... 190 x 380 x 580 mm
Net weight: .....	8.7 kg
Net weight: .....	8.7 kg
Gross weight: .....	9.6 kg
Gross weight: .....	9.6 kg
Residual heat indicator: .....	without
Residual heat indicator: .....	without
Location of control panel: .....	Front
Location of control panel: .....	Front
Basic surface material: .....	Ceramic glass
Basic surface material: .....	Ceramic glass
Color of surface: .....	Black, Alu, brushed
Color of surface: .....	Black, Alu, brushed
Color of frame: .....	Black
Color of frame: .....	Black
Length electrical supply cord: .....	100.0 cm
Length electrical supply cord: .....	100.0 cm
EAN code: .....	4242005357284
EAN code: .....	4242005357284
Gas connection rating: .....	6100 W
Gas connection rating: .....	6100 W
Fuse protection: .....	3 A
Fuse protection: .....	3 A
Voltage: .....	220-240 V
Voltage: .....	220-240 V
Frequency: .....	50; 60 Hz
Frequency: .....	50; 60 Hz
Included accessories: .....	1 x WOK attachment ring

**Included accessories**

1 x WOK attachment ring

**Optional accessories**

- HEZ298105 Simmer plate
- HEZ298113 Small pot support
- HEZ394301 Connecting strip



## **Series 8, Domino gas hob, 30 cm, Ceramic glass, Black PRA3A6B70**

**The domino gas hob with FlameSelect:  
achieve perfect cooking results thanks to  
nine precisely defined power levels.**

---

### **Design**

- ceramic glass surface, Black
- Facette front, rear and side profiles, aluminium, brushed
- Cast iron pan supports
- Low profile burner: elegant burner design

### **Usage convenience**

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### **Burners and power**

- 1 gas burner
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Center front: wok burner up to 6.1 KW (depending on gas type)

### **Safety**

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### **Installation (gas types & measurements)**


- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 59 x 306 x 527
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 6.1 KW

### **Accessories**

- Wok ring included


**Series 8, Domino gas hob, 30 cm,  
Ceramic glass, Black  
PRA3A6B70**

Measurements in mm

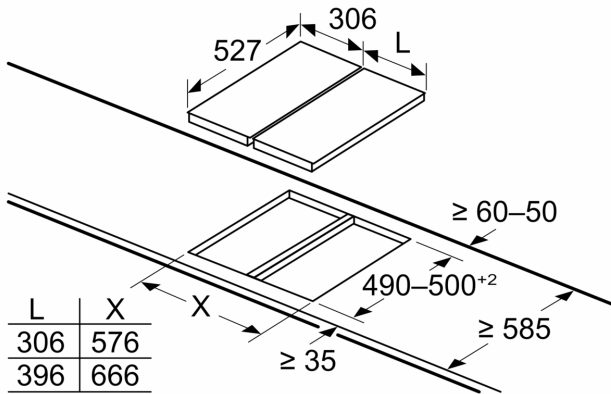


If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm

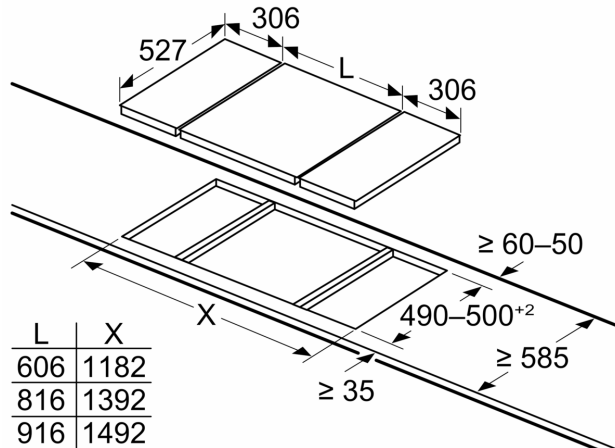


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required

Measurements in mm

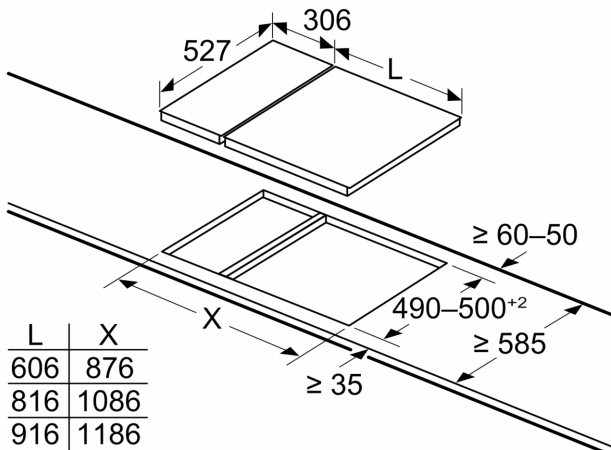


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required

Measurements in mm

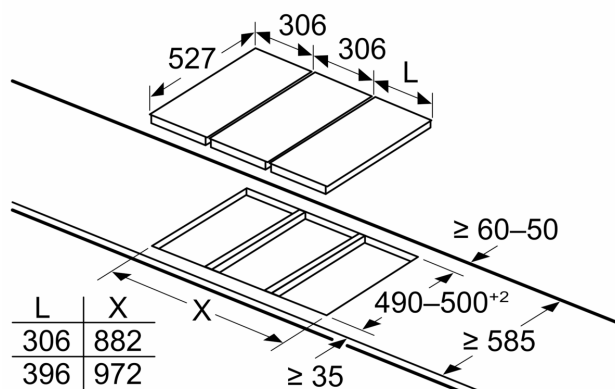

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm  
**Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions**

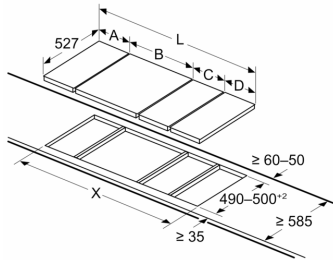

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)


measurements in mm  
 Domino combination options with corresponding appliance and cut-out dimensions

Width category:  
 Appliance width:


	A	B	C	D	L	X		
2x30	306	306	-	-			612	576
1x30, 1x40	306	396	-	-			702	666
1x30, 1x60	306	606	-	-			912	876
1x30, 1x70*	306	710	-	-			1016	980
1x30, 1x80	306	816	-	-			1122	1086
1x30, 1x90	306	916	-	-			1222	1186
2x40	396	396	-	-			792	756
1x40, 1x60	396	606	-	-			1002	966
1x40, 1x70*	396	710	-	-			1106	1070
1x40, 1x80	396	816	-	-			1212	1176
1x40, 1x90	396	916	-	-			1312	1276
3x30	306	306	306	-			918	882
2x30, 1x40	306	306	396	-			1008	972
2x30, 1x60	306	306	606	-			1218	1182
2x30, 1x70*	306	306	710	-			1322	1286
2x30, 1x80	306	306	816	-			1428	1392
2x30, 1x90	306	306	916	-			1528	1492
1x30, 2x40	306	396	396	-			1098	1062
1x30, 1x40, 1x60	306	396	606	-			1308	1272
1x30, 1x40, 1x70*	306	396	710	-			1412	1376
1x30, 1x40, 1x80	306	396	816	-			1518	1482
1x30, 1x40, 1x90	306	396	916	-			1618	1582
2x40, 1x60	396	396	606	-			1398	1362
4x30	306	306	306	306			1224	1188
3x30, 1x40	306	306	306	396			1314	1278
1x30, 1x75	306	750	-	-			1056	1020
1x40, 1x75	396	750	-	-			1146	1110
2x30, 1x75	306	306	750	-			1362	1326
1x30, 1x40, 1x75	306	396	750	-			1452	1416

\* Not possible with 70 cm induction hob

Measurements in mm  
**Assembly kit (HEZ394301) for Domino**

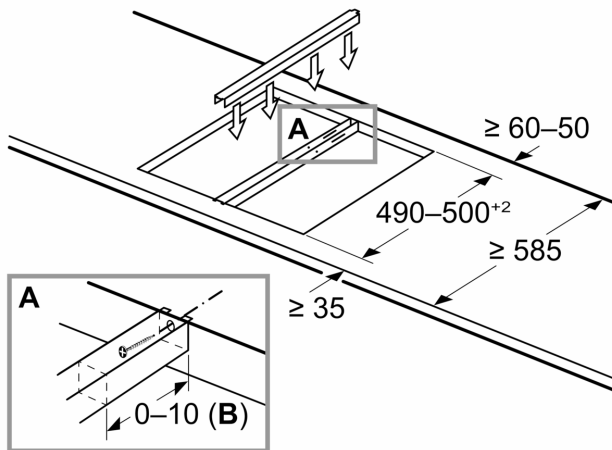

**B:** Dependent on the cut-out depth

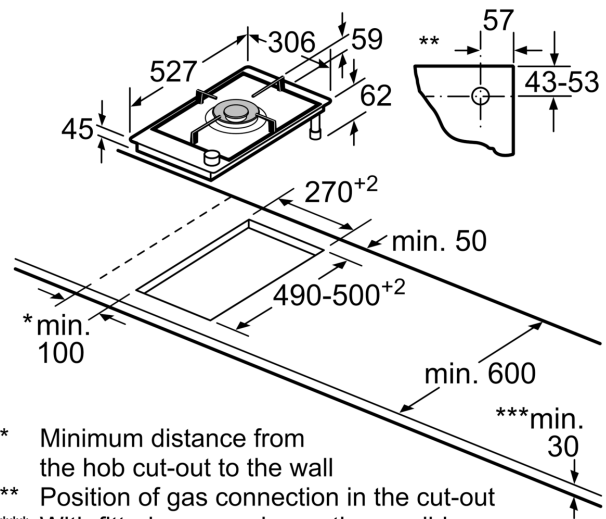

- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

measurements in mm