


Serie | 6, Induction hob, 90 cm, Black PXX275FC1E

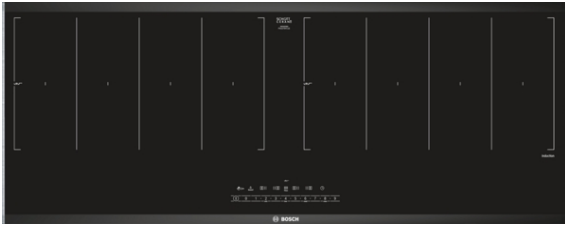

The panorama FlexInduction hob allows you to conveniently place your pots and pans next to each other.

- **DirectSelect:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **FlexInduction:** more flexibility on your hob for large pots and pans.
- **PerfectFry:** no more worrying about scorching.
- **ComfortProfil:** Elegant, appealing design with bevelled front and metal strips on the side.
- **PowerBoost:** up to 50% more power for faster heating on your induction hob.

Technical Data

Product name/family : Cooking zone ceramic

Construction type : Built-in

Energy input : Electric

Total number of positions that can be used at the same time : 4

Required niche size for installation (HxWxD) : 51 x 880-880 x 330-330 mm

Width of the appliance : 916 mm

Dimensions : 51 x 916 x 353 mm

Dimensions of the packed product (HxWxD) : 126 x 1031 x 472 mm

Net weight : 14.6 kg

Gross weight : 15.8 kg

Residual heat indicator : Separate

Location of control panel : Hob front

Basic surface material : Ceramic

Color of surface : Black

Approval certificates : AENOR, CE

Length of electrical supply cord : 110 cm

EAN code : 4242002854458

Electrical connection rating : 7400 W

Voltage : 220-240 V

Frequency : 60; 50 Hz



4 242002 854458

Serie | 6, Induction hob, 90 cm, Black PXX275FC1E

The panorama FlexInduction hob allows you to conveniently place your pots and pans next to each other.

Design

- Profile trim (front facette with side trim)
- 90 cm: space for 4 pots or pans.

Flexibility of cooking zones

- 2 Flex zones: use cookware of any shape or size anywhere within the 40cm long zone.
- Cooking zone front left: 210 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 210 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear right: 210 mm, 200 mm , 2.2 KW (max. power 3.7 KW)
- Cooking zone front right: 210 mm, 200 mm, 2.2 KW (max. power 3.7 KW)

Usage convenience

- DirectSelect: directly control the power with the imprinted touch bar.
- Variable 17-stage power settings for each zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Timer for all zones
: switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- Timer - shows how long the cooktop is in use
: an alarm sounds at the end of the time set (e.g. for pasta).

Time saving & efficiency

- PowerBoost function for all zones
: boil water faster thanks to 50% more energy than at the highest standard level.
- QuickStart function: when switching on, the hob automatically selects the cooking zone with cookware (when placed on a zone whilst the hob is off).
- ReStart function: in case of unintentional switch-off, this feature restores all previous settings by switching on the hob again within 4 seconds.

Cooking assistance

- 4 frying levels: prevents overcooking with the automatic temperature regulation of the integrated sensor.


Safety

- 2 stage residual heat indicator for each zone: indicates which cooking zones are still hot or warm.
- Control panel lock: prevent unintended activation of the hob.
- Freeze function: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main on/off switch: switch off all cooking zones at the touch of a button.
- Automatic safety shut off: for safety reasons, heating stops after a preset time if not used (possible to customise).
- Energy consumption display: shows the electricity consumption of the last cooking process.

Installation




- Dimensions of the product (HxWxD mm): 51 x 916 x 353
- Required niche size for installation (HxWxD mm) : 51 x 880 x (330 - 330)
- Min. worktop thickness: 16 mm
- Connected load: 7.4 KW
- Power management options for 16A, 13A or 10A connection: limit the maximum power if needed (depends on fuse protection of electric installation).
- Power cord: 1.1 m, Cable included

Serie | 6, Induction hob, 90 cm, Black PXX275FC1E

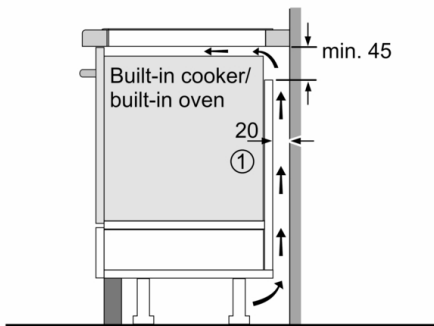


①
Ventilation gap must
be present

All measurements in mm

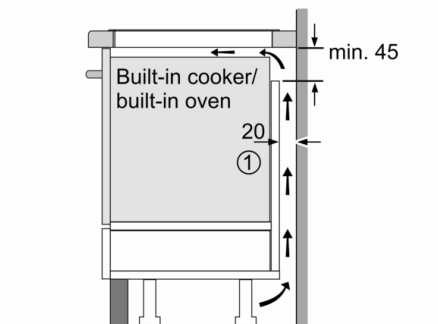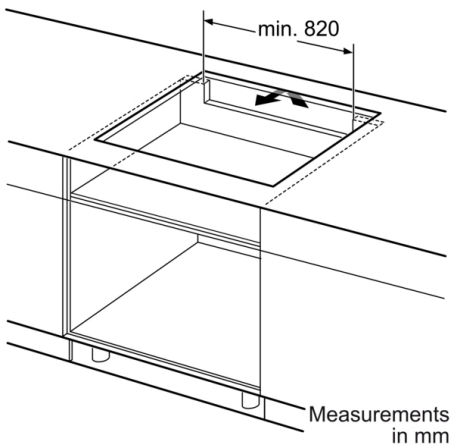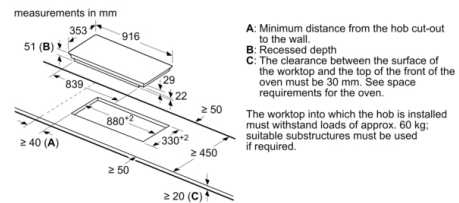

①
Ventilation gap must
be present

All measurements in mm

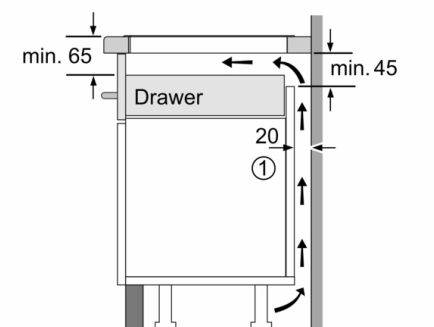

①
Ventilation gap must
be present.

Measurements in mm