

**Series 8, warming drawer, 60 x 14 cm,
Stainless steel
BIC630NS1B**



**The 14 cm multifunctional warming drawer:
for pre-heating plates, keeping food warm
and low temperature cooking.**

Technical data

Built-in / Free-standing : Built-in

Color / Material Front : Stainless steel

Maximum number of plates : 12

Maximum number of espresso cups : 64

Dimensions : 140 x 594 x 548 mm

Dimensions of the packed product (HxWxD) : 200 x 640 x 660 mm

Min. required niche size for installation (HxWxD) : 140 x 560 x 550 mm

Time control : No

Fuse protection : 10 A

Voltage : 220-240 V

Frequency : 60; 50 Hz

Plug type : GB plug

Color / Material Front : Stainless steel

Required cutout/niche size for installation (in) : x x

Dimensions of the packed product : 7.87 x 25.19 x 25.98

Net weight : 34.000 lbs

Gross weight : 39.000 lbs

Length electrical supply cord : 150.0 cm

Min. required niche size for installation (HxWxD) : 140 x 560 x 550 mm

Dimensions : 140 x 594 x 548 mm

Dimensions of the packed product (HxWxD) : 200 x 640 x 660 mm

Net weight : 15.5 kg

Gross weight : 17.5 kg



**Series 8, warming drawer, 60 x 14 cm,
Stainless steel
BIC630NS1B**

**The 14 cm multifunctional warming drawer:
for pre-heating plates, keeping food warm
and low temperature cooking.**

Design:

- 5 functions: Proving yeast dough, thawing food, keeping food warm, pre-warming utensils, slow cooking
- Heating plate made of toughened glass
- Electronic retractable rotary knob


Technical Information:

- Temperature control in 4 levels: ca. 40 °C - 80 °C (glass surface temperature)
- Cavity volume: 20 l
- Loading up to 25 kg
- Max. loading espresso cups: 64 PC or Max. loading plates: 12 PC
- Total connected load: 0.81kW

Dimensions (H x W x D):


- 140 mm x 594 mm x 548 mm
- Please reference the built-in dimensions provided in the installation drawing

**Series 8, warming drawer, 60 x 14 cm,
Stainless steel
BIC630NS1B**

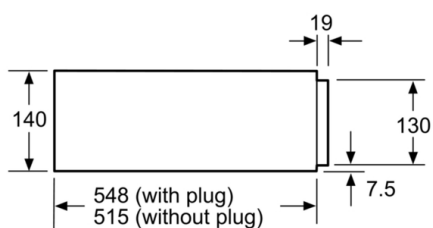

Compact ovens with an appliance height of 455 mm can be installed above a warming drawer. An intermediate floor is not required.

measurements in mm

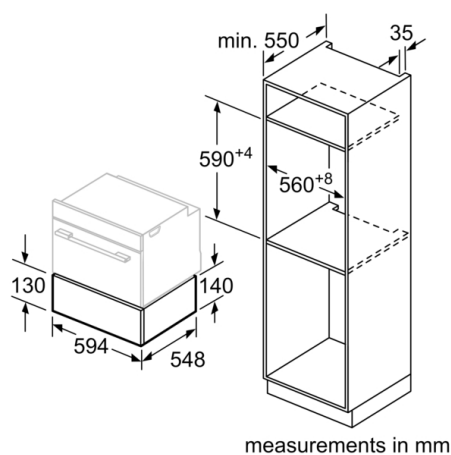

measurements in mm