

**Series 8, warming drawer, 60 x 14  
cm, Black  
BIC7101B1B**



**Preheat plates and cups, so that your  
dishes stay hot longer. Keep warm, for  
keeping cooked dishes warm.**

- **Home Connect – Control the multifunctional warming drawer at any time from wherever you want.**
- **Push-pull mechanism: easy opening and closing thanks to a practical spring mechanism.**

---

Built-in / Free-standing: ..... Built-in  
 Maximum number of plates: ..... 12  
 Maximum number of espresso cups: ..... 64  
 Dimensions: ..... 140 x 594 x 518 mm  
 Dimensions of the packed product (HxWxD): ..... 250 x 660 x 700 mm  
 Min. required niche size for installation (HxWxD): .... 140 x 560 x 550 mm  
 Time control: ..... No  
 Fuse protection: ..... 10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Plug type: ..... GB plug  
 Required cutout/niche size for installation (in): ..... X  
 Dimensions of the packed product: ..... 9.84 x 25.98 x 27.55  
 Net weight: ..... 42.000 lbs  
 Gross weight: ..... 46.000 lbs  
 Length electrical supply cord: ..... 175.0 cm  
 Min. required niche size for installation (HxWxD): .... 140 x 560 x 550 mm  
 Dimensions: ..... 140 x 594 x 518 mm  
 Dimensions of the packed product (HxWxD): ..... 250 x 660 x 700 mm  
 Net weight: ..... 18.8 kg  
 Gross weight: ..... 20.8 kg

---





**Series 8, warming drawer, 60 x 14  
cm, Black  
BIC7101B1B**

**Preheat plates and cups, so that your  
dishes stay hot longer. Keep warm, for  
keeping cooked dishes warm.**

---

- Multifunctional warming drawer with the heating functions: Slow cooking, Keep warm, plate warming, cup warming

**Design:**

**Design:**

- User-friendly electronics: extremely
- easy and comfortable operation
- Heating plate made of toughened glass
- Cavity volume: 20 l
- Loading up to 25 kg
- Max. loading espresso cups: 64 PC or Max. loading plates: 12 PC
- Temperature control in 4 levels: ca. 30 °C - 80 °C (glass surface temperature)
- push&pull
- Touch key operation

**Technical Information:**


- 20A single phase connection
- Total connected load: 0.82kW

**Dimensions (H x W x D):**

- 140 mm x 594 mm x 518 mm
- Niche dimension (h x w x d): 140 mm x 560 mm - 568 mm x 550 mm
- Please reference the built-in dimensions provided in the installation drawing

**Series 8, warming drawer, 60 x 14**  
**cm, Black**  
**BIC7101B1B**

Measurements in mm

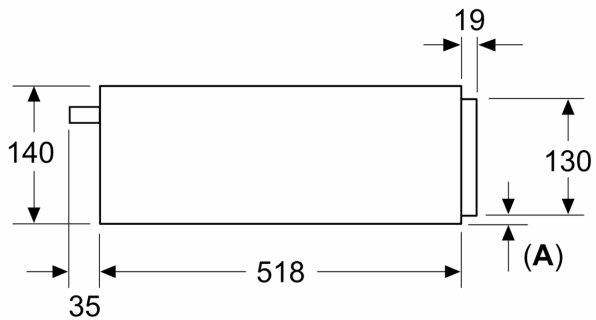

**A: 7.5 mm**

Compact ovens with appliance height of 455 mm can be installed above the warming drawer without an intermediate floor

Measurements in mm

