

**Series 6, wall-mounted cooker hood,
90 cm, clear glass white printed
DWK98JQ20**



**Inclined hood: optimal for keeping an eye
on your pots and pans.**

- **PerfectAir sensor:** automatic control of settings for maximal extractor performance with minimal noise.
- **EcoSilence Drive™:** the powerful, energy-saving drive for hoods.
- **Intensive speed setting:** removes strong kitchen odours especially quickly and effectively.
- **LED lighting:** for perfect, very energy-efficient illumination of the hob.
- **DirectSelect control:** direct selection of desired settings and light.

Technical data

Typology : Wall-mounted
 Length electrical supply cord : 130 cm
 Height of product, without chimney : 323 mm
 Net weight : 22.9 kg
 Type of control : Electronic
 Number of speed settings : 3-stage + 2 intensive
 Maximum output air extraction : 468 m³/h
 Boost position output recirculating : 460 m³/h
 Maximum output recirculating air : 378 m³/h
 Boost position air extraction : 836 m³/h
 Number of lights : 2
 Noise level : 56 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 Odour filter : No
 Operating Mode : Exhaust or re-circulate air operation
 Delay Shut off modes : 10 min
 Optional accessories : DZZ1XX1B6, DWZ0AX5K0, DWZ0AX5L0, DWZ1AK1B6, DWZ1AK1I6, DWZ1AK1V6, DWZ1AX5C6, DZZ0XX0P0, DWZ0AK0R0, DWZ0AK0S0
 Type of lamps used : LED
 Grease filter type : Kasette
 Connection Rating : 163 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : Gardy plug w/ earthing
 Installation typology : Wall-mounted
 Material body : Glass, Lacquered
 Plug type : Gardy plug w/ earthing
 Dimensions of the product, with chimney (if exists) (in) : / x x
 Dimensions of the packed product : 27.16 x 29.13 x 40.94
 Net weight : 50.000 lbs
 Gross weight : 70.000 lbs
 Motor location : Integrated motor in hood body
 No-return airflow flap : Yes
 Length electrical supply cord : 130 cm
 Dimensions of the product, with chimney (if exists) : 452 x 890.0 x 499.0 mm
 Dimensions of the packed product (HxWxD) : 690 x 740 x 1040 mm
 Net weight : 22.9 kg
 Gross weight : 31.8 kg



**Series 6, wall-mounted cooker hood, 90 cm,
clear glass white printed
DWK98JQ20**

**Inclined hood: optimal for keeping an eye on
your pots and pans.**

Design:

- Inclined glass brand design
- Appliance colour: White

Feature:

- Extraction rate according to EN61591: 728 m³/h
- 3-stage + 2 intensive ventilation power settings
- Saturation indicator for metal grease filter
- PerfectAir Sensor
- 2 x 1,5W LED
- BLDC for Ventilation Motor
- Dimmer light function
- SoftLight
- TouchControl
- Rim ventilation

Supplied Accessories:

- 150 mm diameter pipe (120 mm adapter enclosed)
- Supplied with 2 dishwasher safe metal grease filters


Optional Accessory:

- Charcoal Re-circulating kit

Technical Information:


- Total connected load: 163 W
- Suitable for ducted or re-circulated extraction
- Dimensions - exhaust air (HxWxD): 928-1198 x 890 x 499 mm

**Series 6, wall-mounted cooker hood, 90 cm,
clear glass white printed
DWK98JQ20**

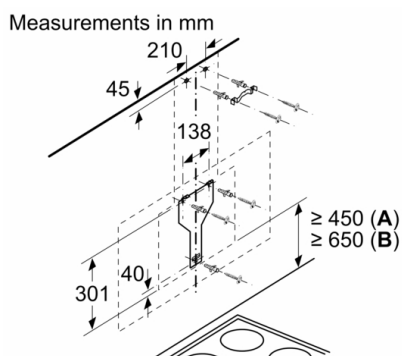


From upper edge of pan support

A: Electric
B: Gas

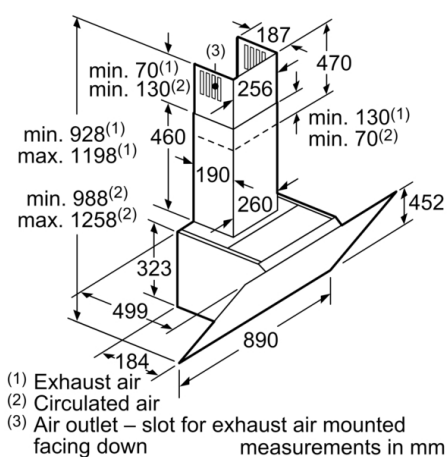


- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slot for exhaust air mounted facing down

measurements in mm

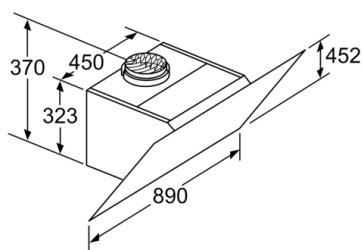


Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

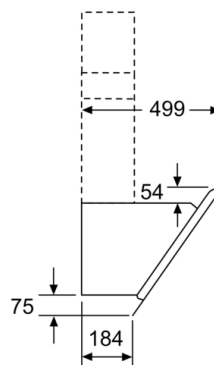

measurements in mm

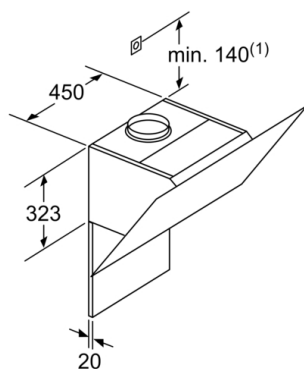

(1)Position
of socket

Note the maximum thickness of the back panel.

measurements in mm

