

**Series 8, Fully automatic espresso machine, Stainless steel CTL636ES1**



**The built-in coffee center with OneTouch Function: offers great variety and highest versatility.**

- **AromaDouble Shot:** Extra-strong coffee without the bitterness thanks to two specialised grinding and brewing processes
- **CeramDrive:** High quality, durable ceramic grinder
- **Intelligent Heater inside:** Perfect brewing temperature and full aroma with the SensoFlow System
- **OneTouch DoubleCup:** Your choice of espresso or milk drinks with a click – even two cups at once.

**Technical Data**

Built-in / Free-standing: ..... Built-in  
 Frothing nozzle: ..... No  
 Display: ..... No  
 Water protection system: ..... No  
 Portion sizes: ..... All cups  
 Dimensions: ..... 455 x 594 x 375 mm  
 Dimensions of the packed product (HxWxD): ..... 550 x 480 x 670 mm  
 Min. required niche size for installation (HxWxD): ..... 449 x 558 x 356 mm  
 EAN code: ..... 4242002769226  
 Fuse protection: ..... 10 A  
 Voltage: ..... 220-240 V  
 Frequency: ..... 50/60 Hz  
 Plug type: ..... Gardy plug w/ earthing

**Optional accessories**

- TCZ7003 Accessories small appliances
- TCZ8001A Cleaning tablets
- TCZ8002A Descaling tablets
- TCZ8004A Care set espresso
- TCZ8009N insulated milk container
- Y988081012 :
- Y988081300 :
- Y988081302 :
- Y988081303 :



## **Series 8, Fully automatic espresso machine, Stainless steel CTL636ES1**

**The built-in coffee center with OneTouch Function: offers great variety and highest versatility.**

---

### **Flavour**

- "sensoFlow system" - Innovative heating system
- One-touch function for Cappuccino, Espresso macchiato, Latte macchiato, Caffè Latte, personalised milk mix beverage
- aromaDouble Shot - Extra strong coffee without compromise in aroma
- Beverage temperature adjustable individually: Coffee: 3 levels, Hot water: 4 grades

### **Convenience**

- TFT display with interactive menu
- 8 personalised beverages Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso
- 20-250 ml
- Cappuccino: Prepare two cups simultaneously for all coffee varieties
- Removable 2.4 litre water tank
- Early warning when bean container or water tank are close to empty

### **Performance**

- "silent ceram drive" - Premium ceramic grinding unit
- Coffee Sensor Pro: The grinding unit automatically adjusts to bean variety
- One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother
- In addition to beverages also available separately: milk foam, warm milk, hot water
- Reduced heat up time: fastest first cup
- Water pump with 19 bar pressure
- Separate container for pre-ground coffee

### **Hygiene**


- Removable brewing unit: Easy and hygienic cleaning under running water
- steam blast: Fully-automatic steam cleaning of the milk system after every beverage
- All milk nozzle parts are easily removable, separable, easy to clean and dishwasher proof
- Single portion cleaning: Complete emptying of all pipes after each brewing process
- Automatic quick rinse programme when switched on or off
- Removable drip tray including container for coffee grounds
- Fully automatic descaling & cleaning programme
- Display of remaining cups before descaling, Cleaning, Change of water filter
- Containers for water, milk and coffee beans are easily accessible but hidden behind a door, so the kitchen always looks clean
- Bean container with aroma preserving lid for up to 500grams
- Illumination for keys, yes, no
- Adjustable grind settings (multilevel)
- Different display languages available
- Child lock: prevents unintended use of machine
- Wattage: 1600 W

### **Accessories**


- Separate milk container with thermally insulated aluminium housing (0.7 l volume)

- Included accessories: 1 x scoop, 1 x milk container (insulated), 1 x milk pipe, 9 x assembly screws, 1 x test strip, 1 x connection hose

**Series 8, Fully automatic espresso machine, Stainless steel  
CTL636ES1**




Bean and water  
are removed from  
Recommended i  
height 95-145 cm



Bean and water  
are removed from  
Recommended i  
height 95-145 cm

left corner insta

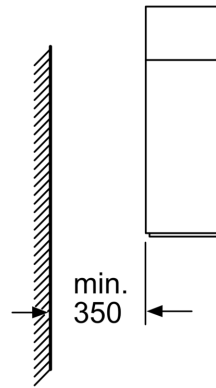

If using the 92° r  
(spare part no. 0  
the minimum dis  
is only 100 mm.

